Complete Green Streets Guide

City of Madison

Renee Callaway, Pedestrian Bicycle Administrator





Why Develop this Guide?

Current policies, practices, and ordinances have moved us to wider street

Right Sized Streets





28 feet wide

48 feet wide

Resident Concerns Over Streets & Safety

Wide streets with low parking utilization lead to people driving fast

Residents want street design changes, even for relatively new streets





Principles of Complete Green Streets

- Complete Streets are for everyone, no matter who they are or how they travel.
- There is no one design of a Complete Street. Each street design considers the specific context of the community, neighborhood & street.
- A Complete Street is designed & operated in a way that prioritizes safety, comfort, and access for people.
- Green streets are part of a healthy, equitable design that are part of designing for a City's resilience.





Complete Green Streets: Street Design Impact



A process centered in community values



Clear direction on priorities



Defined street types to use as starting point for design




Explicit equity framework and associated process




Flexible tool that will evolve over time as Madison evolves

Building Better Streets

- Human Centered Streets, acknowledging the travel needs of unprotected users (people walking and biking). A street should provide safe accommodations for everyone.
- Right-sized Streets, that are not overbuilt.
 Streets should be designed for today's needs, with additional right of way reserved for the future if needed.
- Green Infrastructure, that helps our right of way become both sustainable and a welcoming public place.

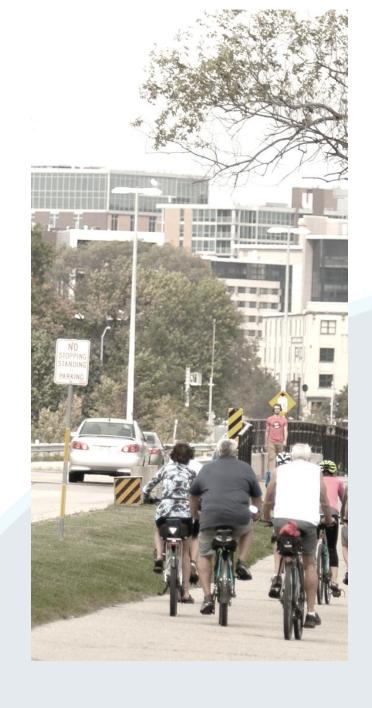

PROJECT TIMELINE

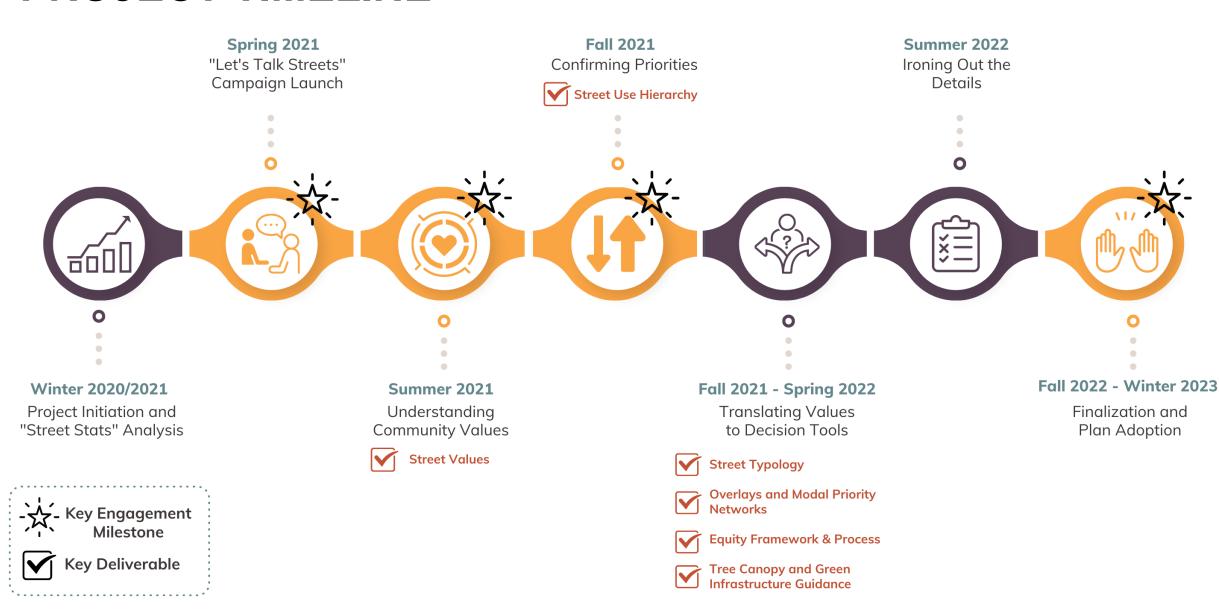

Engagement

Three phases of engagement

- Listening Phase
- Reflecting Phase
- Testing Phase



One survey focused on gathering input from people with disabilities

Online videos

Each phase had focus groups to talk with people of color & low income residents







Guide - Process Overview



Street Values & Modal Hierarchy

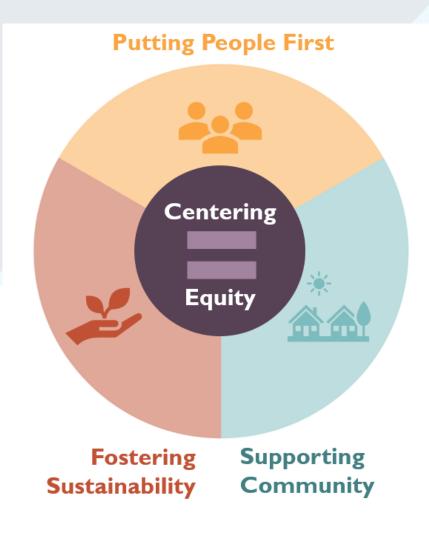


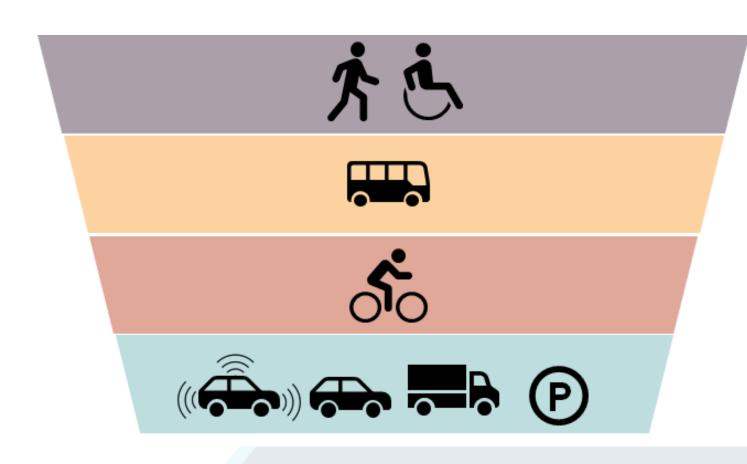





Process and elements

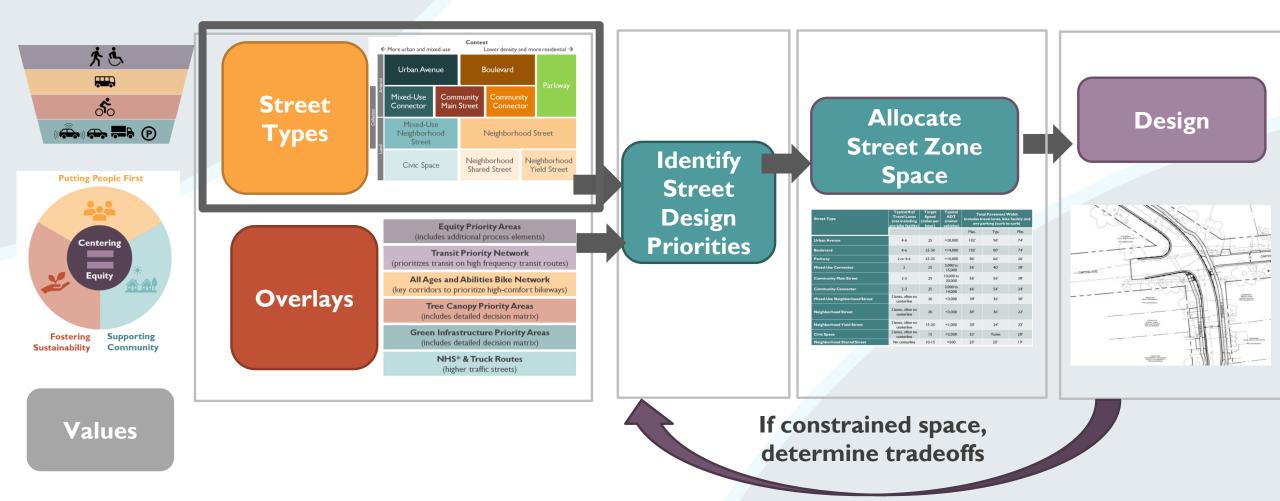

Street Types

CGS is built around a collection of 11 street types (the typology) that describe the spectrum of current and future streets in Madison. They serve as starting points for street design.

The types are based on context and the amount of varied activity occurring.

They are intended to be aspirational.



Street Zones


Each street type is divided into zones.

Movement (walking, biking, driving) happens in the walkway and travelway.

Bike facilities might be part of the travelway (lanes or cycletrack) or part of the walkway (a path).

Stationary uses (parking, cafes, trees) occur in the flex zone.

The flex zone can be terrace or part of the roadway.

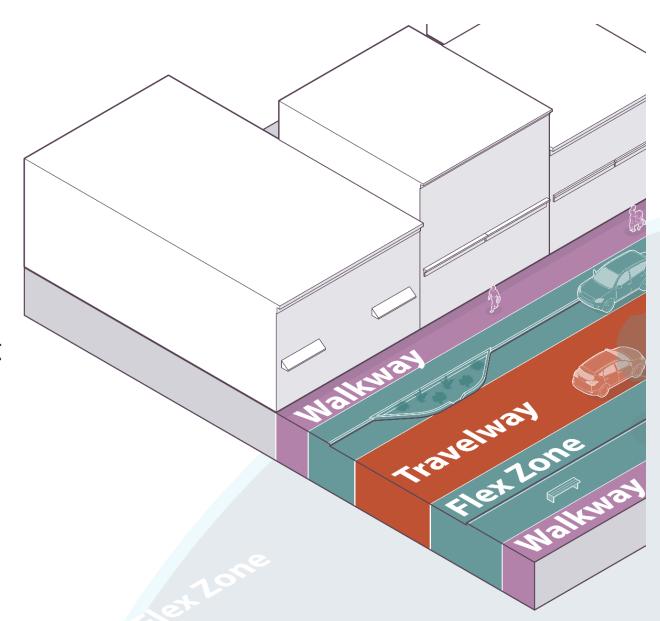

Street Zones

Each street type graphic identifies the location and relative size of each street zone, with color-coding.

Each street type describes the relative priority of each zone, as well as what is typically provided in each zone, specific to that street type.

Urban Avenue Example

Walkway

High Priority

Wider sidewalks with buildings close to or touching the sidewalk.

Flex Zone

Medium Priority

Street trees, bike racks, and enhanced transit stops. Parallel on-street parking. Loading zones, if needed, should be provided around the corner on intersecting minor streets.

Travelway

High Priority

Dedicated transit lanes, separated bike lanes, often 2 travel lanes per direction, and medians.

Example: Urban Avenue

Major streets that serve as backbones of the street network and convey large numbers of people via multiple modes.

Walkway

High Priority

Wider sidewalks with buildings close to or even at the edge of the right of way.

Flex Zone


Medium Priority

Street trees, bike racks, and enhanced transit stops. Parallel on-street parking. Loading zones, if needed, should be provided around the corner on intersecting minor streets.

Travelway

High Priority


Dedicated transit lanes, separated bike lanes, often 2 travel lanes per direction, and medians.

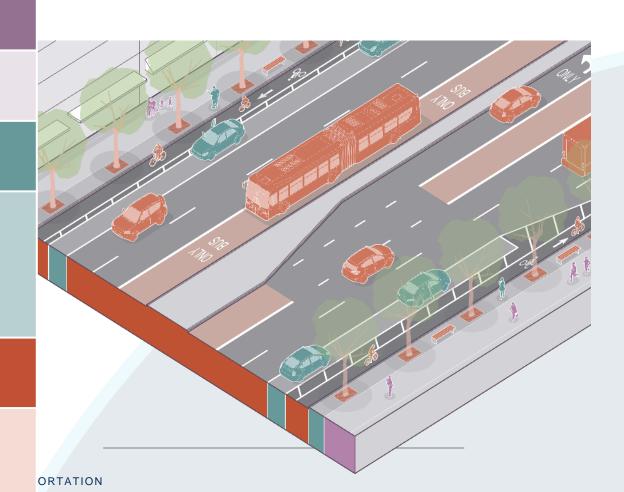


Initial Street Type Map

The street type map will evolve and change over time as development and land use plans change.

Sub-area plans, instead of recommending typical sections, will instead designate a street type that may have multiple cross sections that achieve desired objectives.

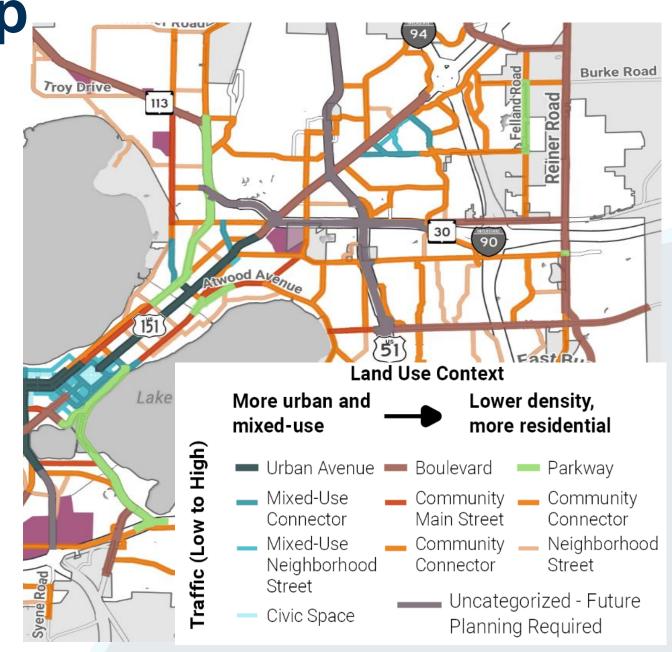

Process and elements

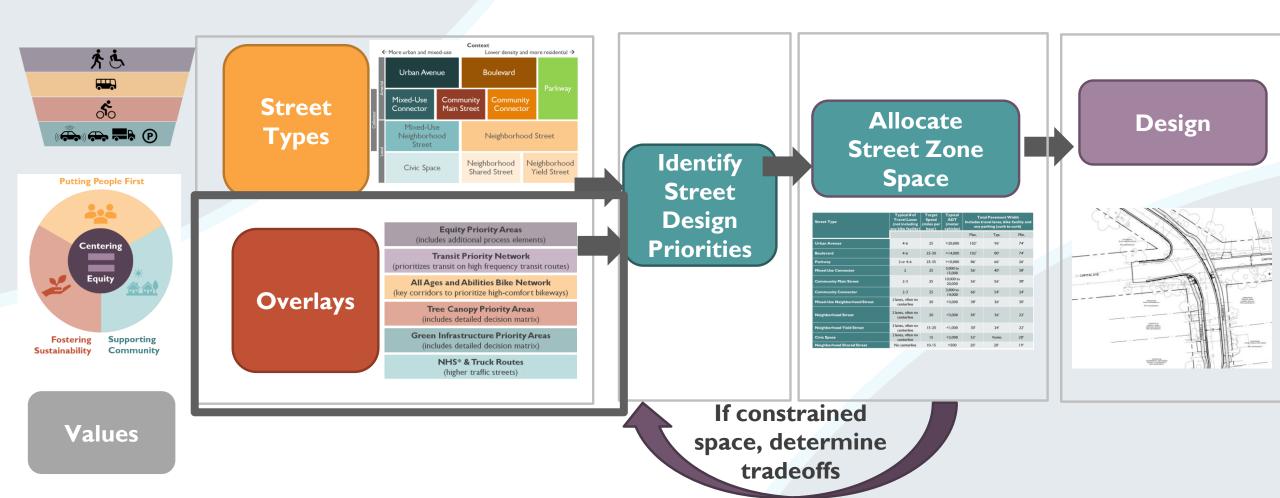

Overlays

- Overlays influence design decisions and the priority of various elements.
- Each street type describes the influence of each overlay.

Equity Priority Areas

(includes additional process elements)

Transit Priority Network

(prioritizes transit on high frequency transit routes)

All Ages and Abilities Bike Network

(key corridors to prioritize high-comfort bikeways)

Tree Canopy Priority Areas

(includes detailed decision matrix)

Green Infrastructure Priority Areas

(includes detailed decision matrix)


National Highway System & Truck Routes

(higher traffic streets)

Equity Priority Areas

Consult the Map of Equity Priority Areas (EPAs)

- Initial map based on Neighborhood Resource Team (NRT) areas
 - City project started that will identify additional areas based on demographic data

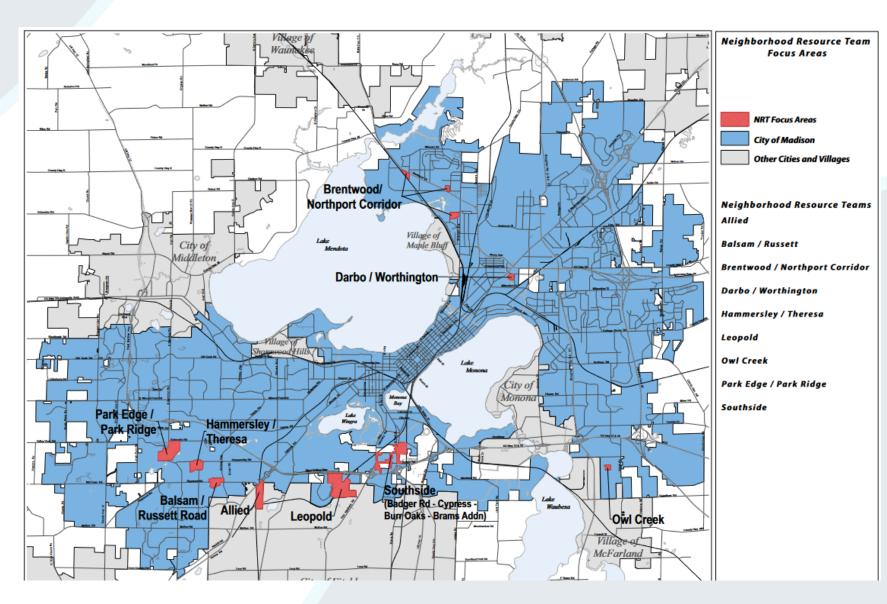

Equity Priority Areas

EPA locations trigger additional process steps that will be in the CGS
 Project Checklist

Is the project within or near an EPA?


- Engage with community to understand needs
- Engage with NRT
- Review past public input
- Use EPA questions on CGS project checklist

Are there other City departments active in the CGS project area?

- Engage with community to understand needs
- Engage with NRT
- Review past public input & other department projects in area and coordinate work
- Use EPA project checklist

Transit Priority Network


- Transit Priority based on approved routes
 - Priority streets would have 15 minute service on weekdays, midday

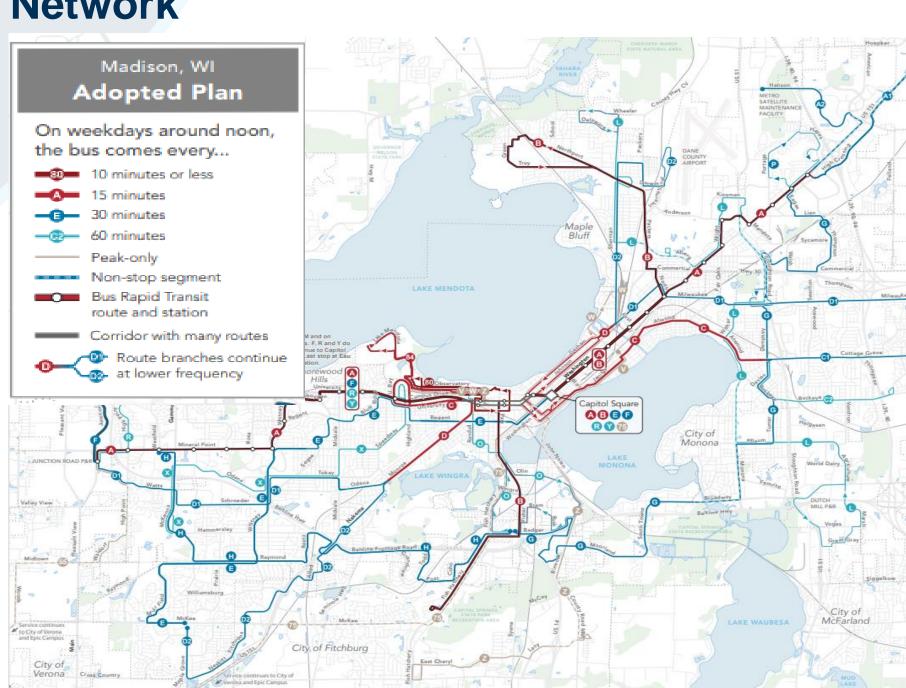


All Ages Ability Bike Network

All Ages Ability Bike Network

- Considered most critical for creating a complete network.
- Designed for all ages and abilities
- Start with interim map & finalize in 2023
- Updates to map approved by Transportation Commission

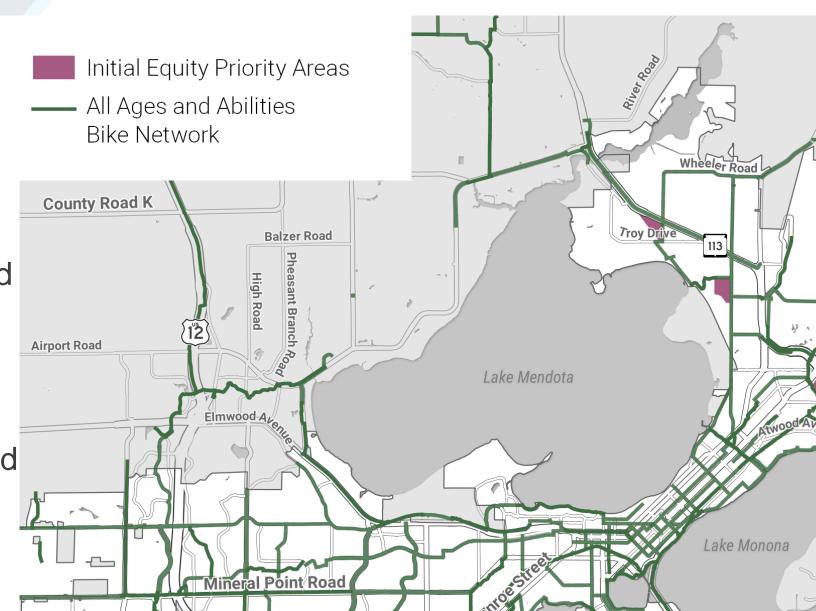


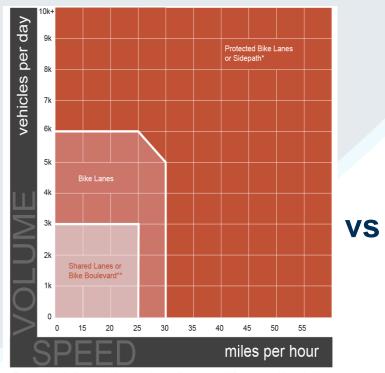

^{*}To determine whether to provide a shared-use path or separated bike lane, consider pedestrian and bicycle volumes or, in the absence of volume, consider land use.

Bike facility selection thresholds for All Ages and Abilities.

Simpler Closer to CROW manual guidance Provides some flexibility at the edges (example Jenifer, Mifflin)

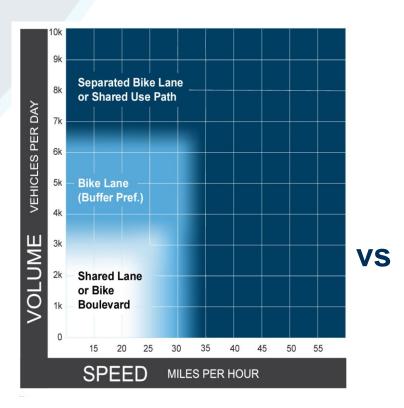

Contextual Guidance for Selecting All Ages & Abilities Bikeways

	All Ages & Abilities					
Target Motor Vehicle Speed	Target Motor Vehicle Volume (ADT)	Motor Vehicle Lanes	Key Operational Considerations	Bicycle Facility		
Any		Any	Any of the following: high curbside activity, frequent buses, motor vehicle congestion, or turning conflicts [‡]	Protected Bicycle Lane		
< 10 mph	Less relevant	No centerline, or	Pedestrians share the roadway	Shared Street		
≤ 20 mph	≤ 1,000 − 2,000	single lane one-way	< 50 motor vehicles per hour in the	Bicycle Boulevard		
	≤ 500 – 1,500		peak direction at peak hour			
≤ 25 mph	≤ 1,500 − 3,000	Single lane each		Conventional or Buffered Bicycle Lane, or Protected Bicycle Lane		
	≤ 3,000 − 6,000	direction, or single lane one-way	Low curbside activity, or low congestion pressure	Buffered or Protected Bicycle Lane		
	Greater than 6,000		congestion pressure			
	Any	Multiple lanes per direction		Protected Bicycle Lane		
		Single lane each direction	Low curbside activity, or low	Protected Bicycle Lane, or Reduce Speed		
Greater than 26 mph [†]	≤ 6,000	Multiple lanes per direction	congestion pressure	Protected Bicycle Lane, or Reduce to Single Lane & Reduce Speed		
	Greater than 6,000	Any	Any	Protected Bicycle Lane		
High-speed limited access roadways, natural corridors, or geographic edge conditions with limited conflicts		Any	High pedestrian volume	Bike Path with Separate Walkway or Protected Bicycle Lane		
			Low pedestrian volume	Shared-Use Path or Protected Bicycle Lane		

DEPARTMENT OF




^{**}The preferred traffic volume for bike boulevards and shared lanes is 2,000 vehicles per day or less. Above this volume, additional considerations should be made to reduce speeds and/or limit the possibility for potential future increases in vehicle volumes.

Tree Canopy priority

Purpose & Goals

- Reach citywide goal of 40% tree canopy coverage.
- Identify areas with low amounts of existing tree canopy coverage to prioritize space in Flex Zone for trees
- Identify appropriate solutions for planting trees while reducing conflicts with other right-of-way priorities.
- Support for <u>Urban Forestry Task Force Report</u>

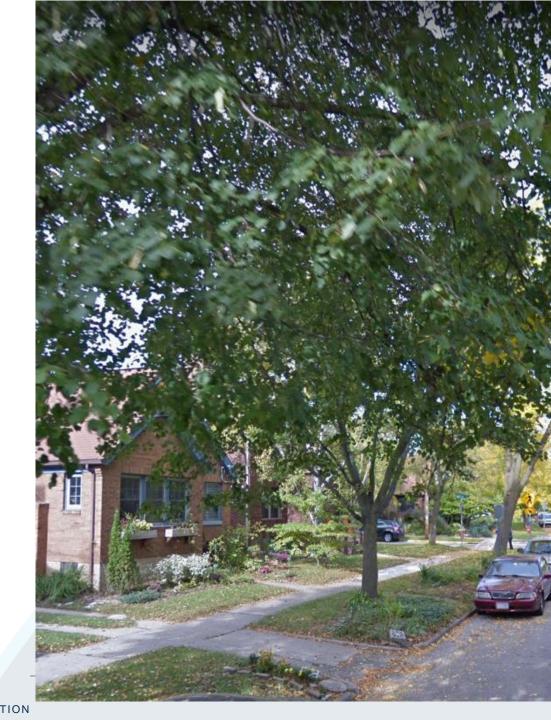

DEPARTMENT OF






Green Infrastructure Priority

Purpose & Goals


 Identify <u>appropriate</u> and <u>viable</u> locations for distributed green infrastructure (DGI) for stormwater management and water quality improvement and appropriate engineering solutions.

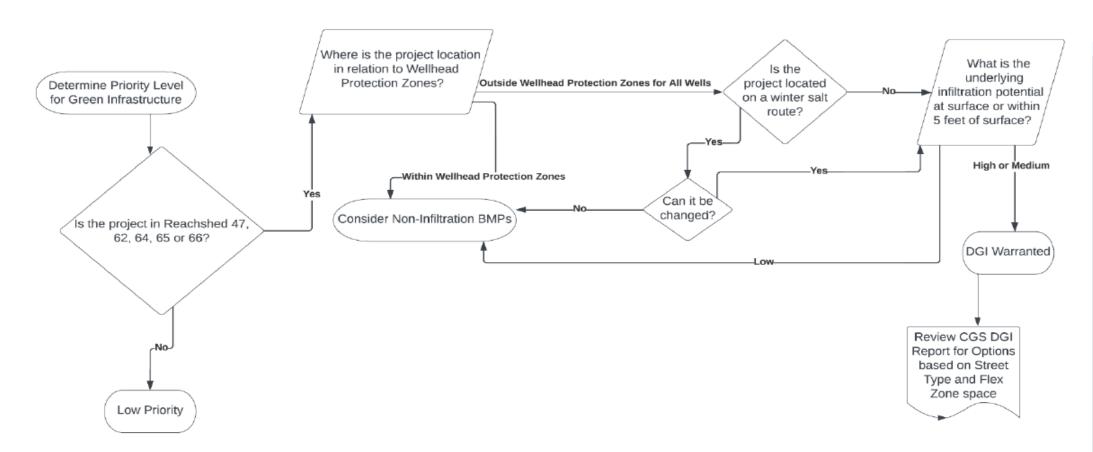


National Highway System & Truck routes

Changes to NHS routes only occur through collaboration with WisDOT and the Greater Madison MPO.

Truck routes must be able to accommodate larger vehicles.

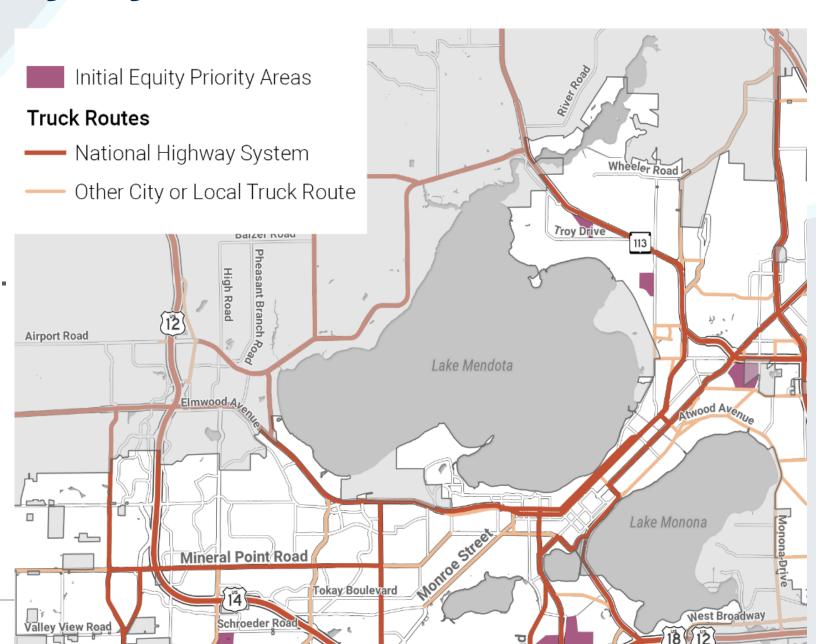

Process and Elements

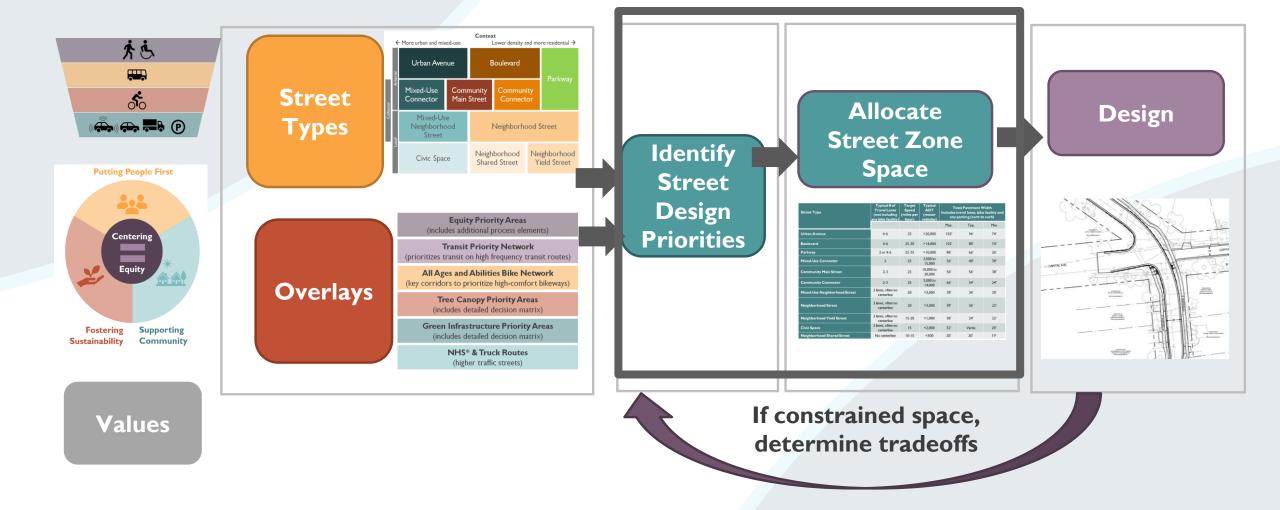

Street Zone Allocation Charts

Charts with widths for each street zone

May be typical widths and/or minimum/maximums

ROW based on preferred widths for each zone

Street Type	Typical # of Travel Lanes*	Lane Width			Travelway Center Turn Lane / Median	Target Speed (miles per hour)***	Typical ADT (motor vehicles)	Total Pavement Width‡ (curb to curb)		
		Max.	Pref.	Min.				Max.	Тур.	Min.
Urban Avenue	4	H	10'	10'	Median Standard	25	>20,000	106'	100'	80'
Boulevard	4	H	10'	10'	Median Standard	25-30	>14,000	106'	84'	80'
Parkway	2-4	112	10'	10'	Median standard	25-35	>10,000	64'	64'	26'
Mixed-Use Connector	2	H	10'	10'	Optional	25	3,000 to 15,000	56'	48'	32'
Community Main Street	2-3	10'	10'	10'	Optional (not common)	25 or less	10,000 to 25,000	60'	52'	40'
Community Connector	2-3	10'	10'	10'	Optional	25 or less	3,000 to 14,000	52'	46'	24'
Mixed-Use Neighborhood Street	No centerline†		N/A†		Not preferred	20-25	<3,000	38'	30'	30'
Neighborhood Street	No centerline†		N/A†		Not preferred	20 or less	<3,000	38'	36'	28' ∞
Neighborhood Yield Street	No centerline		N/A		Not compatible	20 or less	<1,500	32'	28'	24' ∞
Civic Space	No centerline		N/A		Not compatible	20 or less	<2,000	Varies	Varies	24'
Neighborhood Shared Street	No centerline		N/A		Not compatible	10 or less	<500	Varies	Varies	Varies

Street Zone Allocation Charts

Street Type	Total Walkwa (per side	Total Flex Zone Width (per side) ^b		Total Travelway Width c			Total Right-of- Way Width		Typical ADT	
	Pref.	Min.	Pref.	Min.	Max.	Тур.	Min.	Тур.	Min.	(motor vehicles)
Urban Avenue	9'	6'	15'	10'	102	96'	76'	150'	108'	>20,000
Boulevard	7' if sidewalk	6'	15'	10'	102'	80'	76'	146'	108'	>14,000
Parkway	[4' d	6'	20'	12'	62'	60'	22'	128'	58'	>10,000
Mixed-Use Connector	9'	6'	19'	8'	38'	38'	28' e	94'	56'	3,000 to 15,000
Community Main Street	9'	6'	18' f	9'	56' f	36'	36'	90'	66'	10,000 to 20,000
Community Connector	7° g	6' g	15'	9'	36'	36' g	26'	80'	56'	3,000 to 14,000
Mixed-Use Neighborhood Street	9'	6'	19'	9'	22'	20'	20'	78'	50'	<3,000
Neighborhood Street	6'	6'	15'	10'	22'	20'	18'	64'	50'	<3,000
Neighborhood Yield Street	6' h	6' h	17'	10'	16'	16'	14'	62'	46'	<1,500
Civic Space	13'	10'	19'	13'	Varies	Varies	20'	Varies	66'	<2,000
Neighborhood Shared Street	7' i	6' i	Varies	Varies	Varies	NA	NA	Varies	Varies	<500

DEPARTMENT OF



Street Zone Allocation Charts

Additional Design Guidance


	Compatibility of Treatments with Street Types (Y=yes; M=maybe; N=no)												
Street Type	Signal Timing	Pedestrian Refuge / Median Islands	Curb Extensions	Road Diets	Raised Intersection	Raised Crosswalk *	Speed Humps **	All-Way Stops	Traffic Diverters	Chicanes	Choker / Pinchpoint		
Urban Avenue	Y	Y	Y	Y	М	N	N	N	N	N	N		
Boulevard	Υ	Υ	М	Υ	М	N	N	N	N	N	N		
Parkway	Υ	Υ	М	Υ	М	М	N	N	N	N	N		
Mixed-Use Connector	Υ	Y	Y	Υ	Y	М	N	М	N	N	N		
Community Main Street	Y	Y	Y	Y	Y	М	М	М	N	N	N		
Community Connector	М	Υ	М	Υ	Y	М	М	М	N	N	N		
Mixed-Use Neighborhood Street	М	Y	Y	N	Y	Y	М	Υ	М	М	М		
Neighborhood Street	М	Υ	Υ	N	М	Υ	М	Y	М	М	М		
Neighborhood Yield Street	N	М	Y	N	М	Y	Υ	Υ	Y	Y	Y		
Civic Space	Υ	М	Y	N	Y	Y	М	Y	М	М	Υ		
Neighborhood Shared Street	N	N	М	N	Y	Y	Y	Y	Y	Y	Y		


DEPARTMENT OF



Process and Elements



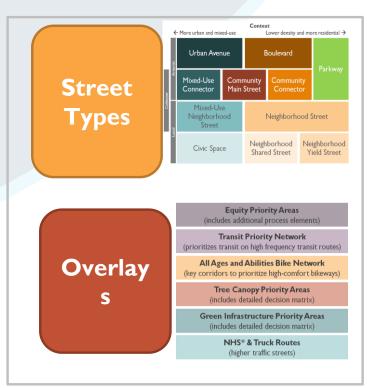

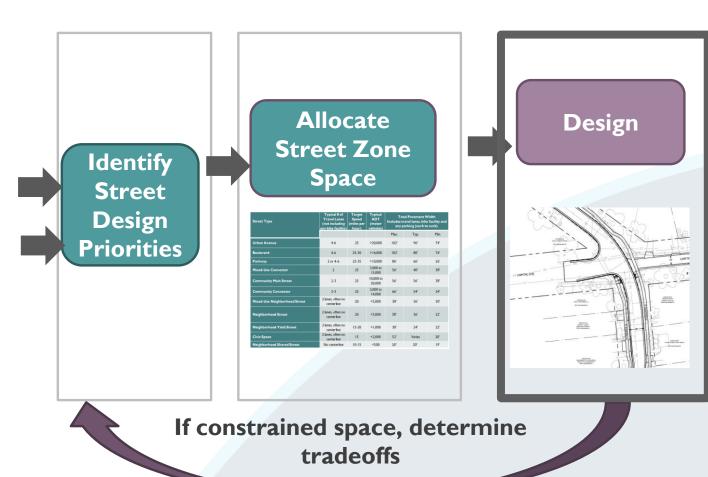

Implementation: Resolution

Transportation Commission Responsibilities

- Street construction and reconstruction that vary from the Complete green Street Policy Guide shall only be implemented if approved by the Transportation Commission
- Ability to modify the Complete Green Streets Policy Guide on an annual basis to address unforeseen challenges & remain current with state of the art design practices
- Approve updates to the Transit Priority Network and All Age Ability Bike Network

Implementation: Resolution

Sub Area Plans will recommend street types based on the Complete Green Streets Policy Guide

Sub Area Plans and plats that recommend street facilities and right of way widths that vary from the Complete Green Streets Policy Guide shall only be included if approved by the Transportation Planning and Policy Board

Revision to Sections 16 and 33 of the Madison General Ordinances to be consistent with the Complete and Green Streets Policy Guide.

- Subdivision Ordinance
- Committee Responsibilities

Implementation: Checklist

Key elements of the project checklist will include:

- Record of project limits, type, schedule
- Identification of Street Type, Overlays and other context that influences design
- Inventory of current conditions and other data
- Identification of engagement efforts and outcomes
- Initial and final cross section
- Final design elements & communication
- Additional Equity Priority Area engagement, collaboration and issues identified but not resolved by project

Questions?

Renee Callaway, Pedestrian Bicycle Administrator

ReCallaway@cityofmadison.com

www.cityofmadison.com/transportation/initiatives/complete-green-streets