


1309 Williamson St. – St. Vincent de Paul

Private Development Project

Project No. 14492, Contract No. 9268

Entity Name: District Council of Madison, Inc. Society of St. Vincent de Paul

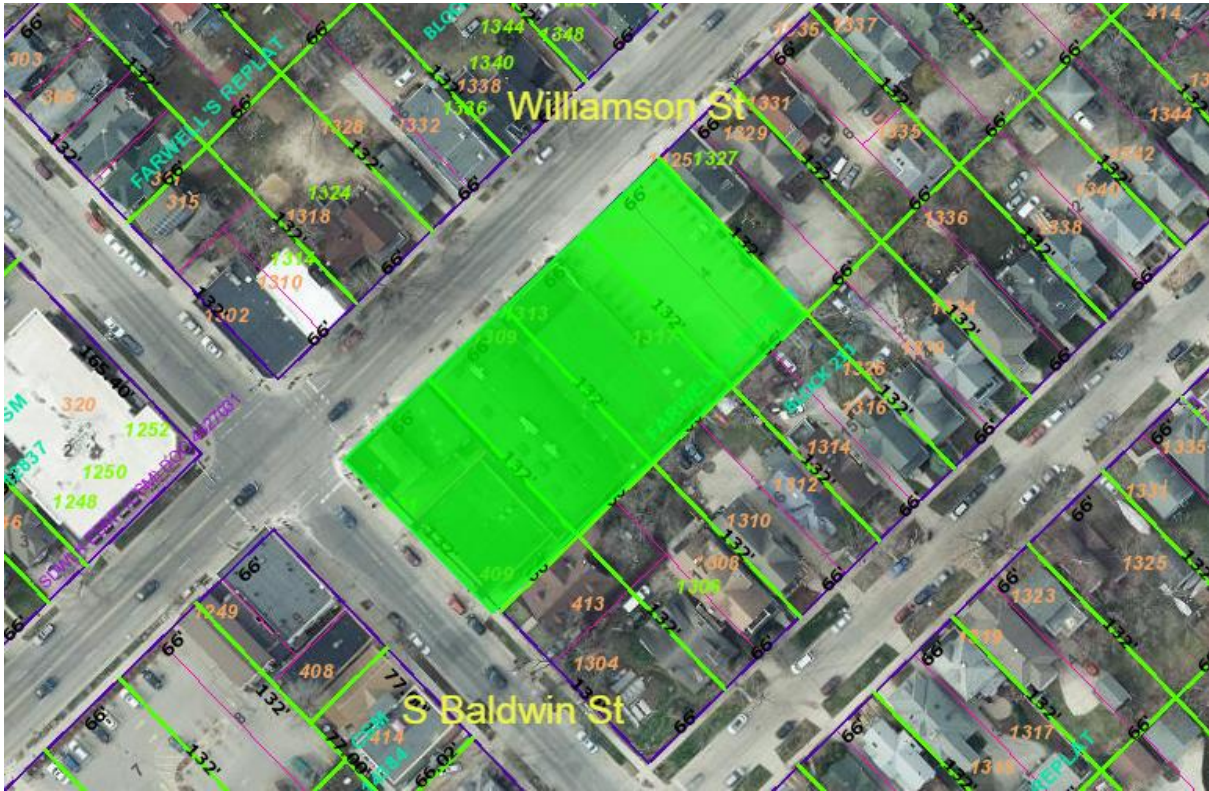


The developer, District Council of Madison, Inc., Society of St. Vincent de Paul, has been conditionally approved the demolition of three commercial buildings and the construction of an approximately 11,000-square-foot addition to create a two-story, approximately 29,100-square-foot, commercial building at its existing location at the corner of Williamson Street and S Baldwin Street.

Work under the Private Developer Agreement includes:

- Earth retention in City right of way requiring coordination with City for all utility conflicts.
- Private sanitary, storm, and lateral connections to public mains.
- Dedication of right of way or a Public Sidewalk Easement for and be responsible for the construction of a five (5)-foot wide sidewalk, eight (8)-foot terrace, and additional one (1) foot for maintenance along frontage of Williamson Street.
- Removal of two existing trees on Williamson Street approved by City Forestry.
- Possible installation of new trees as space allows per City Forestry.
- Street and terrace restoration, signing, and pavement marking as required by City Engineering and Traffic Engineering.
- Traffic control plan approved by Traffic Engineering.

1309 Williamson St. - St. Vincent de Paul
Project: 14492, Contract: 9268
Demolition

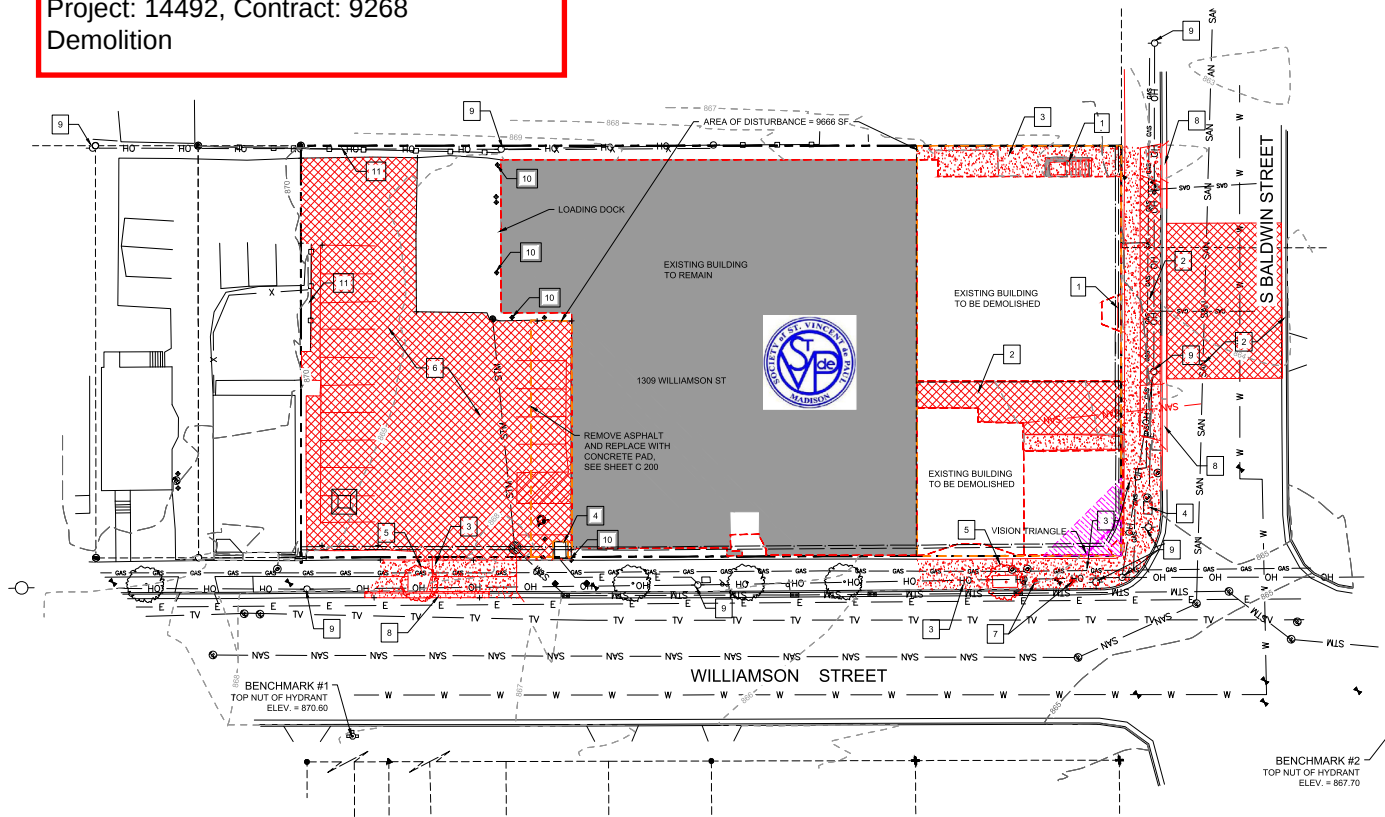

PLAN NOTES:

CONTRACTOR SHALL VERIFY ALL SITE CONDITIONS PRIOR TO COMMENCING WORK ON SITE

CONTRACTOR SHALL CALL FOR UTILITY LOCATIONS PRIOR TO COMMENCING WORK ON SITE

EXISTING SITE CONDITIONS BASED ON TOPOGRAPHIC SURVEY BY:
BIRRENKOTT SURVEYING

CONTRACTOR SHALL PROVIDE ALL NECESSARY EROSION CONTROL MEASURES PER CITY, COUNTY AND STATE SPECIFICATIONS. ALL MEASURES ARE TO BE IN PLACE PRIOR TO COMMENCING WORK ON SITE. ALL MEASURES SHALL BE MAINTAINED UNTIL SITE SOILS ARE STABILIZED.

CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS FOR DEMOLITION AND CONSTRUCTION PRIOR TO COMMENCING ANY WORK ON SITE.

ALL DAMAGED ASPHALT ON STREETS SHALL BE PATCHED TO THE SATISFACTION OF THE GOVERNING MUNICIPALITY.

SITE PLAN KEYNOTES

- 1 REMOVE EXISTING STAIRS
- 2 REMOVE EXISTING ASPHALT, 50' MIN. IN ROADWAY PER CITY OF MADISON
- 3 REMOVE EXISTING CONCRETE SIDEWALK
- 4 EXISTING TRANSFORMER TO REMAIN
- 5 REMOVE EXISTING TREE
- 6 EXISTING PARKING LOT TO BE RESTRIPTED, 18 STALLS
- 7 REMOVE EXISTING BIKE RACKS
- 8 REMOVE DRIVEWAY APRONS, REPLACE CURB
- 9 EXISTING UTILITY POLES/STOP LIGHTS TO REMAIN
- 10 EXISTING BOLLARDS, TYP.
- 11 EXISTING FENCE

FORESTRY NOTES

ALL PROPOSED STREET TREE REMOVALS WITHIN THE RIGHT OF WAY SHALL BE REVIEWED BY CITY FORESTRY BEFORE THE PLAN COMMISSION MEETING. STREET TREE REMOVALS REQUIRE APPROVAL AND A TREE REMOVAL PERMIT ISSUED BY CITY FORESTRY. ANY STREET TREE REMOVALS REQUESTED AFTER THE DEVELOPMENT PLAN IS APPROVED BY THE PLAN COMMISSION OR THE BOARD OF PUBLIC WORKS AND CITY FORESTRY WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHO'S DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO A TREE REMOVAL PERMIT BEING ISSUED.

CITY FORESTRY WILL ISSUE A STREET TREE REMOVAL PERMIT FOR 2 TREES: 9" ELM & 5" PEAR DUE TO AN PROPOSED DRIVEWAY AND CONSTRUCTION IMPACTS WITHIN ROOT ZONE. THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608)266-4816 TO OBTAIN PERMIT.

CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREE(S). THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608) 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.


AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS
EXCAVATION; THE EXCAVATION IS LIMITED TO WITHIN A FIFT (5) FEET OF THE CURB OF THE STREET; TREE OR WHEN CUTTING
ROOTS OVER 3 (3) INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY
FORESTRY AT (608) 266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE
IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS
CAN BE FOUND ON THE FOLLOWING WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)

SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.


ON THIS PROJECT, STREET TREE PROTECTION ZONE FENCING IS REQUIRED. THE FENCING SHALL BE ERECTED BEFORE THE DEMOLITION, GRADING OR CONSTRUCTION BEGINS. THE FENCE SHALL INCLUDE THE ENTIRE WIDTH OF TERRACE AND, EXTEND AT LEAST 5 FEET ON BOTH SIDES OF THE OUTSIDE EDGE OF THE TREE TRUNK. DO NOT REMOVE THE FENCING TO ALLOW FOR DELIVERIES OR EQUIPMENT ACCESS THROUGH THE TREE PROTECTION ZONE.

STREET TREE PRUNING SHALL BE COORDINATED WITH CITY FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. CONTACT CITY FORESTRY AT (608) 266-4816. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 - PART 1 STANDARDS FOR PRUNING.

NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONFLICTS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRADE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRADE, MATCHING FRAME AND/OR TREE GRADE, TREE GRAPE TYPE AND MATCHING FRAME: NEENAH 4X8 (R-8815-A), TREE GRADE NEENAH (R-8501-4818).



1309 Williamson St. - St. Vincent de Paul Project: 14492, Contract: 9268 Site Plan

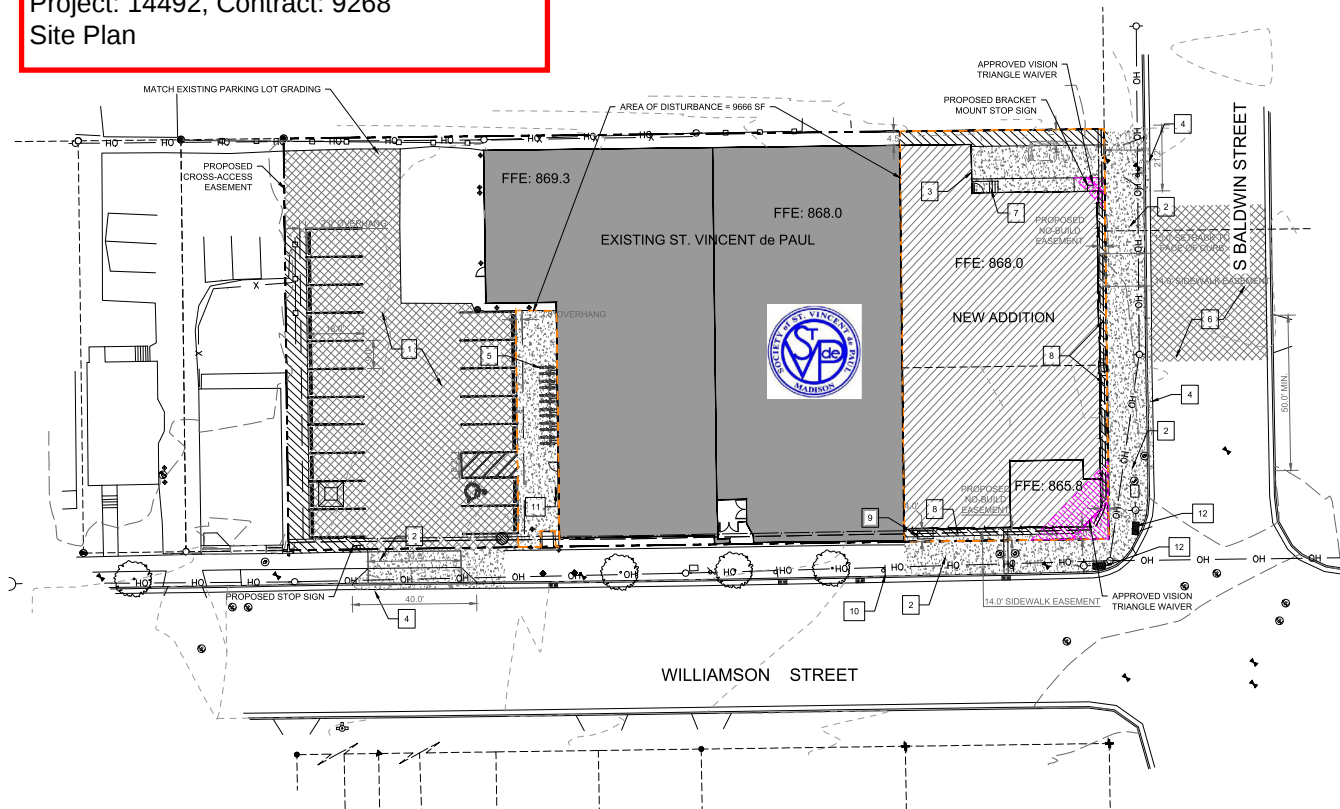

SITE INFORMATION

SITE ADDRESS: 1309 WILLIAMSON ST., MADISON, WI 53703
ZONING DISTRICT: COMMERCIAL
TOTAL SITE AREA: 34,858 SF / 0.8 ACRES
EXISTING IMPERVIOUS AREA: 33,818 SF (97% LOT COVERAGE)
PROPOSED IMPERVIOUS AREA: 32,888 SF (94% LOT COVERAGE)
PROPOSED DISTURBED AREA: 8,890 SF

BUILDING SETBACKS
FRONT: 5' OR 5'
SIDE: 5' OR 5'
REAR: LESSER OF 20% LOT DEPTH OR 20'
MAX. BUILDING HEIGHT: 75'

UTILITY COMPANY INFORMATION

ELECTRICITY - MADISON GAS AND ELECTRIC - (608) 218-5949
NATURAL GAS - MADISON GAS AND ELECTRIC - (608) 218-5949
WATER - CITY OF MADISON - (608) 266-4851
SEWER - CITY OF MADISON - (608) 266-4751

NOTE:

CONTRACTOR SHALL FIELD VERIFY ALL EXISTING UTILITIES ON AND ADJACENT TO THE SITE PRIOR TO THE START OF THE PROJECT.

RADI ARE FROM FACE OF CURB
DIMENSIONS ARE FROM FACE OF CURB

SITE PLAN KEYNOTES

- 1 5" LIGHT DUTY ASPHALT PAVING, SEE DETAIL ON SHEET C 501
- 2 PROPOSED CONCRETE, 5" MIN.
- 3 PROPOSED LOADING DOCK
- 4 REPLACE CURB FROM EXISTING DRIVEWAY APRONS
- 5 PROPOSED BIKE RACK, SEE DETAIL ON SHEET C 501
- 6 PROPOSED ASPHALT PATCH, 50' MIN.
- 7 PROPOSED CONCRETE STAIRS
- 8 PROPOSED PLANTER
- 9 PROPOSED BUS STOP BENCH, SEE DETAIL 5 ON SHEET C 501
- 10 PROPOSED CITY OF MADISON STANDARD BUS STOP SIGN
- 11 PROPOSED ACCESSIBLE PARKING SIGN
- 12 MATCH EXISTING HANDICAP RAMP CURB WITH 2'x4' TRUNCATED DOME CASTING PER CITY STANDARD

OFF-STREET PARKING STALLS SPACES PROVIDED:
(18) - 9'-0" x 18'-0" VEHICLES
(14) - BIKE PARKING

4" WIDE, HIGH VISIBILITY, PAVEMENT STRIPING, LANE MARKINGS AND TEXT
COLOR: YELLOW
PAINT SHALL BE SHERWIN WILLIAMS SETFAST PREMIUM ALKYD ZONE MARKING PAINT OR APPROVED EQUAL.

FORESTRY NOTES

ALL PROPOSED STREET TREE REMOVALS WITHIN THE RIGHT OF WAY SHALL BE REVIEWED BY CITY FORESTRY BEFORE THE PLAN COMMISSION MEETING. STREET TREE REMOVALS REQUIRE APPROVAL AND A TREE REMOVAL PERMIT ISSUED BY CITY FORESTRY. ANY STREET TREE REMOVALS REQUESTED AFTER THE DEVELOPMENT PLAN IS APPROVED BY THE PLAN COMMISSION OR THE BOARD OF PUBLIC WORKS AND CITY FORESTRY WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHO'S DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO A TREE REMOVAL PERMIT BEING ISSUED.

CITY FORESTRY WILL ISSUE A STREET TREE REMOVAL PERMIT FOR 2 TREES: 9" ELM & 5" PEAR DUE TO AN PROPOSED DRIVEWAY AND CONSTRUCTION IMPACTS WITHIN ROOT ZONE. THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608)266-4816 TO OBTAIN PERMIT.

CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREES. THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608)266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.

AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY AT (608)266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)

SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.

ON THIS PROJECT, STREET TREE PROTECTION ZONE FENCING IS REQUIRED. THE FENCING SHALL BE ERECTED BEFORE THE DEMOLITION, GRADING OR CONSTRUCTION BEGINS. THE FENCE SHALL INCLUDE THE ENTIRE WIDTH OF TERRACE AND, EXTEND AT LEAST 5 FEET ON BOTH SIDES OF THE OUTSIDE EDGE OF THE TREE TRUNK. DO NOT REMOVE THE FENCING TO ALLOW FOR DELIVERIES OR EQUIPMENT ACCESS THROUGH THE TREE PROTECTION ZONE.

STREET TREE PRUNING SHALL BE COORDINATED WITH CITY FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. CONTACT CITY FORESTRY AT (608) 266-4816. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 - PART 1 STANDARDS FOR PRUNING.

NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONFLICTS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRATE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRATE, MATCHING FRAME AND/OR TREE GUARD. TREE GRATE TYPE AND MATCHING FRAME: NEENAH 4X8 (R-8815-A). TREE GUARD NEENAH (R-8501-4818).

ST. VINCENT DE PAUL BUILDING ADDITION

SITE PLAN

MADISON, WISCONSIN

SNYDER & ASSOCIATES, INC.




Project No: 122.1166.30

Sheet C 200

DATE	BY
12-1-2022	SJA
REVISION	DATE
1	12-1-2022
2	12-1-2022
3	12-1-2022
4	12-1-2022
5	12-1-2022
6	12-1-2022
7	12-1-2022
8	12-1-2022
9	12-1-2022
10	12-1-2022
11	12-1-2022
12	12-1-2022
13	12-1-2022
14	12-1-2022
15	12-1-2022
16	12-1-2022
17	12-1-2022
18	12-1-2022
19	12-1-2022
20	12-1-2022
21	12-1-2022
22	12-1-2022
23	12-1-2022
24	12-1-2022
25	12-1-2022
26	12-1-2022
27	12-1-2022
28	12-1-2022
29	12-1-2022
30	12-1-2022
31	12-1-2022
32	12-1-2022
33	12-1-2022
34	12-1-2022
35	12-1-2022
36	12-1-2022
37	12-1-2022
38	12-1-2022
39	12-1-2022
40	12-1-2022
41	12-1-2022
42	12-1-2022
43	12-1-2022
44	12-1-2022
45	12-1-2022
46	12-1-2022
47	12-1-2022
48	12-1-2022
49	12-1-2022
50	12-1-2022
51	12-1-2022
52	12-1-2022
53	12-1-2022
54	12-1-2022
55	12-1-2022
56	12-1-2022
57	12-1-2022
58	12-1-2022
59	12-1-2022
60	12-1-2022
61	12-1-2022
62	12-1-2022
63	12-1-2022
64	12-1-2022
65	12-1-2022
66	12-1-2022
67	12-1-2022
68	12-1-2022
69	12-1-2022
70	12-1-2022
71	12-1-2022
72	12-1-2022
73	12-1-2022
74	12-1-2022
75	12-1-2022
76	12-1-2022
77	12-1-2022
78	12-1-2022
79	12-1-2022
80	12-1-2022
81	12-1-2022
82	12-1-2022
83	12-1-2022
84	12-1-2022
85	12-1-2022
86	12-1-2022
87	12-1-2022
88	12-1-2022
89	12-1-2022
90	12-1-2022
91	12-1-2022
92	12-1-2022
93	12-1-2022
94	12-1-2022
95	12-1-2022
96	12-1-2022
97	12-1-2022
98	12-1-2022
99	12-1-2022
100	12-1-2022
101	12-1-2022
102	12-1-2022
103	12-1-2022
104	12-1-2022
105	12-1-2022
106	12-1-2022
107	12-1-2022
108	12-1-2022
109	12-1-2022
110	12-1-2022
111	12-1-2022
112	12-1-2022
113	12-1-2022
114	12-1-2022
115	12-1-2022
116	12-1-2022
117	12-1-2022
118	12-1-2022
119	12-1-2022
120	12-1-2022
121	12-1-2022
122	12-1-2022
123	12-1-2022
124	12-1-2022
125	12-1-2022
126	12-1-2022
127	12-1-2022
128	12-1-2022
129	12-1-2022
130	12-1-2022
131	12-1-2022
132	12-1-2022
133	12-1-2022
134	12-1-2022
135	12-1-2022
136	12-1-2022
137	12-1-2022
138	12-1-2022
139	12-1-2022
140	12-1-2022
141	12-1-2022
142	12-1-2022
143	12-1-2022
144	12-1-2022
145	12-1-2022
146	12-1-2022
147	12-1-2022
148	12-1-2022
149	12-1-2022
150	12-1-2022
151	12-1-2022
152	12-1-2022
153	12-1-2022
154	12-1-2022
155	12-1-2022
156	12-1-2022
157	12-1-2022
158	12-1-2022
159	12-1-2022
160	12-1-2022
161	12-1-2022
162	12-1-2022
163	12-1-2022
164	12-1-2022
165	12-1-2022
166	12-1-2022
167	12-1-2022
168	12-1-2022
169	12-1-2022
170	12-1-2022
171	12-1-2022
172	12-1-2022
173	12-1-2022
174	12-1-2022
175	12-1-2022
176	12-1-2022
177	12-1-2022
178	12-1-2022
179	12-1-2022
180	12-1-2022
181	12-1-2022
182	12-1-2022
183	12-1-2022
184	12-1-2022
185	12-1-2022
186	12-1-2022
187	12-1-2022
188	12-1-2022
189	12-1-2022
190	12-1-2022
191	12-1-2022
192	12-1-2022
193	12-1-2022
194	12-1-2022
195	12-1-2022
196	12-1-2022
197	12-1-2022
198	12-1-2022
199	12-1-2022
200	12-1-2022

Sheet C 200

1309 Williamson St. - St. Vincent de Paul
Project: 14492, Contract: 9268
Utility Plan

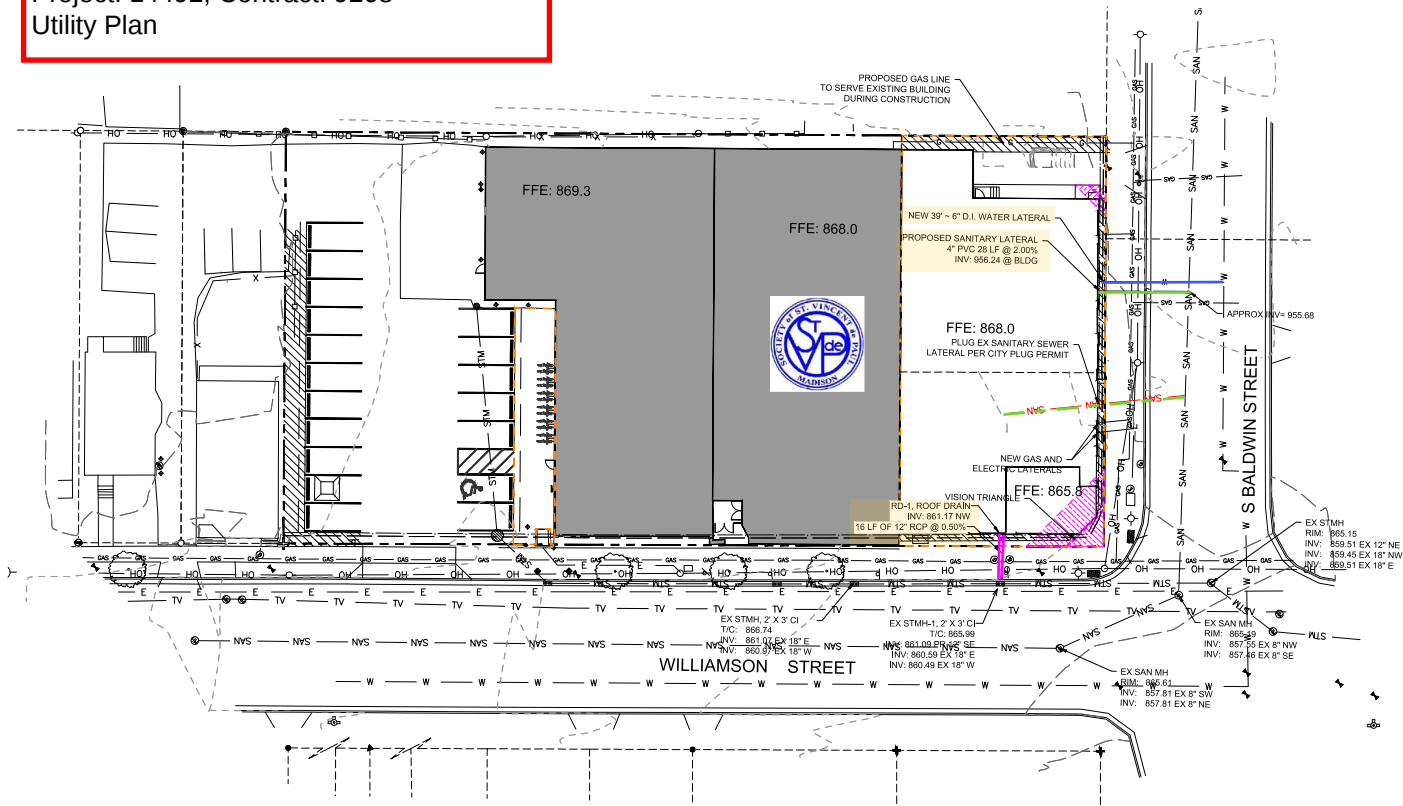

SITE INFORMATION

SITE ADDRESS: 1309 WILLIAMSON ST., MADISON, WI 53703
ZONING DISTRICT: COMMERCIAL
TOTAL SITE AREA: 34,858 SF / 0.8 ACRES
EXISTING IMPERVIOUS AREA: 33,818 SF (97% LOT COVERAGE)
PROPOSED IMPERVIOUS AREA: 32,888 SF (94% LOT COVERAGE)
PROPOSED DISTURBED AREA: 9,235 SF

BUILDING SETBACKS

FRONT: 0' OR 5'
SIDE: 0' OR 5'
REAR: LESSER OF 20% OF LOT DEPTH OR 20'
MIN. DIST. BETWEEN 2 STRUCTURES: 5 FEET


UTILITY COMPANY INFORMATION

ELECTRICITY - MADISON GAS AND ELECTRIC - (608) 218-5049
NATURAL GAS - MADISON GAS AND ELECTRIC - (608) 218-5949
WATER - CITY OF MADISON - (608) 266-4651
SEWER - CITY OF MADISON - (608) 266-4751

NOTE:

CONTRACTOR SHALL FIELD VERIFY ALL EXISTING UTILITIES ON AND ADJACENT TO THE SITE PRIOR TO THE START OF THE PROJECT.

CONTRACTOR SHALL BE LICENSED BY THE CITY OF MADISON TO WORK IN THE PUBLIC RIGHT OF WAY



ST. VINCENT DE PAUL BUILDING ADDITION

UTILITY PLAN

MADISON, WISCONSIN

SNYDER & ASSOCIATES, INC.



Project No: 122.1166.30


Sheet C 300

	MARK	REVISION	DATE	BY
	Engineer: SJA	Checked By: SJA	Scale: 1" = 20'	
	Techician: MW	Date: 12-1-2022	I+AS: TTN-R10E-S7	


Sheet C 300

Project No: 122.1166.30

1309 Williamson St. - St. Vincent de Paul
Project: 14492, Contract: 9268
Exterior Elevations for reference only.

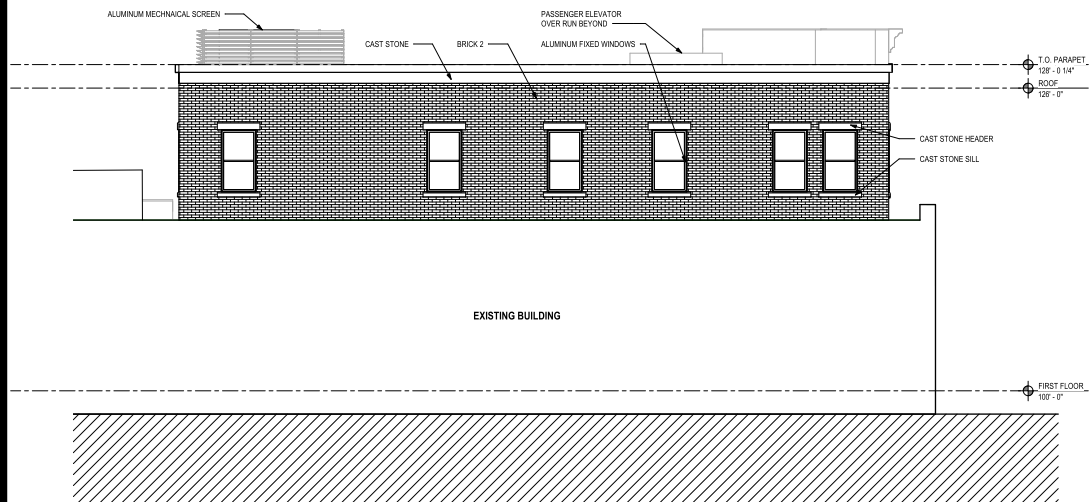

3 NORTH EAST ELEVATION
3/16" = 1'-0"

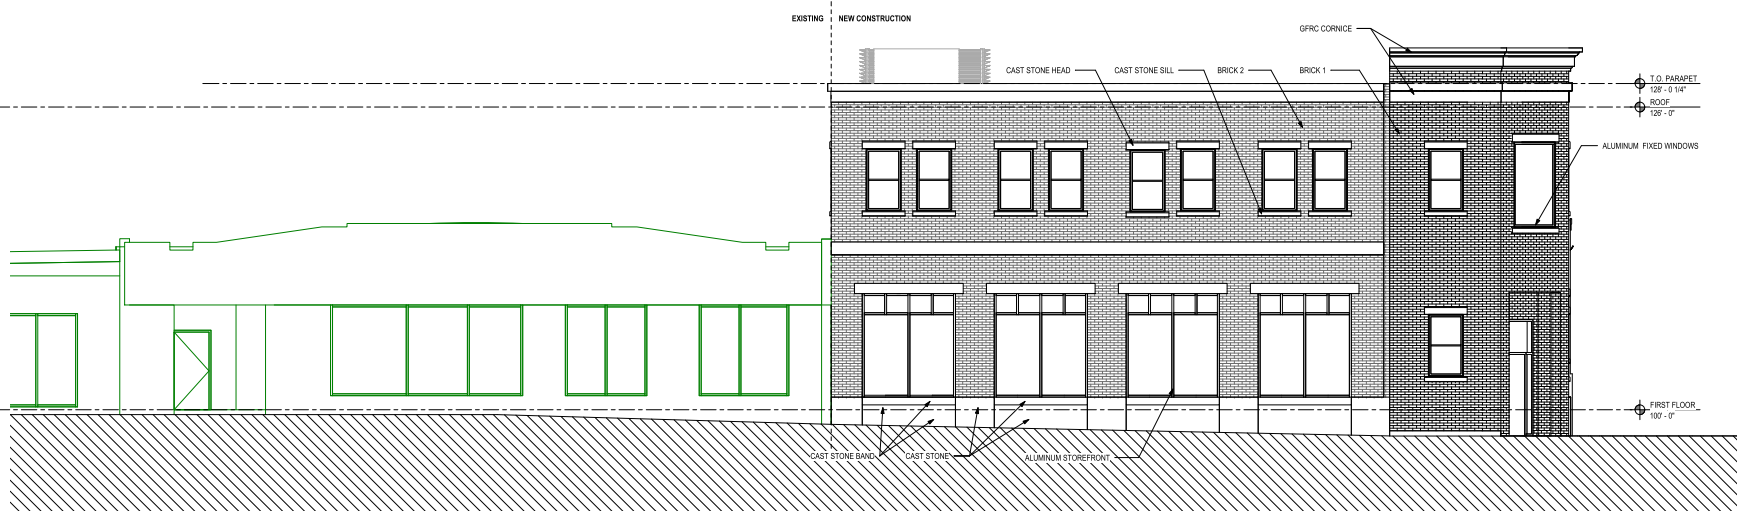

5 NORTH WEST ELEVATION
3/16" = 1'-0"



ELEVATION LEGEND & NOTES

MASONRY	COLOR	MORETAB.
BRK-1 BRICK VENEER	COLOR	COLOR
BRK-2 BRICK VENEER	COLOR	COLOR
EXT-1 EXTERIOR MASONRY TILE	COLOR	COLOR
STN-3 MANUFACTURED THIN STONE	COLOR	COLOR

CST CAST STONE	COLOR	COLOR
PCP PRECAST PANEL	COLOR	COLOR
CNC CONCRETE	COLOR	COLOR
CJ CONTROL JOINT	COLOR	COLOR

PRE-FINISHED METAL	MANUFACTURER (COATED METAL & GROUP)
--------------------	-------------------------------------

APT ALUMINUM PANEL TRIM	CLEAR
ARS ALUMINUM RAILING SYSTEM	COLOR
AMS ALUMINUM MECHANICAL SCREEN	COLOR
DS DOWNSPOUT	COLOR
GTR GUTTER	COLOR
SCR SCUPPER	COLOR

CANOPY ACCESSORIES	COLOR
--------------------	-------

CST CABLE STAY	COLOR
----------------	-------

STOREFRONT	COLOR
------------	-------

ANODIZED ALUMINUM CHAMPAGNE	COLOR (DARK BRONZE, CLEAR, COLOR)
-----------------------------	-----------------------------------

GENERAL NOTES

- NOT ALL MASONRY PENETRATIONS SHOWN. COORDINATE WITH MEP CONTRACTORS.
- AT 135 DEGREE OUTSIDE CORNERS PROVIDE 135 DEGREE BRICK CORNER UNITS.
- CONTROL JOINTS CONTINUOUS FROM TOP OF FOUNDATION TO TOP OF WALL.

DIMENSION IV
Madison Design Group

architecture · interior design · planning

6515 Grand Teton Plaza, Suite 120

Madison, Wisconsin 53719

p608.829.4444 f608.829.4445 dimensionivmadison.com

ST. VINCENT de PAUL
BALDWIN - WILLIAMSON

1309 Williamson St. Madison, WI 53703

DATE OF ISSUE: 12/08/2022

REVISIONS:


PROJECT # 21123

EXTERIOR
ELEVATIONS

A2.0

© 2021 Dimension IV · Madison, LLC All Rights Reserved

1309 Williamson St. - St. Vincent de Paul
Project: 14492, Contract: 9268
Exterior Elevations for reference only.

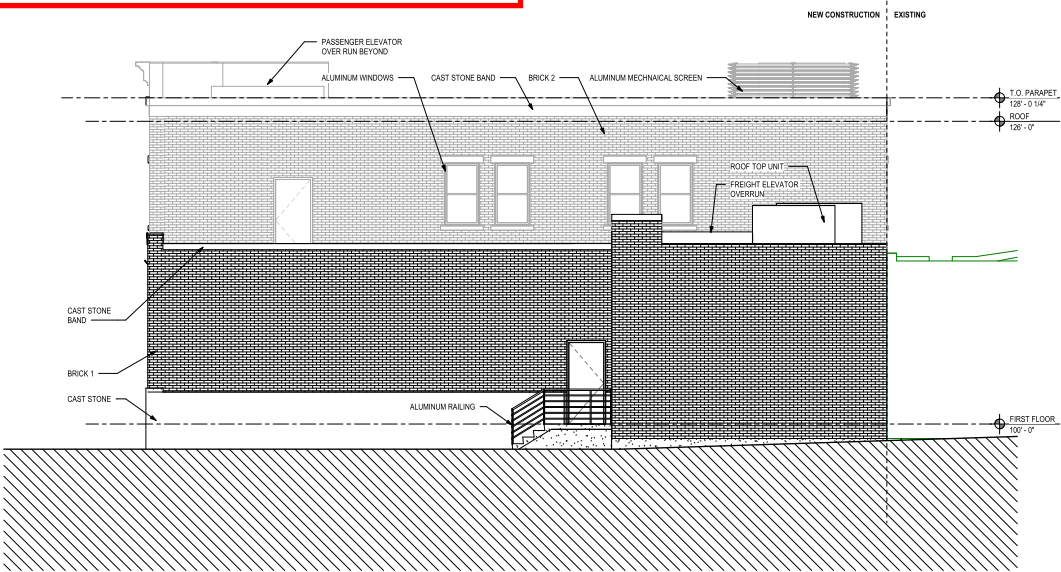

1 SOUTH EAST ELEVATION
3/16" = 1'-0"



2 SOUTH WEST ELEVATION
3/16" = 1'-0"

ELEVATION LEGEND & NOTES		
MASONRY	COLOR	MORTAR
BRK-1	BRICK VENEER	COLOR
BRK-2	BRICK VENEER	COLOR
EXT	EXTERIOR MASONRY TILE	COLOR
STN-3	MANUFACTURED THIN STONE	COLOR
CST	CAST STONE	COLOR
PCP	PREFRCAST PANEL	COLOR
CNC	CONCRETE	COLOR
CJ	CONTROL JOINT	
PREFINISHED METAL MANUFACTURER (COATED METALS GROUP)		
APT	ALUMINUM PANEL TRIM	CLEAR
ARS	ALUMINUM RAILING SYSTEM	COLOR
AMS	ALUMINUM MECHANICAL SCREEN	COLOR
DS	DOWNSPOUT	COLOR
GTR	GUTTER	COLOR
SCR	SCULPTER	COLOR
CANOPY ACCESSORIES		
CAS	CABLE STAY	COLOR
STOREFRONT		
ANODIZED ALUMINUM	COLOR (DARK BRONZE, CLEAR, CHAMPAGNE)	
GENERAL NOTES		
A. NOT ALL MASONRY PENETRATIONS SHOWN, COORDINATE WITH MEP CONTRACTORS.		
B. AT 135 DEGREE OUTSIDE CORNERS PROVIDE 135 DEGREE BRICK CORNER UNITS.		
C. CONTROL JOINTS CONTINUOUS FROM TOP OF FOUNDATION TO TOP OF WALL.		



architecture · interior design · planning
6515 Grand Teton Plaza, Suite 120
Madison, Wisconsin 53719
p608.829.4444 f608.829.4445 dimensionivmadison.com

ST. VINCENT de PAUL
BALDWIN - WILLIAMSON
1309 Williamson St. Madison, WI 53703

DATE OF ISSUE: 12/08/2022

REVISIONS:

PROJECT # 21123

EXTERIOR
ELEVATIONS

A2.1