

# URBAN DESIGN COMMISSION APPLICATION

# UDC

City of Madison  
Planning Division  
Madison Municipal Building, Suite 017  
215 Martin Luther King, Jr. Blvd.  
P.O. Box 2985  
Madison, WI 53701-2985  
(608) 266-4635



## FOR OFFICE USE ONLY:

Paid \_\_\_\_\_ Receipt # \_\_\_\_\_

Date received \_\_\_\_\_

Received by \_\_\_\_\_

Aldermanic District \_\_\_\_\_

Zoning District \_\_\_\_\_

Urban Design District \_\_\_\_\_

Submission reviewed by \_\_\_\_\_

Legistar # \_\_\_\_\_

Complete all sections of this application, including the desired meeting date and the action requested.

*If you need an interpreter, translator, materials in alternate formats or other accommodations to access these forms, please call the phone number above immediately.*

## 1. Project Information

Address: \_\_\_\_\_

Title: \_\_\_\_\_

## 2. Application Type (check all that apply) and Requested Date

UDC meeting date requested \_\_\_\_\_

New development

Alteration to an existing or previously-approved development

Informational

Initial approval

Final approval

## 3. Project Type

Project in an Urban Design District

Project in the Downtown Core District (DC), Urban Mixed-Use District (UMX), or Mixed-Use Center District (MXC)

Project in the Suburban Employment Center District (SEC), Campus Institutional District (CI), or Employment Campus District (EC)

Planned Development (PD)

General Development Plan (GDP)

Specific Implementation Plan (SIP)

Planned Multi-Use Site or Residential Building Complex

### Signage

Comprehensive Design Review (CDR)

Signage Variance (i.e. modification of signage height, area, and setback)

Signage Exception

### Other

Please specify

## 4. Applicant, Agent, and Property Owner Information

**Applicant name** \_\_\_\_\_

Company \_\_\_\_\_

Street address \_\_\_\_\_

City/State/Zip \_\_\_\_\_

Telephone \_\_\_\_\_

Email \_\_\_\_\_

**Project contact person** \_\_\_\_\_

Company \_\_\_\_\_

Street address \_\_\_\_\_

City/State/Zip \_\_\_\_\_

Telephone \_\_\_\_\_

Email \_\_\_\_\_

**Property owner (if not applicant)** \_\_\_\_\_

Street address \_\_\_\_\_

City/State/Zip \_\_\_\_\_

Telephone \_\_\_\_\_

Email \_\_\_\_\_

**Urban Design Commission Application (continued)**



**5. Required Submittal Materials**

- Application Form**
- Letter of Intent**
  - If the project is within an Urban Design District, a summary of how the development proposal addresses the district criteria is required
  - For signage applications, a summary of how the proposed signage is consistent with the applicable CDR or Signage Variance review criteria is required.
- Development Plans** (Refer to checklist on Page 4 for plan details)
- Filing fee**
- Electronic Submittal\***
- Notification to the District Alder**
  - Please provide an email to the District Alder notifying them that you are filing this UDC application. Please send this as early in the process as possible and provide a copy of that email with the submitted application.

Each submittal must include fourteen (14) 11" x 17" **collated** paper copies. Landscape and Lighting plans (if required) must be **full-sized and legible**. Please refrain from using plastic covers or spiral binding.

Both the paper copies and electronic copies **must** be submitted prior to the application deadline before an application will be scheduled for a UDC meeting. Late materials will not be accepted. A completed application form is required for each UDC appearance.

For projects also requiring Plan Commission approval, applicants must also have submitted an accepted application for Plan Commission consideration prior to obtaining any formal action (initial or final approval) from the UDC. All plans must be legible when reduced.

*\*Electronic copies of all items submitted in hard copy are required. Individual PDF files of each item submitted should be compiled on a CD or flash drive, or submitted via email to [udcapplications@cityofmadison.com](mailto:udcapplications@cityofmadison.com). The email must include the project address, project name, and applicant name. Electronic submittals via file hosting services (such as Dropbox.com) are not allowed. Applicants who are unable to provide the materials electronically should contact the Planning Division at (608) 266-4635 for assistance.*

**6. Applicant Declarations**

1. Prior to submitting this application, the applicant is required to discuss the proposed project with Urban Design Commission staff. This application was discussed with Kevin Firchow on 3/18/2021.
2. The applicant attests that all required materials are included in this submittal and understands that if any required information is not provided by the application deadline, the application will not be placed on an Urban Design Commission agenda for consideration.

Name of applicant Tyler Krupp DocuSigned by: Eric Halverson Relationship to property developer  
 Authorizing signature of property owner \_\_\_\_\_ Date 11/28/2022

**7. Application Filing Fees**

Fees are required to be paid with the first application for either initial or final approval of a project, unless the project is part of the combined application process involving the Urban Design Commission in conjunction with Plan Commission and/or Common Council consideration. Make checks payable to City Treasurer. Credit cards may be used for application fees of less than \$1,000.

Please consult the schedule below for the appropriate fee for your request:

- Urban Design Districts: \$350 (per §35.24(6) MGO).
- Minor Alteration in the Downtown Core District (DC) or Urban Mixed-Use District (UMX) : \$150 (per §33.24(6)(b) MGO)
- Comprehensive Design Review: \$500 (per §31.041(3)(d)(1)(a) MGO)
- Minor Alteration to a Comprehensive Sign Plan: \$100 (per §31.041(3)(d)(1)(c) MGO)
- All other sign requests to the Urban Design Commission, including, but not limited to: appeals from the decisions of the Zoning Administrator, requests for signage variances (i.e. modifications of signage height, area, and setback), and additional sign code approvals: \$300 (per §31.041(3)(d)(2) MGO)

A filing fee is not required for the following project applications if part of the combined application process involving both Urban Design Commission and Plan Commission:

- Project in the Downtown Core District (DC), Urban Mixed-Use District (UMX), or Mixed-Use Center District (MXC)
- Project in the Suburban Employment Center District (SEC), Campus Institutional District (CI), or Employment Campus District (EC)
- Planned Development (PD): General Development Plan (GDP) and/or Specific Implementation Plan (SIP)
- Planned Multi-Use Site or Residential Building Complex

## Introduction

The City of Madison's Urban Design Commission (UDC) has been created to:

- Encourage and promote high quality in the design of new buildings, developments, remodeling, and additions so as to maintain and improve the established standards of property values within the City.
- Foster civic pride in the beauty and nobler assets of the City, and in all other ways possible assure a functionally efficient and visually attractive City in the future.

## Types of Approvals

There are three types of requests considered by the UDC:

- Informational Presentation. Applicants may, at their discretion, request to make an Informational Presentation to the UDC prior to seeking any approvals to obtain early feedback and direction before undertaking detailed design. Applicants should provide details on the context of the site, design concept, site and building plans, and other relevant information to help the UDC understand the proposal and provide feedback. (Does not apply to CDR's or Signage Variance requests)
- Initial Approval. Applicants may, at their discretion, request initial approval of a proposal by presenting preliminary design information. As part of their review, the Commission will provide feedback on the design information that should be addressed at Final Approval stage.
- Final Approval. Applicants may request Final Approval of a proposal by presenting all final project details. Recommendations or concerns expressed by the UDC in the initial approval must be addressed at this time.

## Presentations to the Commission

Primarily, the UDC is interested in the appearance and design quality of projects. Emphasis should be given to the site plan, landscape plan, lighting plan, building elevations, exterior building materials, color scheme, and graphics.

When presenting projects to the UDC, applicants must fill out a registration slip provided in the meeting room and present it to the Secretary. Presentations should generally be limited to 5 minutes or as extended by motion by consent of the Commission. The Commission will withhold questions until the end of the presentation.

Applicants are encouraged to consider the use of various graphic presentation material including a locator map, photographs, renderings/model, scale drawings of the proposal in context with adjacent buildings/uses/signs, etc., as may be deemed appropriate to describe the project and its surroundings. Graphics should be mounted on rigid boards so that they may be easily displayed. **Applicants/presenters are responsible for all presentation materials, AV equipment and easels.**

# URBAN DESIGN DEVELOPMENT PLANS CHECKLIST

The items listed below are minimal application requirements for the type of approval indicated. Please note that the UDC and/or staff may require additional information in order to have a complete understanding of the project.

## 1. Informational Presentation

- Locator Map
- Letter of Intent (If the project is within an Urban Design District, a summary of how the development proposal addresses the district criteria is required)
- Contextual site information, including photographs and layout of adjacent buildings/structures
- Site Plan
- Two-dimensional (2D) images of proposed buildings or structures.

Providing additional information beyond these minimums may generate a greater level of feedback from the Commission.

### Requirements for All Plan Sheets

1. Title block
2. Sheet number
3. North arrow
4. Scale, both written and graphic
5. Date
6. Fully dimensioned plans, scaled at 1"= 40' or larger

*\*\* All plans must be legible, including the full-sized landscape and lighting plans (if required)*

## 2. Initial Approval

- Locator Map
- Letter of Intent (If the project is within a Urban Design District, a summary of how the development proposal addresses the district criteria is required)
- Contextual site information, including photographs and layout of adjacent buildings/structures
- Site Plan showing location of existing and proposed buildings, walks, drives, bike lanes, bike parking, and existing trees over 18" diameter
- Landscape Plan and Plant List (*must be legible*)
- Building Elevations in both black & white and color for all building sides (include material callouts)
- PD text and Letter of Intent (if applicable)

Providing additional information beyond these minimums may generate a greater level of feedback from the Commission.

## 3. Final Approval

All the requirements of the Initial Approval (see above), **plus:**

- Grading Plan
- Proposed Signage (if applicable)
- Lighting Plan, including fixture cut sheets and photometrics plan (*must be legible*)
- Utility/HVAC equipment location and screening details (with a rooftop plan if roof-mounted)
- PD text and Letter of Intent (if applicable)
- Samples of the exterior building materials (presented at the UDC meeting)

## 4. Comprehensive Design Review (CDR) and Variance Requests (Signage applications only)

- Locator Map
- Letter of Intent (a summary of how the proposed signage is consistent with the CDR or Signage Variance criteria is required)
- Contextual site information, including photographs of existing signage both on site and within proximity to the project site
- Site Plan showing the location of existing signage and proposed signage, dimensioned signage setbacks, sidewalks, driveways, and right-of-ways
- Proposed signage graphics (fully dimensioned, scaled drawings, including materials and colors, and night view)
- Perspective renderings (emphasis on pedestrian/automobile scale viewsheds)
- Illustration of the proposed signage that meets Ch. 31, MGO compared to what is being requested.
- Graphic of the proposed signage as it relates to what the Ch. 31, MGO would permit

November 28, 2022

Ms. Heather Stouder  
Director, Planning Division  
City of Madison Department of Planning & Community & Economic Development  
215 Martin Luther King Jr. Blvd., Ste 017  
Madison, Wisconsin 53703



RE: Letter of Intent

2165 Linden Ave., Madison, WI  
UDC Submittal  
KBA Project# 2102

Ms. Heather Stouder,

The following is submitted together with the plans and application for the staff, Urban Design Commission, and Plan Commission's consideration of approval.

Owner:	Threshold Development 1954 Atwood Ave. Madison, WI 53704 608-233-6000 Contact: Joe Krupp <a href="mailto:joe@primeurbanproperties.com">joe@primeurbanproperties.com</a>	Architect:	Knothe & Bruce Architects, LLC 7601 University Avenue, Ste 201 Middleton, WI 53562 608-836-3690 Contact: Kevin Burow <a href="mailto:kburow@knothebruce.com">kburow@knothebruce.com</a>
Civil Engineer:	JSD Professional Services, Inc. 161 Horizon Drive, Ste. 101 Verona, WI 53593 (608) 848-5060 Contact: Kevin Yeska <a href="mailto:Kevin.Yeska@jsdinc.com">Kevin.Yeska@jsdinc.com</a>	Landscape Architect:	JSD Professional Services, Inc. 161 Horizon Drive, Ste. 101 Verona, WI 53593 (608) 848-5060 Contact: Kevin Yeska <a href="mailto:Kevin.Yeska@jsdinc.com">Kevin.Yeska@jsdinc.com</a>

**Introduction:**

This proposed development is currently zoned as TR-VI (Traditional Residential-Varied District I) and is the current site of the Zion Faith Community Church. The site will need to be rezoned as PD (Planned Development District) and this will provide the opportunity for new construction of much needed residential units that have walkable access to a coffeeshop, barber shop, restaurants, and many other essential, local businesses.

**Project Description:**

This development proposes a two to three-story, multi-family building with structured underground parking. There will be 32 dwelling units that consist of studios, one-bedrooms, and two-bedroom apartments.

The proposed building has been designed to be in context with the neighboring structures and will serve as a transition from the 4-story mixed use building to the south and the single-family homes to the north. This building has been designed as a two to three-story structure with the third floor set back

on all street sides of the property such that there are only two-story facades along the sidewalks. The building has also been designed to resemble townhomes built next to each other so that the residential scale and context is further reinforced. This design solution was achieved after much discussion with the stakeholders of this project, as explained in more detail below. The garage access is located along the south side of the building and is utilizing a shared access easement between the neighboring properties to keep all vehicular traffic away from the surrounding neighborhood.

## **Planned Development Standards**

### **Statement of Purpose**

We believe the proposed project meets the *general intention* and *specific requirements* for a planned development district. While we understand the PD is meant to rarely be used, we believe the particulars of this site and process are uniquely suited for a PD. We were encouraged to pursue a PD by City Officials and neighborhood leaders familiar with the particularities of this site and process.

### **General intention of PD**

The general intention of the PD district is “*to provide a voluntary regulatory framework as a means to facilitate the unique development of land in an integrated and innovative fashion, to allow for flexibility in site design, and to encourage development that is sensitive to environmental, cultural, and economic considerations, and that features high-quality architecture and building materials.*” We believe this proposal meets the standard of being a ‘*unique development*’, in multiple ways. The context itself, of a Church vacating land in a manner not anticipated by city planning makes the underlying zoning issues unique. That underlying unanticipated zoning context generated a truly unique consultative process involving neighborhood and City stakeholders. While that process did not generate unanimity or consensus, it did generate the outlines of a compromise that garnered significant support. The PD is being requested partly as a means to be sensitive to the ‘*environmental and cultural*’ considerations of respecting that compromise. The PD was thought to be the best way of ensuring that the developers would be narrowly constrained to honor the spirit and outline of the unique and specific compromise(s) that resulted from the neighborhood process.

Lastly, we believe the architecture and materials of this project meet the standard of ‘*high-quality architecture and building materials*’ and were arrived at in response to guidance from the neighborhood, Urban Design Commission, and Passive House consultants.

### **Specific objective(s)**

In addition to meeting the general intent of the PD district, our proposal aims to achieve the specific objective(s) (A) of the PD guidelines “*Promotion of green building technologies, low-impact development techniques for stormwater management, and other innovative measures that encourage sustainable development.*” This project will be exemplary in promoting green building

technologies, low-impact development techniques for stormwater management, and more generally encouraging sustainable development.

We are committed to pursuing passive house net-zero ready standards of construction and building performance on this project. In our assessment, passive house construction and the PHIUS criteria for certification are the current best practice for sustainable building in the United States. Passive house construction can reduce energy use by up to 70-80%. When combined with renewable Photo Voltaic (PV) energy, passive house buildings can attain net-zero energy use. While this building approach and technology has a long history, it's only in the past 5 years that it has become a reality in multifamily housing projects at any scale. It is quickly being incentivized, and becoming the norm, in Massachusetts, New York, and Pennsylvania. We are committed to pursuing passive house net zero ready standards on this project for its own sake, but also as a step towards making passive house construction our baseline for all future projects. We have hired Precipitate passive house consulting to train our entire team, including the contractor and architect for this project, and to expand our capacities for future passive house projects in Madison. This project would be the first attempt in Madison by a for profit developer to achieve passive house standards on a multifamily project. We hope to demonstrate to ourselves, the City, and the broader development community that such standards can be achieved by for profit developers in Madison.

### **Low impact development techniques for stormwater management**

1. This project will provide greater improvements over current conditions for stormwater management by the elimination of the surface parking lot and being in full compliance with the new stormwater standards.
2. A rain garden will be utilized to visually demonstrate a stormwater management system at the northwest corner of the property, so that the residents and the surrounding neighborhood can see this and enjoy the beauty that it provides.
3. The rest of the stormwater management will be accomplished with a green roof system on the 3<sup>rd</sup> floor level of this building. This too will be visible and enjoyed by the residents of this project.
4. Beyond the items listed above, no man-made structures or holding tanks are required, beyond standard piping that ties into the storm sewer system.

### **City and Neighborhood Input:**

We met with the City Staff and the Alder very early on in this process to have a solid understanding of the steps that would need to be taken for this redevelopment to be approved. There were then multiple meetings directly with the immediate neighbors of this property and larger group neighborhood meetings as well, that were spearheaded by Brad Hinkfuss with SASY. These often-included Alder Benford and then Alder Foster was included as well. The project evolved through these discussions and the final resulting design was based on an iterative process arrived at through collaboration with all

parties. We then presented this project to DAT and received further feedback and that information that has been taken into account with this submittal.

### **Demolition Standards**

The structure to be removed has served the community well but unfortunately given today's environment and the diminishing number of members of the Zion Faith Community, the building is no longer needed to host worship services or provide other uses for this congregation. Zion has merged with Lakeview Moravian Community Church and will be basing their ministries out of that facility and has made the hard decision that this building will no longer be used. The structure itself, while having sentimental value, is not a landmark structure, nor does it have any historical significance for this area. Also, it is not of an uncommon or unusual design or method of construction, and as such should meet the demolition criteria. We believe the demolition standards can be met, and a Re-use and Recycling Plan will be submitted prior to the deconstruction of the existing commercial structure.

### **Site Development Data:**

#### Densities:

Lot Area	20,597 S.F. / 0.47 acres
Dwelling Units	32 DU
Lot Area / D.U.	644 S.F./D.U.
Density	68 units/acre
Open Space	3,331 S.F.
Open Space / Unit	104 S.F./Unit
Lot Coverage	15,220 S.F. = 74% of total lot

Building Height: 2 to 3 Stories

#### Dwelling Unit Mix:

Junior One Bedroom	8
One Bedroom	13
<u>Two Bedroom</u>	<u>11</u>
Total Dwelling Units	32

#### Vehicle Parking:

Surface	0 stalls
<u>Enclosed</u>	<u>32 stalls</u>
Total	32 stalls

#### Bicycle Parking:

Surface Guest	4 stalls
Underground Garage F.M.	24 stalls
<u>Underground Garage W.M.</u>	<u>8 stalls</u>
Total	36 stalls



**Project Schedule:**

It is anticipated that the construction on this site will begin in Summer of 2023 with a final completion date of Spring/Summer of 2024.

Thank you for your time reviewing our proposal.

Sincerely,

A handwritten signature in black ink that reads "Kevin Burow". The signature is written in a cursive, flowing style.

Kevin Burow, AIA, NCARB, LEED AP  
Managing Manager

## Zoning Text

### Zion Lutheran Church Redevelopment

2165 Linden Ave.

Legal Description: The lands subject to this planned development shall include those described in Exhibit B (attached).

- A. Statement of Purpose: This zoning district is established to allow the construction of residential multi-family housing.
- B. Permitted Uses:
  - 1. Those uses that are stated as permitted or conditional uses in the Traditional Shopping Street (TSS) zoning district.
  - 2. Uses accessory to the permitted or conditional uses listed in the TSS zoning district.
- C. Lot Area: As stated in Exhibit B (attached).
- D. Maximum Building Height: Heights shall be as indicated on the adopted plans and shall be no higher than 3 stories.
- E. Set Backs: Set backs are to be provided as shown on the approved plans.
- F. Landscaping: Site landscaping will be provided as shown on the approved plans.
- G. Accessory Off-Street Parking & Loading: Accessory off-street parking will be provided as shown on the approved plans.
- H. Lighting: Site lighting will be provided as shown on the approved plans.
- I. Signage: Signage will be allowed as per Chapter 31 of the Madison General Ordinances, as compared to the TSS zoning district.
- J. Phasing:
  - a. This project will be completed in one phase.
- K. Family Definition: The family definition of this Planned Development shall coincide with the definition given in Chapter 28.211 of the Madison General Ordinances for the TSS zoning district.
- L. Alterations: No alteration or revision of this planned development shall be permitted unless approved by the City Plan Commission, however, the Zoning Administrator may issue permits for minor alterations or additions which are approved by the Director of Planning and Development and the alderperson of the district and are compatible with the concept approved by the City Plan Commission.



West of Site



South of Site



West of Site



South of Site

2165 LINDEN AVE  
MADISON, WI  
CONTEXTUAL  
SITE IMAGES





North of Site



North of Site



Northwest of Site



East of Site

2165 LINDEN AVE  
MADISON, WI  
CONTEXTUAL  
SITE IMAGES






# WPX LED Wall Packs



Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Specifications



Front View

Side View

Luminaire	Height (H)	Width (W)	Depth (D)	Side Conduit Location		Weight
				A	B	
WPX1	8.1" (20.6 cm)	11.1" (28.3 cm)	3.2" (8.1 cm)	4.0" (10.3 cm)	0.6" (1.6 cm)	6.1 lbs (2.8kg)
WPX2	9.1" (23.1 cm)	12.3" (31.1 cm)	4.1" (10.5 cm)	4.5" (11.5 cm)	0.7" (1.7 cm)	8.2 lbs (3.7kg)
WPX3	9.5" (24.1 cm)	13.0" (33.0 cm)	5.5" (13.7 cm)	4.7" (12.0 cm)	0.7" (1.7 cm)	11.0 lbs (5.0kg)

## Introduction

The WPX LED wall packs are energy-efficient, cost-effective, and aesthetically appealing solutions for both HID wall pack replacement and new construction opportunities. Available in three sizes, the WPX family delivers 1,550 to 9,200 lumens with a wide, uniform distribution.

The WPX full cut-off solutions fully cover the footprint of the HID glass wall packs that they replace, providing a neat installation and an upgraded appearance. Reliable IP66 construction and excellent LED lumen maintenance ensure a long service life. Photocell and emergency egress battery options make WPX ideal for every wall mounted lighting application.

## Ordering Information

EXAMPLE: WPX2 LED 40K MVOLT DDBXD

Series	Color Temperature	Voltage	Options	Finish
WPX1 LED P1	1,550 Lumens, 11W <sup>1</sup> 30K 3000K	MVOLT 120V - 277V	(blank) None	DDBXD Dark bronze
WPX1 LED P2	2,900 Lumens, 24W 40K 4000K	347 347V <sup>3</sup>	E4WH Emergency battery backup, CEC compliant (4W, 0°C min) <sup>2</sup>	DWHXD White
WPX2 LED	6,000 Lumens, 47W 50K 5000K		E14WC Emergency battery backup, CEC compliant (14W, -20°C min) <sup>2</sup>	DBLXD Black
WPX3 LED	9,200 Lumens, 69W		PE Photocell <sup>3</sup>	Note : For other options, consult factory.

Note: The lumen output and input power shown in the ordering tree are average representations of all configuration options. Specific values are available on request.

### NOTES

- All WPX wall packs come with 6kV surge protection standard, except WPX1 LED P1 package which comes with 2.5kV surge protection standard. Add SPD6KV option to get WPX1 LED P1 with 6kV surge protection. Sample nomenclature: WPX1 LED P1 40K MVOLT SPD6KV DDBXD
- Battery pack options only available on WPX1 and WPX2.
- Battery pack options not available with 347V and PE options.

## FEATURES & SPECIFICATIONS

### INTENDED USE

The WPX LED wall packs are designed to provide a cost-effective, energy-efficient solution for the one-for-one replacement of existing HID wall packs. The WPX1, WPX2 and WPX3 are ideal for replacing up to 150W, 250W, and 400W HID luminaires respectively. WPX luminaires deliver a uniform, wide distribution.

### CONSTRUCTION

WPX feature a die-cast aluminum main body with optimal thermal management that both enhances LED efficacy and extends component life. The luminaires are IP66 rated, and sealed against moisture or environmental contaminants.

### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs and LED lumen maintenance of L90/100,000 hours. Color temperature (CCT) options of 3000K, 4000K and 5000K with minimum CRI of 70. Electronic drivers ensure system power factor >90% and THD <20%. All luminaires have 6kV surge protection (Note: WPX1 LED P1 package comes with a standard surge protection rating of 2.5kV. It can be ordered with an optional 6kV surge protection).

All photocell (PE) operate on MVOLT (120V - 277V) input.

Note: The standard WPX LED wall pack luminaires come with field-adjustable drive current feature. This feature allows tuning the output current of the LED drivers to adjust the lumen output (to dim the luminaire).

### INSTALLATION

WPX can be mounted directly over a standard electrical junction box. Three 1/2 inch conduit ports on three sides allow for surface conduit wiring. A port on the back surface allows poke-through conduit wiring on surfaces that don't have an electrical junction box. Wiring can be made in the integral wiring compartment in all cases. WPX is only recommended for installations with LEDs facing downwards.

### LISTINGS

CSA Certified to meet U.S. and Canadian standards. Suitable for wet locations. IP66 Rated. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. International Dark Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### WARRANTY

5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx).

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25°C. Specifications subject to change without notice.



## Performance Data

### Electrical Load

Luminaire	Input Power (W)	120V	208V	240V	277V	347V
WPX1 LED P1	11W	0.09	0.05	0.05	0.04	0.03
WPX1 LED P2	24W	0.20	0.12	0.10	0.09	0.07
WPX2	47W	0.39	0.23	0.20	0.17	0.14
WPX3	69W	0.58	0.33	0.29	0.25	0.20

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections in a 25°C ambient, based on 6,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	50,000	75,000	100,000
Lumen Maintenance Factor	>0.94	>0.92	>0.90

### Lumen Output

Luminaire	Color Temperature	Lumen Output
WPX1 LED P1	3000K	1,537
	4000K	1,568
	5000K	1,602
WPX1 LED P2	3000K	2,748
	4000K	2,912
	5000K	2,954
WPX2	3000K	5,719
	4000K	5,896
	5000K	6,201
WPX3	3000K	8,984
	4000K	9,269
	5000K	9,393

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-50°C (32-122°F).

Ambient	Ambient	Lumen Multiplier
0°C	32°F	1.05
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### HID Replacement Guide

Luminaire	Equivalent HID Lamp	WPX Input Power
WPX1 LED P1	100W	11W
WPX1 LED P2	150W	24W
WPX2	250W	47W
WPX3	400W	69W

### Emergency Egress Battery Packs

The emergency battery backup is integral to the luminaire — no external housing or back box is required. The emergency battery will power the luminaire for a minimum duration of 90 minutes and deliver minimum initial output of 550 lumens. Both battery pack options are CEC compliant.

Battery Type	Minimum Temperature Rating	Power (Watts)	Controls Option	Ordering Example
Standard	0°C	4W	E4WH	WPX2 LED 40K MVOLT <b>E4WH</b> DDBXD
Cold Weather	-20°C	14W	E14WC	WPX2 LED 40K MVOLT <b>E14WC</b> DDBXD


## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting [WPX LED](#) homepage. Tested in accordance with IESNA LM-79 and LM-80 standards


#### LEGEND

<span style="display:inline-block; width:10px; height:10px; background-color:#004a99;"></span>	0.1 fc
<span style="display:inline-block; width:10px; height:10px; background-color:#0070c0;"></span>	0.2 fc
<span style="display:inline-block; width:10px; height:10px; background-color:#0096d6;"></span>	0.5 fc
<span style="display:inline-block; width:10px; height:10px; background-color:#00b0e0;"></span>	1.0 fc


WPX1 LED P1




WPX1 LED P2



WPX2 LED

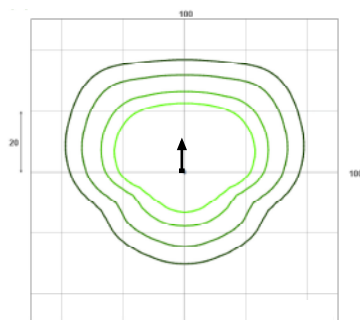



WPX3 LED



Mounting Height = 12 Feet.

**GENERAL NOTES:**

- THE APPLICANT SHALL REPLACE ALL SIDEWALK AND CURB AND GUTTER THAT ABUTS THE PROPERTY THAT IS DAMAGED BY THE CONSTRUCTION, OR ANY SIDEWALK AND CURB AND GUTTER WHICH THE CITY ENGINEER DETERMINES NEEDS TO BE REPLACED BECAUSE IT IS NOT AT A DESIRABLE GRADE, REGARDLESS OF WHETHER THE CONDITION EXISTED PRIOR TO BEGINNING CONSTRUCTION.
- ALL WORK IN THE PUBLIC RIGHT OF WAY SHALL BE PERFORMED BY A CITY-LICENSED CONTRACTOR.
- ALL DAMAGE TO THE PAVEMENT ON CITY STREETS, AND ADJACENT TO THIS DEVELOPMENT SHALL BE RESTORED IN ACCORDANCE WITH THE CITY OF MADISON'S PAVEMENT PATCHING CRITERIA.
- ALL PROPOSED STREET TREE REMOVALS WITHIN THE RIGHT OF WAY SHALL BE REVIEWED BY CITY FORESTRY BEFORE THE PLAN COMMISSION MEETING. STREET TREE REMOVALS REQUIRE APPROVAL AND A TREE REMOVAL PERMIT ISSUED BY CITY FORESTRY. ANY STREET TREE REMOVALS REQUESTED AFTER THE DEVELOPMENT PLAN IS APPROVED BY THE PLAN COMMISSION OR THE BOARD OF PUBLIC WORKS AND CITY FORESTRY WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHOSE DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO A TREE REMOVAL PERMIT BEING ISSUED.
- AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY (266-4816) PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: [CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](http://CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM)
- CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREE(S). THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.
- SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.
- ON THIS PROJECT, STREET TREE PROTECTION ZONE FENCING IS REQUIRED. THE FENCING SHALL BE ERECTED BEFORE THE DEMOLITION, GRADING OR CONSTRUCTION BEGINS. THE FENCE SHALL INCLUDE THE ENTIRE WIDTH OF TERRACE AND, EXTEND AT LEAST 5 FEET ON BOTH SIDES OF THE OUTSIDE EDGE OF THE TREE TRUNK. DO NOT REMOVE THE FENCING TO ALLOW FOR DELIVERIES OR EQUIPMENT ACCESS THROUGH THE TREE PROTECTION ZONE.
- STREET TREE PRUNING SHALL BE COORDINATED WITH MADISON FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 - PART 1 STANDARDS FOR PRUNING.
- AT LEAST ONE WEEK PRIOR TO STREET TREE PLANTING, CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO SCHEDULE INSPECTION AND APPROVAL OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS WITH THE LANDSCAPER.
- APPROVAL OF PLANS FOR THIS PROJECT DOES NOT INCLUDE ANY APPROVAL TO PRUNE, REMOVE, OR PLANT TREES IN THE PUBLIC RIGHT-OF-WAY. PERMISSION FOR SUCH ACTIVITIES MUST BE OBTAINED FROM THE CITY FORESTER (266-4816).
- THE PUBLIC RIGHT-OF-WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME. NO ITEMS SHOWN ON THIS SITE PLAN IN THE RIGHT-OF-WAY ARE PERMANENT AND MAY NEED TO BE REMOVED AT THE APPLICANT'S EXPENSE UPON NOTIFICATION BY THE CITY.

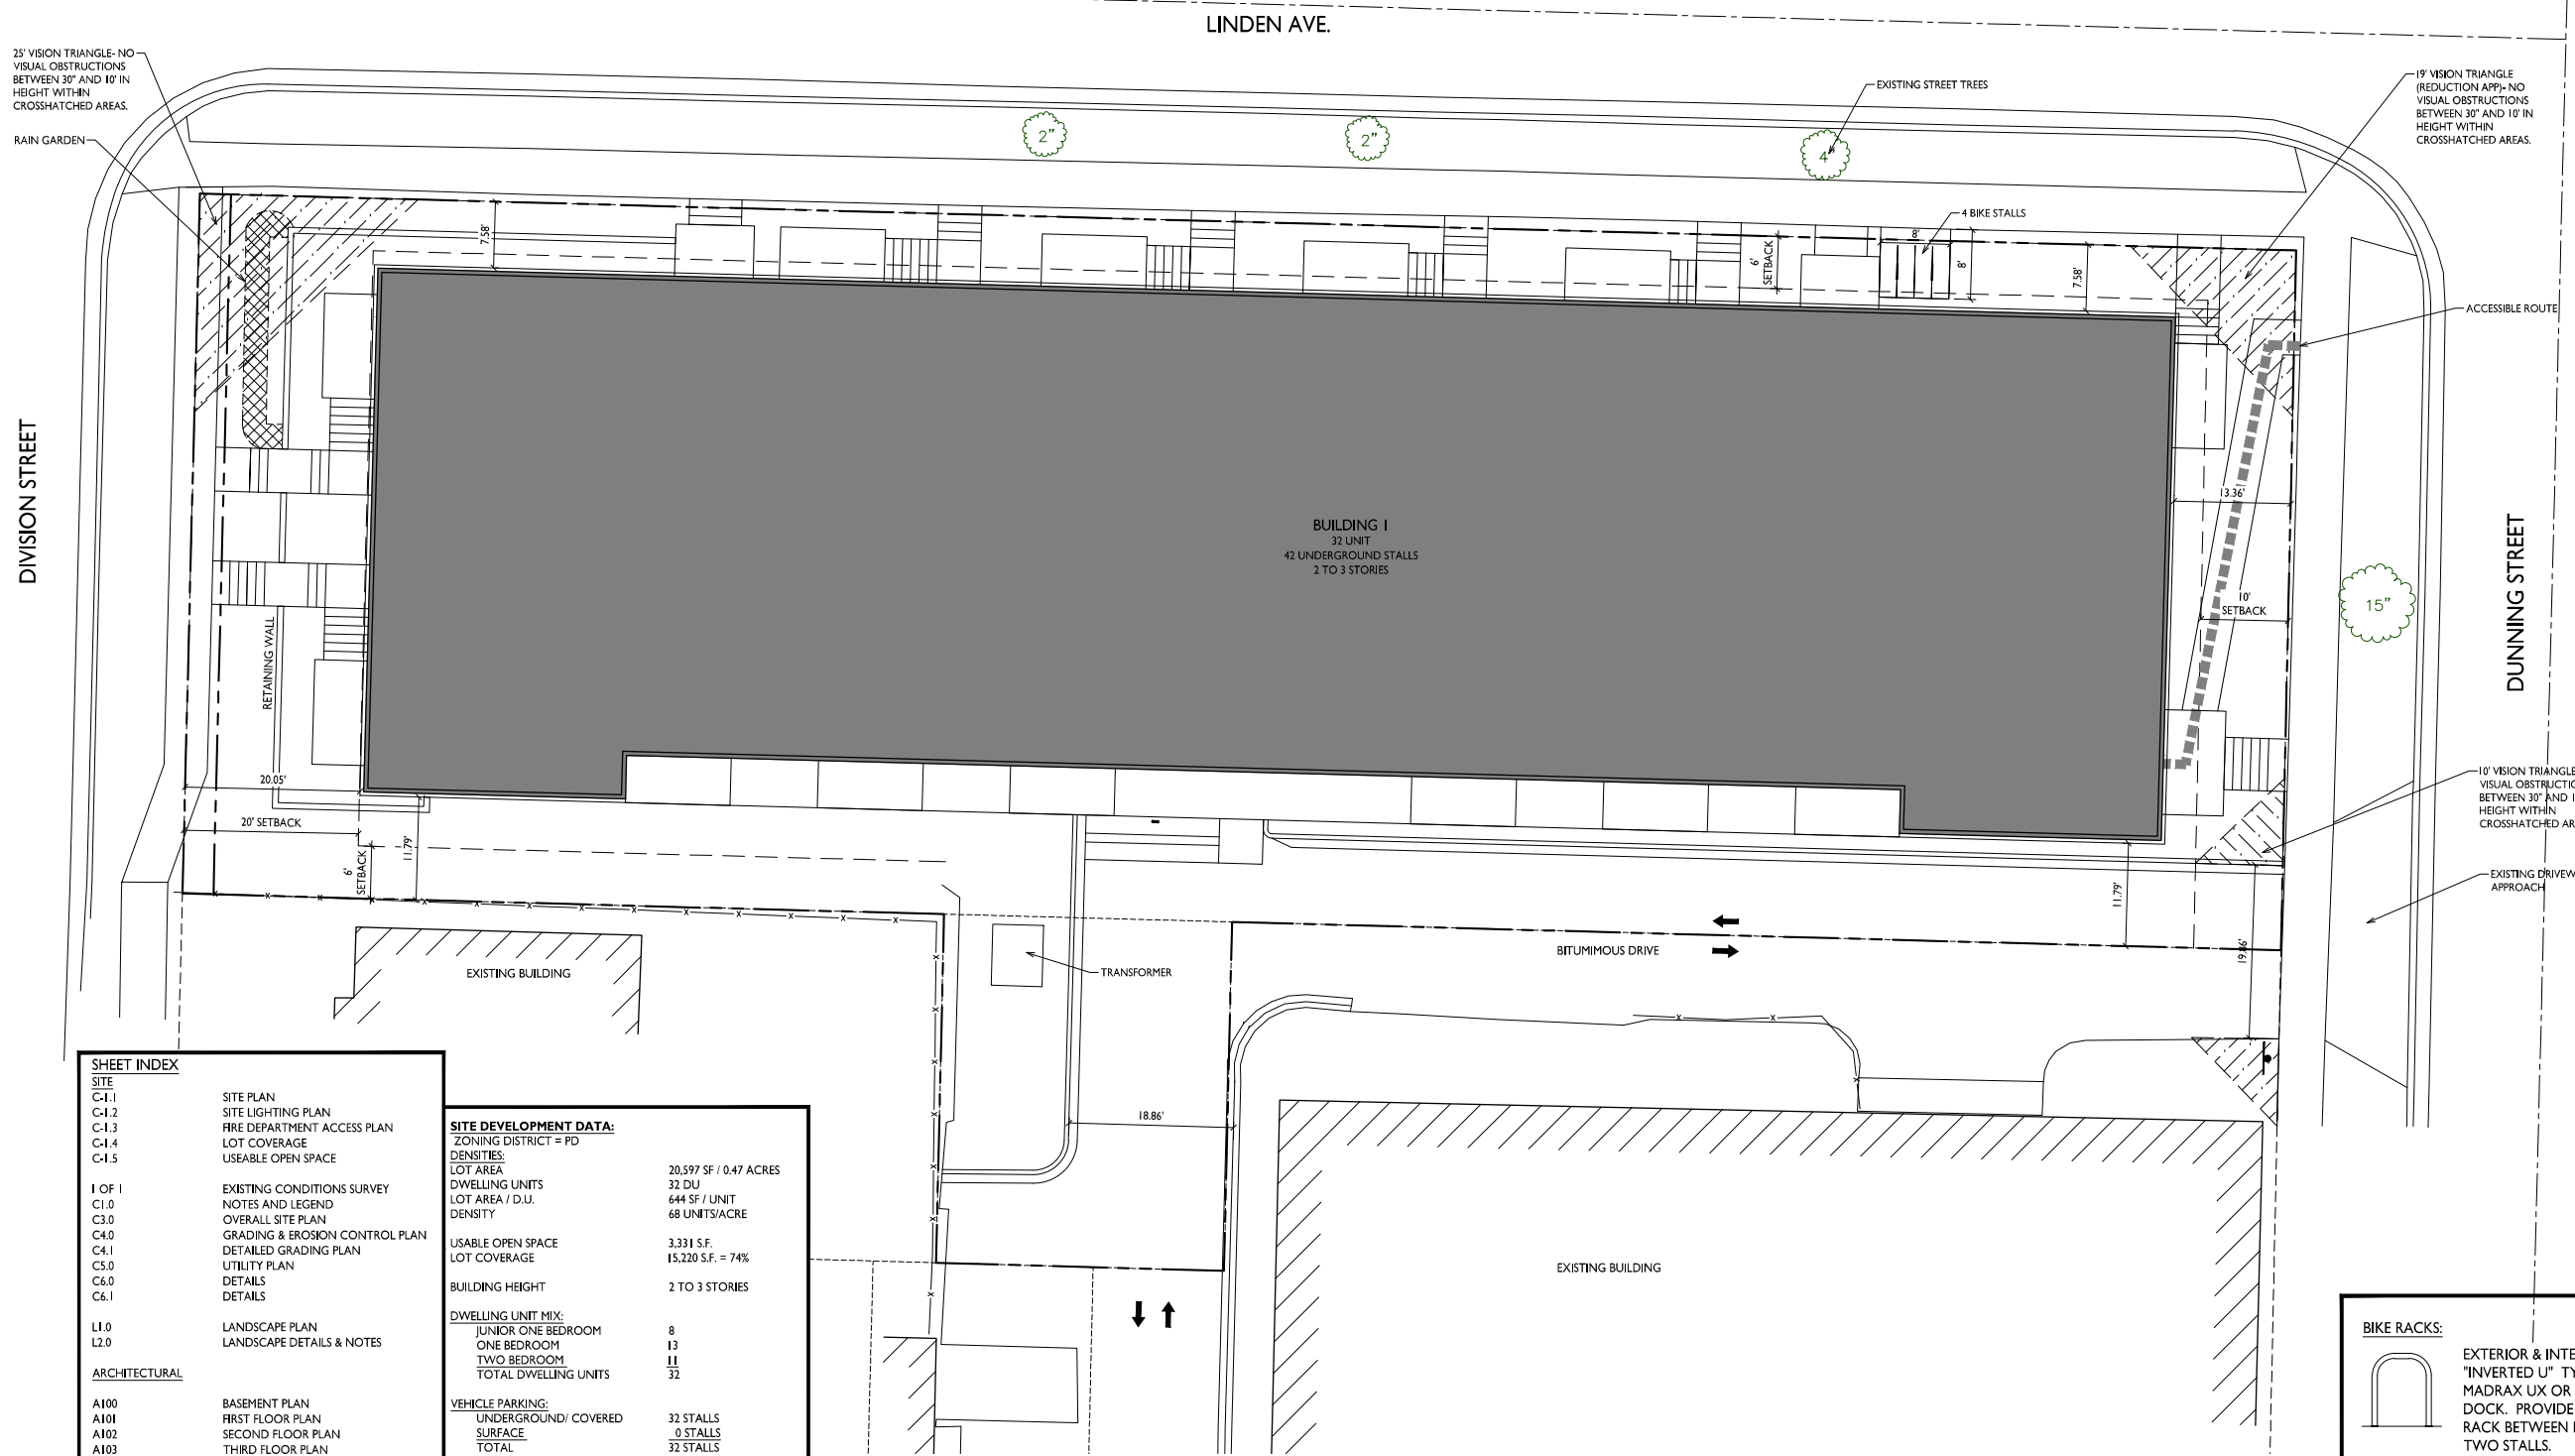


**SHEET INDEX**

SITE	
C-1.1	SITE PLAN
C-1.2	SITE LIGHTING PLAN
C-1.3	FIRE DEPARTMENT ACCESS PLAN
C-1.4	LOT COVERAGE
C-1.5	USEABLE OPEN SPACE
1 OF 1	
C1.0	EXISTING CONDITIONS SURVEY
C3.0	NOTES AND LEGEND
C4.0	OVERALL SITE PLAN
C4.1	GRADING & EROSION CONTROL PLAN
C4.2	DETAILED GRADING PLAN
C5.0	UTILITY PLAN
C6.0	DETAILS
C6.1	DETAILS
LANDSCAPE PLAN	
L1.0	LANDSCAPE PLAN
L2.0	LANDSCAPE DETAILS & NOTES
ARCHITECTURAL	
A100	BASEMENT PLAN
A101	FIRST FLOOR PLAN
A102	SECOND FLOOR PLAN
A103	THIRD FLOOR PLAN
A201	ELEVATIONS
A202	ELEVATIONS
A203	COLOR ELEVATIONS
A204	COLOR ELEVATIONS
	RENDERINGS

**SITE DEVELOPMENT DATA:**

ZONING DISTRICT = PD	
DENSITIES:	
LOT AREA	20,597 SF / 0.47 ACRES
DWELLING UNITS	32 DU
LOT AREA / D.U.	644 SF / UNIT
DENSITY	68 UNITS/ACRE
USEABLE OPEN SPACE	
USEABLE OPEN SPACE	3,331 S.F.
LOT COVERAGE	15,220 S.F. = 74%
BUILDING HEIGHT	
BUILDING HEIGHT	2 TO 3 STORIES
DWELLING UNIT MIX:	
JUNIOR ONE BEDROOM	8
ONE BEDROOM	13
TWO BEDROOM	11
TOTAL DWELLING UNITS	32
VEHICLE PARKING:	
UNDERGROUND/ COVERED	32 STALLS
SURFACE	0 STALLS
TOTAL	32 STALLS
BICYCLE PARKING:	
UNDERGROUND GARAGE - WALL	8 STALLS (COVERED)
UNDERGROUND/STD. 2'X6'	24 STALLS (COVERED)
SURFACE GUEST	4 STALLS (10% OF UNITS)
TOTAL	36 STALLS

**1 SITE PLAN**  
C-1.1 1" = 10'-0"



**BIKE RACKS:**

EXTERIOR & INTERIOR: "INVERTED U" TYPE. MADRAX UX OR SARIS BIKE DOCK. PROVIDE ONE RACK BETWEEN EVERY TWO STALLS.

INTERIOR: MADRAX VERTICAL WALL MOUNT

**ISSUED**  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Re-submittal - Feb. 28, 2022  
Issued for Final UDC Submittal - November 28, 2022

**PROJECT TITLE**  
Threshold Development  
Zion Lutheran Site Development

2165 Linden Ave  
Madison, Wisconsin  
**SHEET TITLE**  
Site Plan

**SHEET NUMBER**  
**C-1.1**  
**PROJECT NO.** 2102  
© Knothe & Bruce Architects, LLC



**knothe • bruce**  
**ARCHITECTS**  
 Planner: 7601 University Ave, Ste 201  
 608.896.3690 Madison, WI 53706

ISSUED  
 Issued for UDC & Land Use - Jan. 10, 2022  
 Issued for Rebid/Amend - Feb. 28, 2022  
 Issued for Final UDC Submittal - November 28, 2022

PROJECT TITLE  
**Threshold  
 Development  
 Zion Lutheran Site  
 Development**

2165 Linden Ave  
 Madison, Wisconsin  
 SHEET TITLE  
**Site Lighting Plan**

SHEET NUMBER

**C-1.2**

PROJECT NO. **2102**  
 © Knothe & Bruce Architects, LLC

LINDEN AVE.

DIVISION STREET

DUNNING STREET

BUILDING 1  
 32 UNIT  
 42 UNDERGROUND STALLS  
 2 TO 3 STORIES


A

2.9	5.3	5.9	3.6	1.6		
3.1	4.3	4.6	3.6	2.1	1.0	0.4
1.9	2.3	2.4	2.1	1.6	0.9	0.4
1.0	1.1	1.1	1.0	0.9	0.6	0.3
0.4	0.4	0.4	0.4	0.4	0.4	0.2
0.2	0.2	0.2	0.2	0.2	0.2	0.1
0.1	0.1	0.1	0.1	0.1	0.1	0.1



LIGHT LEVEL STATISTICS						
DESCRIPTION	SYMBOL	AVG.	MAX.	MIN.	MAX. / MIN.	AVG. / MIN.
Parking Garage Entry Security Lighting	+	1.3 fc	5.9 fc	0.1 fc	59.0:1	13.0:1

LUMINAIRE SCHEDULE							
SYMBOL	LABEL	QTY.	MANUF.	CATALOG	DESCRIPTION	FILE	MOUNTING
⎓	A	1	LITHONIA LIGHTING	WPXI LED PI 30K MVOLT	WPXI LED WALLPACK, 1500LM, 3000K COLOR TEMP., 120-277 VOLTS	WPXI_LED_PI_30K_MVOLT.jes	8'-0" ABOVE GRADE ON BUILDING


EXAMPLE LIGHT FIXTURE DISTRIBUTION




**1**  
 C-1.2  
 1" = 10'-0"





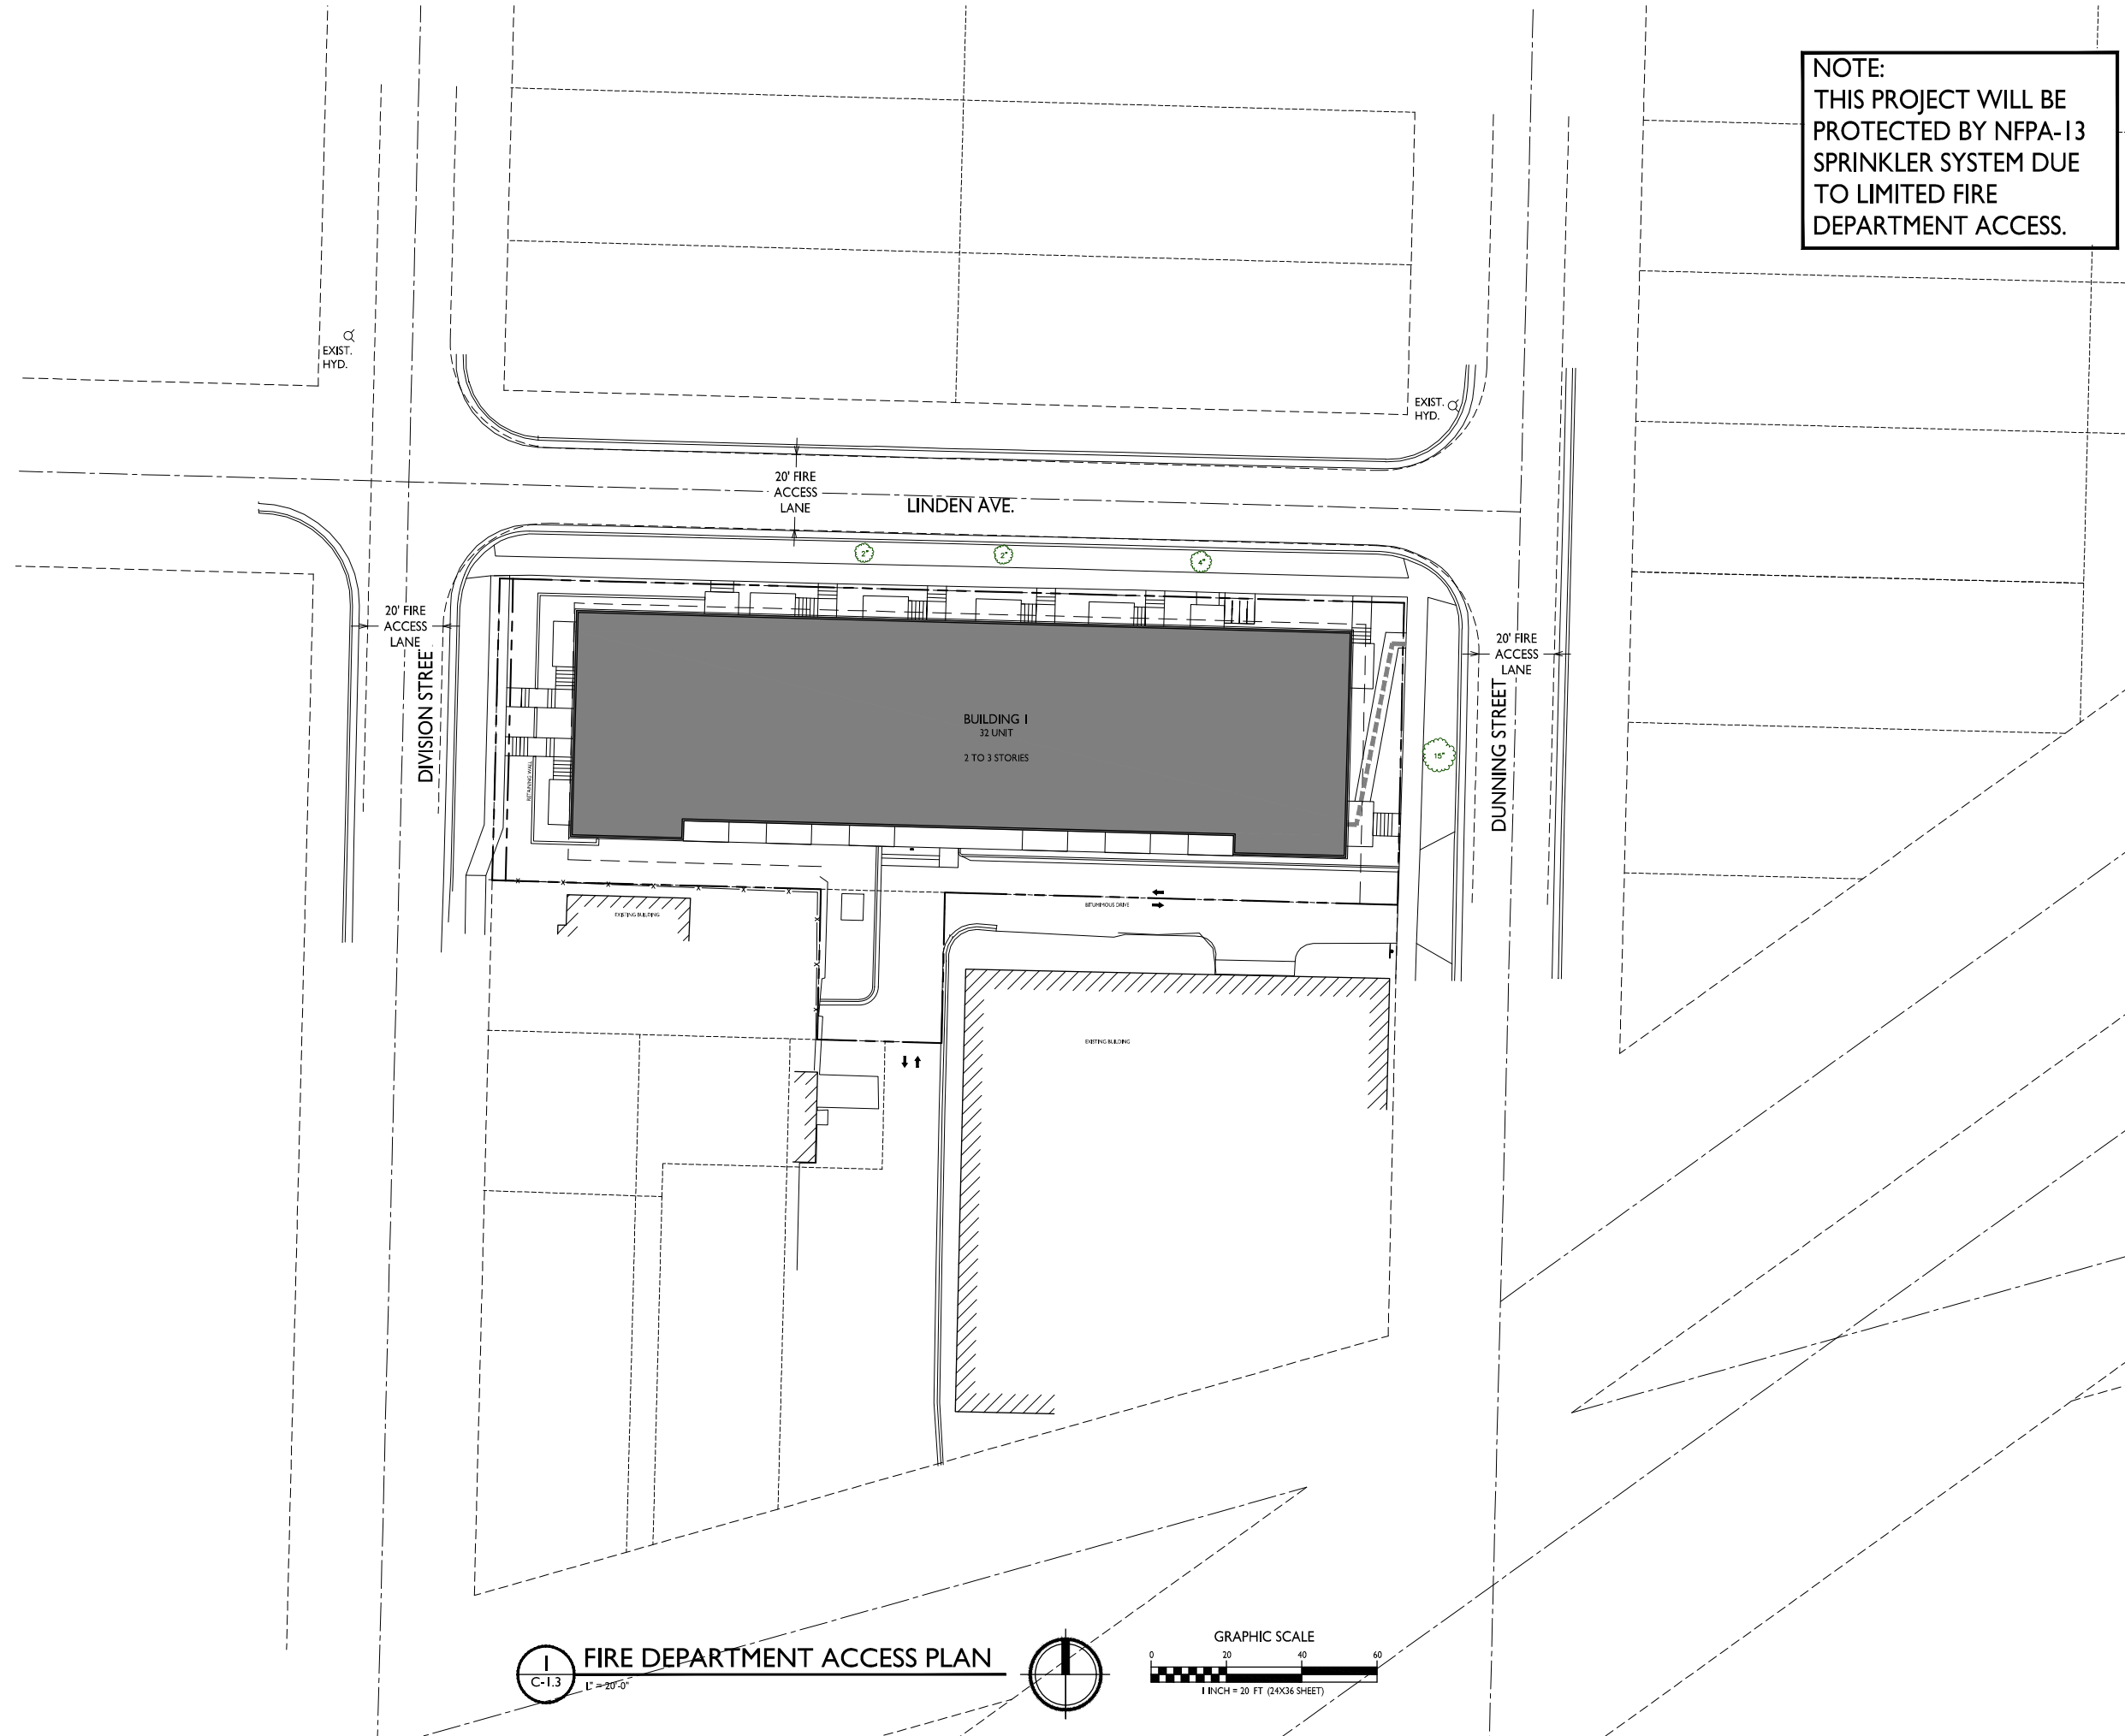

NOTE:  
THIS PROJECT WILL BE  
PROTECTED BY NFPA-13  
SPRINKLER SYSTEM DUE  
TO LIMITED FIRE  
DEPARTMENT ACCESS.



ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Reattachment - Feb. 28, 2022  
Issued for Final UDC Submittal - November 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran Site  
Development

2165 Linden Ave  
Madison, Wisconsin  
SHEET TITLE  
Fire Department  
Access Plan

SHEET NUMBER  
**C-1.3**  
PROJECT NO. 2102  
© Knothe & Bruce Architects, LLC

**1** FIRE DEPARTMENT ACCESS PLAN  
C-1.3 1" = 20'-0"

GRAPHIC SCALE  
0 20 40 60  
1 INCH = 20 FT (24X36 SHEET)



**knothe-bruce**  
ARCHITECTS

Planner: 7601 University Ave, Ste 201  
400.896.3090 Madison, WI 53706

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Recheck/Amend - Feb. 28, 2022  
Issued for Final UDC Submittal - November 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran Site  
Development

2165 Linden Ave  
Madison, Wisconsin  
SHEET TITLE  
Lot Coverage

SHEET NUMBER

**C-1.4**


PROJECT NO. 2102

© Knothe & Bruce Architects, LLC

LINDEN AVE.



DIVISION STREET

DUNNING STREET

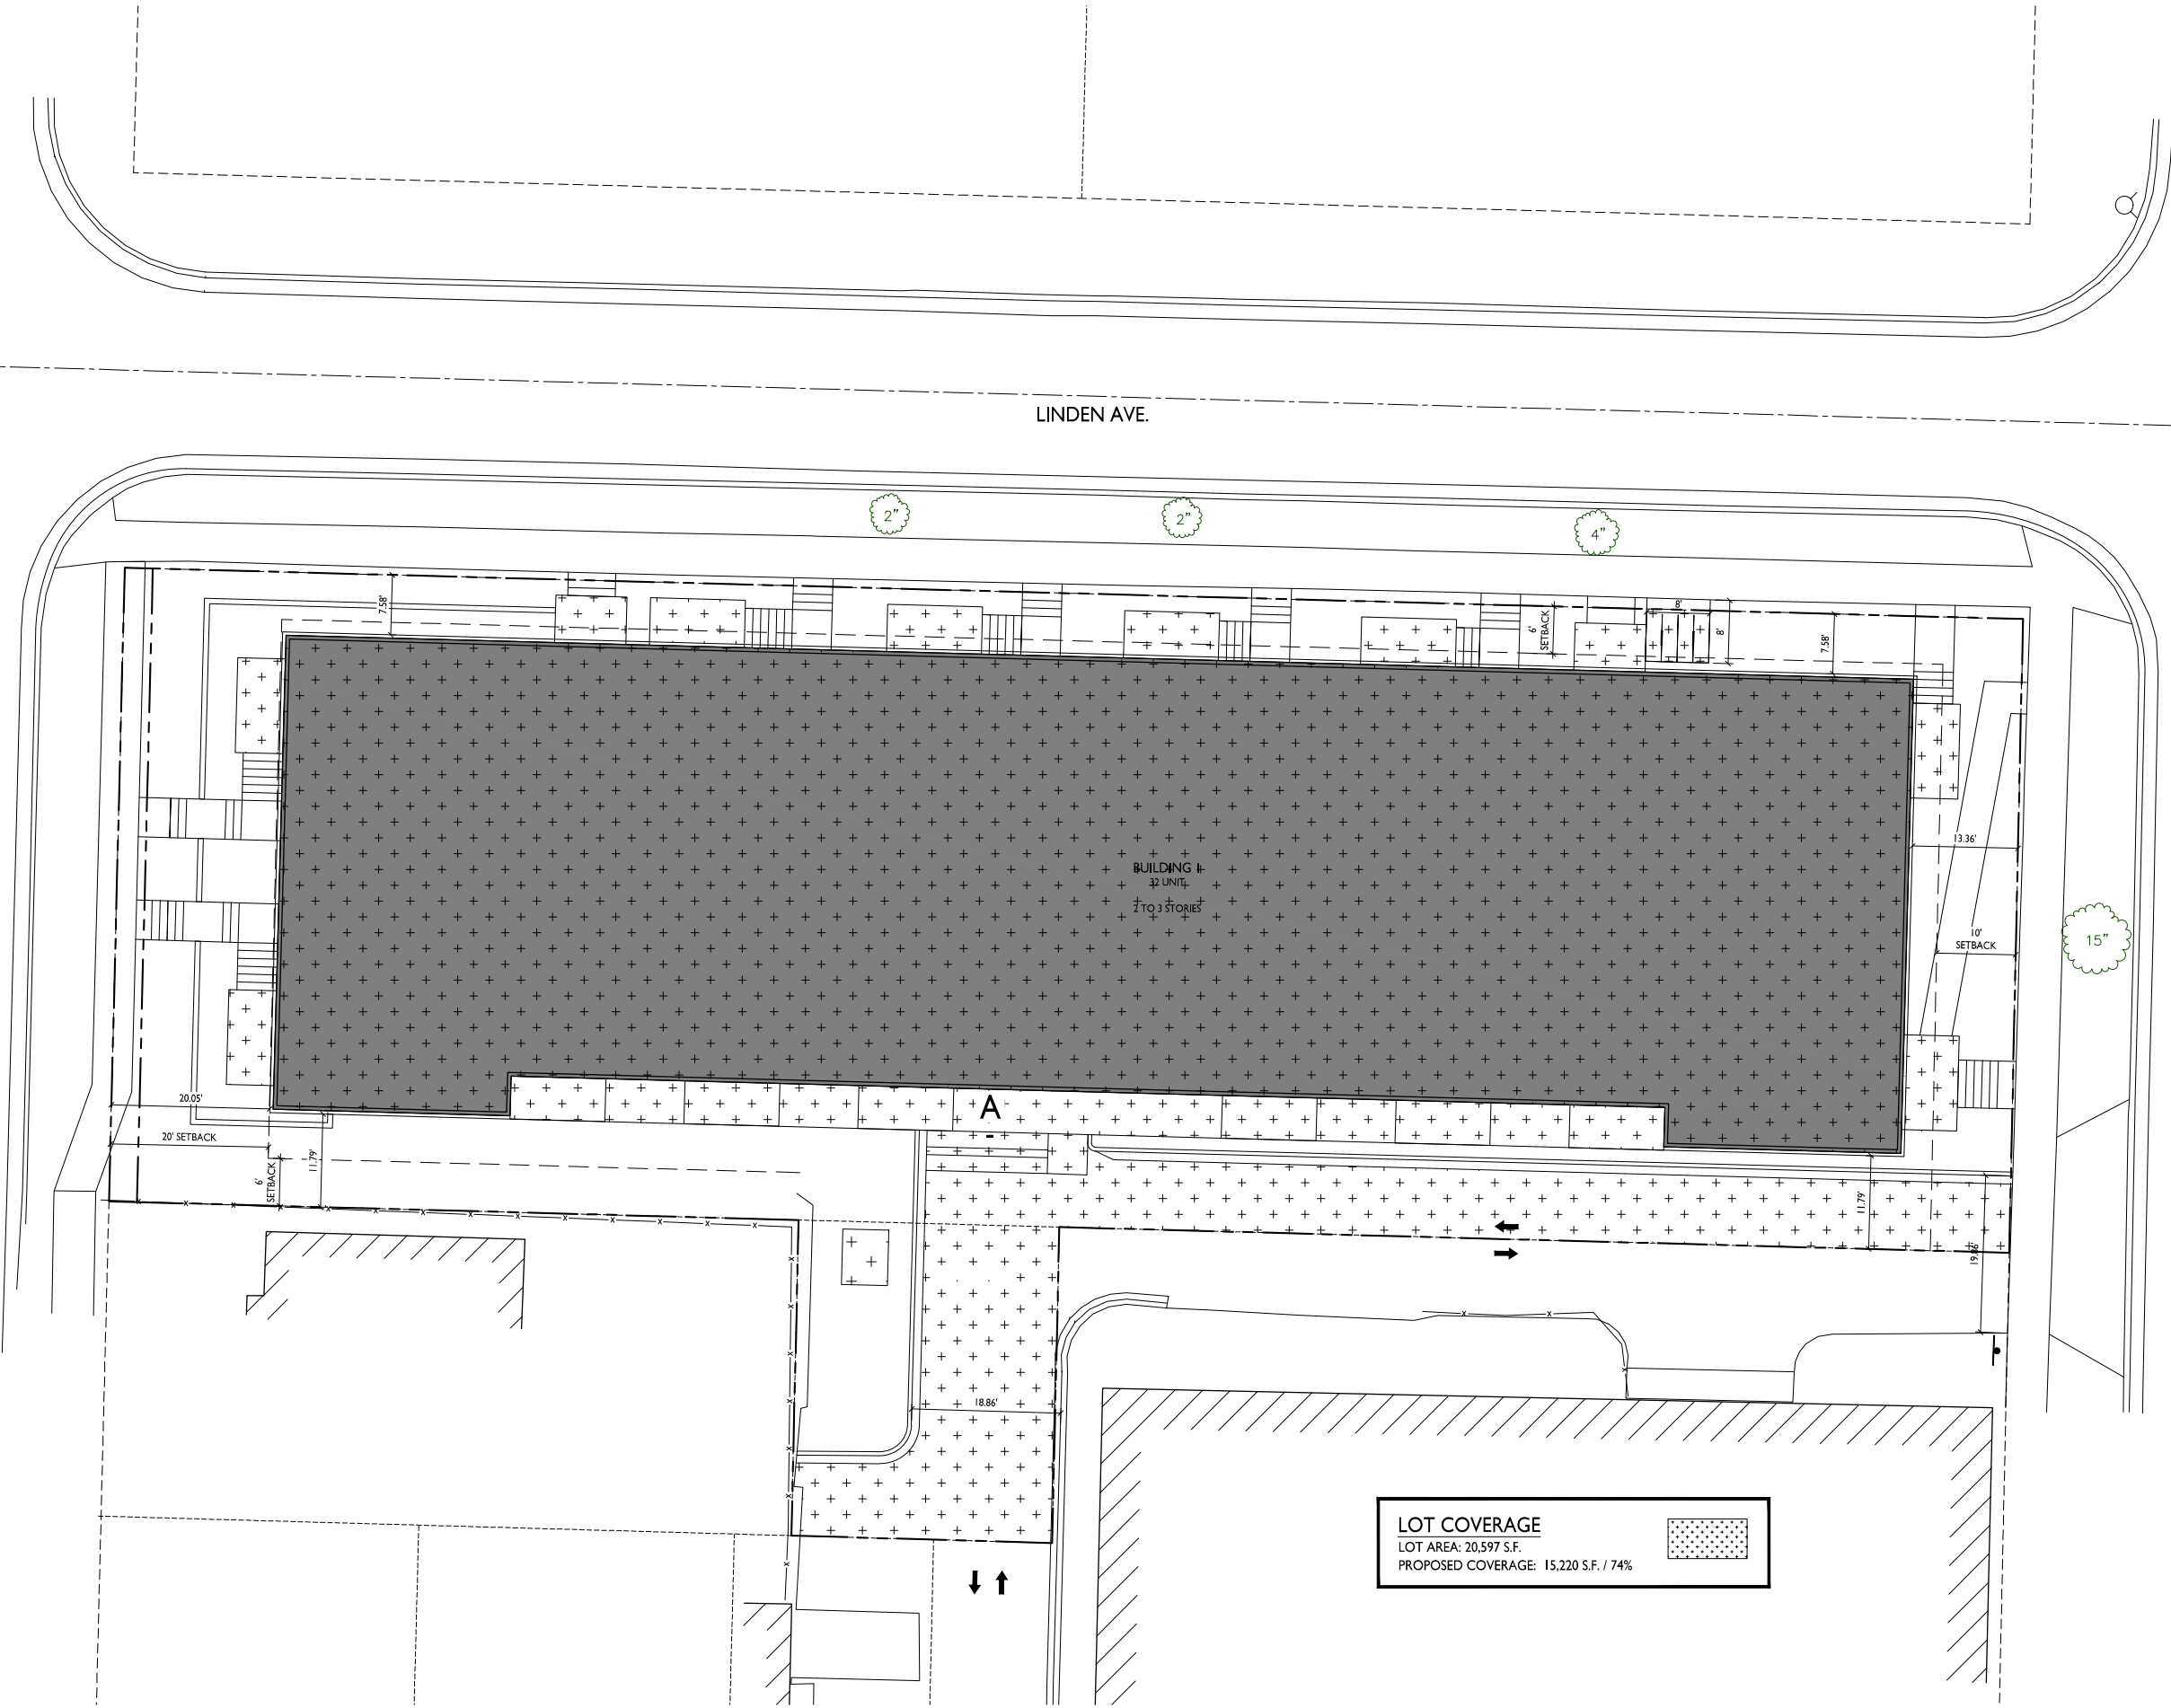

**LOT COVERAGE**  
LOT AREA: 20,597 S.F.  
PROPOSED COVERAGE: 15,220 S.F. / 74%

**LOT COVERAGE**  
C-1.4 1" = 10'-0"





**knothe • bruce**  
ARCHITECTS

Planner: 7601 University Ave., Ste 201  
400.896.3090 Madison, WI 53702

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Reclaiming - Feb. 28, 2022  
Issued for Final UDC Submittal - November 28, 2022

PROJECT TITLE  
**Threshold  
Development  
Zion Lutheran Site  
Development**


2165 Linden Ave  
Madison, Wisconsin  
SHEET TITLE  
**Open Space**

SHEET NUMBER

**C-1.5**



PROJECT NO. **2102**

© Knothe & Bruce Architects, LLC

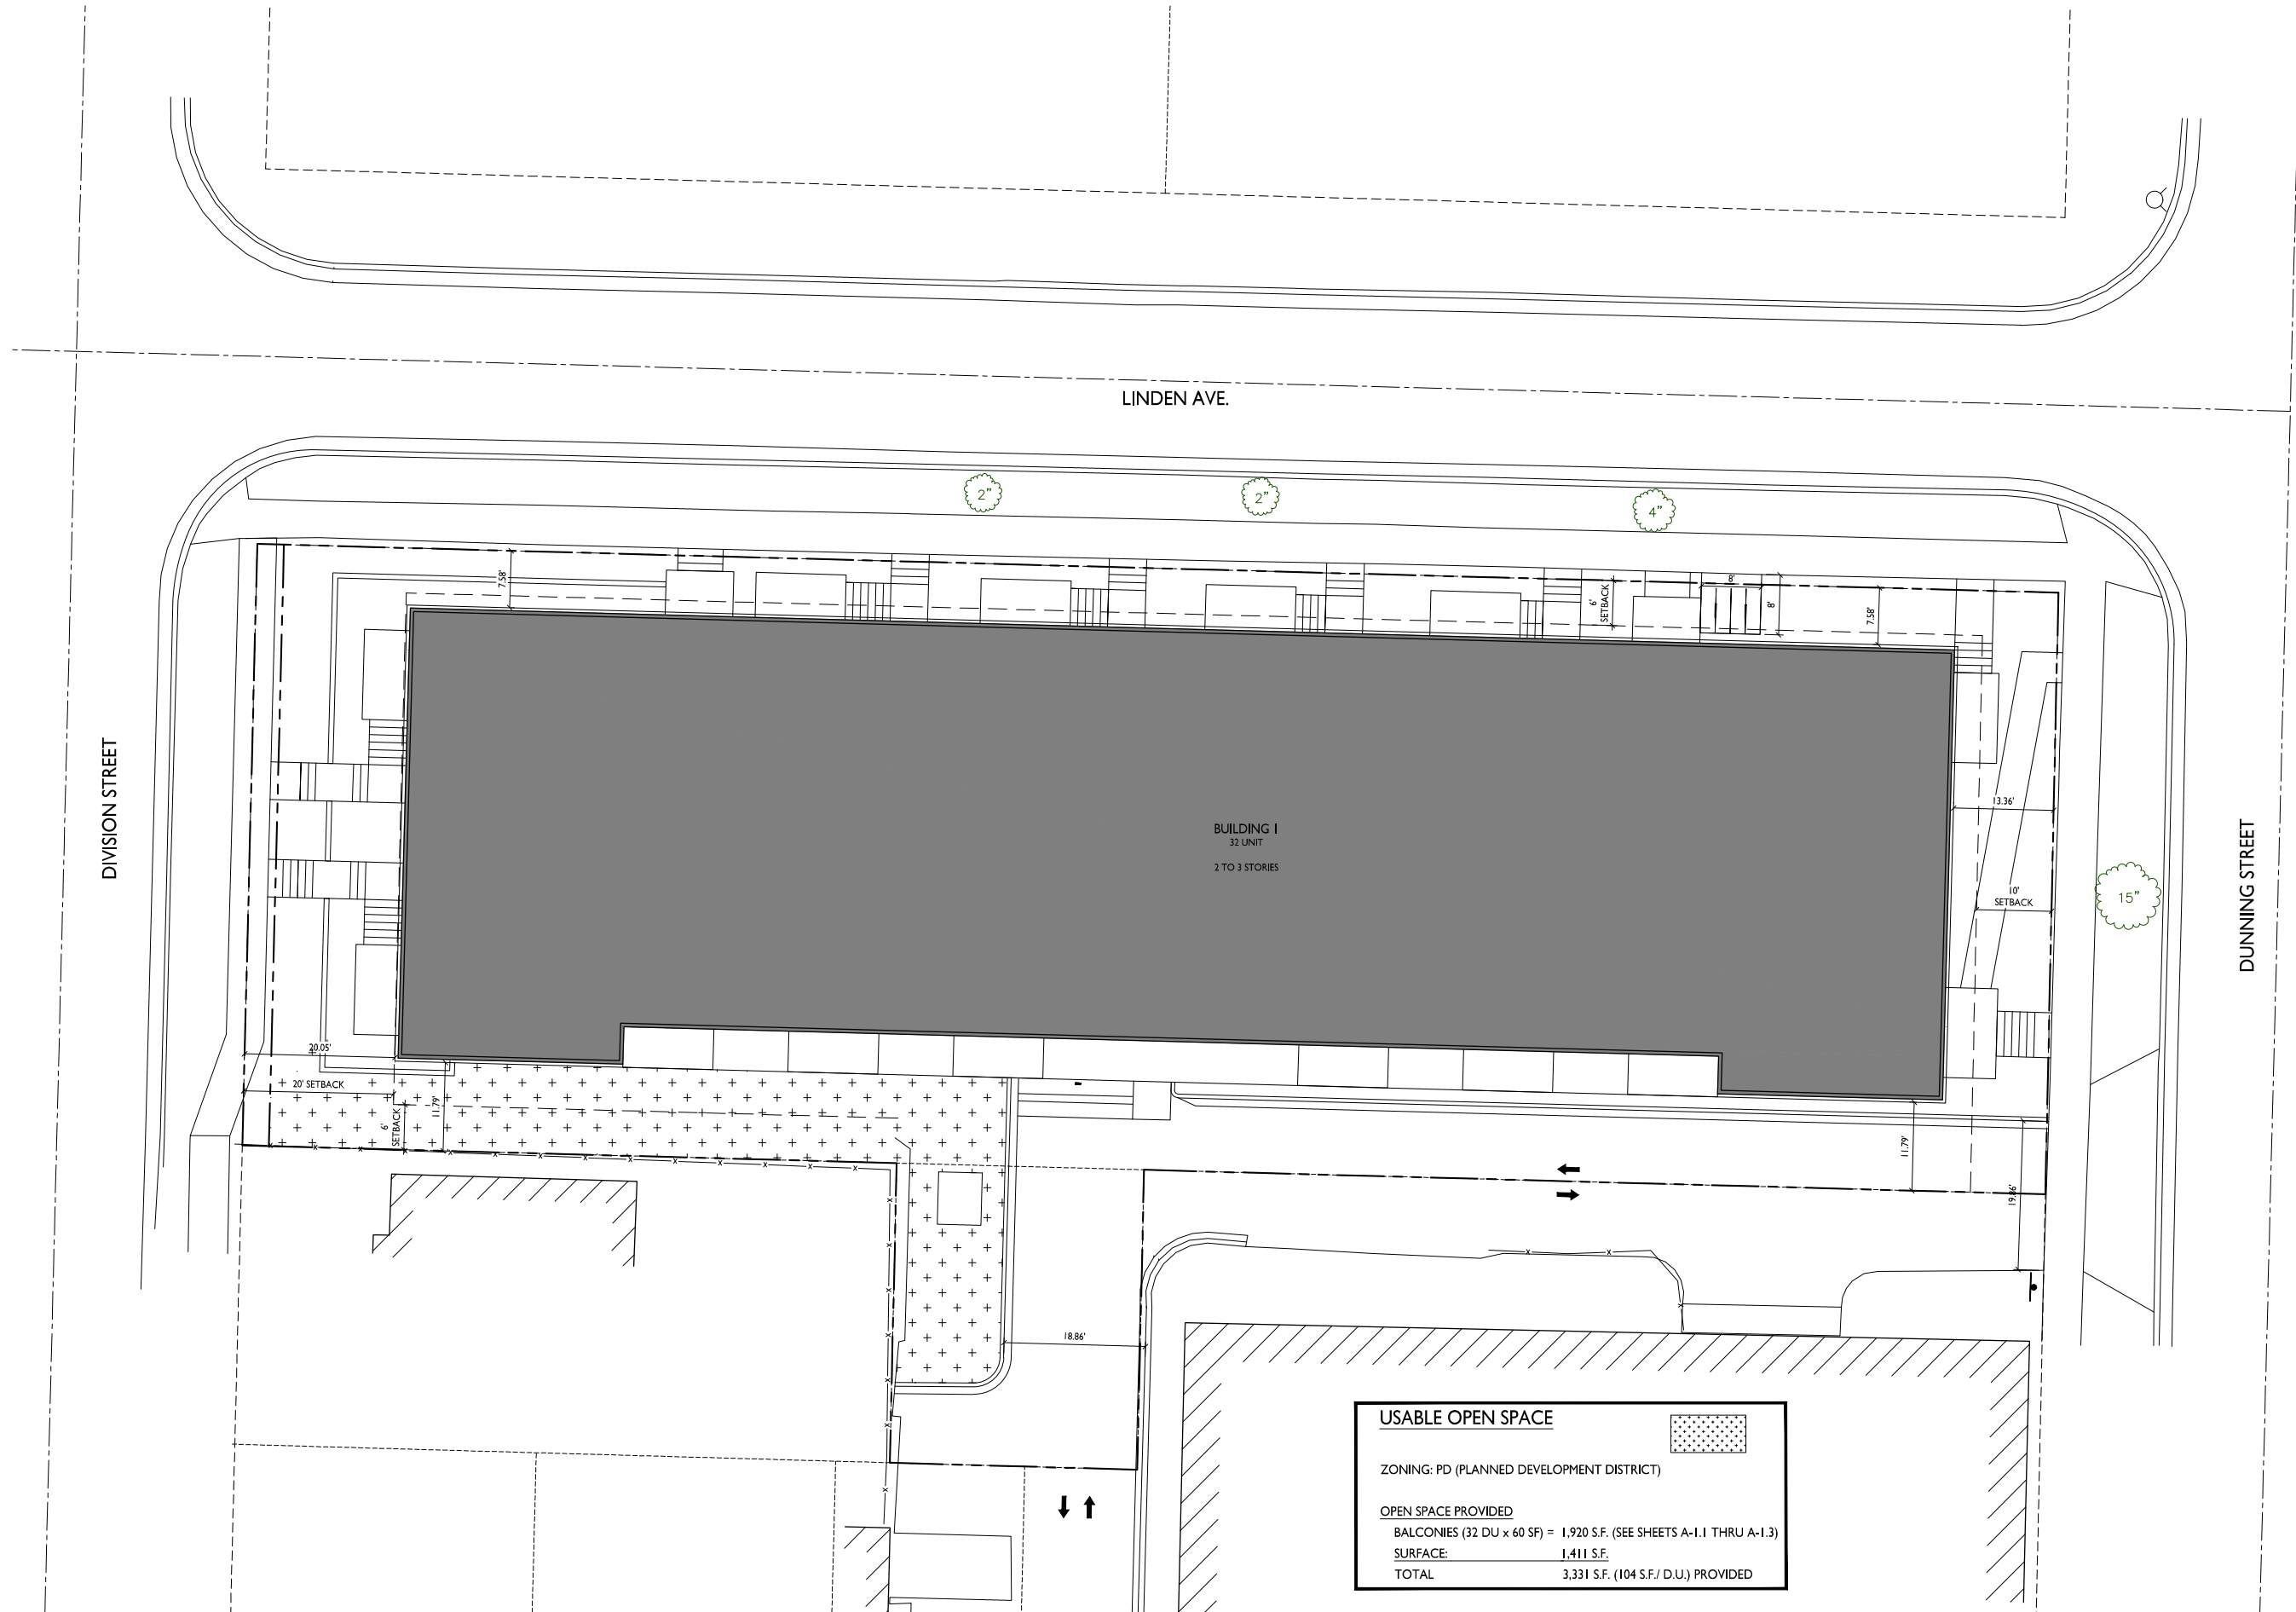

<b>USABLE OPEN SPACE</b>	
ZONING: PD (PLANNED DEVELOPMENT DISTRICT)	
OPEN SPACE PROVIDED	
BALCONIES (32 DU x 60 SF) =	1,920 S.F. (SEE SHEETS A-1.1 THRU A-1.3)
SURFACE:	1,411 S.F.
TOTAL	3,331 S.F. (104 S.F./ D.U.) PROVIDED

**OPEN SPACE**  
C-1.5  
1" = 10'-0"



MODIFICATIONS:

#	Date:	Description:
1		
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Prepared By: CMD 12/22/21  
Reviewed By: BK 12/29/21  
Approved By: BK 12/29/21

SHEET TITLE:  
**EXISTING  
CONDITIONS  
SURVEY**

SHEET NUMBER:

**1 OF 1**

PROJECT NO: 21-11164

**EXISTING CONDITIONS SURVEY**

LOTS 1, 2, 10, 11, AND THE EAST 33 FEET OF LOT 3, BLOCK 5, FAIR OAKS, LOCATED IN PART OF THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 06, TOWNSHIP 07 NORTH, RANGE 10 EAST, CITY OF MADISON, DANE COUNTY, WISCONSIN.



VICINITY MAP  
(NOT TO SCALE)

**LEGEND**

- GOVERNMENT CORNER
- 3/4" x 24" REBAR SET (1.50 LBS/LF)
- CHISELED "X" SET
- CHISELED "X" FOUND
- 1" IRON PIPE FOUND
- PK/MAG NAIL FOUND
- 3/4" REBAR FOUND
- BENCHMARK
- FINISHED FLOOR SHOT LOCATION
- BOLLARD
- MAIL BOX
- SIGN
- SANITARY MANHOLE
- WATERMAIN OR GASMAIN VALVE
- HYDRANT
- WATER VALVE
- STORM MANHOLE
- ROUND CASTED INLET
- CURB INLET
- GAS REGULATOR/METER
- MANHOLE - UNVERIFIED TYPE
- ELECTRIC MANHOLE
- ELECTRIC METER
- ELECTRIC TRANSFORMER
- POWER POLE
- TELEPHONE PEDESTAL
- DECIDUOUS TREE
- BUSH
- PARCEL BOUNDARY
- CHORD LINE
- RIGHT-OF-WAY LINE
- CENTERLINE
- SETBACK LINE
- SECTION LINE
- PLATTED LOT LINE
- EASEMENT LINE
- FENCE LINE
- EDGE OF PAVEMENT
- CONCRETE CURB & GUTTER
- SANITARY SEWER
- WATER LINE
- STORM SEWER
- NATURAL GAS
- OVERHEAD LINE
- UNDERGROUND ELECTRIC
- FIBER OPTIC
- UNDERGROUND TELEPHONE
- BUILDING
- INDEX CONTOUR
- INTERMEDIATE CONTOUR
- BITUMINOUS PAVEMENT
- RETAINING WALL
- CONCRETE PAVEMENT
- EDGE OF BITUMINOUS
- PAVEMENT STRIPING
- END OF FLAGGED UTILITIES
- DENOTES RECORD DATA DEPICTING THE SAME LINE ON THE GROUND AS RETRACED BY THIS SURVEY

**NOTES**

- FIELD WORK PERFORMED ON DECEMBER 17 AND 20, 2021.
- BEARINGS FOR THIS SURVEY AND MAP ARE REFERENCED TO THE WISCONSIN COUNTY COORDINATE SYSTEM, DANE ZONE THE EAST LINE OF SOUTHEAST 1/4 OF SECTION 06, TOWNSHIP 07 NORTH, RANGE 10 EAST, S00°02'25"W.
- ELEVATIONS ARE BASED ON THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAVD88).
- CONTOUR INTERVAL IS ONE FOOT.
- SUBSURFACE UTILITIES AND FEATURES SHOWN ON THIS MAP HAVE BEEN APPROXIMATED BY LOCATING SURFICIAL FEATURES AND APPURTENANCES, LOCATING DIGGERS HOTLINE FIELD MARKINGS AND BY REFERENCE TO UTILITY RECORDS AND MAPS. DIGGER'S HOTLINE LOCATE TICKET NO. 20215010071, 20215010220, 20215010223, AND 20215010225 WITH A CLEAR DATE OF DECEMBER 15, 2021, PRINT TICKET NO. 20215010212, 20215010218, 2021501023, AND 20215010232 WITH A CLEAR DATE OF DECEMBER 20, 2021.
- UTILITY COMPANIES CONTACTED THRU DIGGERS HOTLINE:  
CITY OF MADISON  
MGE (ELECTRIC AND GAS)  
CHARTER COMMUNICATIONS  
AT&T DISTRIBUTION  
AT&T TRANSMISSIONS
- BEFORE EXCAVATION, APPROPRIATE UTILITY COMPANIES SHOULD BE CONTACTED. FOR EXACT LOCATION OF UNDERGROUND UTILITIES, CONTACT DIGGERS HOTLINE, AT 1.800.242.8511.
- JSD PROFESSIONAL SERVICES, INC. DOES NOT GUARANTEE THAT THE BENCHMARKS SHOWN ON THIS MAP HAVE NOT BEEN DISTURBED SINCE THE DATE OF THIS SURVEY AND SHOULD BE VERIFIED BEFORE UTILIZED.
- ROADWAY UTILITY RECORD DRAWINGS WERE REQUESTED FROM THE CITY OF MADISON. THE UTILITIES SHOWN REPRESENT FIELD LOCATED UTILITIES IN COMBINATION WITH THE SUPPLIED CITY RECORDS.

**LEGAL DESCRIPTION**

LOTS 1, 2, 10, 11 AND EAST 33 FEET OF LOT 3, BLOCK 5, FAIR OAKS, RECORDED IN VOLUME 2 OF PLATS, ON PAGE 37 AS DOCUMENT NUMBER 243077, CITY OF MADISON, DANE COUNTY, WISCONSIN.



TAX KEY NO: 251/0710-064-1101-2

**SURVEYOR'S CERTIFICATE**

I, JOHN KREBS, WISCONSIN PROFESSIONAL LAND SURVEYOR NO. S-1878, HEREBY CERTIFY THAT UNDER THE DIRECTION OF THRESHOLD DEVELOPMENT THIS SURVEY AND MAP HAS BEEN PREPARED AND COMPLIES WITH WISCONSIN ADMINISTRATIVE CODE A-7 AND IS CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF IN ACCORDANCE WITH THE INFORMATION PROVIDED.

JOHN KREBS, S-1878  
WISCONSIN PROFESSIONAL LAND SURVEYOR

DATE

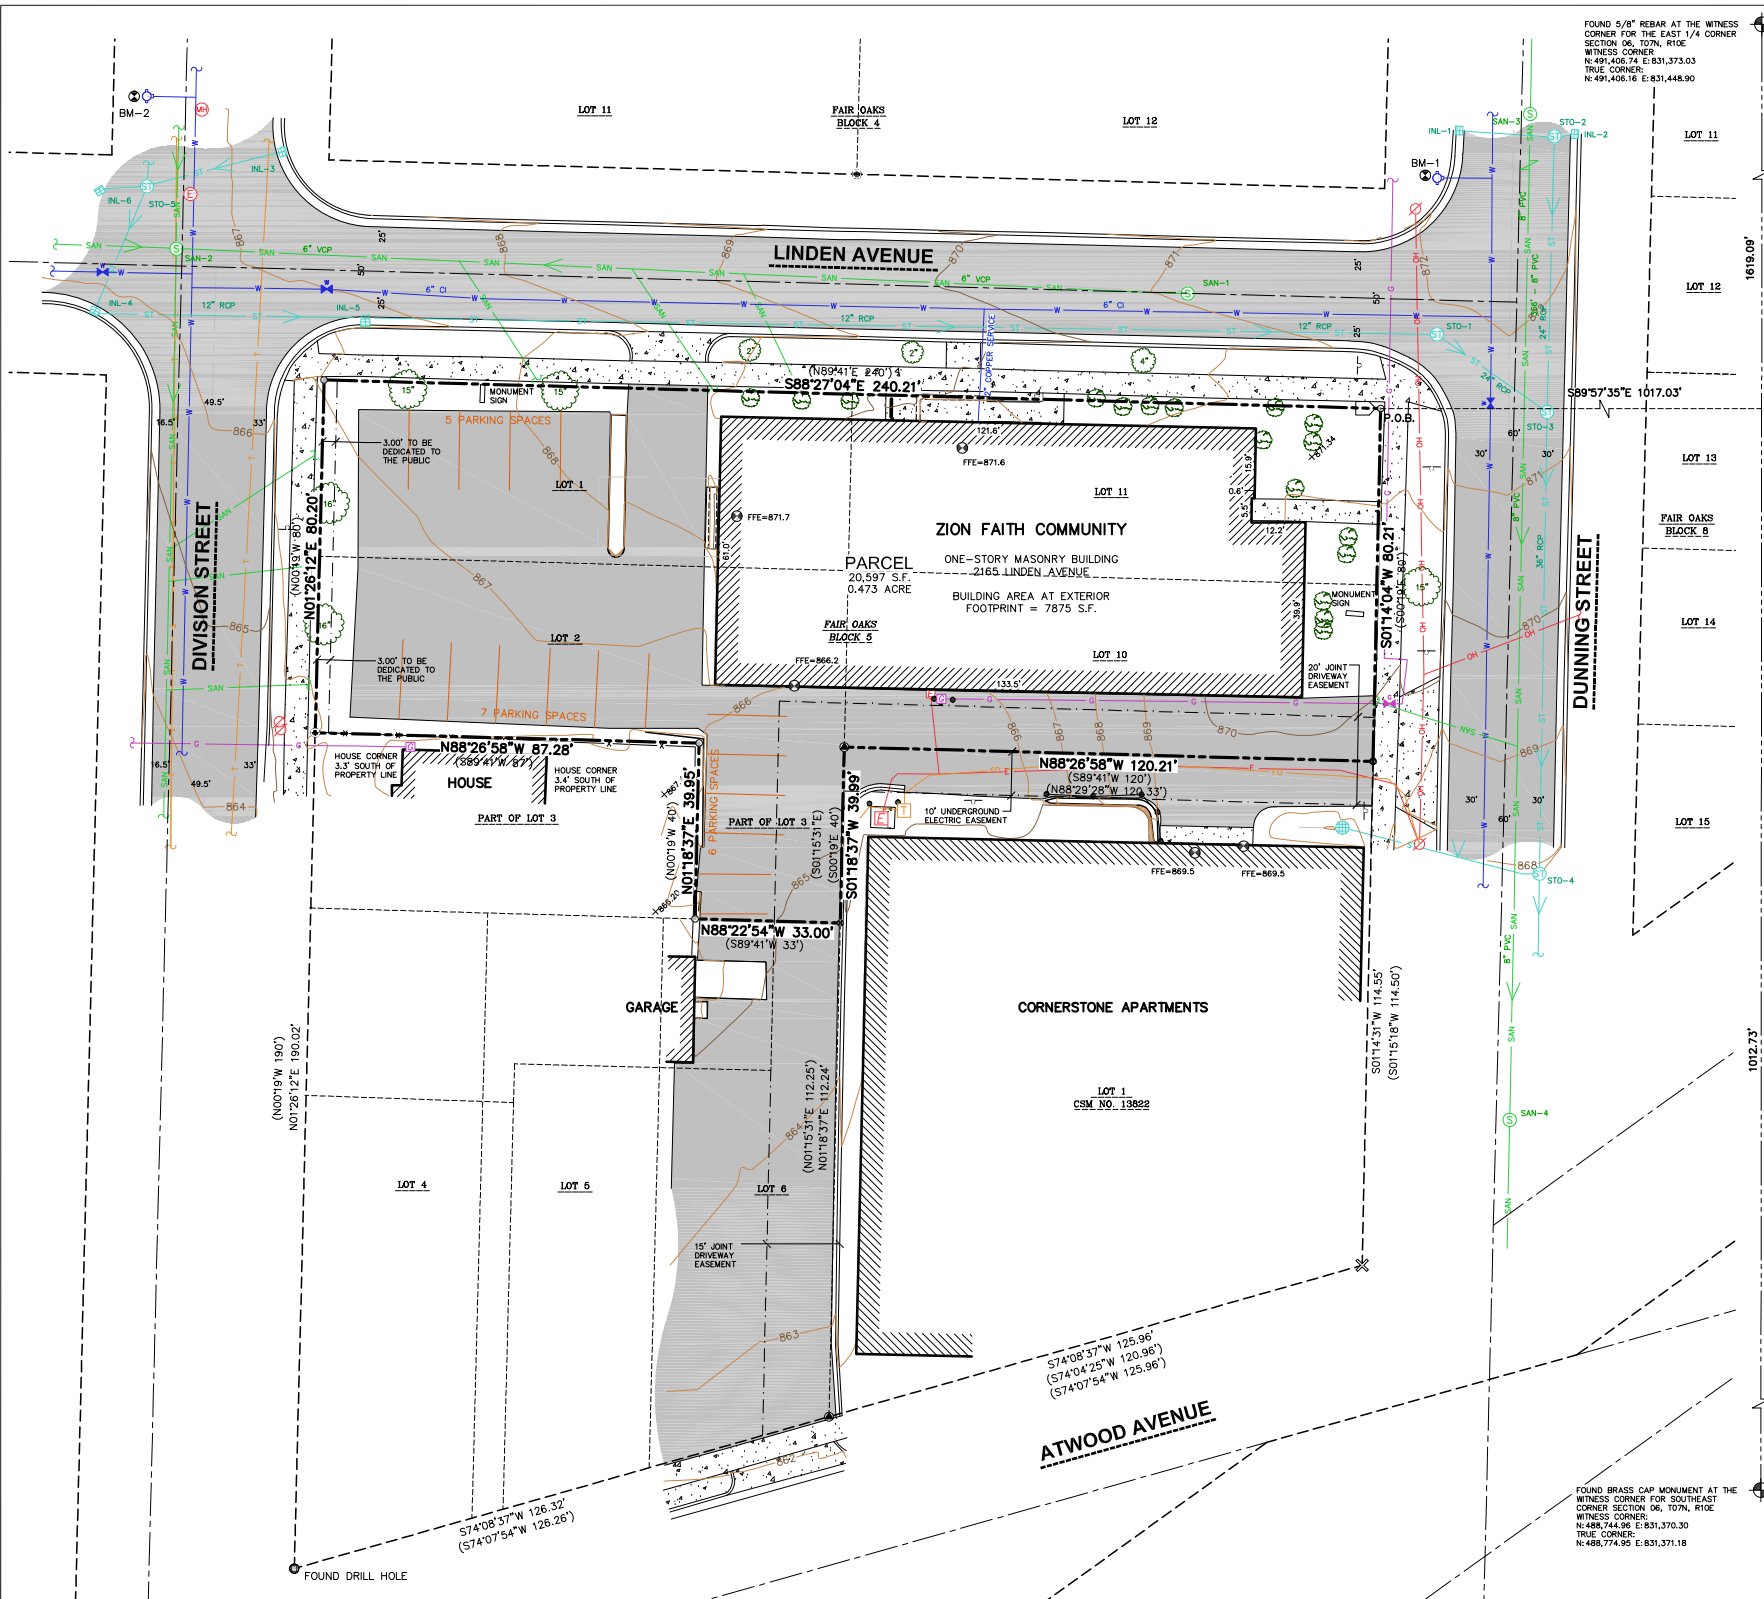


SANITARY SEWER MANHOLES					
STRUCT. ID	RIM ELEVATION	INVERT	ELEVATION	PIPE SIZE	PIPE TYPE
SAN-1	871.17	W	864.07	6"	CLAY
		E	858.18	6"	CLAY
SAN-2	866.68	N	858.03	6"	CLAY
		W	859.13	6"	CLAY
		S	857.93	6"	CLAY
SAN-3	873.32	N	863.77	8"	PVC
		S	863.77	8"	PVC
SAN-4	865.85	N	853.25	8"	PVC
		NE	853.40	8"	PVC
		S	853.25	8"	PVC

STORM SEWER INLETS					
INLET ID	RIM ELEVATION	INVERT	ELEVATION	PIPE SIZE	PIPE TYPE
INL-1	872.15	E	868.15	12"	RCP
INL-2	872.17	W	868.72	12"	RCP
INL-3	867.01	SW	864.16	12"	RCP
INL-4	865.28	NE	861.83	12"	RCP
INL-5	866.54	N	862.59	12"	RCP
INL-6	865.61	NE	862.86	12"	RCP

STORM SEWER MANHOLES					
STRUCT. ID	RIM ELEVATION	INVERT	ELEVATION	PIPE SIZE	PIPE TYPE
STO-1	871.62	W	861.12	12"	RCP
		SE	860.92	24"	RCP
STO-2	872.48	N	867.18	24"	RCP
		W	868.04	12"	RCP
		E	868.78	12"	RCP
STO-3	871.40	S	866.78	24"	RCP
		N	861.35	24"	RCP
		NW	860.80	24"	RCP
		S	860.80	36"	RCP
STO-4	867.88	N	860.33	36"	PVC
		W	860.63	12"	RCP
		S	860.63	36"	RCP
		W	862.58	12"	RCP
STO-5	866.38	N	862.28	12"	RCP
		E	862.23	12"	RCP
		S	862.18	12"	RCP

BENCHMARKS			
BENCH MARK	ELEVATION	DESCRIPTION	
BM-1	875.40	TOP NUT ON HYDRANT NEAR NORTHEAST CORNER OF SITE	
BM-2	870.89	TOP NUT ON HYDRANT NEAR NORTHWEST CORNER OF SITE	

\*JSD PROFESSIONAL SERVICES, INC. DOES NOT GUARANTEE THAT THE BENCHMARK ELEVATIONS LISTED ON THIS MAP HAVE NOT BEEN DISTURBED SINCE THE DATE OF SURVEY AND SHOULD BE VERIFIED PRIOR TO CONSTRUCTION ACTIVITIES.



### GENERAL NOTES

- REFER TO THE EXISTING CONDITIONS SURVEY FOR EXISTING CONDITIONS NOTES AND LEGENDS.
- ALL WORK IN THE ROW AND/OR PUBLIC EASEMENTS SHALL BE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR SEWER & WATER CONSTRUCTION IN WISCONSIN AND MUNICIPAL REQUIREMENTS.
- EXISTING GRADE SPOT ELEVATIONS SHOWN FOR INFORMATIONAL PURPOSES. DURING CONSTRUCTION WATCH EXISTING GRADES AT CONSTRUCTION LIMITS.
- NO SITE GRADING OUTSIDE OR DOWNSLOPE OF PROPOSED SILT FENCE LOCATION. NO LAND DISTURBANCE BEYOND PROPERTY LINES.
- JSD SHALL BE HELD HARMLESS AND DOES NOT WARRANT ANY DEVIATIONS BY THE OWNER/CONTRACTOR FROM THE APPROVED CONSTRUCTION PLANS THAT MAY RESULT IN DISCIPLINARY ACTIONS BY ANY OR ALL REGULATORY AGENCIES.

### DEMOLITION NOTES

- THIS PLAN INDICATES ITEMS ON THE PROPERTY INTENDED FOR DEMOLITION BASED ON THE CURRENT SITE DESIGN THAT HAVE BEEN IDENTIFIED BY A REASONABLE OBSERVATION OF THE EXISTING CONDITIONS THROUGH FIELD SURVEY RECONNAISSANCE. "DIGGER'S HOTLINE" LOCATION, AND GENERAL "STANDARD OF CARE", THERE MAY BE ADDITIONAL ITEMS THAT CAN NOT BE IDENTIFIED BY A REASONABLE ABOVE GROUND OBSERVATION, OF WHICH THE ENGINEER WOULD HAVE NO KNOWLEDGE OR MAY BE A PART OF ANOTHER DESIGN DISCIPLINE. IT IS THE CONTRACTOR'S/BIDDER'S RESPONSIBILITY TO REVIEW THE PLANS, INSPECT THE SITE AND PROVIDE THEIR OWN DUE DILIGENCE TO INCLUDE IN THEIR BID WHAT ADDITIONAL ITEMS, IN THEIR OPINION, MAY BE NECESSARY FOR DEMOLITION. ANY ADDITIONAL ITEMS IDENTIFIED BY THE CONTRACTOR/BIDDER SHALL BE IDENTIFIED IN THE BID AND REPORTED TO THE ENGINEER OF RECORD. JSD TAKES NO RESPONSIBILITY FOR ITEMS ON THE PROPERTY THAT COULD NOT BE LOCATED BY A REASONABLE OBSERVATION OF THE PROPERTY OR OF WHICH THEY WOULD HAVE NO KNOWLEDGE.
- CONTRACTOR SHALL KEEP ALL STREETS AND PRIVATE DRIVES FREE AND CLEAR OF ALL CONSTRUCTION RELATED DIRT, DUST AND DEBRIS.
- ALL TREES WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED UNLESS SPECIFICALLY CALLED OUT FOR PROTECTION. ALL TREES TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY AND STUMPS SHALL BE GROUND TO PROPOSED SUBGRADE.
- ALL LIGHT POLES TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY, INCLUDING BASE AND ALL APPURTENANCES. SALVAGE FOR RELOCATION, COORDINATE RELOCATION AND/OR ABANDONMENT OF ALL ELECTRIC LINES WITH ELECTRICAL ENGINEER AND OWNER PRIOR TO DEMOLITION.
- ABANDONED/REMOVED ITEMS SHALL BE DISPOSED OF OFF SITE UNLESS OTHERWISE NOTED.
- CONTRACTOR TO REPLACE ALL SIDEWALK AND CURB AND GUTTER ABUTTING THE PROPERTIES, WHICH IS DAMAGED BY THE CONSTRUCTION, OR ANY SIDEWALK AND CURB AND GUTTER THAT THE CITY ENGINEER DETERMINES NEEDS TO BE REPLACED BECAUSE IT IS NOT AT A DESIRABLE GRADE. REGARDLESS OF WHETHER THE CONDITION EXISTED PRIOR TO BEGINNING CONSTRUCTION.
- PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR:
  - EXAMINE ALL SITE CONDITIONS RELATIVE TO THE CONDITIONS INDICATED ON THE ENGINEERING DRAWINGS. ANY DISCREPANCIES ARE TO BE REPORTED IMMEDIATELY TO THE ENGINEER AND RESOLVED PRIOR TO THE START OF CONSTRUCTION.
  - VERIFYING UTILITY ELEVATIONS AND NOTIFYING ENGINEER OF ANY DISCREPANCIES. NO WORK SHALL BE PERFORMED UNTIL THE DISCREPANCIES ARE RESOLVED.
  - NOTIFYING ALL UTILITIES PRIOR TO THE REMOVAL OF ANY UNDERGROUND UTILITIES.
  - NOTIFYING THE DESIGN ENGINEER AND LOCAL CONTROLLING MUNICIPALITY 48 HOURS PRIOR TO THE START OF CONSTRUCTION TO ARRANGE FOR APPROPRIATE CONSTRUCTION INSPECTION.
- ANY SANITARY SEWER, SANITARY SEWER SERVICES, WATER MAIN, WATER SERVICES, STORM SEWER, OR OTHER UTILITIES, WHICH ARE DAMAGED BY THE CONTRACTORS, SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.
- CONTRACTOR IS RESPONSIBLE FOR SITE SAFETY DURING THE CONSTRUCTION OF THESE IMPROVEMENTS.
- CONTRACTOR TO COORDINATE PRIVATE UTILITY REMOVAL // ABANDONMENT AND NECESSARY RELOCATION WITH RESPECTIVE UTILITY COMPANY. COORDINATION REQUIRED PRIOR TO CONSTRUCTION.
- ALL DEMOLITION SHALL BE IN ACCORDANCE WITH THE APPROVED MUNICIPALITY RECYCLING PLAN.
- ANY CONTAMINATED SOLS SHALL BE REMOVED IN ACCORDANCE WITH FEDERAL AND STATE REGULATIONS TO AN APPROVED LANDFILL.
- ALL EXISTING UTILITIES TO BE FIELD LOCATED AND FLAGGED BY CONTRACTOR.
- EXISTING FIBER OPTIC LINE TO BE CLEARLY MARKED PRIOR TO ANY EXCAVATION. CONTRACTOR TO NOTIFY ENGINEER IMMEDIATELY IF ANY DISCREPANCIES OCCUR IN THE LOCATION SHOWN OR PROPOSED IMPROVEMENTS IMPACTING EXISTING FIBER OPTIC LINE LOCATION.
- SEWER ABANDONMENT SHALL BE IN ACCORDANCE WITH SECTION 3.2.24. OF THE STANDARD SPECIFICATIONS FOR WATER AND SEWER CONSTRUCTION IN WISCONSIN, LATEST ADDITION, AND THE CITY OF MADISON SPECIFICATIONS.
- WATER ABANDONMENT SHALL BE IN ACCORDANCE WITH SECTION 4.14.0 OF THE STANDARD SPECIFICATIONS FOR WATER AND SEWER CONSTRUCTION IN WISCONSIN, LATEST ADDITION, AND THE CITY OF MADISON SPECIFICATIONS.
- ALL PERIMETER EROSION CONTROL DEVICES SHALL BE INSTALLED PRIOR TO THE START OF DEMOLITION ACTIVITIES. CONTRACTOR SHALL KEEP ALL STREETS AND PAVEMENT FREE AND CLEAR OF ALL CONSTRUCTION RELATED DIRT, DUST AND DEBRIS.
- BUILDING REMOVALS SHALL BE BY A QUALIFIED CONTRACTOR. CONTRACTOR TO FOLLOW ALL DEMOLITION REGULATIONS, DISCONNECT ALL UTILITIES, OBTAIN ALL APPLICABLE PERMITS AND DISPOSE OF ALL BUILDING MATERIALS IN APPROPRIATE LANDFILLS. DEMOLISHED MATERIALS SHALL NOT BE BURIED ON SITE. IF ENCOUNTERED, ANY CONTAMINATED SOLS SHALL BE REMOVED TO A LANDFILL IN ACCORDANCE WITH APPROPRIATE STATE AND FEDERAL REGULATIONS.
- CONTRACTOR TO REMOVE EXISTING UTILITY PIPE OR PROVIDE PIPE BACK-FILLING AFTER REMOVAL OF EXISTING UTILITIES WITHIN BUILDING FOOTPRINT USING "LOW DENSITY CONCRETE/FLOWABLE FILL".
- RESTORATION OF THE EXISTING ROADWAY RIGHT-OF-WAYS ARE CONSIDERED INCIDENTAL AND SHOULD BE PART OF THE COST OF THE UNDERGROUND IMPROVEMENTS. DEMOLITION AND REMOVAL THIS INCLUDES CURB & GUTTER, SIDEWALK, TOPSOIL, SEEDING AND MULCHING.

### CONSTRUCTION SEQUENCING

- INSTALL PERIMETER SILT FENCE, INLET PROTECTION AND TEMPORARY CONSTRUCTION ENTRANCE.
- STRIP AND STOCKPILE TOPSOIL, INSTALL SILT FENCE AROUND PERIMETER OF STOCKPILE.
- CONDUCT ROUGH GRADING EFFORTS AND INSTALL CHECK DAMS WITHIN DRAINAGE DITCHES AS NEEDED.
- INSTALL UTILITY PIPING AND STRUCTURES. IMMEDIATELY INSTALL INLET PROTECTION.
- COMPLETE FINAL GRADING, INSTALLATION OF GRAVEL BASE COURSES, PLACEMENT OF CURBS, PAVEMENTS, WALKS, ETC.
- PLACE TOPSOIL AND IMMEDIATELY STABILIZE DISTURBED AREAS WITH EROSION CONTROL MEASURES AS INDICATED ON PLANS.
- EROSION CONTROLS SHALL NOT BE REMOVED UNTIL SITE IS FULLY STABILIZED OR 70% VEGETATIVE COVER IS ESTABLISHED.

CONTRACTOR MAY MODIFY SEQUENCING AFTER ITEM NO. 1 AS NEEDED TO COMPLETE CONSTRUCTION IF EROSION CONTROLS ARE MAINTAINED IN ACCORDANCE WITH THE CONSTRUCTION SITE EROSION CONTROL REQUIREMENTS.

### PAVING NOTES

- GENERAL.
    - ALL PAVING SHALL CONFORM TO "STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY & STRUCTURE CONSTRUCTION, LATEST EDITION, AND APPLICABLE THE CITY OF MADISON ORDINANCES.
    - ALL PAVING DIMENSIONS ARE TO FACE OF CURB UNLESS SPECIFIED OTHERWISE.
    - SURFACE PREPARATION – NOTIFY ENGINEER/OWNER OF UNSATISFACTORY CONDITIONS. DO NOT BEGIN PAVING WORK UNTIL DEFICIENT SUBBASE AREAS HAVE BEEN CORRECTED AND ARE READY TO RECEIVE PAVING.
    - ANY REQUIRED REPLACEMENT OF PUBLIC CURB AND GUTTER SHALL MATCH EXISTING AND MEET MUNICIPALITY REQUIREMENTS.
  - ASPHALTIC CONCRETE PAVING SPECIFICATIONS.
    - CODES AND STANDARDS – THE PLACING, CONSTRUCTION AND COMPOSITION OF THE ASPHALTIC BASE COURSE AND ASPHALTIC CONCRETE SURFACE COURSE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTIONS 455, 455.460 AND 465 OF THE STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, CURRENT EDITION. HEREAFTER, THIS PUBLICATION WILL BE REFERRED TO AS STATE HIGHWAY SPECIFICATIONS.
    - WEATHER LIMITATIONS – APPLY TACK COATS WHEN AMBIENT TEMPERATURE IS ABOVE 50° F (10° C) AND WHEN TEMPERATURE HAS NOT BEEN BELOW 35° F (1° C) FOR 12 HOURS IMMEDIATELY PRIOR TO APPLICATION. DO NOT APPLY WHEN BASE IS WET OR CONTAINS EXCESS OF MOISTURE. CONSTRUCT ASPHALTIC CONCRETE SURFACE COURSE WHEN ATMOSPHERIC TEMPERATURE IS ABOVE 40° F (4° C) AND WHEN BASE IS DRY AND WHEN WEATHER IS NOT RAINY. BASE COURSE MAY BE PLACED WHEN AIR TEMPERATURE IS ABOVE 30° F (-1° C).
  - GRADE CONTROL – ESTABLISH AND MAINTAIN REQUIRED LINES AND ELEVATIONS FOR EACH COURSE DURING CONSTRUCTION.
  - CRUSHED AGGREGATE BASE COURSE – THE TOP LAYER OF BASE COURSE SHALL CONFORM TO SECTIONS 301 AND 305, STATE HIGHWAY SPECIFICATIONS.
  - BINDER COURSE AGGREGATE – THE AGGREGATE FOR THE BINDER COURSE SHALL CONFORM TO SECTIONS 460 AND 315, STATE HIGHWAY SPECIFICATIONS.
  - SURFACE COURSE AGGREGATE – THE AGGREGATE FOR THE SURFACE COURSE SHALL CONFORM TO SECTIONS 460 AND 465, STATE HIGHWAY SPECIFICATIONS.
  - ASPHALTIC MATERIALS – THE ASPHALTIC MATERIALS SHALL CONFORM TO SECTION 455 AND 460, STATE HIGHWAY SPECIFICATIONS.
- CONCRETE PAVING SPECIFICATIONS.
    - CONCRETE PAVING SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTIONS 415 AND 416 OF THE STATE HIGHWAY SPECIFICATIONS.
    - CONCRETE PAVEMENT SHALL BE REINFORCED WITH NOVOMESH 950 (OR EQUAL) FIBER REINFORCEMENT AT A RATE OF 5 LBS/CUBIC YARD.
    - CURING COMPOUNDS SHALL CONFORM TO SECTION 415 OF THE STATE HIGHWAY SPECIFICATIONS.
    - CONTRACTOR SHALL PROVIDE CONTROL JOINTS AND CONSTRUCTION JOINTS OF ONE-QUARTER CONCRETE THICKNESS AT AN EQUAL RATIO OF LENGTH TO WIDTH WHEREVER POSSIBLE WITH A MAXIMUM LENGTH BETWEEN JOINTS OF 8' ON CENTER.
    - CONTRACTOR SHALL PROVIDE EXPANSION JOINTS IN SIDEWALKS AT A MAXIMUM 24' ON CENTER.
    - EXTERIOR CONCRETE SURFACES SHALL BE BROOM FINISHED.
    - ALL CONCRETE SURFACES TO BE SEALED WITH TYPE TK-26UV CONCRETE SEALANT.

### GRADING AND SEEDING NOTES

- ALL PROPOSED GRADES SHOWN ARE FINISHED GRADES. CONTRACTOR SHALL VERIFY ALL GRADES, MAKE SURE ALL AREAS DRAIN PROPERLY AND SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO CONSTRUCTION.
- CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR COMPUTATIONS OF ALL GRADING QUANTITIES. WHILE JSD PROFESSIONAL SERVICES, INC. ATTEMPTS TO PROVIDE A COST EFFECTIVE APPROACH TO BALANCE EARTHWORK, GRADING DESIGN IS BASED ON MANY FACTORS, INCLUDING SAFETY, AESTHETICS, AND COMMON ENGINEERING STANDARDS OF CARE. THEREFORE, NO GUARANTEE CAN BE MADE FOR A BALANCED SITE.
- PARKING LOT AND DRIVEWAY ELEVATIONS ARE PAVEMENT GRADES, NOT TOP OF CURB GRADES, UNLESS OTHERWISE NOTED.
- ANY WORK WITHIN RIGHT-OF-WAY SHALL BE PROPERLY PERMITTED AND COORDINATED WITH THE APPROPRIATE OFFICIALS PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES. ALL GRADING WITHIN RIGHT-OF-WAY IS SUBJECT TO APPROVAL BY SAID OFFICIALS.
- CONTRACTOR SHALL PROVIDE NOTICE TO THE MUNICIPALITY IN ADVANCE OF ANY SOIL DISTURBING ACTIVITIES, IN ACCORDANCE WITH MUNICIPAL REQUIREMENTS.
- ALL DISTURBED AREAS SHALL BE SODED AND/OR SEEDED AND MULCHED IMMEDIATELY FOLLOWING GRADING ACTIVITIES. SOD/SEED MIX TO BE IN ACCORDANCE WITH LANDSCAPE PLAN.
- CONTRACTOR SHALL CHISEL-PLow OR DEEP TILL WITH DOUBLE TINES ALL STORMWATER MANAGEMENT FACILITIES JUST PRIOR TO SODDING AND/OR SEEDING AND MULCHING TO PROMOTE INFILTRATION.
- CONTRACTOR SHALL WATER ALL NEWLY SODED/SEEDED AREAS DURING THE SUMMER MONTHS WHENEVER THERE IS A 7 DAY LAPSE WITH NO SIGNIFICANT RAINFALL.
- CONTRACTOR TO DEEP TILL ALL COMPACTED PERVIOUS SURFACES PRIOR TO SODDING AND/OR SEEDING AND MULCHING.
- ALL SLOPES 20% OR GREATER SHALL BE TEMPORARY SEEDED, MULCHED, OR OTHER MEANS OF COVER PLACED ON THEM WITHIN 2 WEEKS OF DISTURBANCE.
- ALL EXPOSED SOIL AREAS THAT WILL NOT BE BROUGHT TO FINAL GRADE OR ON WHICH LAND DISTURBING ACTIVITIES WILL NOT BE PERFORMED FOR A PERIOD GREATER THAN 30 DAYS AND REQUIRE VEGETATIVE COVER FOR LESS THAN 1 YEAR, REQUIRE TEMPORARY SEEDING FOR EROSION CONTROL. SEEDING FOR EROSION CONTROL SHALL BE IN ACCORDANCE WITH WDNR TECHNICAL STANDARD 1059 AND THE CITY OF MADISON ORDINANCE.

### FORESTRY NOTES

- ALL PROPOSED STREET TREE REMOVALS WITHIN THE RIGHT OF WAY SHALL BE REVIEWED BY CITY FORESTRY BEFORE THE PLAN COMMISSION MEETING. STREET TREE REMOVALS REQUIRE APPROVAL AND A TREE REMOVAL PERMIT ISSUED BY CITY FORESTRY. ANY STREET TREE REMOVALS REQUESTED AFTER THE DEVELOPMENT PLAN IS APPROVED BY THE PLAN COMMISSION OR THE BOARD OF PUBLIC WORKS AND CITY FORESTRY WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHO'S DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO A TREE REMOVAL PERMIT BEING ISSUED.
- AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY (266-4816) PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: <https://www.cityofmadison.com/BUSINESS/PW/SPECSCFM>
- CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREE(S). THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.
- SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION ADDRESSES SOIL COMPACTON NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.
- ON THIS PROJECT, STREET TREE PROTECTION ZONE FENCING IS REQUIRED. THE FENCING SHALL BE ERECTED BEFORE THE DEMOLITION, GRADING OR CONSTRUCTION BEGINS. THE FENCE SHALL INCLUDE THE ENTIRE WIDTH OF TERRACE AND, EXTEND AT LEAST 5 FEET ON BOTH SIDES OF THE OUTSIDE EDGE OF THE TREE TRUNK. DO NOT REMOVE THE FENCING TO ALLOW FOR DELIVERIES OR EQUIPMENT ACCESS THROUGH THE TREE PROTECTION ZONE.
- STREET TREE PRUNING SHALL BE COORDINATED WITH MADISON FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 – PART 1 STANDARDS FOR PRUNING.
- AT LEAST ONE WEEK PRIOR TO STREET TREE PLANTING, CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO SCHEDULE INSPECTION AND APPROVAL OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS WITH THE LANDSCAPER.

### UTILITY NOTES

- ALL EXISTING UTILITIES ARE SHOWN FOR INFORMATIONAL PURPOSES ONLY AND ARE NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATION AS TO THE TYPE AND LOCATIONS OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO. CONTRACTOR/OWNER SHALL CALL "DIGGER'S HOTLINE" PRIOR TO ANY CONSTRUCTION.
- PRIOR TO CONSTRUCTION, THE PRIME CONTRACTOR IS RESPONSIBLE FOR:
  - EXAMINING ALL SITE CONDITIONS RELATIVE TO THE CONDITIONS INDICATED ON THE ENGINEERING DRAWINGS. ANY DISCREPANCIES ARE TO BE REPORTED TO THE ENGINEER AND RESOLVED PRIOR TO THE START OF CONSTRUCTION.
  - OBTAINING ALL PERMITS INCLUDING PERMIT COSTS, TAP FEES, METER DEPOSITS, BONDS, AND ALL OTHER FEES REQUIRED FOR PROPOSED WORK TO OBTAIN OCCUPANCY.
  - VERIFYING ALL ELEVATIONS, LOCATIONS AND SIZES OF SANITARY, WATER AND STORM LATERALS AND CHECK ALL UTILITY CROSSINGS FOR CONFLICTS. NOTIFY ENGINEER OF ANY DISCREPANCY. NO WORK SHALL BE PERFORMED UNTIL THE DISCREPANCY IS RESOLVED.
  - NOTIFYING ALL UTILITIES PRIOR TO INSTALLATION OF ANY UNDERGROUND IMPROVEMENTS.
  - NOTIFYING THE DESIGN ENGINEER AND MUNICIPALITY 48 HOURS PRIOR TO THE START OF CONSTRUCTION TO ARRANGE FOR APPROPRIATE CONSTRUCTION OBSERVATION.
  - COORDINATING ALL CONSTRUCTION WITH OTHER CONTRACTORS INVOLVED WITH CONSTRUCTION OF THE PROPOSED DEVELOPMENT AND FOR REPORTING ANY ERRORS OR DISCREPANCIES BETWEEN THESE PLANS AND PLANS PREPARED BY OTHERS.
- ALL UTILITY WORK SHALL BE DONE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN – AND ALL STATE AND LOCAL CODES AND SPECIFICATIONS. IT IS THE CONTRACTORS RESPONSIBILITY TO DETERMINE WHICH SPECIFICATIONS AND CODES APPLY, AND TO COORDINATE ALL CONSTRUCTION ACTIVITIES WITH THE APPROPRIATE LOCAL AND STATE AUTHORITIES.
- SPECIFICATIONS SHALL COMPLY WITH THE CITY OF MADISON SPECIAL PROVISIONS.
- LENGTHS OF ALL UTILITIES ARE TO CENTER OF STRUCTURES OR FITTINGS AND MAY VARY SLIGHTLY FROM PLAN. LENGTHS SHALL BE VERIFIED IN THE FIELD DURING CONSTRUCTION.
- CONTRACTOR IS RESPONSIBLE FOR SITE SAFETY DURING THE CONSTRUCTION OF IMPROVEMENTS.
- CONTRACTOR SHALL INSTALL A PEDESTRIAN FENCE AROUND ALL EXCAVATIONS TO BE LEFT OPEN OVER NIGHT AS REQUIRED IN CONSTRUCTION SITES WHERE THE POTENTIAL FOR PEDESTRIAN INJURY EXISTS.
- CONTRACTOR SHALL ADJUST AND/OR RECONSTRUCT ALL UTILITY COVERS (SUCH AS MANHOLE COVERS, VALVE BOX COVERS, ETC.) TO MATCH THE FINISHED GRADES OF THE AREAS EFFECTED BY THE CONSTRUCTION.
- THE PRIME CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONSTRUCTION WITH OTHER CONTRACTORS INVOLVED WITH CONSTRUCTION OF THE PROPOSED DEVELOPMENT AND FOR REPORTING ANY ERRORS OR DISCREPANCIES BETWEEN THESE PLANS AND PLANS PREPARED BY OTHERS.
- ANY SANITARY SEWER, SANITARY SEWER SERVICES, WATER MAIN, WATER SERVICES, STORM SEWER, OR OTHER UTILITIES, WHICH ARE DAMAGED BY THE CONTRACTORS, SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.
- THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING THE ENGINEER WITH AS-BUILT CONDITIONS OF THE DESIGNATED IMPROVEMENTS IN ORDER THAT THE APPROPRIATE DRAWINGS CAN BE PREPARED, IF REQUIRED. ANY CHANGES TO THE DRAWINGS OR ADDITIONAL ITEMS MUST BE REPORTED TO THE ENGINEER AS WORK PROGRESSES.
- STORM SEWER SPECIFICATIONS –
  - PIPE – REINFORCED CONCRETE PIPE (RCP) SHALL MEET THE REQUIREMENTS OF ASTM CLASS III (MINIMUM) C-76 WITH RUBBER GASKET JOINTS CONFORMING TO ASTM C-443. HIGH DENSITY DUAL-WALL POLYETHYLENE CORRUGATED PIPE SHALL BE AS MANUFACTURED BY ADS OR EQUAL WITH WATER TIGHT JOINTS, AND SHALL MEET THE REQUIREMENTS OF AASHTO DESIGNATION M-284 TYPE "S".
  - INLETS – INLETS SHALL BE CONSTRUCTED IN ACCORDANCE WITH FILE. NO. 28 OF THE "STANDARD SPECIFICATIONS", OR APPROVED EQUAL WITH A 1'-8" X 2'-6" MAXIMUM OPENING. CURB FRAME & GRATE SHALL BE NENAH R-3067 WITH TYPE R GRATE, OR EQUAL.
  - BACKFILL AND BEDDING – STORM SEWER SHALL BE CONSTRUCTED WITH GRAVEL BACKFILL AND CLASS "B" BEDDING IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS".
  - MANHOLE FRAMES AND COVERS – MANHOLE FRAMES AND COVERS SHALL BE NENAH R-1642 WITH TYPE "B" SELF SEALING LIDS, NON-ROCKING OR EQUAL.
  - FIELD TILE CONNECTION – ALL FIELD TILE ENCOUNTERED DURING CONSTRUCTION SHALL BE INCLUDED IN THE UNIT PRICE(S) FOR STORM SEWER. TILE LINES CROSSED BY THE TRENCH SHALL BE REPLACED WITH THE SAME MATERIAL AS THE STORM SEWER.
- WATER MAIN SPECIFICATIONS –
  - PIPE – DUCTILE IRON PIPE SHALL BE CLASS 52 CONFORMING TO AWMA C151 AND CHAPTER 8.18.0 OF THE "STANDARD SPECIFICATIONS". POLYVINYL CHLORIDE (PVC) PIPE SHALL MEET THE REQUIREMENTS OF AWMA STANDARD C-900, CLASS 150, DR-18, WITH CAST IRON O.D. AND INTEGRAL ELASTOMERIC BELL AND SPOUT JOINTS. NON-METALLIC WATER MAINS SHALL BE INSTALLED WITH BLUE INSULATION TRACER WIRE AND CONFORM WITH SFS 382.30(11)(b).
  - VALVES AND VALVE BOXES – GATE VALVES SHALL BE AWMA GATE VALVES MEETING THE REQUIREMENTS OF AWMA C-500 AND CHAPTER 8.27.0 OF THE "STANDARD SPECIFICATIONS". GATE VALVES AND VALVE BOXES SHALL CONFORM TO LOCAL PLUMBING ORDINANCES.
  - BEDDING AND COVER MATERIAL – PIPE BEDDING AND COVER MATERIAL SHALL BE SAND, CRUSHED STONE CHIPS OR CRUSHED STONE SCREENINGS CONFORMING TO CHAPTER 8.43.2 OF THE "STANDARD SPECIFICATIONS".
  - BACKFILL – BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE WITH CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS". GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS".
- SANITARY SEWER SPECIFICATIONS –
  - PIPE – SANITARY SEWER PIPE MATERIAL SHALL BE POLYVINYL CHLORIDE (PVC) MEETING REQUIREMENTS OF ASTM D 3034, SDR-35, WITH INTEGRAL BELL TYPE FLEXIBLE ELASTOMERIC JOINTS, MEETING THE REQUIREMENTS OF ASTM D-3212.
  - BEDDING AND COVER MATERIAL – BEDDING AND COVER MATERIAL SHALL CONFORM TO THE APPROPRIATE SECTIONS OF THE "STANDARD SPECIFICATION" WITH THE FOLLOWING MODIFICATION: "COVER MATERIAL SHALL BE THE SAME AS USED FOR BEDDING AND SHALL CONFORM TO SECTION 8.43.2 (A). BEDDING AND COVER MATERIAL SHALL BE PLACED IN A MINIMUM OF THREE SEPARATE LIFTS, OR AS REQUIRED TO INSURE ADEQUATE COMPACTING OF THESE MATERIALS, WITH ONE LIFT OF BEDDING MATERIAL ENDING AT OR NEAR THE SPRINGLINE OF THE PIPE. THE CONTRACTOR SHALL TAKE CARE TO COMPLETELY WET BEDDING MATERIAL UNDER THE HAUNCH OF THE PIPE TO PROVIDE ADEQUATE SIDE SUPPORT."
  - BACKFILL – BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS". GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.43.5 OF THE "STANDARD SPECIFICATIONS".
- WATERMAIN AND SANITARY SEWER SHALL BE INSULATED WHEREVER THE DEPTH OF COVER IS LESS THAN 6 FEET. INSULATION AND INSTALLATION OF INSULATION SHALL BE CONFORMING WITH CHAPTER 4.17.0 "INSULATION" OF THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN 6TH EDITION UPDATED WITH ITS LATEST ADDENDUM (TYP.).


### EROSION CONTROL NOTES

- CONTRACTOR IS RESPONSIBLE TO NOTIFY ENGINEER OF RECORD AND OFFICIALS OF ANY CHANGES TO THE EROSION CONTROL AND STORMWATER MANAGEMENT PLANS. ENGINEER OF RECORD AND APPROPRIATE CITY OF MADISON OFFICIALS MUST APPROVE ANY CHANGES PRIOR TO DEVIATION FROM THE APPROVED PLANS.
- ALL EROSION CONTROL MEASURES SHALL BE CONSTRUCTED AND MAINTAINED BY THE CONTRACTOR IN ACCORDANCE WITH THE WISCONSIN DEPARTMENT OF NATURAL RESOURCES (WDNR) TECHNICAL STANDARDS (REFERRED TO AS BMP'S) AND CITY OF MADISON ORDINANCE. IT IS THE CONTRACTOR'S RESPONSIBILITY TO OBTAIN A COPY OF THESE STANDARDS. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY ADDITIONAL EROSION CONTROL MEASURES WHICH MAY BE NECESSARY TO MEET UNFORESEEN FIELD CONDITIONS.
- INSTALL PERIMETER EROSION CONTROL MEASURES (SUCH AS CONSTRUCTION ENTRANCES, SILT FENCE AND EXISTING INLET PROTECTION) PRIOR TO ANY SITE WORK, INCLUDING GRADING OR DISTURBANCE OF EXISTING SURFACE COVER, AS SHOWN ON PLAN. MODIFICATIONS TO THE APPROVED EROSION CONTROL DESIGN IN ORDER TO MEET UNFORESEEN FIELD CONDITIONS IS ALLOWED IF MODIFICATIONS CONFORM TO BMP'S. ALL DESIGN MODIFICATIONS MUST BE APPROVED BY THE CITY OF MADISON PRIOR TO DEVIATION OF THE APPROVED PLAN.
- ADDITIONAL EROSION CONTROL MEASURES, AS REQUESTED BY STATE INSPECTORS, LOCAL INSPECTORS, COUNTY INSPECTORS AND/OR ENGINEER OF RECORD SHALL BE INSTALLED WITHIN 24 HOURS OF REQUEST.
- INSPECTIONS AND MAINTENANCE OF ALL EROSION CONTROL MEASURES SHALL BE ROUTINE (ONCE PER WEEK MINIMUM) TO ENSURE PROPER FUNCTION OF EROSION CONTROLS AT ALL TIMES. EROSION CONTROL MEASURES ARE TO BE IN WORKING ORDER AT THE END OF EACH WORK DAY.
- ALL EROSION AND SEDIMENT CONTROL ITEMS SHALL BE INSPECTED WITHIN 24 HOURS OF ALL RAIN EVENTS EXCEEDING 0.5 INCHES. ANY DAMAGED EROSION CONTROL MEASURES SHALL BE REPAIRED OR REPLACED IMMEDIATELY UPON INSPECTION.
- CONSTRUCTION ENTRANCES SHALL BE INSTALLED AT ALL LOCATIONS OF VEHICLE INGRESS/EGRESS POINTS. ADDITIONAL LOCATIONS OTHER THAN AS SHOWN ON THE PLANS MUST BE PRIOR APPROVED BY THE MUNICIPALITY. CONSTRUCTION ENTRANCES SHALL BE 50' LONG AND NO LESS THAN 12" THICK BY USE OF 3" CLEAR STONE. CONSTRUCTION ENTRANCES SHALL BE MAINTAINED BY THE CONTRACTOR IN A CONDITION WHICH WILL PREVENT THE TRACKING OF MUD OR DRY SEDIMENT ONTO ADJACENT PUBLIC STREETS AFTER EACH WORKING DAY OR MORE FREQUENTLY AS REQUIRED.
- PAVED SURFACES ADJACENT TO CONSTRUCTION SITE VEHICLE ACCESS SHALL BE SWEEP AND/OR SCRAPED TO REMOVE ACCUMULATED SOIL, DIRT AND/OR DUST AFTER THE END OF EACH WORK DAY AND AS REQUESTED BY THE CITY OF MADISON.
- INLET PROTECTION SHALL BE IMMEDIATELY FITTED AT THE INLET OF ALL INSTALLED STORM SEWER AND SILT FENCE SHALES BE IMMEDIATELY FITTED AT ALL INSTALLED CULVERT INLETS TO PREVENT SEDIMENT DEPOSITION WITHIN STORM SEWER SYSTEMS.
- INSTALL EROSION CONTROLS ON THE DOWNSTREAM SIDE OF STOCKPILES. IF STOCKPILE REMAINS UNDISTURBED FOR MORE THAN SEVEN (7) DAYS, TEMPORARY SEEDING AND STABILIZATION IN ACCORDANCE WITH BEST MANAGEMENT PRACTICES IS REQUIRED. IF DISTURBANCE OCCURS BETWEEN NOVEMBER 15TH AND MAY 15TH, THE MULCHING SHALL BE PERFORMED BY HYDRO-MULCHING WITH A TACKIFIER.
- DITCH CHECKS AND APPLICABLE EROSION NETTING/MATting SHALL BE INSTALLED IMMEDIATELY AFTER COMPLETION OF GRADING EFFORTS WITHIN DITCHES/SWALES TO PREVENT SOIL TRANSPORTATION.
- EROSION CONTROL FOR UTILITY CONSTRUCTION (STORM SEWER, SANITARY SEWER, WATER MAIN, ETC.):
  - PLACE EXCAVATED TRENCH MATERIAL ON THE HIGH SIDE OF THE TRENCH.
  - BACKFILL, COMPACT, AND STABILIZE THE TRENCH IMMEDIATELY AFTER PIPE CONSTRUCTION.
  - DISCHARGE FROM TRENCH SHALL BE FILTERED AND SEDIMENT FILTERS SHALL BE INSTALLED IN ACCORDANCE WITH THE Dewatering TECHNICAL STANDARD NO. 1061 PRIOR TO RELEASE INTO THE STORM SEWER, RECEIVING STREAM, OR DRAINAGE DITCH.
- ALL SLOPES 4:1 OR GREATER SHALL BE STABILIZED WITH CLASS L TYPE B EROSION MATTING OR APPLICATION OF A WISCONSIN DEPARTMENT OF TRANSPORTATION (WisDOT) APPROVED POLYMER SOIL STABILIZATION TREATMENT OR A COMBINATION THEREOF, AS REQUIRED WITHIN 7 DAYS OF REACHING FINAL GRADE AND/OR AS SOON AS CONDITIONS ALLOW. DRAINAGE SWALES SHALL BE STABILIZED WITH CLASS II, TYPE B EROSION MATTING. EROSION MATTING AND/OR NETTING USED ONSITE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES AND WDNR TECHNICAL STANDARDS 1052 AND 1053.
- CONTRACTOR SHALL TAKE ALL NECESSARY STEPS TO CONTROL DUST ARISING FROM CONSTRUCTION OPERATIONS. REFER TO WDNR TECHNICAL STANDARD 1068.
- EROSION CONTROL MEASURES SHALL NOT BE REMOVED UNTIL ALL LAND DISTURBING CONSTRUCTION ACTIVITY AT THE SITE HAS BEEN COMPLETED AND THAT A UNIFORM PERENNIAL VEGETATIVE COVER HAS BEEN ESTABLISHED WITH A DENSITY OF AT LEAST 70% FOR UNPAVED AREAS AND AREAS NOT COVERED BY PERMANENT STRUCTURES OR THAT EMPLOY EQUIVALENT PERMANENT STABILIZATION MEASURES.
  - PERMANENT SEEDING; IN ACCORDANCE WITH APPROVED CONSTRUCTION SPECIFICATION
    - TEMPORARY SEEDING; MAY CONSIST OF SPRING OATS(100LBS/ACRE) AND/OR WHEAT OR CEREAL RYE (150LB/ACRE)
    - HYDRO-MULCHING WITH A TACKIFIER
    - GEOTEXTILE EROSION MATTING
    - SODDING
- STABILIZATION PRACTICES:
  - STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED. NO MORE THAN SEVEN (7) DAYS SHALL PASS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS CEASED UNLESS:
    - THE INITIATION STABILIZATION MEASURES BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY HAS CEASED IS PRECLUDED BY SNOW COVER. IN THAT EVENT, STABILIZATION SHALL BE INITIATED AS SOON AS PRACTICABLE.
    - CONSTRUCTION ACTIVITY WILL RESUME ON A PORTION OF THE SITE WITHIN FOURTEEN (14) DAYS FROM WHEN ACTIVITY CEASED. (I.E. THE TOTAL TIME PERIOD THAT THE CONSTRUCTION ACTIVITY IS TEMPORARILY CEASED IS LESS THAN FOURTEEN (14) DAYS. IN THAT EVENT, STABILIZATION MEASURES DO NOT HAVE TO BE INITIATED ON THAT PORTION OF THE SITE BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY HAS TEMPORARILY CEASED.
  - STABILIZATION MEASURES SHALL BE DETERMINED BASED ON SITE CONDITIONS AT THE TIME OF CONSTRUCTION ACTIVITY HAS CEASED, INCLUDING BUT NOT LIMITED TO WEATHER CONDITIONS AND LENGTH OF TIME MEASURE MUST BE EFFECTIVE. THE FOLLOWING ARE ACCEPTABLE STABILIZATION MEASURES:
    - PERMANENT SEEDING; IN ACCORDANCE WITH APPROVED CONSTRUCTION SPECIFICATION
    - TEMPORARY SEEDING; MAY CONSIST OF SPRING OATS(100LBS/ACRE) AND/OR WHEAT OR CEREAL RYE (150LB/ACRE)
    - HYDRO-MULCHING WITH A TACKIFIER
    - GEOTEXTILE EROSION MATTING
    - SODDING

### STORMWATER FACILITIES CONSTRUCTION NOTES

- ENGINEER SHALL BE NOTIFIED PRIOR TO INSTALLATION OF STORMWATER MANAGEMENT FACILITIES. CONSTRUCTION OF STORMWATER MANAGEMENT FACILITIES SHALL BE OBSERVED AND DOCUMENTED BY THE ENGINEER, OR AN OWNER'S REPRESENTATIVE.
- STORMWATER MANAGEMENT FACILITIES SHALL BE INSTALLED AFTER SUBSTANTIAL COMPLETION OF FINAL SITE GRADING AND SOILS HAVE BEEN STABILIZED.
- AREAS USED FOR TEMPORARY SEDIMENT BASINS SHALL BE REMOVED IN THEIR ENTIRETY AFTER CONSTRUCTION OF STORMWATER MANAGEMENT FACILITIES.
- CONSTRUCTION TRAFFIC, HEAVY EQUIPMENT AND SOIL STOCKPILES SHALL NOT BE PLACED IN AREAS WHERE PROPOSED STORMWATER MANAGEMENT FACILITIES ARE LOCATED.
- NATIVE SOIL INFILTRATION RATES BELOW STORMWATER FACILITIES SHALL BE VERIFIED BY THE OWNER'S GEOTECHNICAL ENGINEER PRIOR INSTALLATION OF FACILITIES. NATIVE SOIL INFILTRATION RATES SHALL BE EQUAL TO OR GREATER THAN DESIGN INFILTRATION RATES.
- NATIVE SOILS SHALL BE BLENDED A MINIMUM OF TWO FEET PRIOR TO INSTALLATION OF STORMWATER INFILTRATION FACILITIES TO BREAKUP ANY LOWER PERMEABILITY SEAMS THAT MAY BE PRESENT.
- THICKER SILT OR CLAY LAYERS SHALL BE OVER-EXCAVATED AND BACKFILLED WITH GRANULAR MATERIALS CONFORMING TO SPECIFICATIONS PER WDNR TECH STANDARD 1004.

### LEGEND

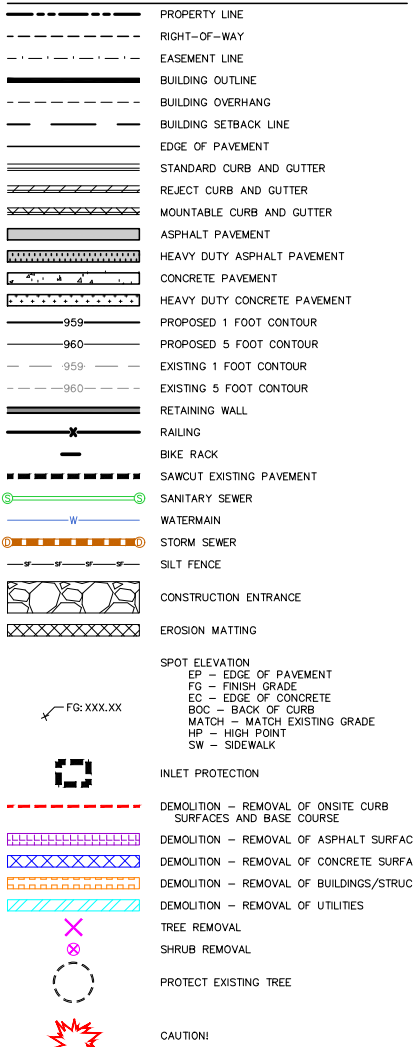

CREATE THE VISION TELL THE STORY  
jstdinc.com

MADISON REGIONAL OFFICE  
161 HORIZON DRIVE, SUITE 101  
VERONA, WISCONSIN 53593  
P. 608.848.5060

### CLIENT: THRESHOLD DEVELOPMENT GROUP

CLIENT ADDRESS:  
1952 ATWOOD AVENUE  
MADISON, WISCONSIN 53704


### PROJECT: 2165 LINDEN AVENUE REDEVELOPMENT

PROJECT LOCATION:  
2165 LINDEN AVENUE  
MADISON, DANE COUNTY  
WISCONSIN 53704

#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Designed By: CTD  
Reviewed By: AG  
Approved By:  
SHEET TITLE:  
**NOTES AND LEGEND**

SHEET NUMBER:  
**C1.0**  
JSD PROJECT NO: 21-11164




PLAN MODIFICATIONS:

#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		


Designed By: CTD  
Reviewed By: AG  
Approved By:

SHEET TITLE:  
**OVERALL SITE PLAN**


SHEET NUMBER:  
**C3.0**

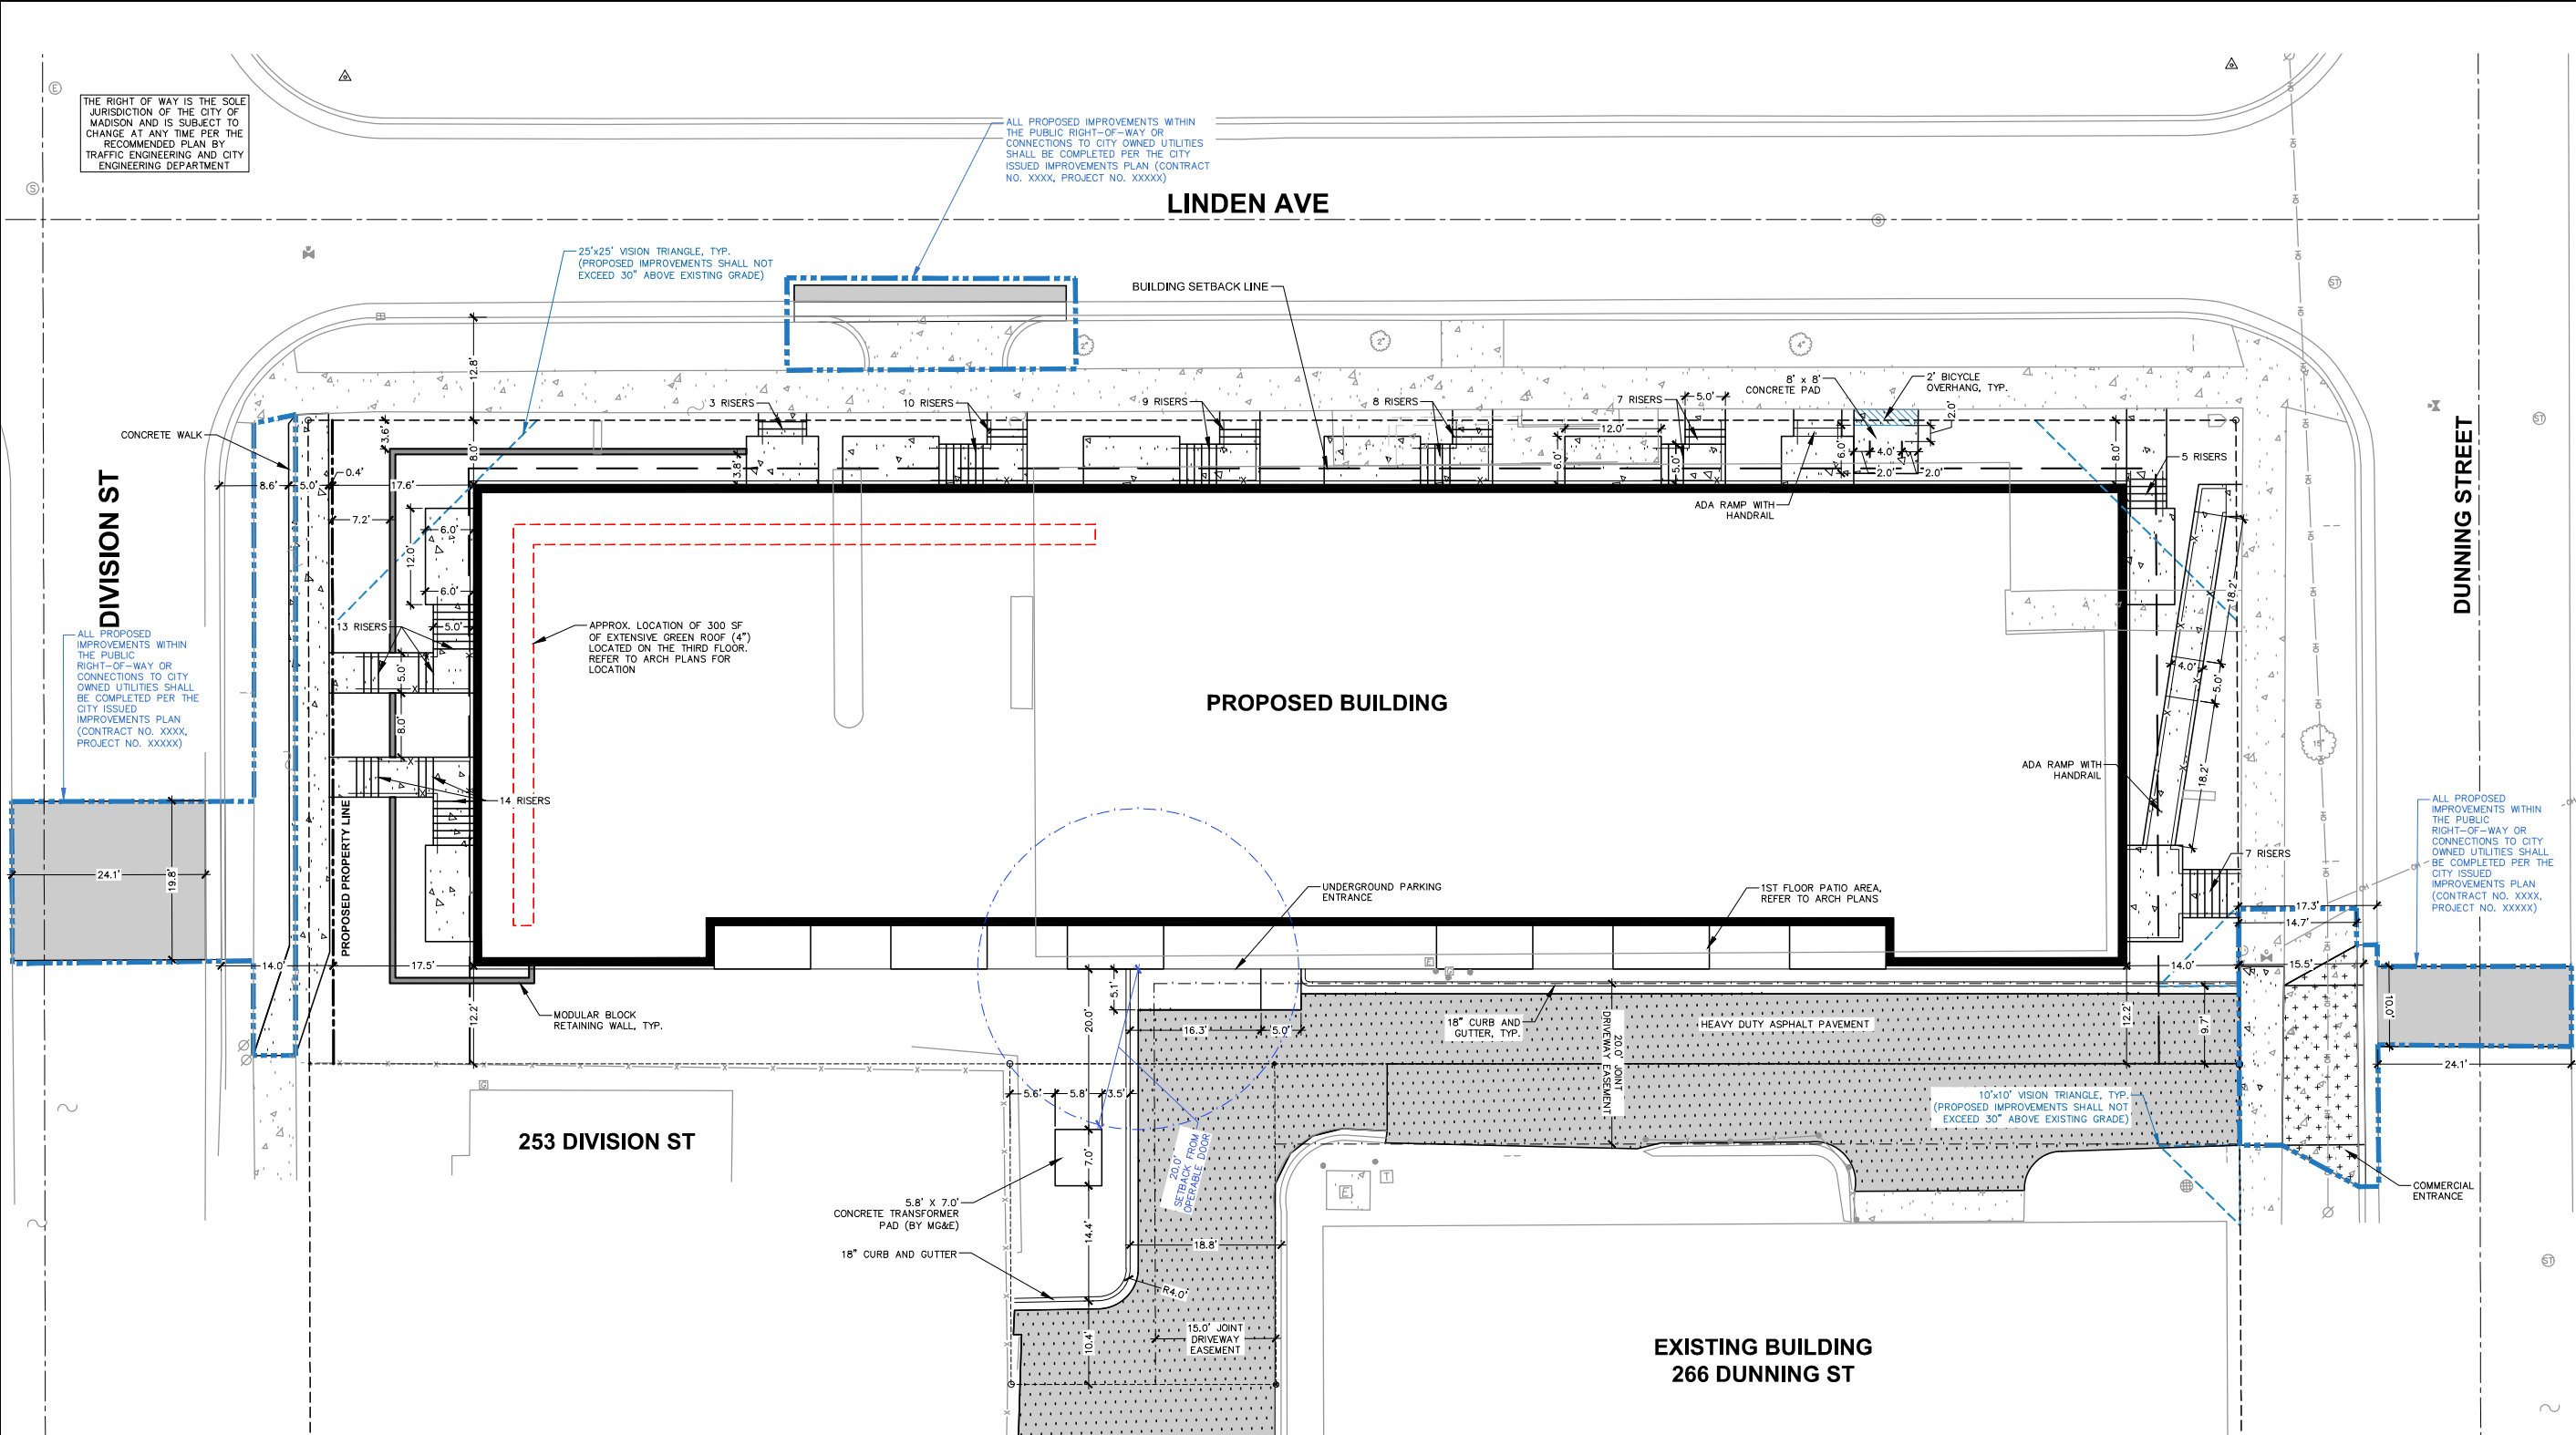

SITE INFORMATION BLOCK	
SITE ADDRESS	2165 LINDEN AVENUE
PROPERTY ACREAGE	0.47 ACRES
NUMBER OF BUILDING STORIES	3
TOTAL BUILDING SQUARE FOOTAGE	12,796
GROSS BUILDING SQUARE FOOTAGE	45,506
NUMBER OF UNDERGROUND PARKING STALLS	32 (42 VEHICLES)
NUMBER OF INTERIOR BICYCLE STALLS:	32
NUMBER OF EXTERIOR BICYCLE STALLS:	4
EXISTING VS. PROPOSED SITE COVERAGE	
EXISTING IMPERVIOUS SURFACE AREA	17,328 SF
EXISTING PERVIOUS SURFACE AREA	3,269 SF
EXISTING IMPERVIOUS SURFACE AREA RATIO	0.84
PROPOSED IMPERVIOUS SURFACE AREA	16,796 SF
PROPOSED PERVIOUS SURFACE AREA	3,801 SF
PROPOSED IMPERVIOUS SURFACE AREA RATIO	0.82



THE RIGHT OF WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT

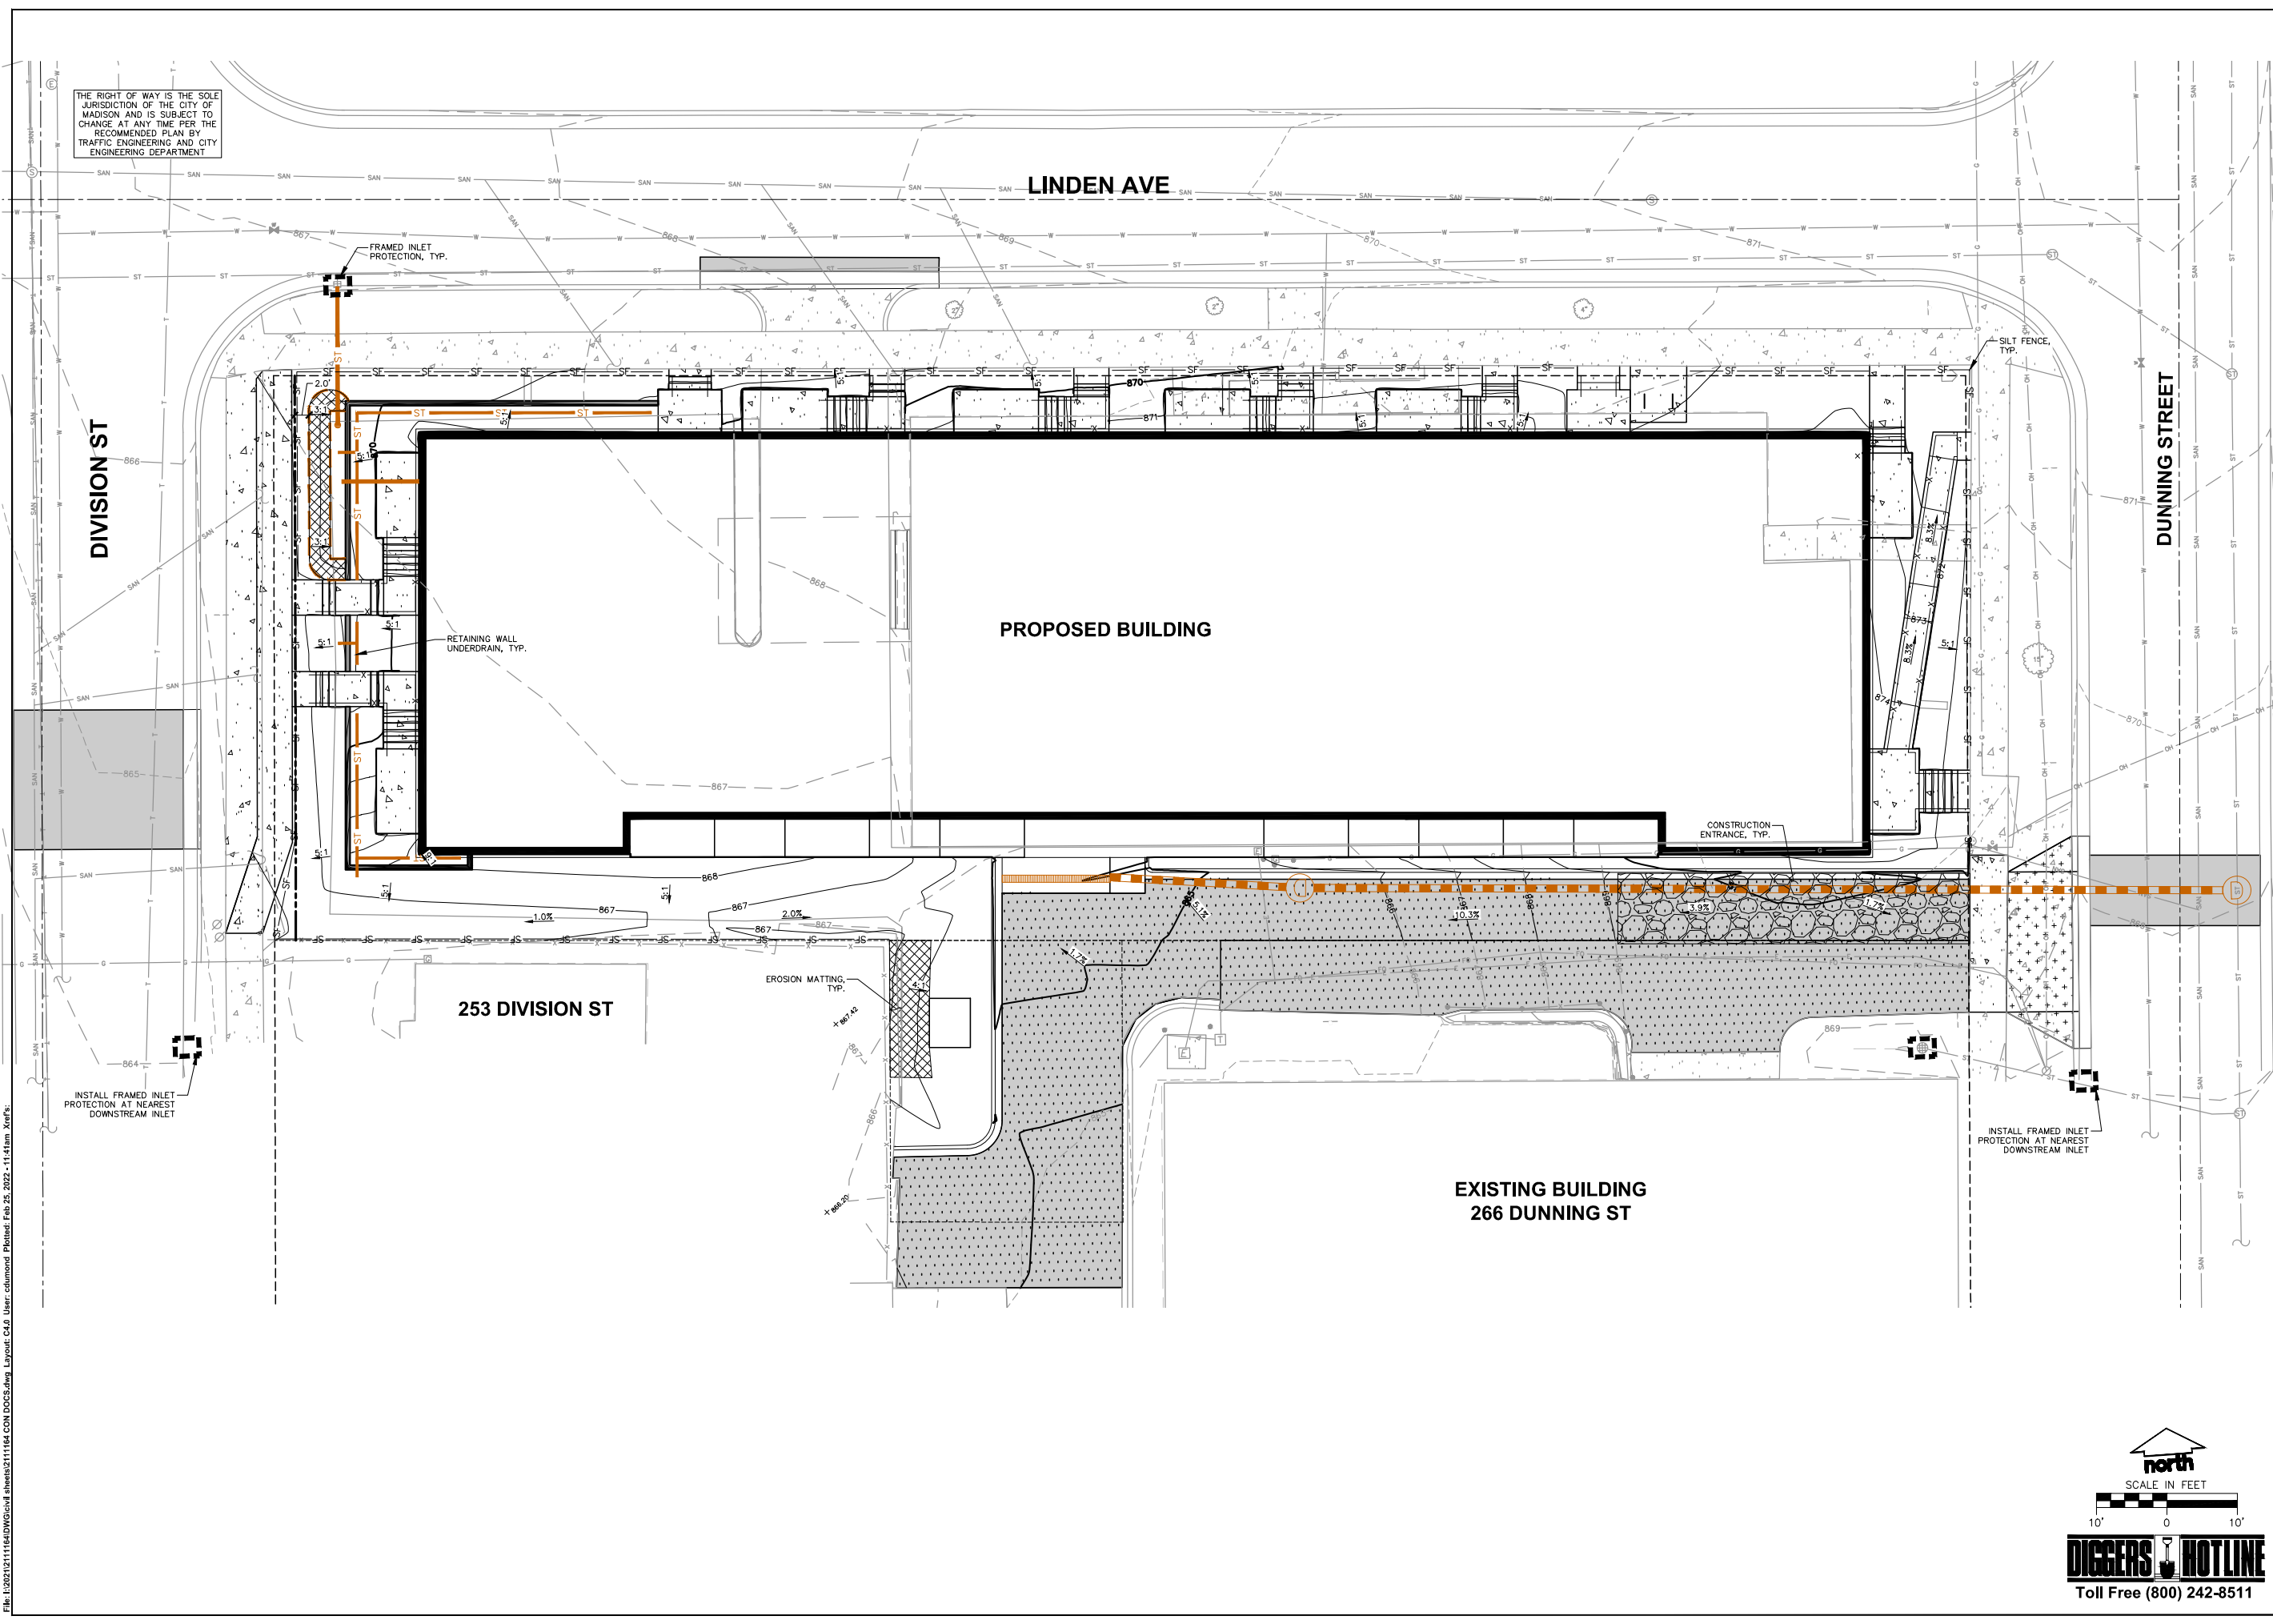

CREATE THE VISION TELL THE STORY

jsdinc.com

MADISON REGIONAL OFFICE  
161 HORIZON DRIVE, SUITE 101  
VERONA, WISCONSIN 53693  
P. 608.848.5060

CLIENT:  
**THRESHOLD DEVELOPMENT GROUP**

CLIENT ADDRESS:  
1952 ATWOOD AVENUE  
MADISON, WISCONSIN 53704

PROJECT:  
**2165 LINDEN AVENUE REDEVELOPMENT**

PROJECT LOCATION:  
2165 LINDEN AVENUE  
MADISON, DANE COUNTY  
WISCONSIN 53704

PLAN MODIFICATIONS:

#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Designed By: CTD  
Reviewed By: AG  
Approved By:

SHEET TITLE:  
**GRADING AND EROSION CONTROL PLAN**

SHEET NUMBER:  
**C4.0**

JSD PROJECT NO: 21-11164



File: I:\2021\1164\DWG\level sheets\211164 CON DCCS.dwg Layout: C4.0 User: cdumand Plotter: Feb 25, 2022 - 11:41am Xref's:

THE RIGHT OF WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT



CREATE THE VISION TELL THE STORY

jsdinc.com

MADISON REGIONAL OFFICE  
161 HORIZON DRIVE, SUITE 101  
VERONA, WISCONSIN 53593  
P. 608.848.5060

CLIENT:  
**THRESHOLD DEVELOPMENT GROUP**

CLIENT ADDRESS:  
1952 ATWOOD AVENUE  
MADISON, WISCONSIN 53704

PROJECT:  
**2165 LINDEN AVENUE REDEVELOPMENT**

PROJECT LOCATION:  
2165 LINDEN AVENUE  
MADISON, DANE COUNTY  
WISCONSIN 53704

PLAN MODIFICATIONS:

#	Date	Description
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		


Designed By: CTD  
Reviewed By: AG

Approved By:  
SHEET TITLE:  
**DETAILED GRADING PLAN**

SHEET NUMBER:

**C4.1**

JSD PROJECT NO: 21-11164

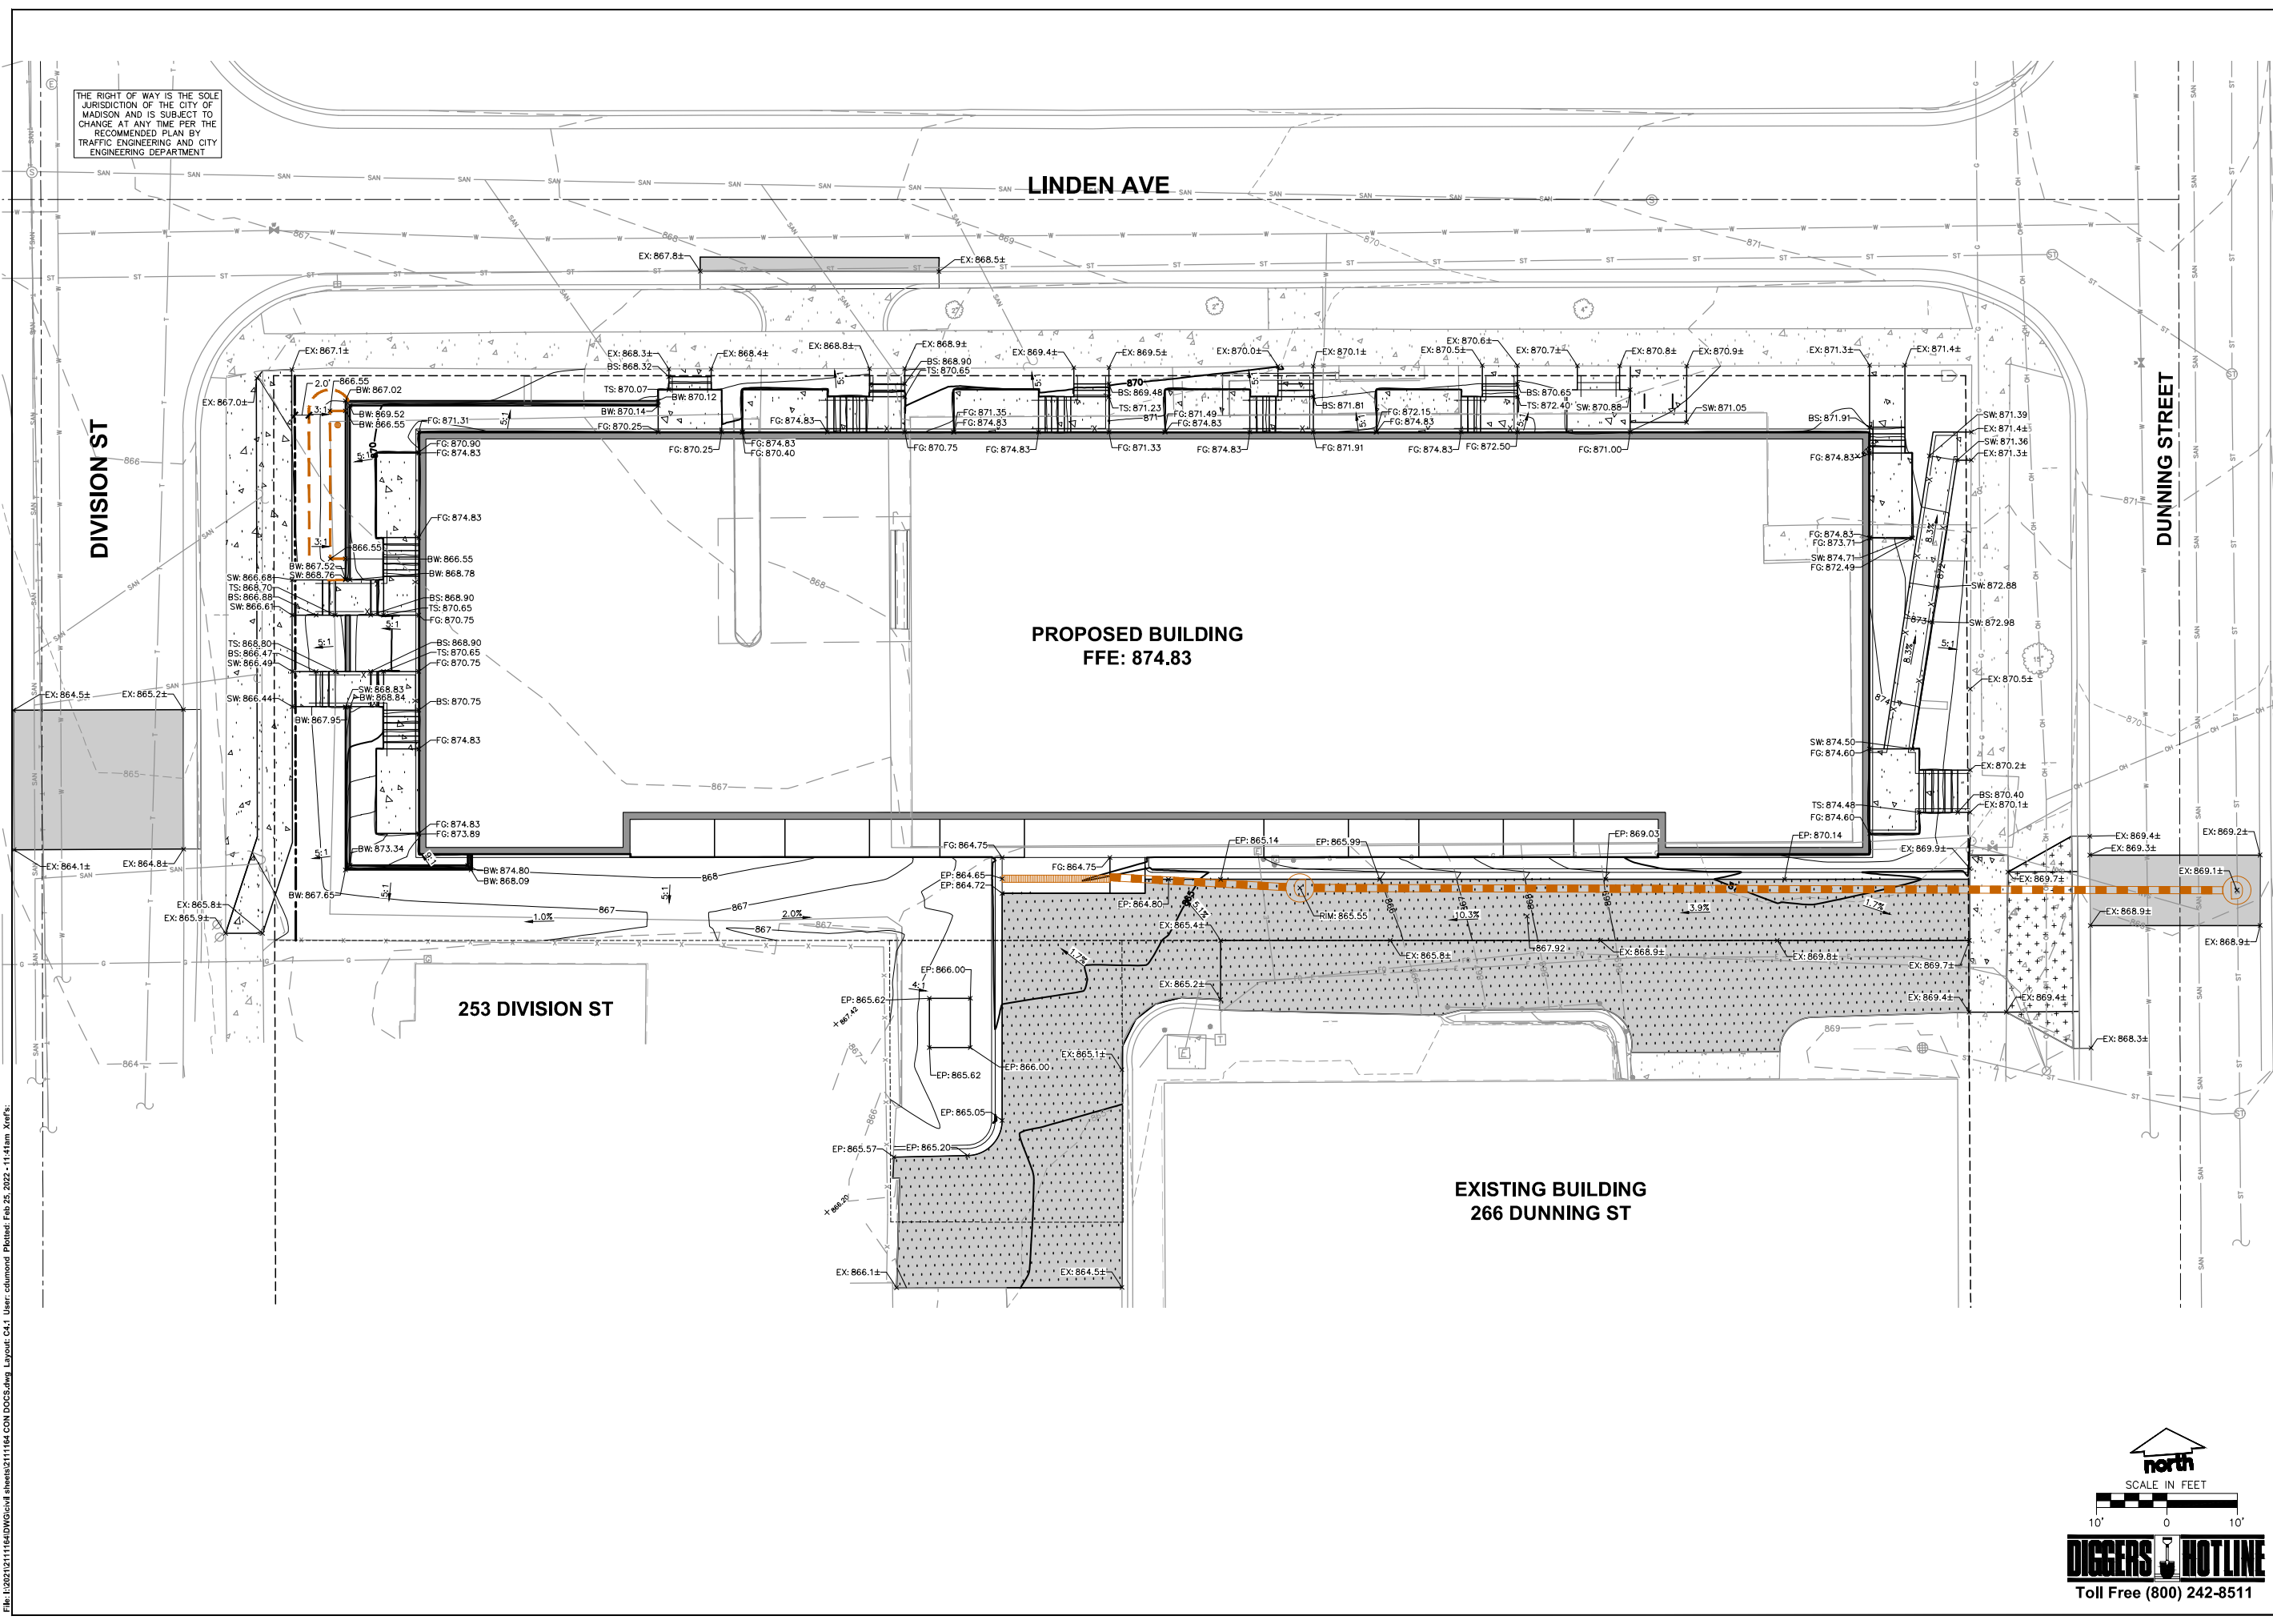

File: I:\2021\11164\DWG\level sheets\211164 CON DCCS.dwg Layout: C4.1 User: cdumand Plotdate: Feb 25, 2022 - 11:41am Xref(s):

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF JSD PROFESSIONAL SERVICES, INC.



PLAN MODIFICATIONS:


#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Designed By: **CTD**  
Reviewed By: **AG**

Approved By:  
SHEET TITLE:  
**UTILITY PLAN**


SHEET NUMBER:  
**C5.0**



JSD PROJECT NO: 21-11164

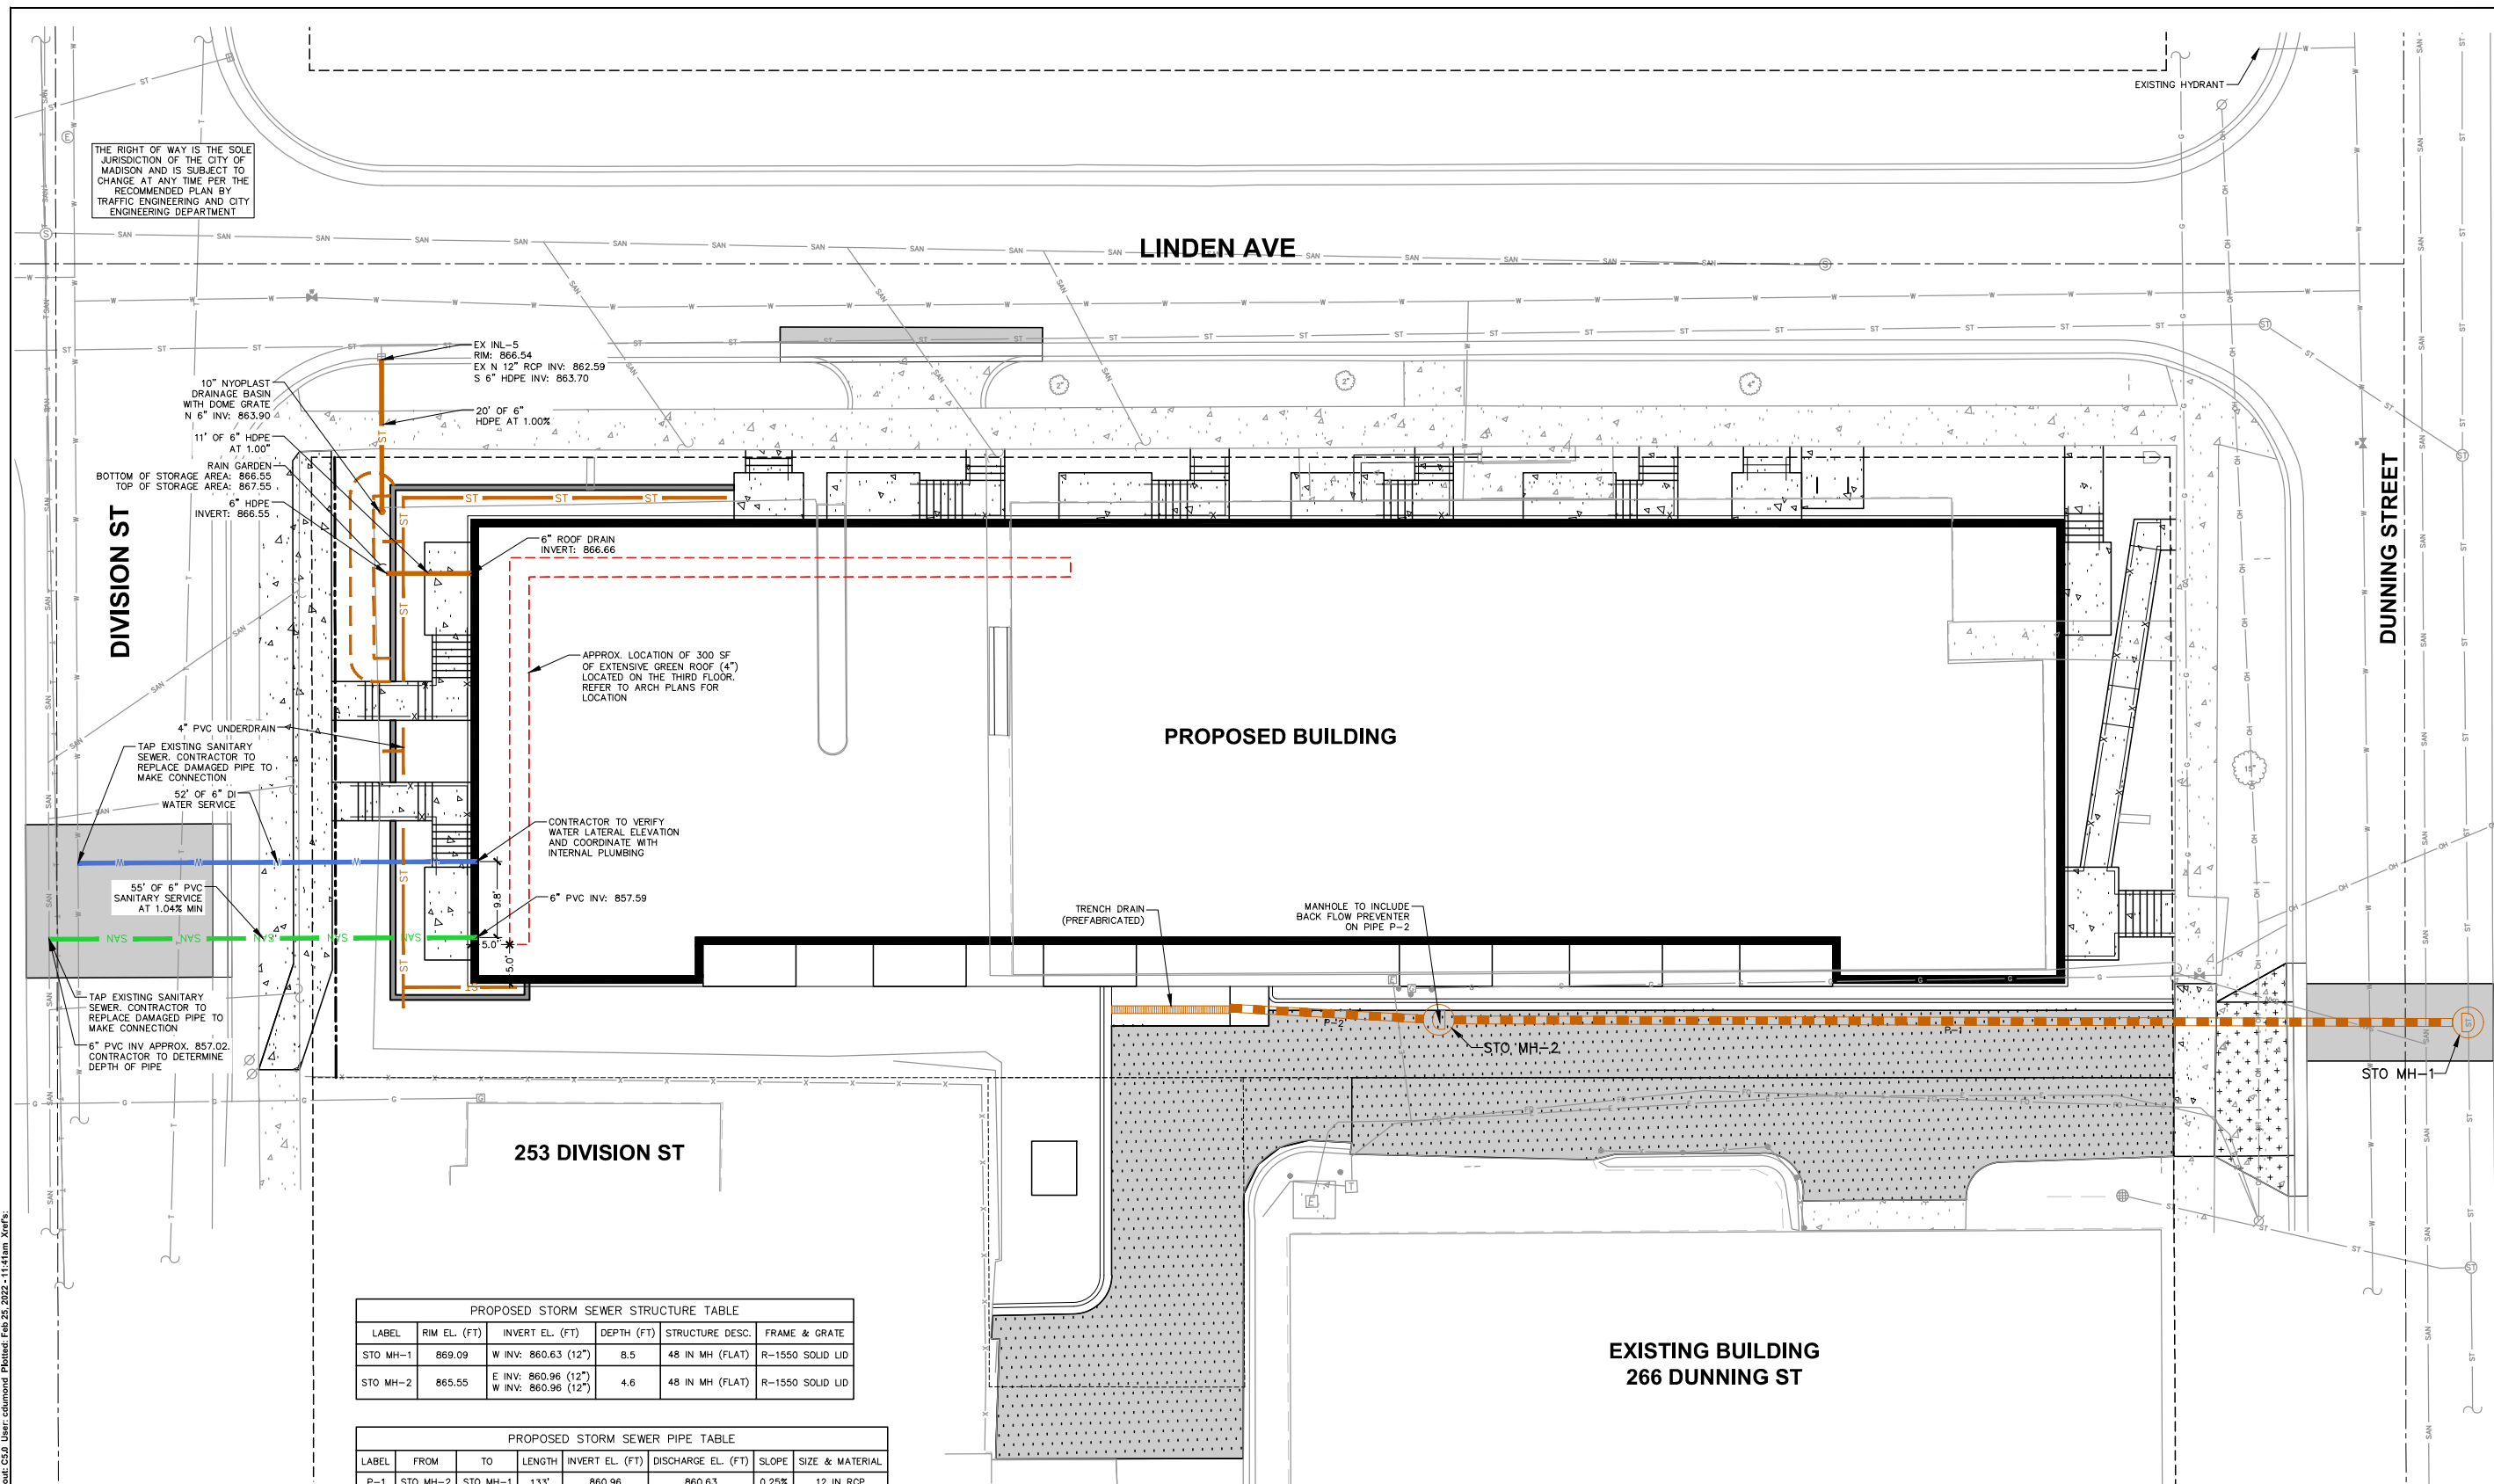











PROPOSED STORM SEWER STRUCTURE TABLE					
LABEL	RIM EL. (FT)	INVERT EL. (FT)	DEPTH (FT)	STRUCTURE DESC.	FRAME & GRATE
STO MH-1	869.09	W INV: 860.63 (12")	8.5	48 IN MH (FLAT)	R-1550 SOLID LID
STO MH-2	865.55	E INV: 860.96 (12") W INV: 860.96 (12")	4.6	48 IN MH (FLAT)	R-1550 SOLID LID

PROPOSED STORM SEWER PIPE TABLE						
LABEL	FROM	TO	LENGTH	INVERT EL. (FT)	DISCHARGE EL. (FT)	SLOPE SIZE & MATERIAL
P-1	STO MH-2	STO MH-1	133'	860.96	860.63	0.25% 12 IN RCP
P-2		STO MH-2	27'	861.03	860.96	0.25% 12 IN RCP



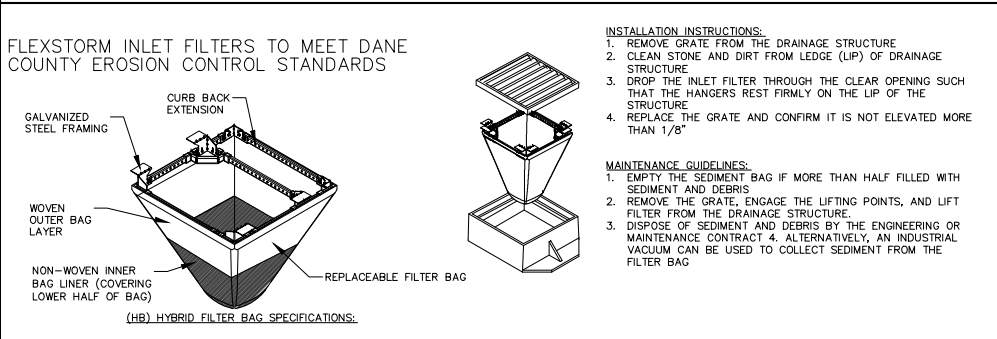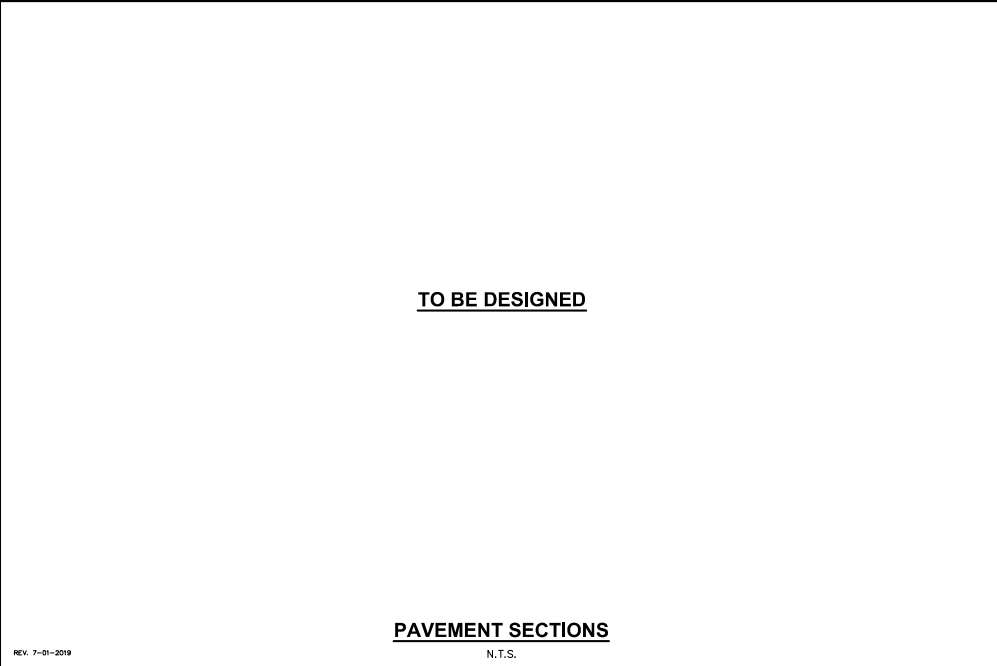

Material	Flow Ratings (CFS)	ADS PIN
3067	4.4 - 5.8	62LCBEXHB
3248A	4.2 - 5.9	62LCB3624HB
3030	1.6 - 2.2	62MBC2316HB
3087-C	3.2 - 5.2	62LSC3818HB
R-2501	0.8 - 5.2	62MFD209HD
R-1772/2580	0.6 - 4.6	62MFD222HB

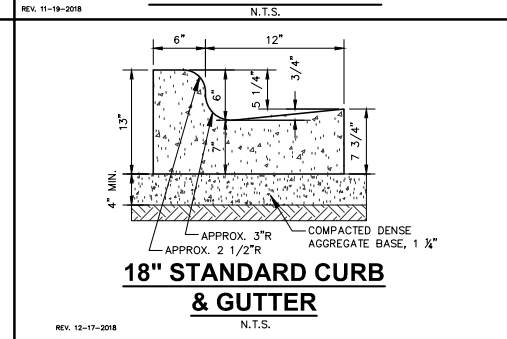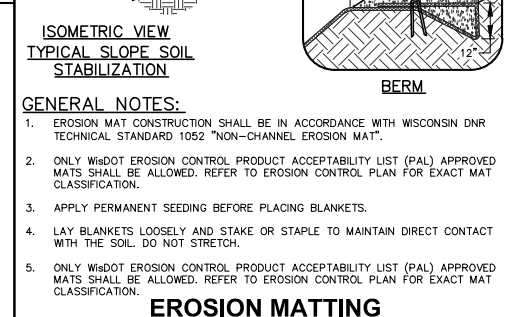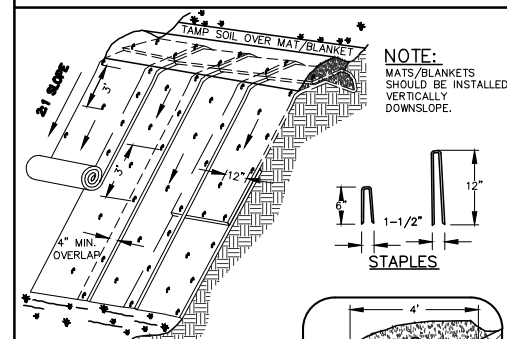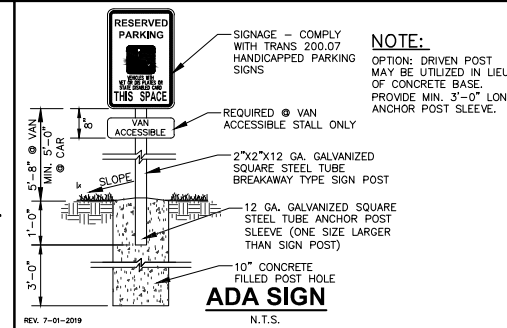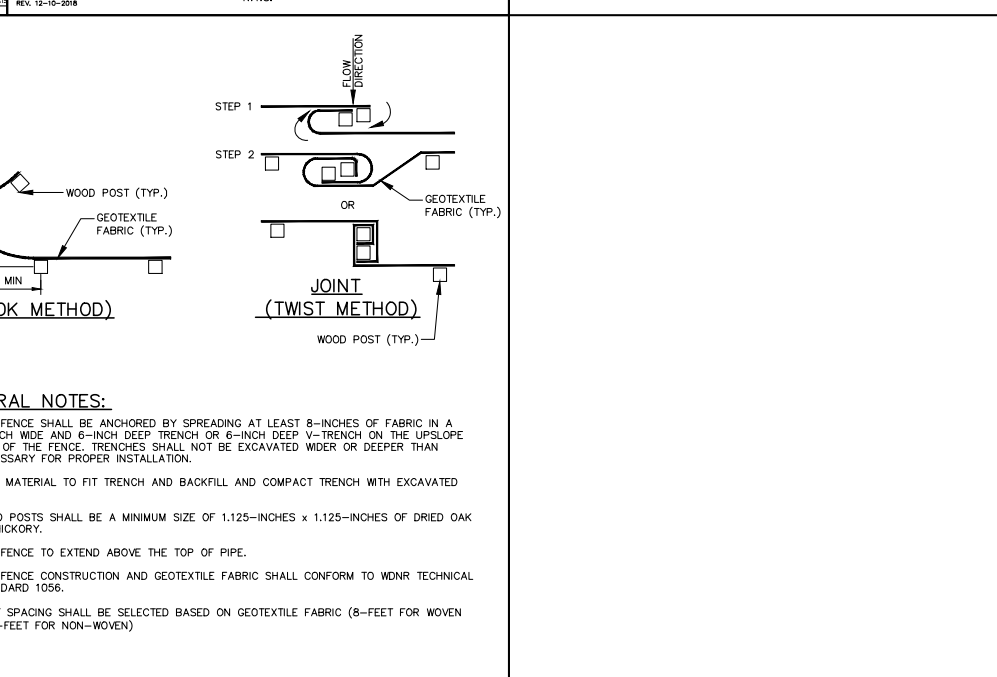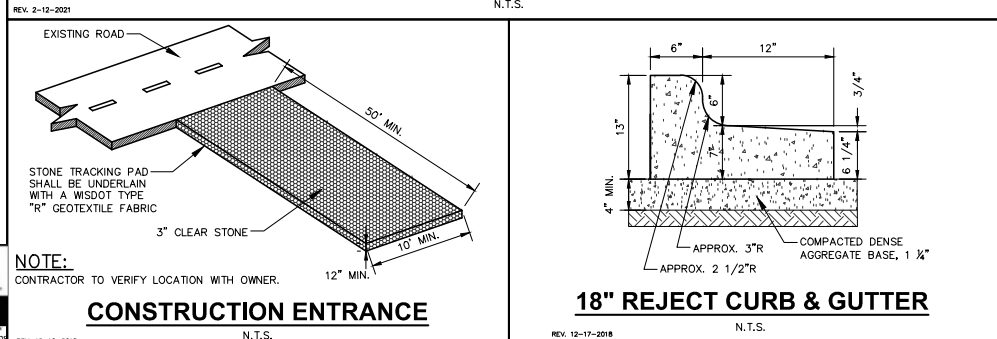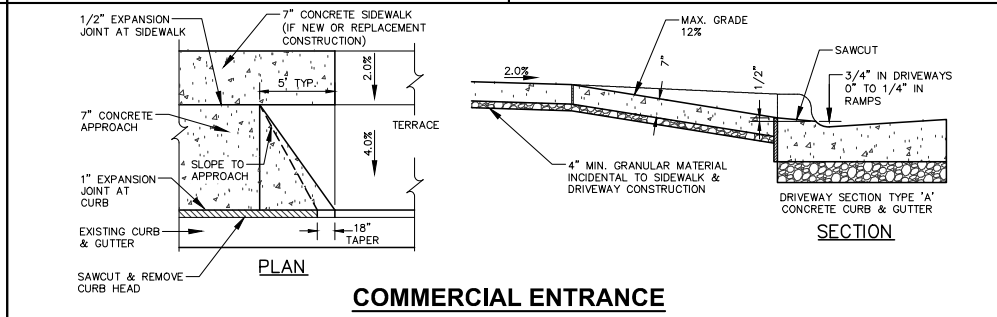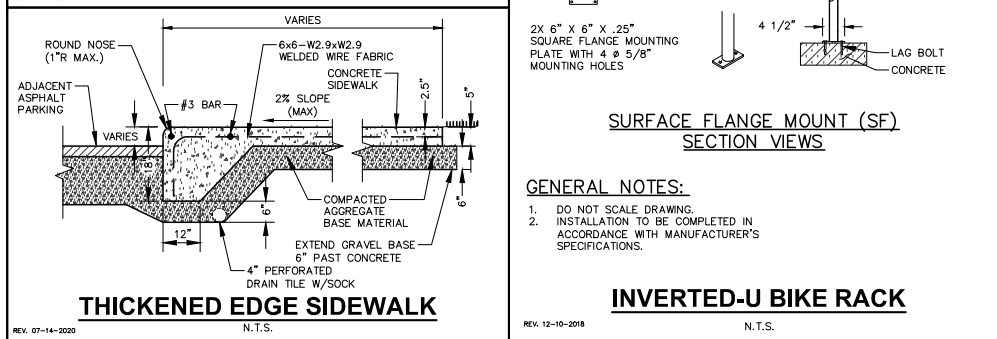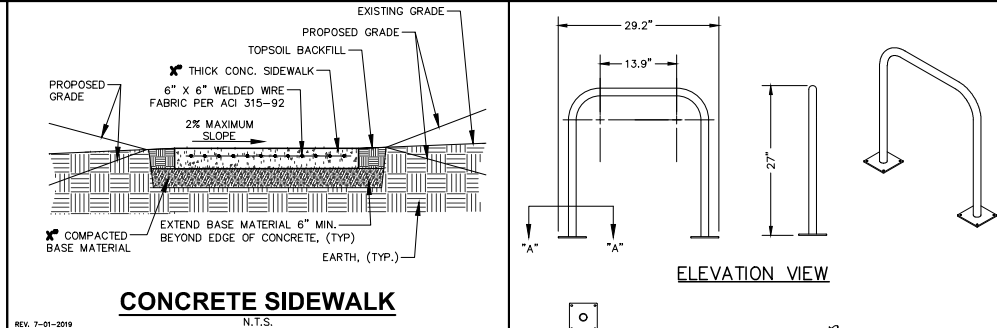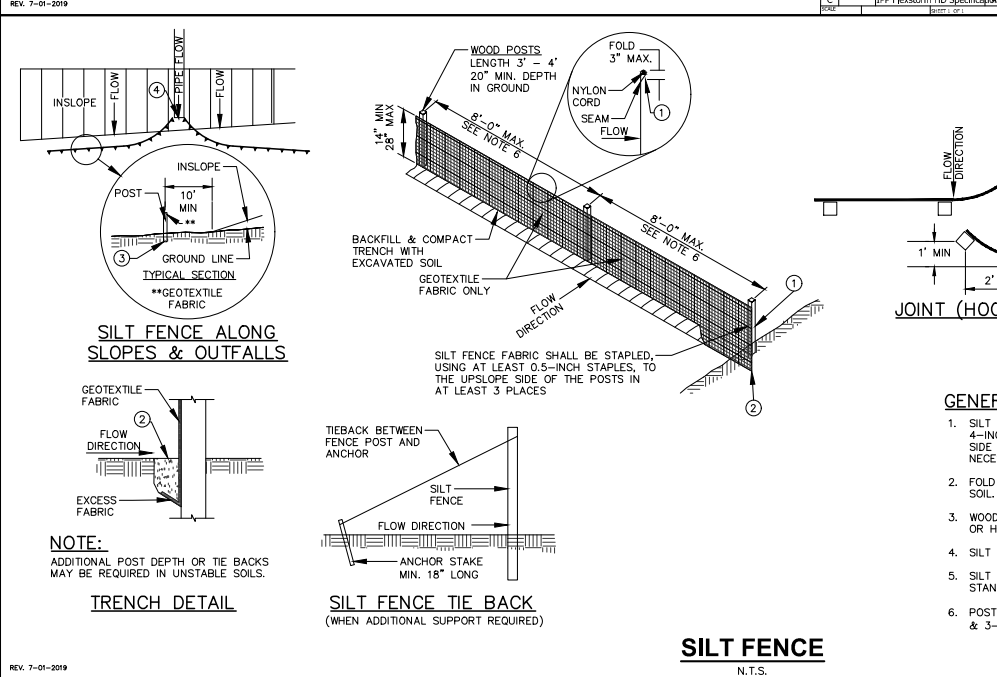

**JSD**  
CREATE THE VISION TELL THE STORY

jsdinc.com

**MADISON REGIONAL OFFICE**  
161 HORIZON DRIVE, SUITE 101  
VERONA, WISCONSIN 53593  
P. 608.848.5060

CLIENT:  
**THRESHOLD DEVELOPMENT GROUP**

CLIENT ADDRESS:  
**1952 ATWOOD AVENUE  
MADISON, WISCONSIN 53704**

PROJECT:  
**2165 LINDEN AVENUE  
REDEVELOPMENT**

PROJECT LOCATION:  
**2165 LINDEN AVENUE  
MADISON, DANE COUNTY  
WISCONSIN 53704**

PLANNING & DESIGN SERVICES ARE PROVIDED BY JSD PROFESSIONAL SERVICES, INC.

DESIGNED BY: CTD

REVIEWED BY: AG



APPROVED BY:

SHEET TITLE:  
**DETAILS**

SHEET NUMBER:  
**C6.0**

JSD PROJECT NO: 21-11164


File: I:\2021\1164\DWG\civil sheets\211164 CON DOCS.dwg Layout: C6.0 User: ctdmndm Plotfile: Feb 25, 2022 - 11:41am Xref's:

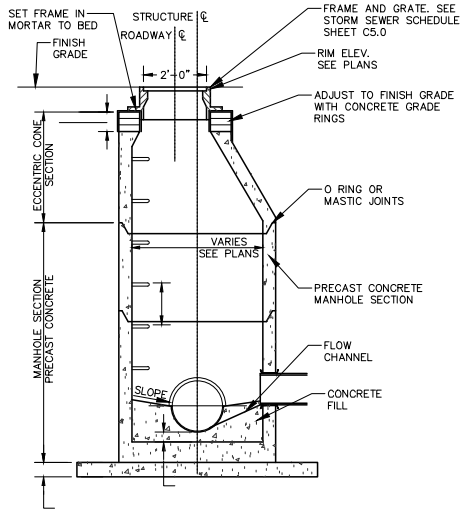

- GENERAL NOTES:**
1. MANHOLE CONSTRUCTION TO MEET REQUIREMENTS OF ASTM C478.
  2. PROVIDE FLAT TOP SLAB FOR MANHOLES 5' OR LESS IN DEPTH. FLAT TOP SLABS TO BE IN-BELL TYPE.
  3. JOINTS SHALL BE WATERTIGHT. USE BUTYL RUBBER GASKET.
  4. USE MORTAR FOR PIPE CONNECTIONS.
  5. ECCENTRIC CONE SECTION OF MANHOLE TO BE SET OUTSIDE OF VEHICULAR WHEEL PATH NEAR  $\phi$  ROADWAY.


**STORM MANHOLE**

REV. 12-07-2018 N.T.S.

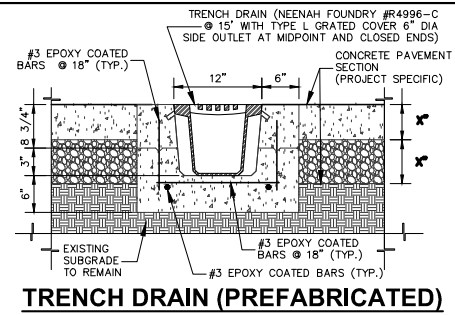


**TRENCH DRAIN (PREFABRICATED)**

REV. 12-07-2018 N.T.S.



**WATERMAIN BEDDING**


REV. 12-05-2018 N.T.S.



**STORM & SANITARY SEWER BEDDING**

REV. 12-05-2018 N.T.S.

**NYLOPLAST 10" DRAIN BASIN: 2810AG \_\_ X**

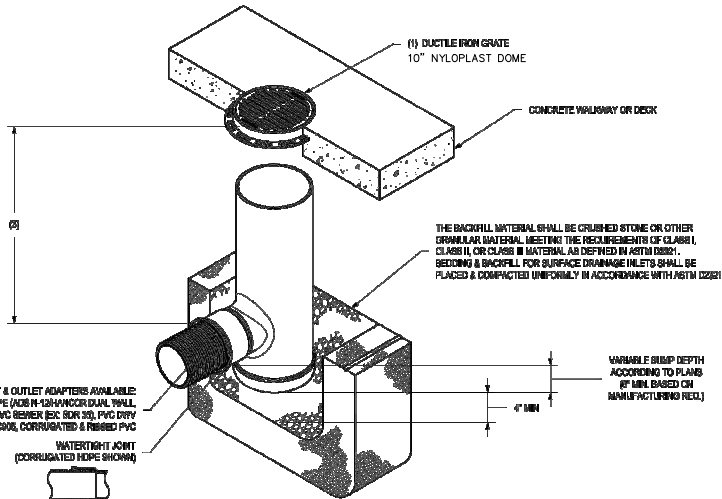

- 1 - GRATE/DOME COVER SHALL BE DUCTILE IRON PER ASTM A536 OR A536-04, WITH THE EXCEPTION OF THE BRASS GRATE.
- 2 - CUSTOM DRAIN BASIN TO BE CUSTOM MANUFACTURED ACCORDING TO PLAN DETAILS. PERKS ARE NEEDED FOR GRATE OR DOME TO BE SPACING RESTRICTIONS. SEE DRAWING NO. 2810-PI-001.
- 3 - NYLOPLAST DRAIN BASIN HAS PRE-DRILLED LOCATIONS OF 4" & 6" CUSTOM DRAIN BASIN ADAPTERS CAN BE LOCATED ON ANY ANGLE 0° TO 90°. TO DETERMINE MINIMUM ANGLE BETWEEN ADAPTERS SEE DRAWING NO. 2810-PI-001.
- 4 - DRAINAGE CONNECTIONS BY JOINT TIGHTNESS SHALL CONFORM TO ARIIS 8000 FOR CORRUGATED HDPE (PER NYLOPLAST DRAIN WALL) & PVC RISERS (P-19).

DESIGNED BY	MM	MATERIAL	2810 NYLOPLAST
DATE	04-20-18		2810 NYLOPLAST
APP'D BY	MM	PROJECT NO./NAME	2810 NYLOPLAST
DATE	04-20-18		2810 NYLOPLAST
DWG SIZE	A	SCH. 1 OF 1	2810 NYLOPLAST

THIS PRINT DISCLOSES SUBJECT MATTER IN WHICH NYLOPLAST HAS PROPRIETARY RIGHTS. THE SUBJECT OR INFRINGEMENT OF THIS PRINT DOES NOT CONFER, TRANSFER, OR LICENSE THE USE OF THE DESIGN OR TECHNICAL INFORMATION OR INVENTION REPRODUCTION OF THIS PRINT OR ANY INFORMATION CONTAINED HEREIN, OR MANUFACTURE OF ANY ARTICLES OR DEVICES, FOR THE DESIGN OR USE TO OTHERS IS PROHIBITED, EXCEPT BY EXPRESS WRITTEN PERMISSION FROM NYLOPLAST.
---



CREATE THE VISION TELL THE STORY

jsdinc.com

MADISON REGIONAL OFFICE  
161 HORIZON DRIVE, SUITE 101  
VERONA, WISCONSIN 53593  
P. 608.848.5060

CLIENT:  
**THRESHOLD DEVELOPMENT GROUP**

CLIENT ADDRESS:  
**1952 ATWOOD AVENUE  
MADISON, WISCONSIN 53704**

PROJECT:  
**2165 LINDEN AVENUE REDEVELOPMENT**

PROJECT LOCATION:  
**2165 LINDEN AVENUE  
MADISON, DANE COUNTY  
WISCONSIN 53704**

**PLAN MODIFICATIONS:**

#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Designed By: CTD  
Reviewed By: AG  
Approved By:

**DETAILS**

SHEET NUMBER:

**C6.1**


JSD PROJECT NO: 21-11164



Toll Free (800) 242-8511

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF JSD PROFESSIONAL SERVICES, INC.

File: I:\2021\11164\DWG\civil sheets\211164 CON DDCS.dwg Layout: C6.1 User: cdundad Printed: Feb 25, 2022 - 11:42am Xref:

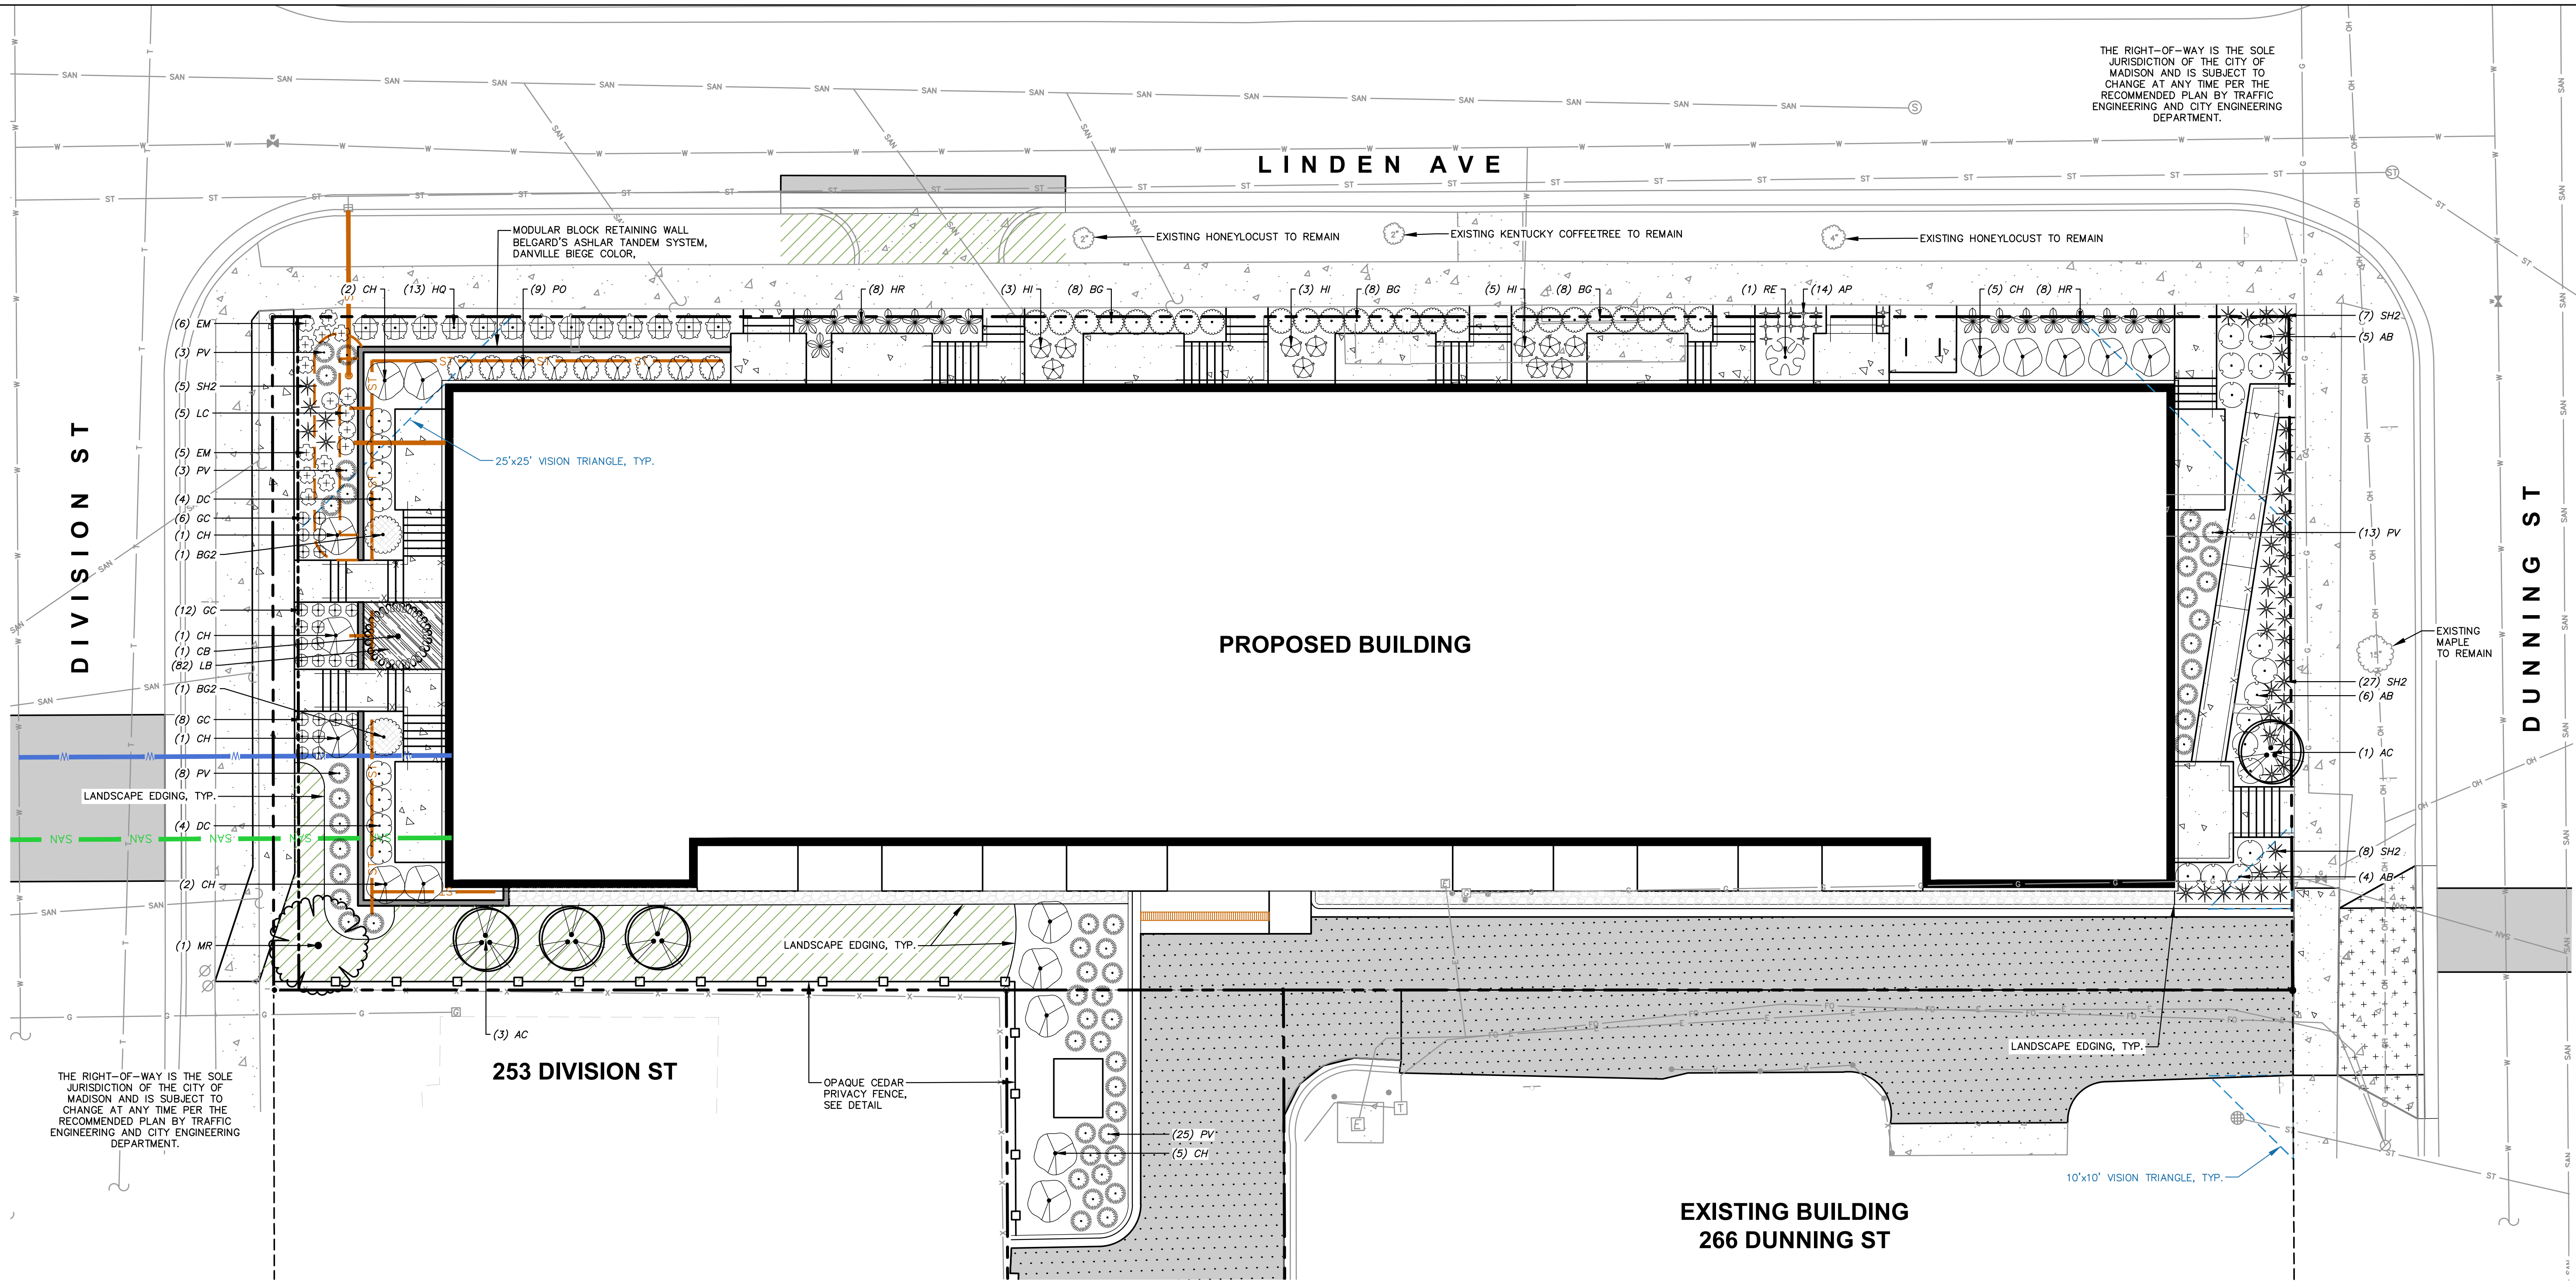

THE RIGHT-OF-WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT.

THE RIGHT-OF-WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT.

PLANT LIST		
ORNAMENTAL TREES	CODE	BOTANICAL / COMMON NAME
	AC	<i>Amelanchier laevis</i> 'Cumulus' / Cumulus Allegheny Serviceberry
	CB	<i>Carpinus caroliniana</i> 'J.N. Globe' TM / Ball O' Fire American Hornbeam
	MR	<i>Malus x 'Royal Raindrops'</i> / Royal Raindrops Crabapple
DECIDUOUS SHRUBS		
	AB	<i>Aronia melanocarpa</i> 'Morton' TM / Iroquois Beauty Black Chokeberry
	CH	<i>Cornus hessii</i> 'UMN978587' TM / Garden Glow Dogwood
	DC	<i>Diervilla sessilifolia</i> 'Cool Splash' / Cool Splash False Honeysuckle
	HI	<i>Hydrangea arborescens</i> 'Incrediball' / Incrediball White Hydrangea
	HQ	<i>Hydrangea paniculata</i> 'Little Quick Fire' / Little Quick Fire Hydrangea
	PO	<i>Physocarpus opulifolius</i> 'Little Devil' TM / Dwarf Ninebark
	RE	<i>Rhododendron x 'P.J.M.'</i> / P.J.M. Rhododendron

EVERGREEN SHRUBS		
CODE	BOTANICAL / COMMON NAME	
	BG	<i>Buxus x 'Green Velvet'</i> / Green Velvet Boxwood
	BG2	<i>Buxus x 'Green Mountain'</i> / Green Mountain Boxwood
PERENNIALS & GRASSES		
CODE	BOTANICAL / COMMON NAME	
	AP	<i>Astilbe chinensis</i> 'Vision in Pink' / Vision in Pink Chinese Astilbe
	EM	<i>Echinacea purpurea</i> 'Magnus' / Magnus Purple Coneflower
	GC	<i>Geranium x cantabrigiense</i> 'Biovoko' / Biovoko Cranesbill
	HR	<i>Hosta x 'Regal Splendor'</i> / Regal Splendor Hosta
	LC	<i>Lobelia cardinalis</i> / Cardinal Flower
	PV	<i>Panicum virgatum</i> 'Shenandoah' / Shenandoah Switch Grass
	SH2	<i>Sporobolus heterolepis</i> / Prairie Dropseed
GROUND COVERS		
CODE	BOTANICAL / COMMON NAME	
	LB	<i>Liriope muscari</i> 'Big Blue' / Big Blue Lilyturf

**GENERAL NOTES**


- REFER TO THE EXISTING CONDITIONS SURVEY FOR EXISTING CONDITIONS NOTES AND LEGEND.
- ALL WORK IN THE ROW SHALL BE IN ACCORDANCE WITH THE MUNICIPAL STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
- JSD SHALL BE HELD HARMLESS AND DOES NOT WARRANT ANY DEVIATIONS BY THE OWNER/CONTRACTOR FROM THE APPROVED CONSTRUCTION PLANS THAT MAY RESULT IN DISCIPLINARY ACTIONS BY ANY OR ALL REGULATORY AGENCIES.
- DRAWING FOR REVIEW - NOT FOR CONSTRUCTION UNLESS OTHERWISE NOTED IN THE TITLE BLOCK.
- THE LANDSCAPE CONTRACTOR SHALL COORDINATE ALL FINE GRADING AND TOPSOILING WITH GENERAL CONTRACTOR
- REFER TO "LANDSCAPE DETAILS AND NOTES" SHEET FOR ADDITIONAL DETAILS, NOTES AND SPECIFICATION INFORMATION INCLUDING MATERIALS, GUARANTEE AND EXECUTION RELATED TO LANDSCAPE PLAN
- CONTRACTOR SHALL REVIEW SITE CONDITIONS FOR UTILITY CONFLICTS, DRAINAGE ISSUES, SUBSURFACE ROCK, AND PLANT PLACEMENT CONFLICTS PRIOR TO PLANT INSTALLATION. REPORT ANY CONDITIONS THAT MAY HAVE ADVERSE IMPACT ON PLANTING OPERATIONS TO LANDSCAPE ARCHITECT
- DO NOT COMMENCE PLANTING OPERATIONS UNTIL ALL ADJACENT SITE IMPROVEMENTS, IRRIGATION INSTALLATION (IF APPLICABLE), AND FINISH GRADING ARE COMPLETE

**CONTRACTOR NOTES**

- ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH (TYP), UNLESS OTHERWISE DEPICTED.

**LEGEND**

	PROPERTY LINE
	RIGHT-OF-WAY
	BUILDING OUTLINE
	EDGE OF PAVEMENT
	STANDARD CURB AND GUTTER
	REJECT CURB AND GUTTER
	ASPHALT PAVEMENT
	HEAVY DUTY ASPHALT PAVEMENT
	CONCRETE PAVEMENT
	SANITARY SEWER
	WATERMAIN
	STORM SEWER
	EXISTING SANITARY SEWER
	EXISTING WATERMAIN
	EXISTING STORM SEWER
	6' OPAQUE CEDAR PRIVACY FENCE
	POLYETHYLENE EDGING
	DECORATIVE STONE MULCH
	SEED - BLUEGRASS

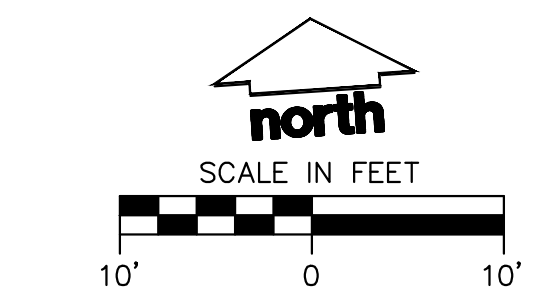

PLAN MODIFICATIONS:		
#	Date:	Description:
1	01.10.2022	LAND USE SUBMITTAL
2	02.25.2022	LAND USE RESUBMITTAL
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		
16		

Designed By: MWS  
Reviewed By: KJY  
Approved By: KJY

SHEET TITLE:  
**LANDSCAPE PLAN**

SHEET NUMBER:  
**L1.0**

# COMPREHENSIVE PLANT SCHEDULE

ORNAMENTAL TREES	CODE	BOTANICAL / COMMON NAME	CONT	SIZE	QTY
	AC	<i>Amelanchier laevis</i> 'Cumulus' / Cumulus Allegheny Serviceberry	B & B	Min. 5' tall	4
	CB	<i>Carpinus caroliniana</i> 'J.N. Globe' TM / Ball O' Fire American Hornbeam	B & B	Min. 4' Ht.	1
	MR	<i>Malus</i> x 'Royal Raindrops' / Royal Raindrops Crabapple	B & B	1.5" Cal	1
DECIDUOUS SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT	SIZE	QTY
	AB	<i>Aronia melanocarpa</i> 'Morton' TM / Iroquois Beauty Black Chokeberry	#3	Min. 12"-24"	15
	CH	<i>Cornus hessei</i> 'UMN970507' TM / Garden Glow Dogwood	B & B	Min. 36" tall	17
	DC	<i>Diervilla sessilifolia</i> 'Cool Splash' / Cool Splash False Honeysuckle	B & B	Min. 18"-24" Ht.	8
	HI	<i>Hydrangea arborescens</i> 'Incrediball' / Incrediball White Hydrangea	#3	Min. 12"-24"	11
	HQ	<i>Hydrangea paniculata</i> 'Little Quick Fire' / Little Quick Fire Hydrangea	#3	Min. 12"-24"	13
	PO	<i>Physocarpus opulifolius</i> 'Little Devil' TM / Dwarf Ninebark	#3	Min. 12"-24"	9
	RE	<i>Rhododendron</i> x 'P.J.M.' / PJM Rhododendron	B & B	Min. 18"-24" Ht.	1
EVERGREEN SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT	SIZE	QTY
	BG	<i>Buxus</i> x 'Green Velvet' / Green Velvet Boxwood	3 gal	Min. 12"-24"	24
	BG2	<i>Buxus</i> x 'Green Mountain' / Green Mountain Boxwood	B & B	Min. 36" Ht.	2
PERENNIALS & GRASSES	CODE	BOTANICAL / COMMON NAME	CONT	SIZE	QTY
	AP	<i>Astilbe chinensis</i> 'Vision in Pink' / Vision in Pink Chinese Astilbe	#1	Min. 8"-18"	14
	EM	<i>Echinacea purpurea</i> 'Magnus' / Magnus Purple Coneflower	#1	Min. 8"-18"	11
	GC	<i>Geranium</i> x cantabrigiense 'Blokovo' / Blokovo Cranesbill	#1	Min. 8"-18"	26
	HR	<i>Hosta</i> x 'Regal Splendor' / Regal Splendor Hosta	#1	Min. 8"-18"	16
	LC	<i>Lobelia cardinalis</i> / Cardinal Flower	#1	Min. 8"-18"	5
	PV	<i>Panicum virgatum</i> 'Shenandoah' / Shenandoah Switch Grass	#1	Min. 8"-18"	52
	SH2	<i>Sporobolus heterolepis</i> / Prairie Dropseed	#1	Min. 8"-18"	48
GROUND COVERS	CODE	BOTANICAL / COMMON NAME	CONT	SPACING	QTY
	LB	<i>Liriope muscari</i> 'Big Blue' / Big Blue Lilyturf	4" plug	12"	78 sf

## LANDSCAPE CALCULATIONS AND DISTRIBUTIONS

Required landscaped areas shall be calculated based upon the total developed area of the property. Developed area is defined as that area within a single contiguous boundary which is made up of structures, parking, driveways and docking/loading facilities, but excluding the area of any building footprint at grade, land designated for open space uses such as athletic fields, and undeveloped land area on the same zoning lot. There are three methods for calculating landscape points depending on the size of the lot and Zoning District.

(A) For lots except those described in (B) and (C) below, five (5) landscape points shall be provided for each three hundred (300) square feet of developed area.

Total square footage of developed area: **6,456 SF**  
 Total landscape points required: **108 POINTS**

(B) For lots larger than five (5) acres, points shall be provided at five (5) points per three hundred (300) square feet for the first five (5) developed acres, and one (1) point per one hundred (100) square feet for all additional acres.

Total square footage of developed area: \_\_\_\_\_  
 Five (5) acres = \_\_\_\_\_  
 First five (5) developed acres = \_\_\_\_\_  
 Remainder of developed area = \_\_\_\_\_  
 Total landscape points required: \_\_\_\_\_

(C) For the Industrial - Limited (IL) and Industrial - General (IG) districts, one (1) point shall be provided per one hundred (100) square feet of developed area.

Total square footage of developed area: \_\_\_\_\_  
 Total landscape points required: \_\_\_\_\_

## TABULATION OF LANDSCAPE CREDITS AND POINTS

PLANT TYPE/ELEMENT	MINIMUM INSTALLATION SIZE	POINTS	CREDITS / EXISTING LANDSCAPING		NEW / PROPOSED LANDSCAPING	
			QUANTITY	POINTS ACHIEVED	QUANTITY	POINTS ACHIEVED
OVERSTORY DECIDUOUS TREE	2.5' CAL MIN.	35	0	0	0	0
TALL EVERGREEN TREE	5-6' TALL MIN.	35	0	0	0	0
ORNAMENTAL TREE	1.5' CAL MIN.	15	0	0	6	90
UPRIGHT EVERGREEN SHRUB	3-4' TALL, MIN.	10	0	0	0	0
SHRUB, DECIDUOUS	#3 CONT., MIN. 12"-24"	3	0	0	74	222
SHRUB, EVERGREEN	#3 CONT., MIN. 12"-24"	4	0	0	26	104
ORNAMENTAL GRASS & PERENNIAL	#1 CONT., MIN. 8"-18"	2	0	0	172	344
ORNAMENTAL / DECORATIVE FENCING OR WALL	4 POINTS / 10 LF	.4	0	0	0	0
EXISTING SIGNIFICANT SPECIMEN TREE	14 POINTS / CAL (MAXIMUM 200 POINTS PER TREE)	14	0	0	0	0
LANDSCAPE FURNITURE	5 POINTS PER SEAT (WITHIN PUBLICALLY ACCESSIBLE DEVELOPED AREA. CANNOT COMPRISE MORE THAN 5% OF TOTAL REQUIRED POINTS)	5	0	0	0	0
SUBTOTAL			0	0	0	760
TOTAL NUMBER OF POINTS PROVIDED			760			

### NOTE:


- DIG HOLE NO DEEPER THAN BASE OF ROOT BALL TO FLARE. ROOT BALL TO BE SET ON UNDISTURBED SOIL UNLESS COMPACTED AGGREGATE STONE REMAINS FROM SITE EXCAVATOR. REMOVE REMAINING AGGREGATE STONE UNTIL SOIL LAYER IS REACHED.
- TREE PIT DIAMETER SHALL BE AT LEAST TWO-TIMES ROOT BALL DIAMETER IN ALL DIRECTIONS. SLOPE SIDES OF TREE PIT FROM PROPOSED GRADE TO BOTTOM OF ROOT BALL IN ALL DIRECTIONS.

- SET TREE PLUMB
- ROOT FLARE SHALL BE EXPOSED
- SEE NOTES FOR MULCH SPECIFICATIONS
- INSTALL 3" WATERING SAUCER
- PROPOSED GRADE
- REMOVE BURLAP, TWINE, AND WIRE FROM UPPER HALF OF BALL
- PLANTING MIXTURE (WATER TAMP TO REMOVE AIR POCKETS)
- UNDISTURBED GROUND

## DECIDUOUS TREE PLANTING DETAIL

N.T.S.

REV. 10-29-2021

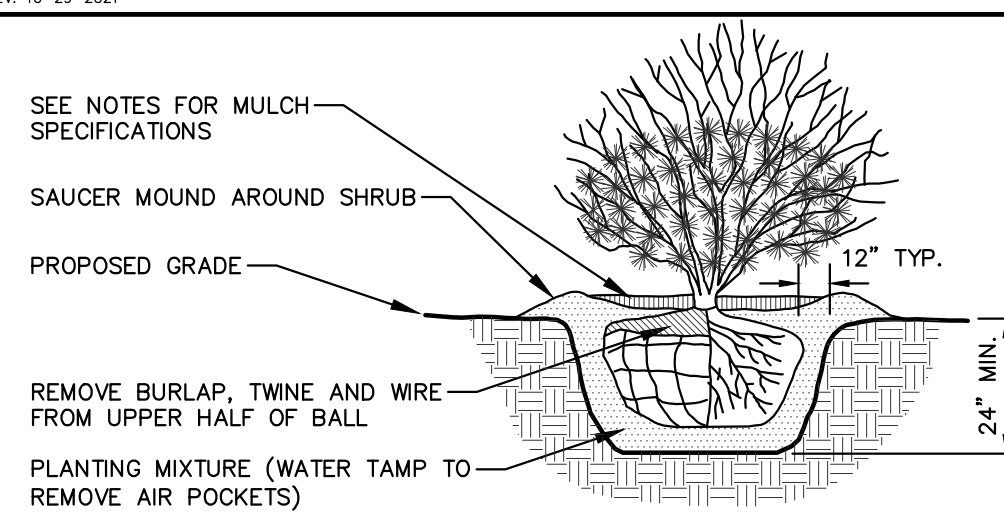


- NOTE:
- ROOT FLARE TO BE EXPOSED.

## SHRUB PLANTING DETAIL

N.T.S.



REV. 01-03-2019

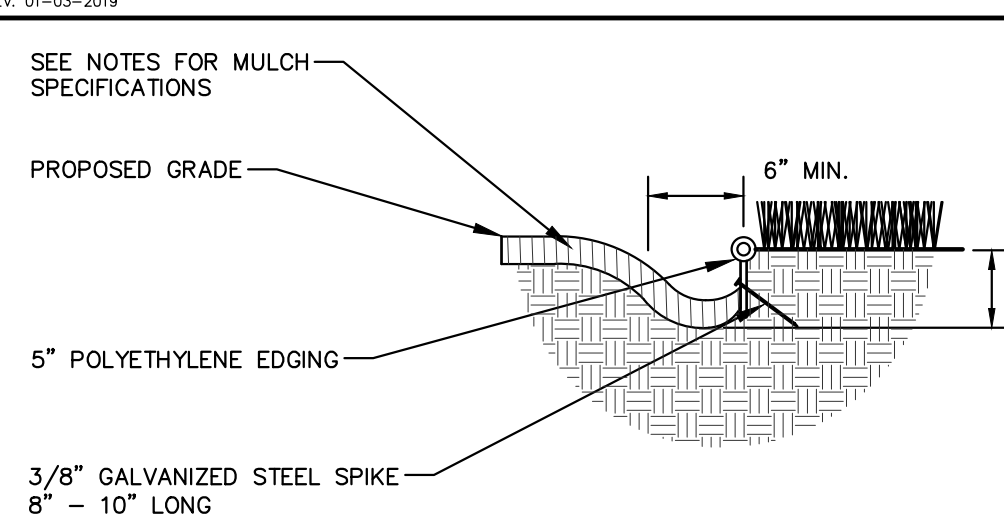

## POLYETHYLENE LANDSCAPE EDGING DETAIL

N.T.S.

REV. 01-03-2019

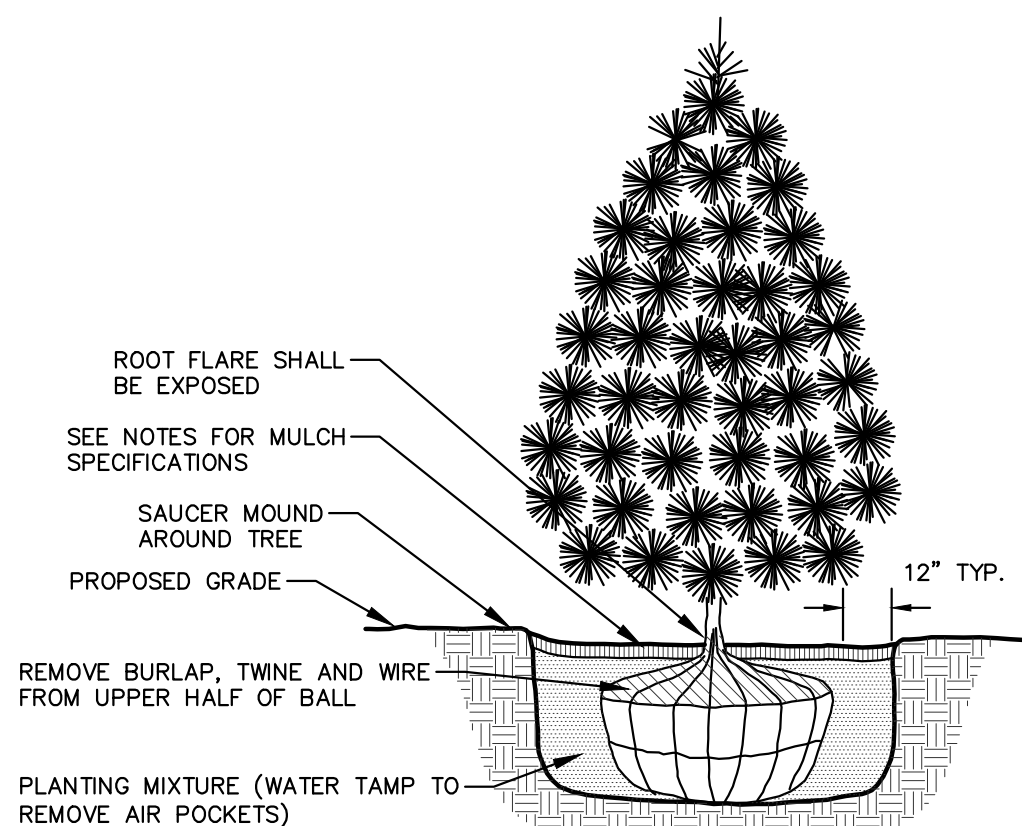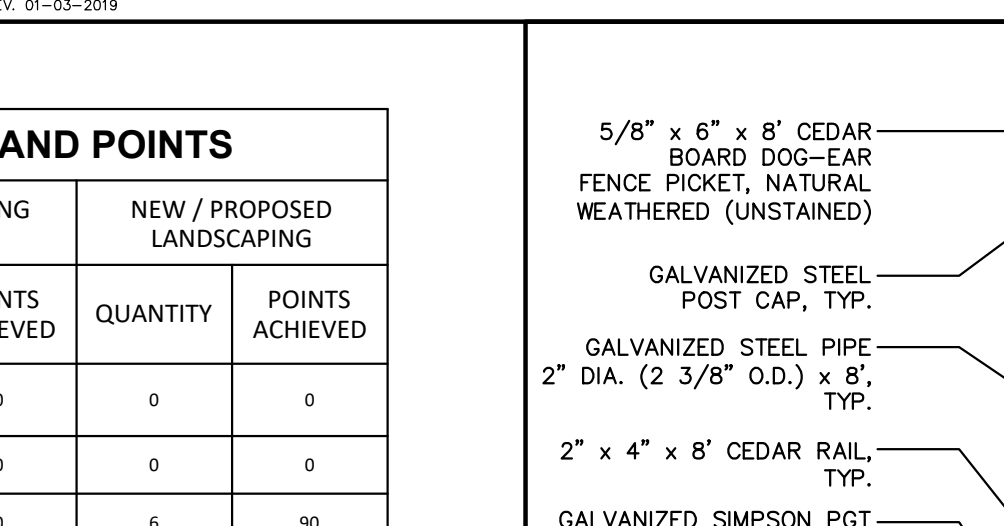


### NOTE:

- DIG HOLE NO DEEPER THAN BASE OF ROOT BALL TO FLARE. ROOT BALL TO BE SET ON UNDISTURBED SOIL UNLESS COMPACTED AGGREGATE STONE REMAINS FROM SITE EXCAVATOR. REMOVE REMAINING AGGREGATE STONE UNTIL SOIL LAYER IS REACHED

## EVERGREEN TREE PLANTING DETAIL

N.T.S.

REV. 01-03-2019

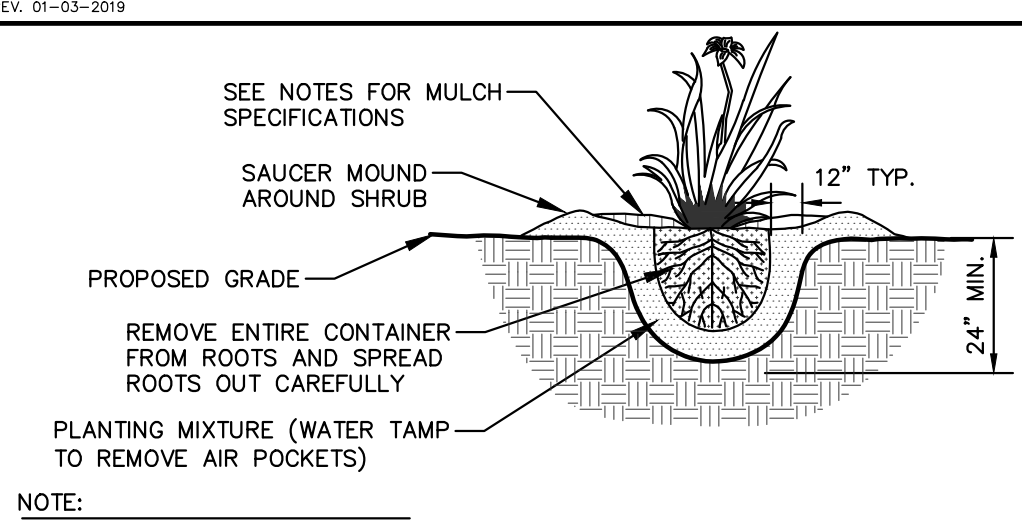


### NOTE:

- ROOT FLARE TO BE EXPOSED

## PERENNIAL/ORNAMENTAL GRASS PLANTING DETAIL

N.T.S.


REV. 01-03-2019

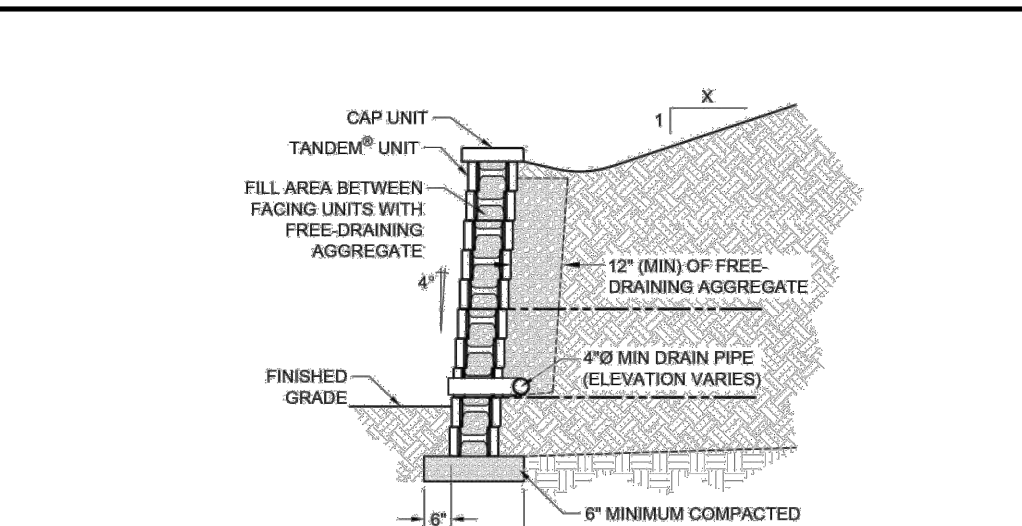

## MODULAR BLOCK RETAINING WALL

N.T.S.

REV. 06-21-2019

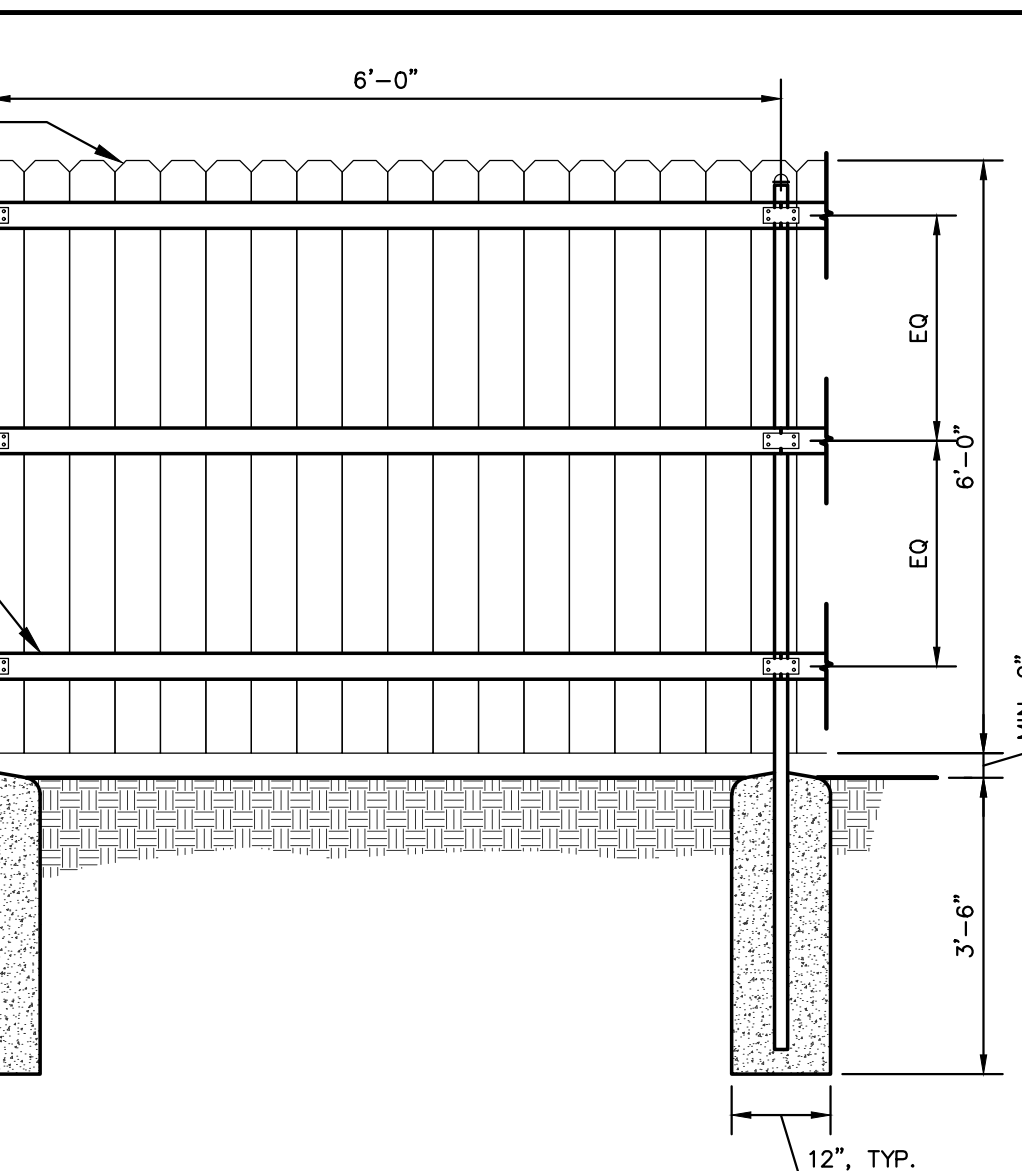

NOTE:  
 BOARD-ON-BOARD OPTION TO HAVE PICKETS ON BOTH SIDES OF FENCE WITH 3 1/2" GAP BETWEEN ALL PICKETS.

## OPAQUE CEDAR PRIVACY FENCE

N.T.S.

## GENERAL NOTES

- GENERAL: ALL WORK IN THE R-O-W AND PUBLIC EASEMENTS SHALL BE IN ACCORDANCE WITH LOCAL MUNICIPAL REQUIREMENTS. JSD SHALL BE HELD HARMLESS AND DOES NOT WARRANT ANY DEVIATIONS BY THE OWNER/CONTRACTOR FROM THE APPROVED CONSTRUCTION PLANS THAT MAY RESULT IN DISCIPLINARY ACTIONS BY ANY OR ALL REGULATORY AGENCIES. LOCATE ALL UTILITIES PRIOR TO CONSTRUCTION. THE CONTRACTOR IS RESPONSIBLE FOR REPAIRING ANY DAMAGE DONE TO UTILITIES. CONTRACTOR MUST CALL 1-800-242-8511 FOR UTILITY LOCATIONS AT LEAST THREE DAYS PRIOR TO DIGGING. HAND DIG AND INSTALL ALL PLANTS THAT ARE NEAR EXISTING UTILITIES. PROTECT PREVIOUSLY INSTALLED WORK OF OTHER TRADES. CONTRACTOR IS RESPONSIBLE FOR STAKING THE PLANT MATERIALS FOR REVIEW BY OWNER PRIOR TO DIGGING AND PLACEMENT AND SHALL COORDINATE ALL FINE GRADING AND RESTORATION WITH THE GRADING CONTRACTOR.
- DELIVERY AND HANDLING: DO NOT DELIVER MORE PLANT MATERIALS THAN CAN BE PLANTED IN ONE DAY, UNLESS ADEQUATE, APPROPRIATE AND SECURE STORAGE IS PROVIDED AND APPROVED BY OWNER'S REPRESENTATIVE. AT ALL TIMES, PROTECT ALL PLANT MATERIALS FROM WIND AND DIRECT SUN. DELIVER PLANTS WITH LEGIBLE IDENTIFICATION LABELS PRIOR TO DELIVERY AND DO NOT PRUNE PRIOR TO DELIVERY. ALL TREES AND SHRUBS SHALL BE PLANTED ON THE DAY OF DELIVERY; IF THIS IS NOT POSSIBLE, PROTECT THE PLANT MATERIALS NOT PLANTED BY STORING THEM IN A SHADED, SECURE AREA, PROTECTING THE ROOT MASS WITH WET SOIL, MULCH, HAY OR OTHER SUITABLE MEDIUM. CONTRACTOR TO KEEP ALL PLANT MATERIALS ADEQUATELY WATERED TO PREVENT ROOT DESICCATION. DO NOT REMOVE CONTAINER GROWN STOCK FROM CONTAINERS BEFORE TIME OF PLANTING. DO NOT PICK UP CONTAINER OR BALLED PLANTS BY STEM OR ROOTS. ALL PLANTS SHALL BE LIFTED AND HANDLED FROM THE BOTTOM OF THE CONTAINER OR BALL. PERFORM ACTUAL PLANTING ONLY WHEN WEATHER AND SOIL CONDITIONS ARE SUITABLE IN ACCORDANCE WITH LOCALLY ACCEPTED BEST HORTICULTURAL PRACTICES.
- MATERIALS - PLANTS: ALL PLANTS SHALL CONFORM TO THE LATEST VERSION OF THE AMERICAN STANDARD FOR NURSERY STOCK ANSI Z60.1. PLANTS SHALL BE TRUE TO SPECIES AND VARIETY SPECIFIED AND NURSERY GROWN IN ACCORDANCE WITH GOOD HORTICULTURAL PRACTICES UNDER CLIMATIC CONDITIONS SIMILAR TO THOSE IN THE LOCALITY OF THE PROJECT FOR AT LEAST 2 YEARS. PLANTS SHALL BE FRESHLY DUG (DURING THE MOST RECENT FAVORABLE HARVEST SEASON). PLANTS SHALL BE SO TRAINED IN DEVELOPMENT AND APPEARANCE AS TO BE UNQUESTIONABLY SUPERIOR IN FORM, COMPACTNESS, AND SYMMETRY. PLANTS SHALL BE SOUND, HEALTHY, VIGOROUS, WELL BRANCHED AND DENSELY FOLIATED WHEN IN LEAF, AND FREE OF DISEASE AND INSECTS (ADULT EGGS, PUPAE OR LARVAE). THEY SHALL HAVE HEALTHY, WELL-DEVELOPED ROOT SYSTEMS AND SHALL BE FREE FROM PHYSICAL DAMAGE OR OTHER CONDITIONS THAT WOULD PREVENT THRIVING GROWTH OR PREMATURE MORTALITY. PLANTS SHALL BE OF THE HIGHEST QUALITY, POSSESS TYPICAL GROWTH HABITS AND FORM FOR THEIR SPECIES AND BE FREE OF INJURY. PARKWAY TREES AND PARKING LOT TREES SHALL HAVE A MINIMUM BRANCHING HEIGHT OF SIX (6) FEET ABOVE THE GROUND TO ALLOW ADEQUATE VISUAL AND PHYSICAL CLEARANCE.
- PRUNING: THE CONTRACTOR SHALL PRUNE ALL TREES AND REPAIR ANY INJURIES THAT OCCURRED DURING THE PLANTING PROCESS. DOUBLE LEADERS, DEAD BRANCHES, AND LIMBS DAMAGED OR BROKEN DURING THE PLANTING PROCESS SHALL BE PRUNED. THIS SHALL BE THE ONLY PRUNING ALLOWED AT PLANTING. PRUNING SHALL CONFORM TO THE LATEST VERSION OF THE AMERICAN STANDARD FOR TREE CARE OPERATIONS, ANSI A300. PRUNE TREES IN ACCORDANCE WITH NAA GUIDELINES. DO NOT TOP TREES. PRUNE SHRUBS ACCORDING TO STANDARD HORTICULTURAL PRACTICES. ON CUTS OVER 3/4" IN DIAMETER AND BRUISES OR SCARS ON BARK, TRACE THE INJURED CAMBIUM LAYER BACK TO LIVING TISSUE AND REMOVE. SMOOTH AND SHAPE WOUNDS SO AS NOT TO RETAIN WATER. TREAT THE AREA WITH AN APPROVED INCONSPICUOUS LATEX BASED ANTISEPTIC TREE PAINT, IF PRUNING OCCURS "IN SEASON". DO NOT PRUNE ANY OAK TREES DURING THE MONTHS FROM APRIL TO OCTOBER.
- CLEANUP: THE WORK AREA SHALL BE KEPT SAFE AND NEAT AT ALL TIMES. DISPOSED OF EXCESS SOIL. REMOVE ALL CUTTINGS AND WASTE MATERIALS. SOIL AND BRANCHES. BIND AND WRAP THESE MATERIALS, ANY REJECTED PLANTS, AND ANY OTHER DEBRIS RESULTING FROM ALL PLANTING TASKS AND PROMPTLY CLEAN UP AND REMOVE FROM THE PROJECT SITE. UNDER NO CIRCUMSTANCES SHALL THE ACCUMULATION OF SOIL, BRANCHES OR OTHER DEBRIS BE ALLOWED UPON A PUBLIC PROPERTY IN SUCH A MANNER AS TO RESULT IN A PUBLIC SAFETY HAZARD OR DAMAGE. LIKEWISE, UNDER NO CIRCUMSTANCES SHALL ANY DEBRIS OR INCIDENTAL MATERIALS BE ALLOWED UPON ADJACENT PRIVATE PROPERTY.
- ANY SUBSTITUTIONS IN PLANT TYPE, LOCATION, OR SIZE SHALL BE APPROVED BY LANDSCAPE ARCHITECT PRIOR TO INSTALLATION.
- CONTRACTOR TO VERIFY PLANT MATERIAL QUANTITIES AND SQUARE FOOTAGES. QUANTITIES SHOWN ON PLAN TAKE PRECEDENCE OVER THOSE ON SCHEDULE.

## LANDSCAPE MATERIAL NOTES

- MATERIALS - PLANTING MIXTURE: ALL HOLES EXCAVATED FOR TREES, SHRUBS, PERENNIALS AND ORNAMENTAL GRASSES SHALL BE BACKFILLED WITH TWO (2) PARTS TOPSOIL, ONE (1) PART SAND AND ONE (1) PART COMPOST. SOIL MIXTURE SHALL BE WELL BLENDED PRIOR TO INSTALLATION.
- MATERIALS - TOPSOIL: TOPSOIL TO BE CLEAN, FRIABLE LOAM FROM A LOCAL SOURCE, FREE FROM STONES OR DEBRIS OVER 3/4" IN DIAMETER, AND FREE FROM TOXINS OR OTHER DELETERIOUS MATERIALS. TOPSOIL SHALL HAVE A PH VALUE BETWEEN 6 AND 7. TOPSOIL AND PLANTING SOIL SHALL BE TESTED TO ENSURE CONFORMANCE WITH THESE SPECIFICATIONS AND SHALL BE AMENDED TO MEET THESE SPECIFICATIONS. PROVIDE TEST RESULTS TO OWNER'S REPRESENTATIVE PRIOR TO PLACEMENT. DO NOT PLACE FROZEN OR MUDDY TOPSOIL. APPLY SOIL AMENDMENTS TO ALL LANDSCAPE AREAS PER SOIL TEST.
- MATERIALS - STONE MULCH: ALL PLANTING AREAS LABELED ON PLAN SHALL RECEIVE 1-1/2" HERITAGE STONE MULCH SPREAD TO A MINIMUM AND CONSISTENT DEPTH OF 3-INCHES. STONE MULCH AREAS SHALL RECEIVE WOVEN WEED BARRIER FABRIC. NO PLASTIC/IMPERVIOUS BARRIERS WILL BE PERMITTED. EXAMPLE: BLACK WISQUEEN.
- MATERIALS - SHREDDED HARDWOOD BARK MULCH: ALL PLANTING AREAS LABELED ON PLAN SHALL RECEIVE CERTIFIED WEED FREE (COLOR: BROWN) SHREDDED HARDWOOD BARK MULCH TO A MINIMUM AND CONSISTENT DEPTH OF 3-INCHES. SHREDDED HARDWOOD BARK MULCH SIZE & COLOR TO BE APPROVED BY OWNER'S REPRESENTATIVE PRIOR TO INSTALLATION. FERTILIZER SHALL BE IN ACCORDANCE WITH APPLICABLE LOCAL, COUNTY AND STATE REQUIREMENTS. SHREDDED HARDWOOD BARK MULCH AREAS SHALL NOT RECEIVE WOVEN WEED BARRIER FABRIC.
- MATERIALS - TREE & SHRUB RINGS: ALL TREES AND/OR SHRUBS PLANTED IN SEEDED LAWN AREAS TO BE INSTALLED WITH A MINIMUM 4" DIAMETER SHREDDED HARDWOOD BARK MULCH TREE RING SPREAD TO A CONSISTENT DEPTH OF 3-INCHES. ALL TREE RINGS SHOULD BE INSTALLED WITH A 6" DEPTH SHOVEL CUT EDGE, ANGLED 45 DEGREES INTO SOIL AT A 5' DIAMETER ABOUT THE CENTER OF THE TREE PLANTING. A PRE-EMERGENT GRANULAR HERBICIDE WEED-PREVENTER SHOULD BE MIXED WITH MULCH USED TO INSTALL TREE RING AS WELL AS TOPICALLY APPLIED TO COMPLETED INSTALLATION OF TREE RING.
- MATERIALS - POLYETHYLENE EDGING: EDGING SHALL BE 5" DEEP, POLYETHYLENE EDGING. OWNER'S REPRESENTATIVE SHALL APPROVE PRODUCT SPECIFICATION PROVIDED BY LANDSCAPE CONTRACTOR.
- MATERIALS - TREE PROTECTION: ALL TREES TO BE INSTALLED WITH LDPE TREE GUARDS AS MANUFACTURED BY A.M. LEONARD HORTICULTURAL TOOL & SUPPLY CO., OR APPROVED EQUAL.
- MATERIALS - TURFGRASS SEED: DISTURBED LAWN AREAS LABELED ON PLAN AS SUCH, SHALL RECEIVE 6" OF TOPSOIL AND EARTH CARPET'S "MADISON PARKS" GRASS SEED, OR EQUIVALENT AS APPROVED BY THE OWNER'S REPRESENTATIVE, INSTALLED PER MANUFACTURER'S RECOMMENDATIONS. IN ADDITION TO TURFGRASS SEED, ANNUAL RYE SHALL BE APPLIED TO ALL DISTURBED AREAS AT A RATE OF 1 1/2 LBS PER 1000 SQUARE FEET. FERTILIZE AND MULCH PER MANUFACTURER'S RECOMMENDATIONS. MULCH SHALL BE CERTIFIED NOXIOUS WEED SEED-FREE.

## CONTRACTOR AND OWNER RESPONSIBILITY NOTES

- GUARANTEE: THE CONTRACTOR SHALL GUARANTEE ALL PLANTS THROUGH ONE (1) YEAR AFTER ACCEPTANCE BY THE OWNER'S REPRESENTATIVE. PLANTS SHALL BE ALIVE AND IN HEALTHY AND FLOURISHING CONDITION AT THE END OF THE GUARANTEE PERIOD. THE CONTRACTOR SHALL REPLACE (AT NO COST TO OWNER) ANY PLANTS THAT ARE DEAD OR NOT IN A VIGOROUS THRIVING CONDITION. REPLACEMENT PLANTS SHALL BE OF THE SAME KIND AND SIZE AS ORIGINALLY SPECIFIED UNLESS OTHERWISE DIRECTED BY OWNER'S REPRESENTATIVE. RESTORE BEDS AS NECESSARY FOLLOWING PLANT REPLACEMENT, INCLUDING BUT NOT LIMITED TO BEDDING, EDGING, MULCH, ETC. REPLACE PLANTS DAMAGED AT TIME OF PLANTING. REPAIR AREAS DISTURBED IN ANY WAY DURING PLANT REPLACEMENT AT NO COST TO OWNER. CONTRACTOR SHALL PROVIDE A ONE (1)-YEAR STRAIGHTENING GUARANTEE FOR ALL TREES.
- CONTRACTOR IS RESPONSIBLE FOR STAKING THE PLANT MATERIALS FOR REVIEW BY OWNER'S REPRESENTATIVE PRIOR TO DIGGING AND PLACEMENT AND SHALL COORDINATE ALL FINE GRADING AND RESTORATION WITH THE GRADING CONTRACTOR.
- MAINTENANCE: (CONTRACTOR) FOR ALL PLANTINGS, SEEDED AND/OR SODDED LAWN AREAS: THE CONTRACTOR SHALL MAINTAIN ALL PLANTINGS AND LAWN AREAS FOR A MINIMUM TIME PERIOD OF 60 DAYS, UNTIL FINAL ACCEPTANCE BY OWNER'S REPRESENTATIVE. THE CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY WATERING PLANTS AND LAWN/TURFGRASS DURING THIS 60 DAY ESTABLISHMENT PERIOD. CONTRACTOR IS RESPONSIBLE FOR THE ESTABLISHMENT OF HEALTHY VIGOROUS PLANT MATERIALS AND LAWN/TURFGRASS GROWTH. CONTRACTOR IS ALSO RESPONSIBLE FOR ANY PRUNING OF PLANT MATERIALS, AND SHAPING AND/OR REPLACEMENT OR SUPPLEMENT OF DEFICIENT SHREDDED HARDWOOD BARK MULCH DURING THIS PERIOD. LONG TERM PLANT MATERIALS AND LAWN/TURFGRASS MAINTENANCE AND ANY PROGRAM FOR SUCH IS THE RESPONSIBILITY OF THE OWNER. ALL PLANTINGS AND LAWN/TURFGRASS AREAS SHALL BE MAINTAINED IN A MANICURED CONDITION UNTIL THE TIME WHEN THE OWNER'S ACCEPTANCE IS GIVEN.
- MAINTENANCE: (OWNER) THE OWNER IS RESPONSIBLE FOR THE CONTINUED MAINTENANCE, REPAIR AND REPLACEMENT OF ALL LANDSCAPING MATERIALS AND WEED BARRIER FABRIC AS NECESSARY FOLLOWING THE ONE (1) YEAR CONTRACTOR GUARANTEE PERIOD.



CREATE THE VISION TELL THE STORY

jsdinc.com

MADISON REGIONAL OFFICE  
 161 HORIZON DRIVE, SUITE 101  
 VERONA, WISCONSIN 53593  
 P. 608.848.5060

CLIENT:  
**THRESHOLD DEVELOPMENT GROUP**

CLIENT ADDRESS:  
 1952 ATWOOD AVENUE  
 MADISON, WISCONSIN 53704

PROJECT:  
 2165 LINDEN AVENUE  
 REDEVELOPMENT

PROJECT LOCATION:  
 2165 LINDEN AVENUE  
 MADISON, DANE COUNTY  
 WISCONSIN 53704

### PLAN MODIFICATIONS:

#	Date:	Description:
1.	01.10.2022	LAND USE SUBMITTAL
2.	02.25.2022	LAND USE RESUBMITTAL
3.		
4.		
5.		
6.		
7.		
8.		
9.		
10.		
11.		
12.		
13.		
14.		
15.		
16.		

Designed By: MWS  
 Reviewed By: KJY  
 Approved By: KJY  
 SHEET TITLE:  
**LANDSCAPE DETAILS & NOTES**

SHEET NUMBER:

**L2.0**

JSD PROJECT NO: 21-11164



Toll Free (800) 242-8511

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF JSD PROFESSIONAL SERVICES, INC.

File: L:\2021\211164\DWG\Landscaping\Sheet211164\_Landscape.dwg, Layout: L2.0, User: mwf@jds.com, Plot Date: Feb 25, 2022, 8:18am, Xref's: 2111164, 2165 Linden Ave.




knothe • bruce  
ARCHITECTS

Phone: 7601 University Ave. #201  
608.836.3690 Middleton, WI 53562

TRUE NORTH



KEY PLAN

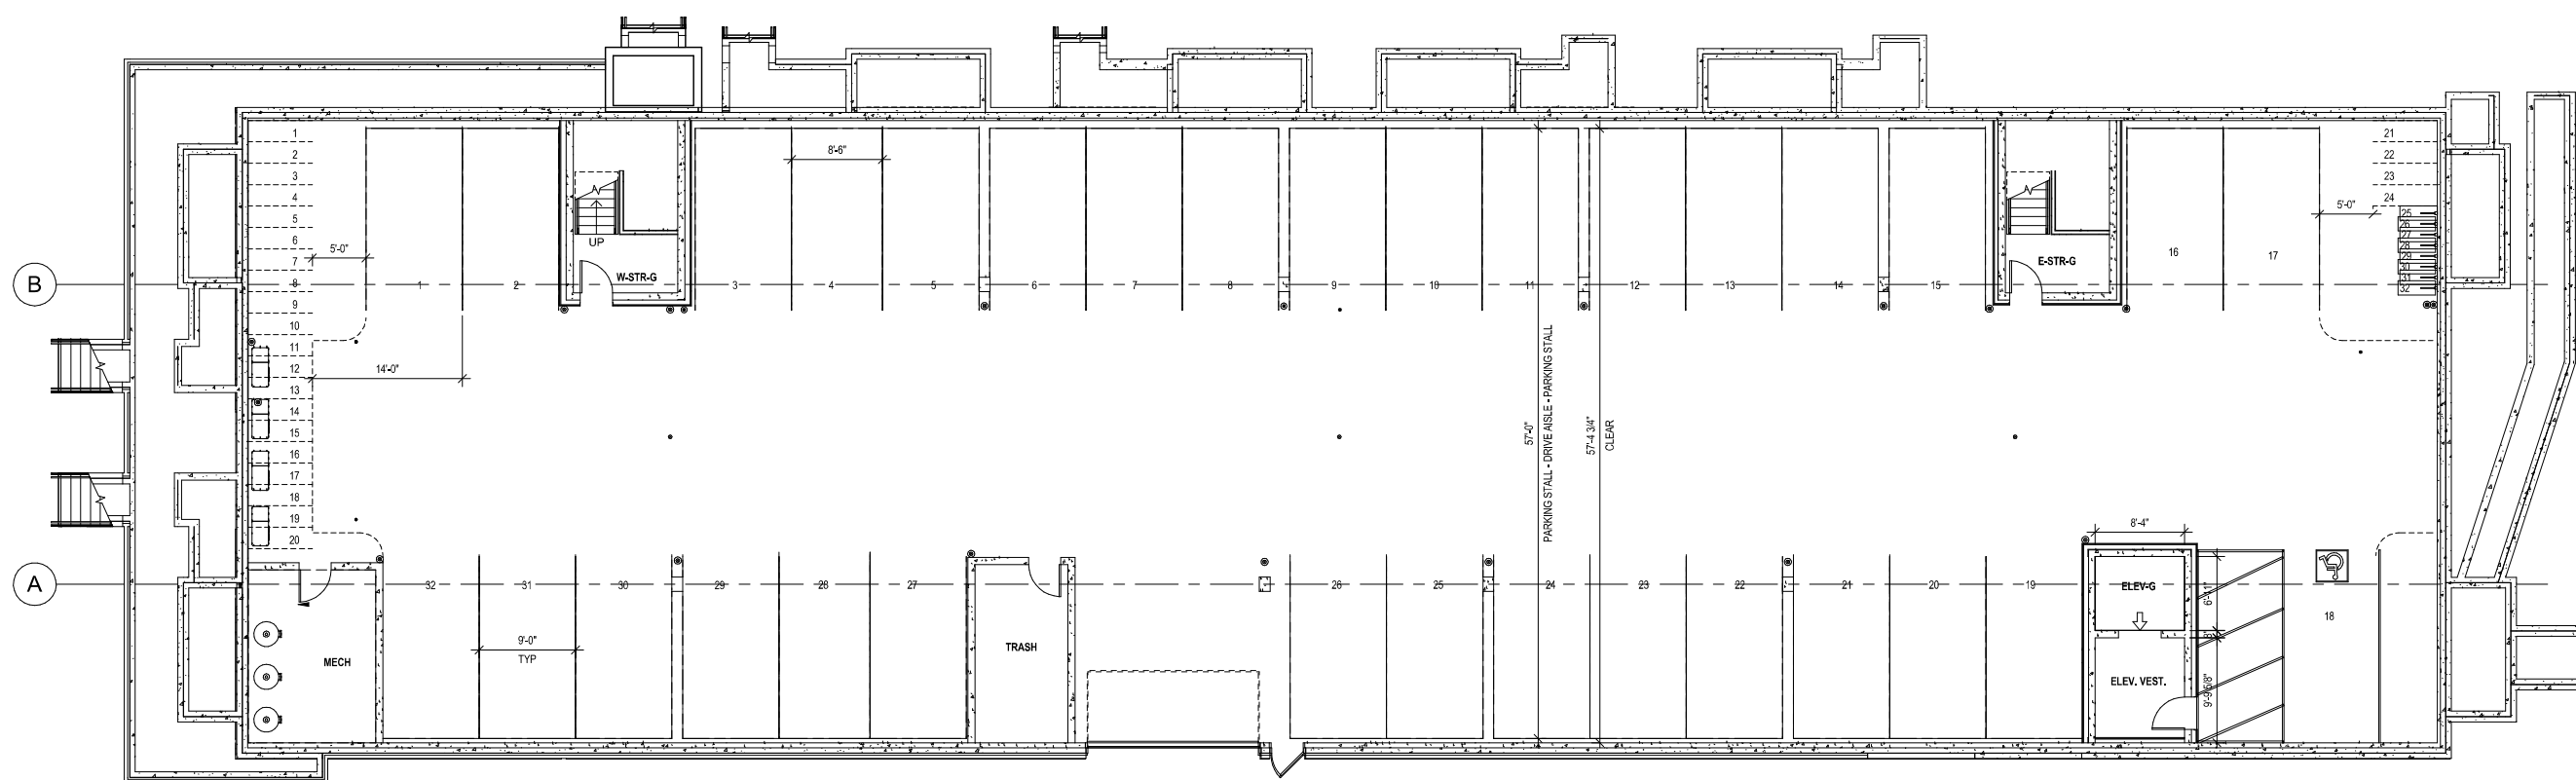

1 BASEMENT FLOOR PLAN  
A100 1/8" = 1'-0"

NOT FOR CONSTRUCTION

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran  
Site Development

2165 Lindin Ave  
Madison, Wisconsin  
SHEET TITLE  
BASEMENT  
FLOOR PLAN

SHEET NUMBER

A100  
PROJECT NUMBER 2102

NOT FOR CONSTRUCTION



knothe • bruce  
ARCHITECTS

Phone: 7601 University Ave. #201  
608.836.3690 Middleton, WI 53562

TRUE NORTH



KEY PLAN

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran  
Site Development


2165 Lindin Ave  
Madison, Wisconsin  
SHEET TITLE  
FIRST FLOOR  
PLAN

SHEET NUMBER

A101

PROJECT NUMBER 2102

© Knothe & Bruce Architects, LLC

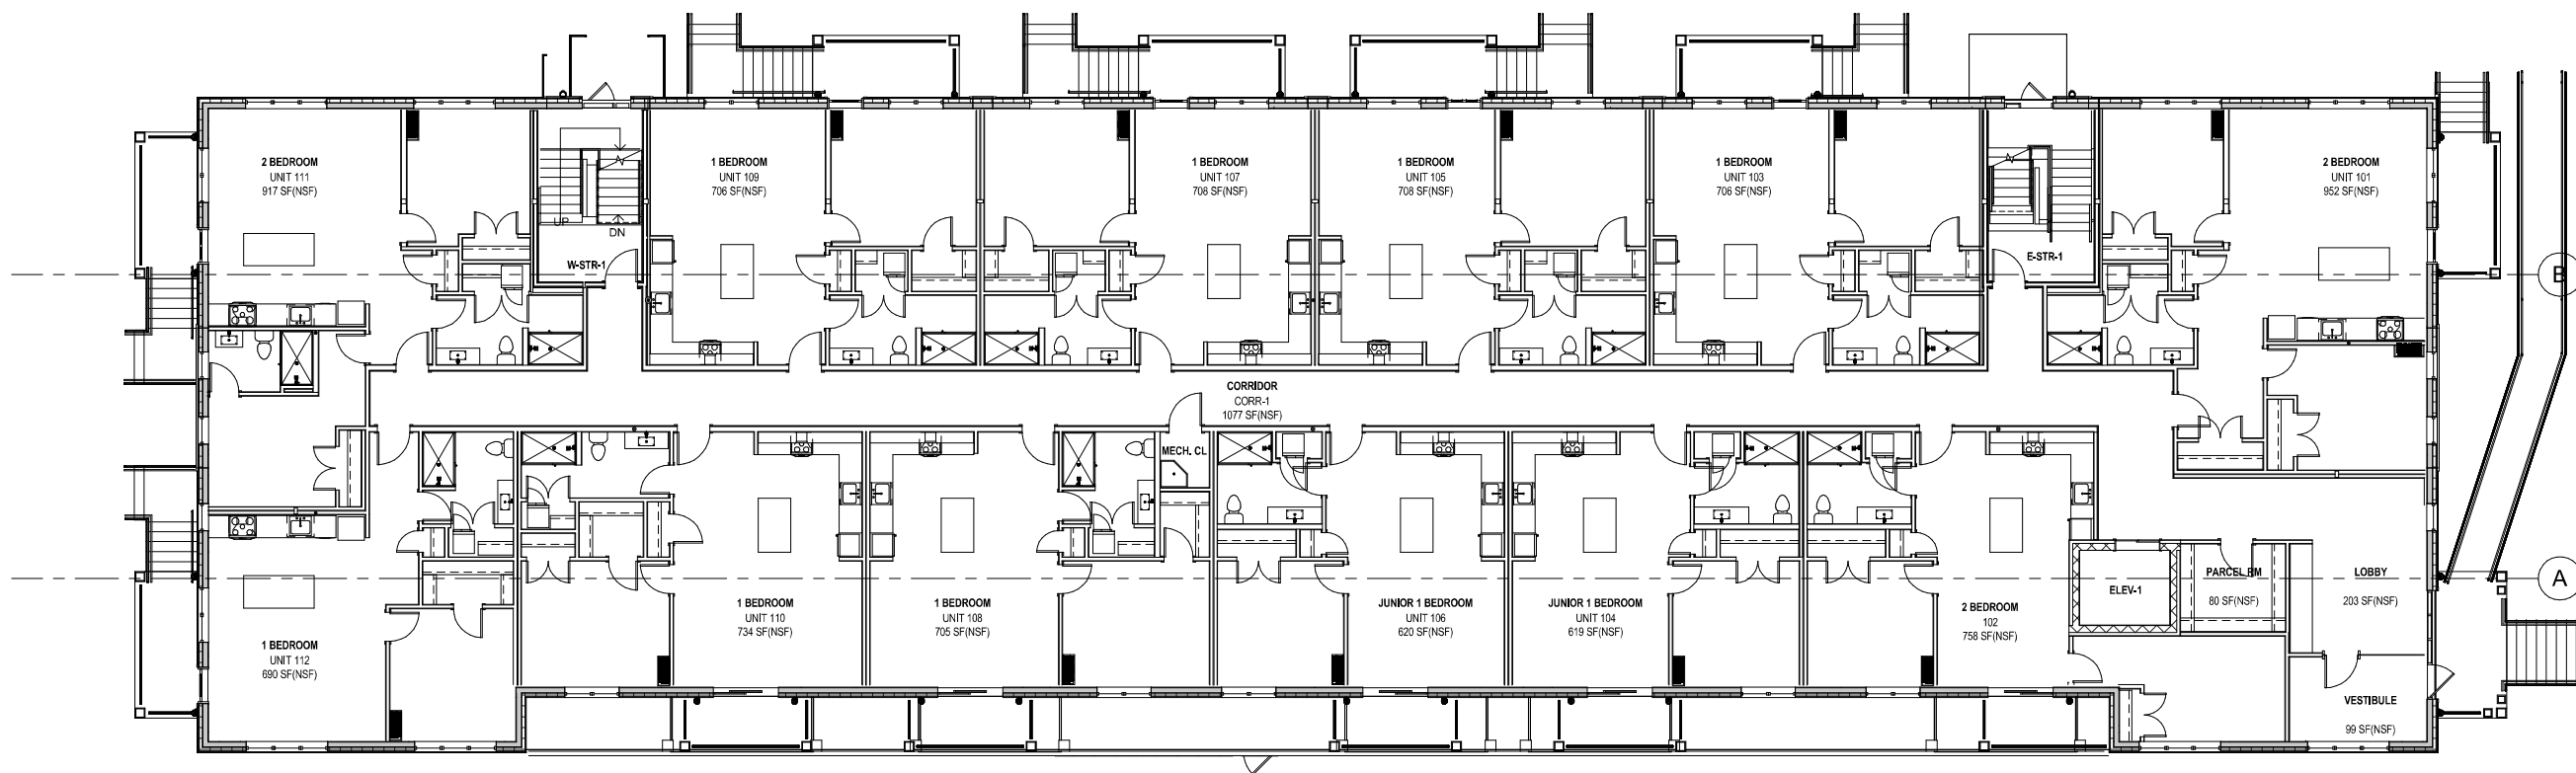

1 FIRST FLOOR PLAN  
A101 1/8" = 1'-0"

NOT FOR CONSTRUCTION



knothe • bruce  
ARCHITECTS

Phone: 7601 University Ave. #201  
608.836.3690 Middleton, WI 53562

TRUE NORTH



KEY PLAN

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran  
Site Development


2165 Lindin Ave  
Madison, Wisconsin  
SHEET TITLE  
SECOND FLOOR  
PLAN

SHEET NUMBER

A102

PROJECT NUMBER 2102

© Knothe & Bruce Architects, LLC

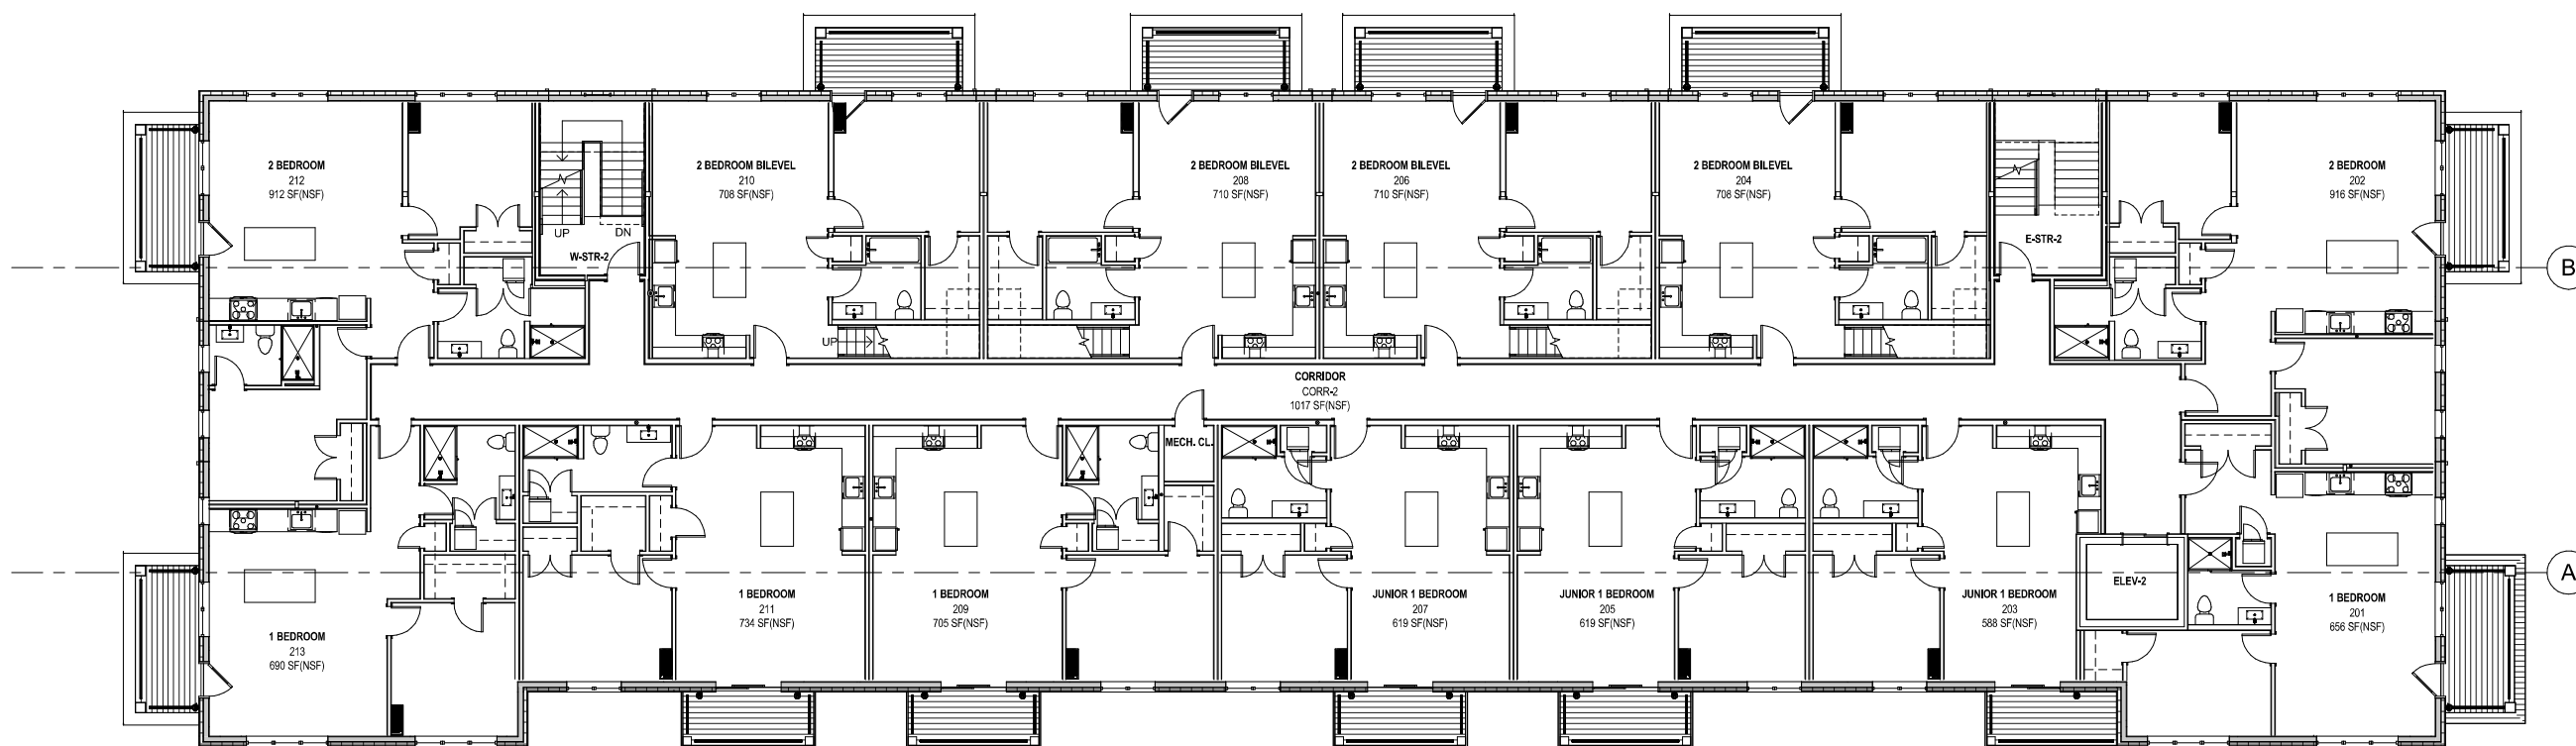

1 SECOND FLOOR PLAN  
A102 1/8" = 1'-0"



NOT FOR CONSTRUCTION



knothe • bruce  
ARCHITECTS

Phone: 7601 University Ave. #201  
608.836.3690 Middleton, WI 53562

TRUE NORTH



KEY PLAN

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
Threshold  
Development  
Zion Lutheran  
Site Development


2165 Lindin Ave  
Madison, Wisconsin  
SHEET TITLE  
THIRD FLOOR  
PLAN

SHEET NUMBER

A103

PROJECT NUMBER 2102

© Knothe & Bruce Architects, LLC

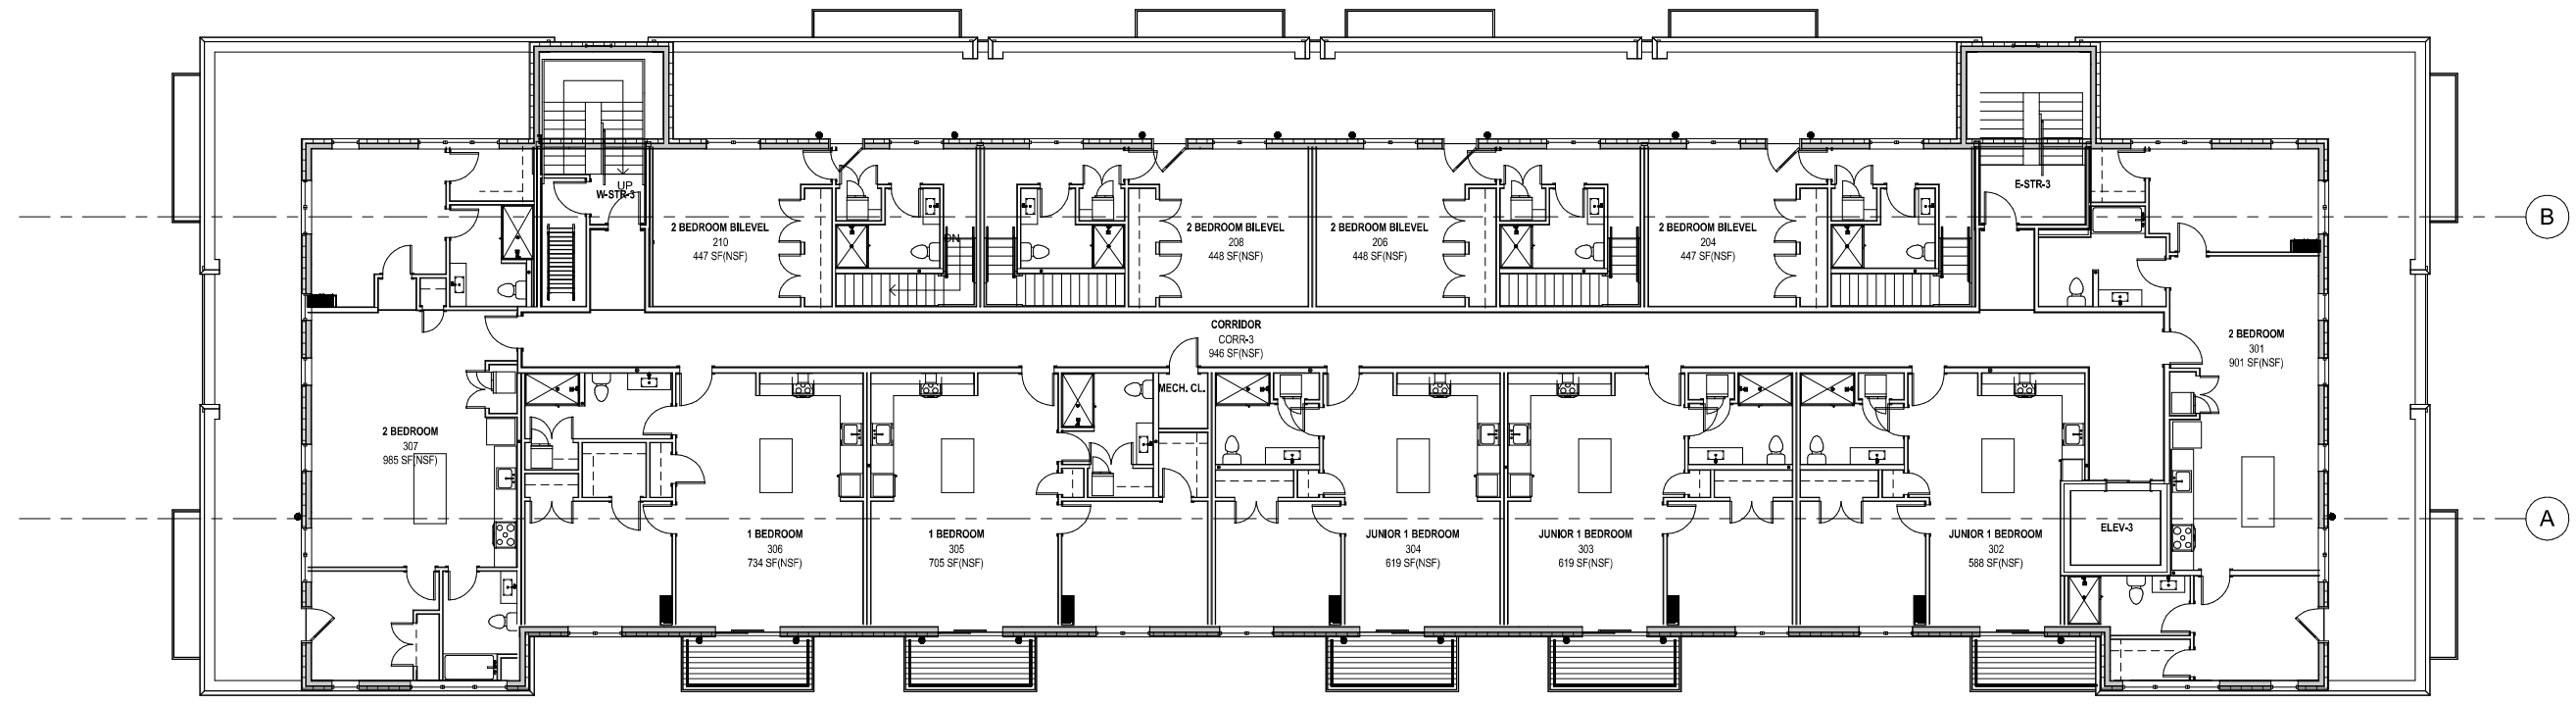


1 THIRD FLOOR PLAN  
A103 1/8" = 1'-0"



knothe | bruce  
ARCHITECTS

Phone: 608.836.3690 7601 University Ave. #201  
Middleton, WI 53562

TRUE NORTH



KEY PLAN

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE

Threshold  
Development  
Zion Lutheran  
Site Development

2165 Lindin Ave  
Madison, Wisconsin

SHEET TITLE  
ROOF PLAN


SHEET NUMBER

A104

PROJECT NUMBER 2102

© Knothe & Bruce Architects, LLC

NOT FOR CONSTRUCTION

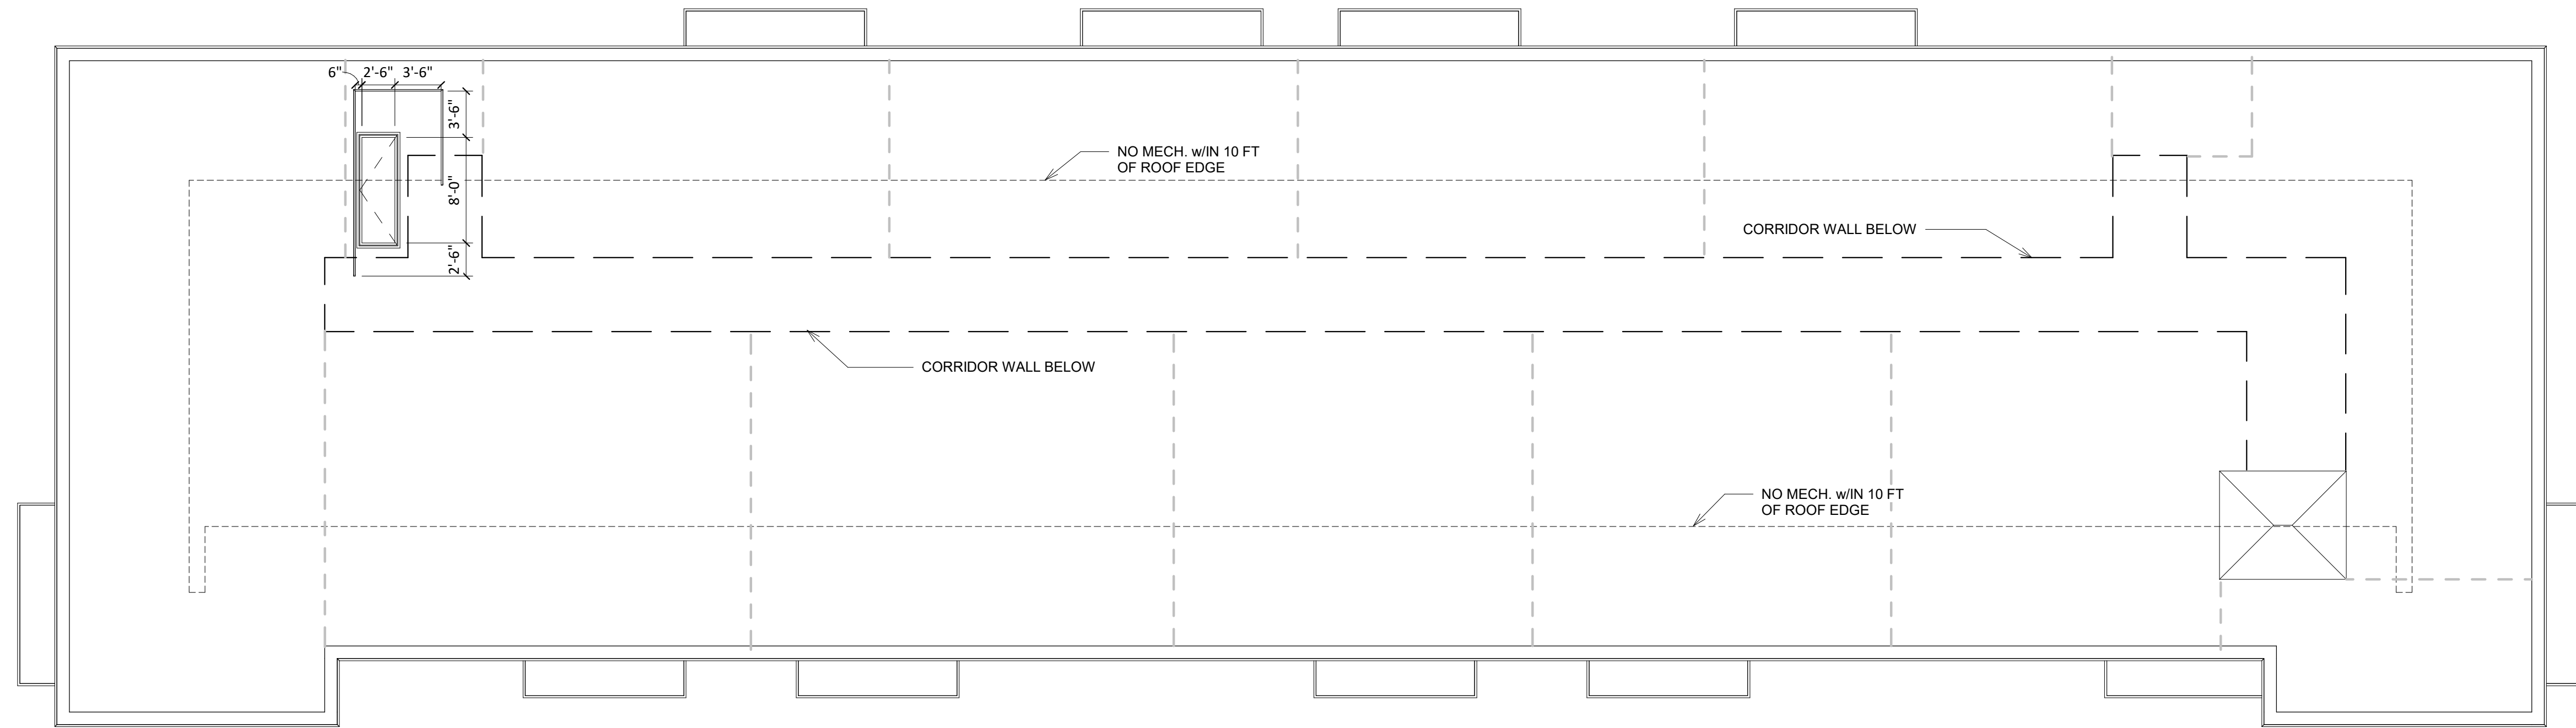

1 ROOF PLAN  
A104 1/8" = 1'-0"



**knothe bruce**  
ARCHITECTS  
Phone: 7601 University Ave. #201  
608.836.3690 Middleton, WI 53562



1 ELEVATION - NORTH  
A201 1/8" = 1'-0"

EXTERIOR MATERIAL SCHEDULE			
MARK	BUILDING ELEMENT	MANUFACTURER	COLOR
1	VERTICAL WOOD SIDING	TBD RESAWN TIMBER ACCOYA	TBD CERRO
2	HORIZONTAL WOOD SIDING	RESAWN TIMBER ACCOYA	RAILAY
3	COMPOSITE LAP SIDING	JAMES HARDIE	LIGHT MIST
4	COMPOSITE LAP SIDING	JAMES HARDIE	NIGHT GRAY
8	COMPOSITE WINDOWS	ANDERSEN 100	BLACK
9	ALUMINUM STOREFRONT	N/A	BLACK
10	INSUL. METAL DOORS & FRAMES	N/A	TBD
12	RAILINGS & HANDRAILS	N/A	BLACK



2 ELEVATION - EAST  
A201 1/8" = 1'-0"

NOT FOR CONSTRUCTION

ISSUED  
Issued for UDC & Land Use - Jan. 10, 2022  
Issued for Resubmittal - Feb. 28, 2022  
Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
**Threshold  
Development  
Zion Lutheran  
Site Development**

2165 Lindin Ave  
Madison, Wisconsin  
SHEET TITLE  
**EXTERIOR  
ELEVATIONS**

SHEET NUMBER

**A201**  
PROJECT NUMBER **2102**

© Knothe & Bruce Architects, LLC



1 ELEVATION - SOUTH  
 1/8" = 1'-0"

EXTERIOR MATERIAL SCHEDULE			
MARK	BUILDING ELEMENT	MANUFACTURER	COLOR
		TBD	TBD
1	VERTICAL WOOD SIDING	RESAWN TIMBER ACCOYA	CERRO
2	HORIZONTAL WOOD SIDING	RESAWN TIMBER ACCOYA	RAILAY
3	COMPOSITE LAP SIDING	JAMES HARDIE	LIGHT MIST
4	COMPOSITE LAP SIDING	JAMES HARDIE	NIGHT GRAY
8	COMPOSITE WINDOWS	ANDERSEN 100	BLACK
9	ALUMINUM STOREFRONT	N/A	BLACK
10	INSUL. METAL DOORS & FRAMES	N/A	TBD
12	RAILINGS & HANDRAILS	N/A	BLACK



2 ELEVATION - WEST  
 1/8" = 1'-0"

NOT FOR CONSTRUCTION

ISSUED  
 Issued for UDC & Land Use - Jan. 10, 2022  
 Issued for Resubmittal - Feb. 28, 2022  
 Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
**Threshold  
 Development  
 Zion Lutheran  
 Site Development**

2165 Lindin Ave  
 Madison, Wisconsin  
 SHEET TITLE  
**EXTERIOR  
 ELEVATIONS**

SHEET NUMBER

**A202**  
 PROJECT NUMBER 2102



1 ELEVATION - NORTH COLOR  
 1/8" = 1'-0"

EXTERIOR MATERIAL SCHEDULE			
MARK	BUILDING ELEMENT	MANUFACTURER	COLOR
1	VERTICAL WOOD SIDING	TBD RESAWN TIMBER ACCOYA	TBD CERRO
2	HORIZONTAL WOOD SIDING	RESAWN TIMBER ACCOYA	RAILAY
3	COMPOSITE LAP SIDING	JAMES HARDIE	LIGHT MIST
4	COMPOSITE LAP SIDING	JAMES HARDIE	NIGHT GRAY
8	COMPOSITE WINDOWS	ANDERSEN 100	BLACK
9	ALUMINUM STOREFRONT	N/A	BLACK
10	INSUL. METAL DOORS & FRAMES	N/A	TBD
12	RAILINGS & HANDRAILS	N/A	BLACK



2 ELEVATION - EAST COLOR  
 1/8" = 1'-0"

NOT FOR CONSTRUCTION

ISSUED  
 Issued for UDC & Land Use - Jan. 10, 2022  
 Issued for Resubmittal - Feb. 28, 2022  
 Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
**Threshold  
 Development  
 Zion Lutheran  
 Site Development**

2165 Lindin Ave  
 Madison, Wisconsin  
 SHEET TITLE  
**EXTERIOR  
 ELEVATIONS  
 COLOR**

SHEET NUMBER  
**A203**  
 PROJECT NUMBER **2102**



1 ELEVATION - SOUTH COLOR  
 A204 1/8" = 1'-0"

EXTERIOR MATERIAL SCHEDULE			
MARK	BUILDING ELEMENT	MANUFACTURER	COLOR
1	VERTICAL WOOD SIDING	TBD RESAWN TIMBER ACCOYA	TBD CERRO
2	HORIZONTAL WOOD SIDING	RESAWN TIMBER ACCOYA	RAILAY
3	COMPOSITE LAP SIDING	JAMES HARDIE	LIGHT MIST
4	COMPOSITE LAP SIDING	JAMES HARDIE	NIGHT GRAY
8	COMPOSITE WINDOWS	ANDERSEN 100	BLACK
9	ALUMINUM STOREFRONT	N/A	BLACK
10	INSUL. METAL DOORS & FRAMES	N/A	TBD
12	RAILINGS & HANDRAILS	N/A	BLACK



2 ELEVATION - WEST COLOR  
 A204 1/8" = 1'-0"

NOT FOR CONSTRUCTION

ISSUED  
 Issued for UDC & Land Use - Jan. 10, 2022  
 Issued for Resubmittal - Feb. 28, 2022  
 Issued for Final UDC Submittal - Nov. 28, 2022

PROJECT TITLE  
**Threshold  
 Development  
 Zion Lutheran  
 Site Development**

2165 Lindin Ave  
 Madison, Wisconsin  
 SHEET TITLE  
**EXTERIOR  
 ELEVATIONS  
 COLOR**

SHEET NUMBER

**A204**

PROJECT NUMBER **2102**



THE ZERO

LOOKING NORTH-WEST





THE  
ZERO

LOOKING NORTH-WEST







RO

LOOKING SOUTH-WEST





LOOKING SOUTH-WEST





LOOKING SOUTH-EAST





LOOKING SOUTH-EAST






LOOKING NORTH-EAST





PEDESTRIAN CORNER



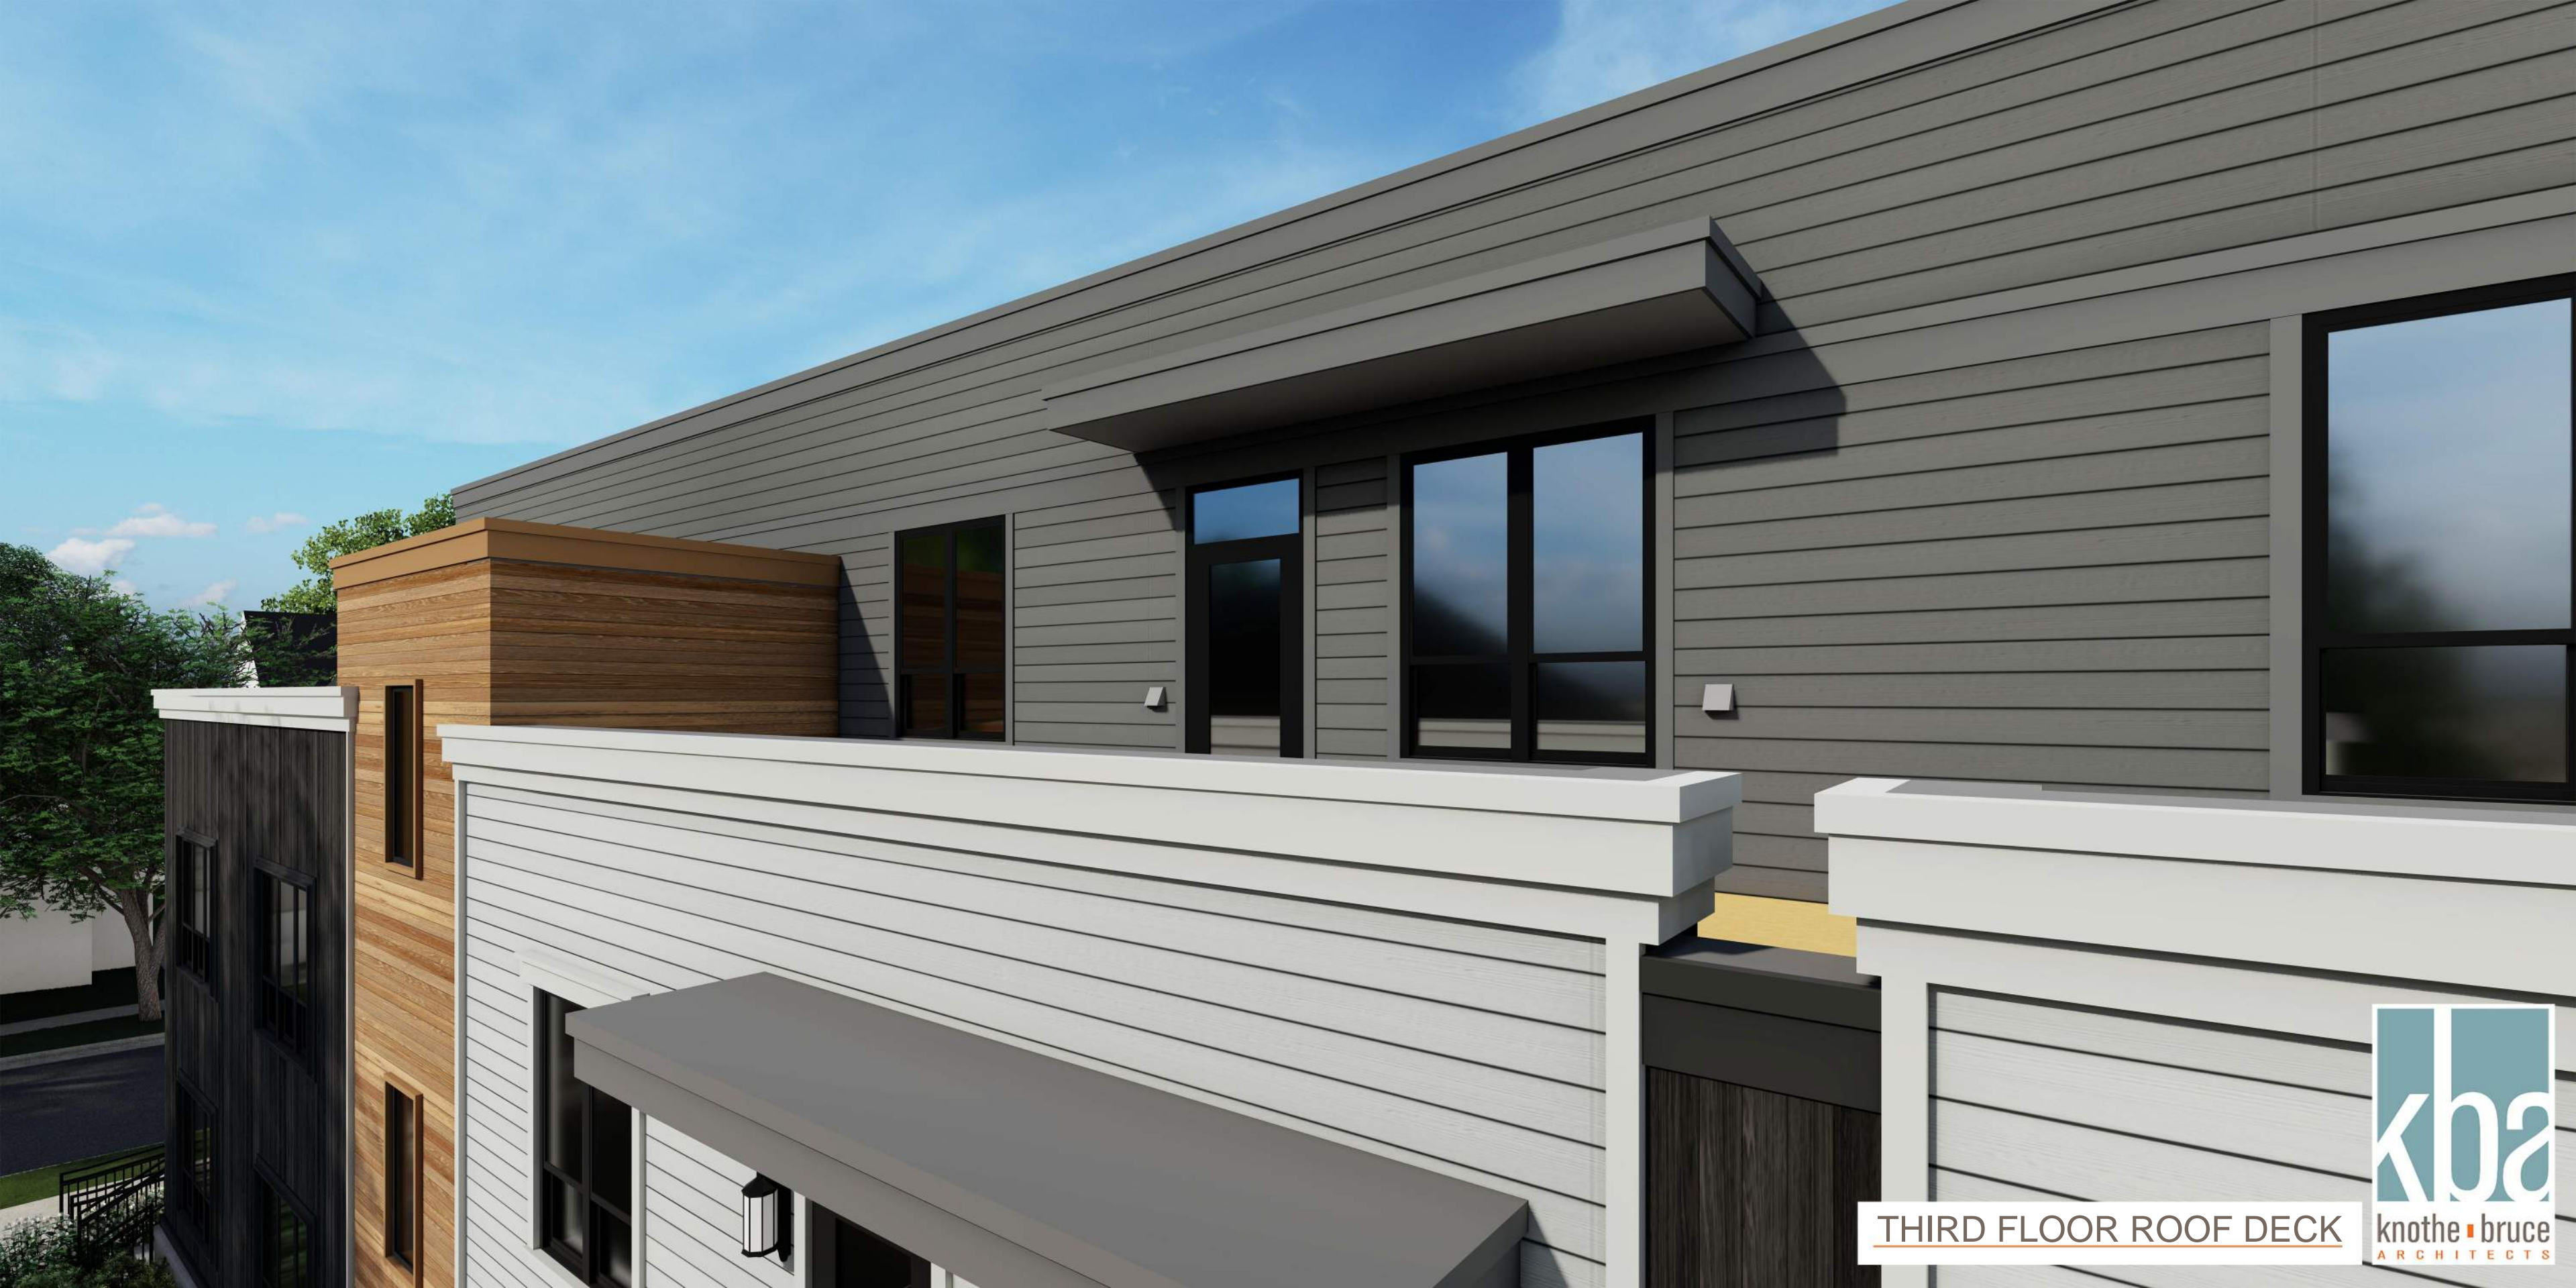

THIRD FLOOR ROOF DECK





SECOND FLOOR PATIO







FIRST FLOOR WALK-UP





LOOKING SOUTH






ACCOYA  
CERRO

**VERTICAL WOOD SIDING & TRIM**




ACCOYA  
RAILAY

**HORIZONTAL WOOD SIDING & TRIM**

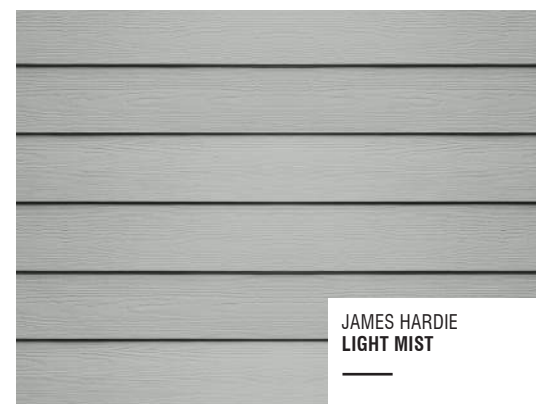

JAMES HARDIE  
LIGHT MIST

**COMPOSITE LAP SIDING & TRIM**

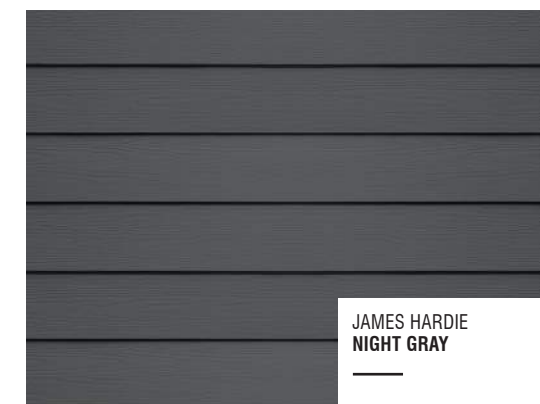

JAMES HARDIE  
NIGHT GRAY



ANDERSEN 100  
BLACK

**RAILINGS & WINDOWS  
ALUM. STOREFRONT**

EXTERIOR MATERIAL SCHEDULE		
BUILDING ELEMENT	MANUFACTURER	COLOR
VERTICAL WOOD SIDING	RESAWN TIMBER ACCOYA	CERRO
HORIZONTAL WOOD SIDING	RESAWN TIMBER ACCOYA	RAILAY
COMPOSITE LAP SIDING	JAMES HARDIE	LIGHT MIST
COMPOSITE LAP SIDING	JAMES HARDIE	NIGHT GRAY
COMPOSITE WINDOWS	ANDERSEN 100	BLACK
ALUMINUM STOREFRONT	N/A	BLACK
INSUL. METAL DOORS & FRAMES	N/A	TBD
RAILINGS & HANDRAILS	N/A	BLACK