

Project		Catalog #		Type	
Prepared by		Notes		Date	



# HALO Commercial

## HC6 | HM6 | 61 | 61PS

6-inch LED downlight and wall wash

### Typical Applications

Office • Healthcare • Hospitality • Institutional • Mixed-Use/Retail

### Interactive Menu

- Order Information [page 2](#)
- Product Specifications [page 4](#)
- Photometric Data [page 5](#)
- Energy & Performance Data [page 8](#)
- Connected Systems [page 10](#)
- Product Warranty

### Top Product Features

- New construction/remodel series; 500 to 6,000 lumens
- Narrow, Medium and Wide distributions; Wall wash with rotatable linear spread lens
- 2700K, 3000K, 3500K, 4000K, 5000K CCT; 80 or 90 CRI
- Universal voltage 120V-277V; Standard 0-10V driver dims to 1%
- Mounting frame converts to remodel that installs from below the ceiling
- Quick Spec emergency backup mounting frames - fast delivery option

### Product Certification





### Product Features



### Control Compatibility



### Dimensional and Mounting Details

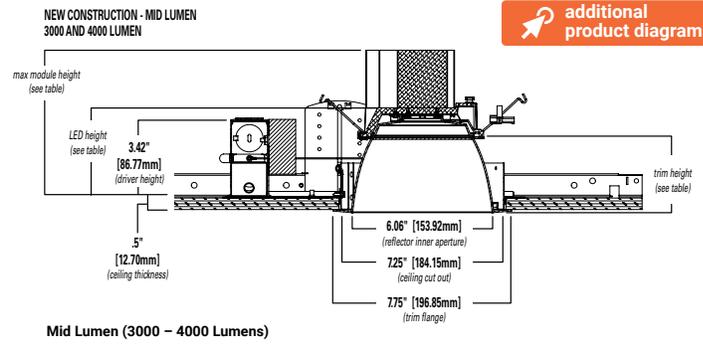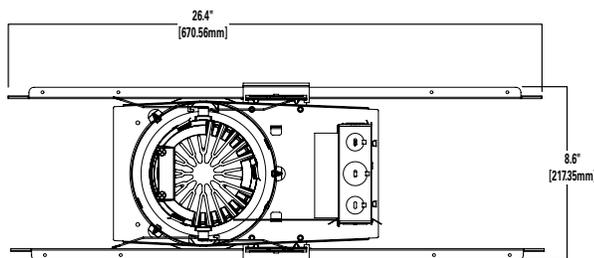

additional product diagrams

Mid Lumen (3000 – 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"

## Mounting Frame Order Information

Sample Number: **HC620D010REM7 – HM60525835 - 61MDC**

A complete luminaire consists of a housing frame, LED module, and reflector (ordered separately)

Mounting Frame	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<p><b>HC6</b> = 6" new construction downlight housing</p> <p><b>HC6CP</b> = 6" new construction housing, Chicago Plenum - CCEA compliant</p>	<p><b>05</b> = 500 lm</p> <p><b>07</b> = 750 lm</p> <p><b>10</b> = 1000 lm</p> <p><b>15</b> = 1500 lm</p> <p><b>20</b> = 2000 lm</p> <p><b>25</b> = 2500 lm</p> <p><b>30</b> = 3000 lm</p> <p><b>35</b> = 3500 lm</p> <p><b>40</b> = 4000 lm</p> <p><b>45</b> = 4500 lm <sup>(7)</sup></p> <p><b>50</b> = 5000 lm <sup>(7)</sup></p> <p><b>55</b> = 5500 lm <sup>(7)</sup></p> <p><b>60</b> = 6000 lm <sup>(7)</sup></p>	<p><b>D010</b>=UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls</p> <p><b>Canada Option 500-5000 lumens:</b>  <b>D010347</b> = 347VAC 50/60Hz 0-10V 1%-100% dimming. For 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000lm models only <sup>(1)</sup></p> <p><b>Canada Option 5500-6000 lumens:</b>  <b>D010X347</b> = step down transformer factory installed (with standard "D010" 120V-277V LED driver). For 5500, 6000lm models only <sup>(1)</sup></p> <p><b>DLV</b> = Distributed Low Voltage dimming driver 1%-100%, 1000-4000 lumens only. For use with DLVP system only, refer to DLVP specifications for details. <sup>(1)</sup></p>	<p><b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (6)</sup></p> <p><b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (6)</sup></p> <p><b>IEM7</b> = 7 watt emergency battery pack with integral test / indicator light, use with D010 only <sup>(1) (2) (6)</sup></p> <p><b>IEM14</b> = 14 watt emergency battery pack with integral test / indicator light, use with D010 only <sup>(1) (2) (6)</sup></p> <p><b>BOD7ST</b> = 7.5 watt Bodine self-test emergency battery pack with remote test / indicator light, use with D010 only <sup>(1) (2) (6)</sup></p> <p><b>WTA</b> = Factory WaveLinX PRO Tilemount Sensor Kit <sup>(4)</sup></p> <p><b>WTK</b> = Factory WaveLinX LITE Tilemount Sensor Kit <sup>(5)</sup></p> <p><b>WPN</b> = WaveLinX PRO Wireless Node without Sensor <sup>(9)</sup></p> <p><b>WLN</b> = WaveLinX LITE Wireless Node without Sensor <sup>(10)</sup></p> <p><b>REM7V</b> = 7 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1) (2) (3) (6)</sup></p> <p><b>REM14V</b> = 14 watt emergency battery pack with remote test / indicator light, use with DLV only <sup>(1) (2) (3) (6)</sup></p> <p><b>IEM7V</b> = 7 watt emergency battery pack with integral test / indicator light, use with DLV only <sup>(1) (2) (3) (6)</sup></p> <p><b>IEM14V</b> = 14 watt emergency battery pack with integral test / indicator light, use with DLV only <sup>(1) (2) (3) (6)</sup></p>	<p><b>HB128APK</b> = L channel hanger bar, 26", pair (replacement)</p> <p><b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long</p> <p><b>HSA6</b> = Slope Adapter for 6" Aperture Housings, Specify Slope (refer to instructions for installing housing and trim)</p> <p><b>H347</b> = 347 to 120V step down transformer, 75VA</p> <p><b>H347200</b> = 347 to 120V step down transformer, 200VA</p> <p><b>WTA</b> = Field WaveLinX PRO Tilemount Sensor Kit <sup>(4)</sup></p> <p><b>WTK</b> = Field WaveLinX LITE Tilemount Sensor Kit <sup>(5)</sup></p>
<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>
	<p>(7) Marked Spacing: Center to Center of Adjacent Luminaires = 36" Center of Luminaire to Building Member = 18" Minimum overhead = 0.5</p>	<p>(1) Not available with CP models</p>	<p>(1) Not available with CP models</p> <p>(2) Not available with D010347 (347V models)</p> <p>(3) ULus for U.S. only</p> <p>(4) WTA = WaveLinX PRO tilemount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only. (Refer to WaveLinX PRO specifications.)</p> <p>(5) WTK = WaveLinX LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only. (Refer to WaveLinX LITE specifications.)</p> <p>(6) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C</p> <p>(9) WPN = WaveLinX PRO wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. Not compatible with 347V or Chicago plenum. (Refer to WaveLinX PRO specifications.)</p> <p>(10) WLN = WaveLinX LITE wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. Not compatible with 347V or Chicago plenum. (Refer to WaveLinX LITE specifications.)</p>	<p>(4) WTA = WaveLinX PRO tilemount sensor kit for daylight dimming, PIR motion sensing, and optional RLTS - Real Time Location Services, use with D010 only. (Refer to WaveLinX PRO specifications.)</p> <p>(5) WTK = WaveLinX LITE tilemount sensor kit for daylight dimming, PIR motion sensing, use with D010 only. (Refer to WaveLinX LITE specifications.)</p>

## Quick Spec Emergency Mounting Frame Order Information

Sample Number :

Quick Spec Emergency Mounting Frame: **RR-HC620D010REM7**

LED module and reflectors are ordered separately.

Order separately: LED Module: HM60525835 | Reflector: 61MDC

Select from the Quick Spec Mounting Frame ordering information to receive the **Fast Delivery** option for the frame.

Quick Spec Code	Mounting Frame	Lumens	Driver Options	Factory Installed Emergency & Connected Lighting Options	Accessories (Order & Install Separately)
<p><b>RR</b> = East Region</p> <p><b>BRR</b> = West Region</p>	<p><b>HC6</b> = 6" new construction downlight housing</p>	<p><b>10</b> = 1000 lm</p> <p><b>15</b> = 1500 lm</p> <p><b>20</b> = 2000 lm</p> <p><b>30</b> = 3000 lm</p> <p><b>40</b> = 4000 lm</p>	<p><b>D010</b>=UNV 120-277V, 50/60Hz, 0-10V 1%-100% dimming at 120-277V on 0-10V controls</p>	<p><b>REM7</b> = 7 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(2) (6)</sup></p> <p><b>REM14</b> = 14 watt emergency battery pack with remote test / indicator light, use with D010 only <sup>(2) (6)</sup></p> <p><b>IEM7</b> = 7 watt emergency battery pack with integral test / indicator light, use with D010 only <sup>(2) (6)</sup></p> <p><b>IEM14</b> = 14 watt emergency battery pack with integral test / indicator light, use with D010 only <sup>(2) (6)</sup></p>	<p><b>HB128APK</b> = L channel hanger bar, 26", pair (replacement)</p> <p><b>RMB22</b> = Adjustable wood joist mounting bars, pair, extend to 22" long</p>
<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>
				<p>(2) Not available with D010347 (347V models)</p> <p>(6) Emergency battery backup options are Non-IC only, and rated for a minimum starting temperature of 0°C</p>	

## LED Module Order Information

LED Module	Lumens	CRI/CCT	
<b>HM6</b> = 6" LED Modules For use with HC6 - HC6CP New Construction housings only	<b>0525</b> = 500 - 2500 lumen <b>3040</b> = 3000-4000 lumen <b>4560</b> = 4500-6000 lumen	<b>827</b> = 80CRI, 2700K <b>830</b> = 80CRI, 3000K <b>835</b> = 80CRI, 3500K <b>840</b> = 80CRI, 4000K <b>850</b> = 80CRI, 5000K	<b>927</b> = 90CRI, 2700K <b>930</b> = 90CRI, 3000K <b>935</b> = 90CRI, 3500K <b>940</b> = 90CRI, 4000K <b>950</b> = 90CRI, 5000K
<b>Notes</b>	<b>Notes</b>	<b>Notes</b>	

## Trim Order Information

Reflector	Distribution <sup>(8)</sup>	Finish	Flange	Accessories
<b>61</b> = 6" conical reflector	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC <b>RWW</b> = rotatable wall wash with linear spread lens	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>61RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 61RWW* only.
<b>Notes</b>	<b>Notes</b> <small>(8) Values are nominal, with specular clear reflector, other finishes and field results may vary.</small>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

Baffle	Distribution <sup>(8)</sup>	Finish	Flange	Accessories
<b>61</b> = 6" baffle reflector	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal) <b>RWW</b> = rotatable wall wash with linear spread lens	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option available with BB	<b>61RWWPK</b> = Replacement part kit - wall wash lens insert - for use with 61RWW* only.
<b>Notes</b>	<b>Notes</b> <small>(8) Values are nominal, with specular clear reflector, other finishes and field results may vary.</small>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

Reflector	Distribution <sup>(8)</sup>	Finish	Flange
<b>61PS</b> = 6" non-conductive polymer 'dead front' conical reflector <sup>(9)</sup>	<b>MD</b> = medium 60° beam angle 1.10 SC (nominal)	<b>W</b> = White	<b>Blank</b> = White flange standard with W reflector
<b>Notes</b> <small>(9) 61PS is 1000-2000 lumens Non-IC rated. 500 &amp; 750 lumens IC rated. 61PS is not for use over 2000lm in Non-IC or over 750lm in IC.</small>	<b>Notes</b> <small>(8) Values are nominal, with specular clear reflector, other finishes and field results may vary.</small>	<b>Notes</b>	<b>Notes</b>

IEM Reflector	Distribution <sup>(8)</sup>	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM reflector for integral emergency only	<b>ND</b> = narrow 55° beam angle 0.97 SC <b>MD</b> = medium 60° beam angle 1.10 SC <b>WD</b> = wide 65° beam angle 1.28 SC	<b>C</b> = Specular clear <b>H</b> = Semi-specular clear <b>W</b> = White	<b>Blank</b> = Polished flange standard with C & H reflectors <b>Blank</b> = White flange standard with W reflector <b>WF</b> = White flange option available with C & H reflectors	<b>IEM</b> = Reflector for use with integral emergency housings only. Provides access hole for integral emergency test switch.
<b>Notes</b>	<b>Notes</b> <small>(8) Values are nominal, with specular clear reflector, other finishes and field results may vary.</small>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

IEM Baffle	Distribution <sup>(8)</sup>	Finish	Flange	Integral Emergency
<b>61</b> = 6" IEM baffle reflector for integral emergency only	<b>WD</b> = wide 65° beam angle 1.28 SC (nominal)	<b>BB</b> = Black baffle <b>WB</b> = White baffle	<b>Blank</b> = White flange standard with BB, & WB <b>BF</b> = Black flange option with BB	<b>IEM</b> = Reflector for use with integral emergency housings only. Provides access hole for integral emergency test switch.
<b>Notes</b>	<b>Notes</b> <small>(8) Values are nominal, with specular clear reflector, other finishes and field results may vary.</small>	<b>Notes</b>	<b>Notes</b>	<b>Notes</b>

## Product Specifications

### Housing Frame

- Boat shaped galvanized steel plaster frame with adjustable plaster lip
- Accommodates 1/2" to 1-1/2" thick ceilings
- Installs in new construction or from below the finished ceiling (non-accessible) for remodeling (with mounting bars removed)
- Provided with two remodel clips to secure the frame to the ceiling

### Universal Mounting Bracket

- Adjusts 2" vertically from above and below the ceiling
- Use with the included mounting bars or with 1/2" Electric Metallic Tube (EMT)
- Removable to facilitate remodeling installation from below the finished ceiling

### Mounting Bars

- Captive pre-installed No Fuss™ mounting bars lock to T-grid with screwdriver or pliers
- Centering detents allow for consistent positioning of fixtures

### LED Module

- Proximity phosphors over chip on board LEDs provide a uniform source with high efficiency and no pixilation
- Available in 80 or 90 color rendering index (CRI)
- Color accuracy within 3 SDCM provides color consistency and uniformity
- 90 CRI option: R9>50 (refer to chromaticity information for details)
- Available in 2700K, 3000K, 3500K, 4000K and 5000K correlated color temperature (CCT)
- Lumen options include 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000, 5500, 6000 lumens (nominal)
- Passive thermal management achieves 60,000 hours at 70% lumen maintenance (L70) in insulated ceilings (IC) and non-IC applications
- Integral diffuse lens provides visual shielding
- Integral connector allows quick connection to housing flex

### Reflector

- Self-flanged aluminum reflectors available in narrow, medium or wide distribution patterns
- Medium distribution polymer non-conductive matte white reflector may be used to meet local codes for 'dead front' applications (500 & 750 lumen max. in IC and 2000 lumen max. in Non-IC)
- Wall wash reflector features a rotatable linear spread lens for alignment of vertical illumination
- Reflectors attach to LED module with three speed clamps
- Available in multiple painted or plated finishes

### Reflector/Module Retention

- Reflector/module assembly is securely retained in the housing with two torsion springs

### Driver

- Field-replaceable constant current driver provides low noise operation
- Universal 120-277VAC 50/60Hz input standard
- Continuous, 1% to 100% dimming with 0-10V analog control
- Optional low-voltage DC driver for use with Distributed Low Voltage Power (DLVP) system
- Distributed Low Voltage Power (DLVP) system combines power, lighting and controls with ease of installation (refer to DLVP Design Guide at [www.cooperlighting.com](http://www.cooperlighting.com) for details)

### Canada Options

- 347VAC 50/60Hz; 1% dimming on 0-10V analog control, for 500, 750, 1000, 1500, 2000, 2500, 3000, 3500, 4000, 4500, 5000 lumen models only
- 347V step down transformer factory installed with the standard "D010" 120V-277V, LED driver on 5500, 6000 lumen models only

### Emergency Option

- Provides 90 minutes of standby lighting, meeting most life safety codes for egress lighting
- Available with integral or remote charge indicator and test switch
- Available Self-Test (self-diagnostic) with remote charge indicator and test switch
- Quick Spec emergency ordering option for quick-turn projects

### Connected Lighting System

Two WaveLinx connected solutions to choose from. Refer to WaveLinx system specifications and application guides for details.

#### WaveLinx PRO Tilemount Sensor Kit

- WaveLinx PRO WTA tilemount sensor kit offers daylight dimming, PIR motion sensing, scene and zone configuration, automatic commissioning; and optional RLTS - Real Time Location Services available.

#### WaveLinx PRO Wireless Node

- WaveLinx PRO WPN wireless node provides luminaire-level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

#### WaveLinx LITE Tilemount Sensor Kit

- WaveLinx LITE WTK tilemount sensor kit offers daylight dimming and PIR motion sensing, scene and grouping configuration.

#### WaveLinx LITE Wireless Node

- WaveLinx LITE WLN wireless node provides luminaire level control with scene and zone configuration without an integrated sensor; Connects wirelessly with daylight dimming sensor and PIR motion sensor if desired. Use with 0-10V driver only. **Note:** Not compatible with 347V or Chicago plenum.

#### WaveLinx Tilemount Sensor Kits Application

- The WTA and WTK tilemount sensor kits include a control module mounted on the luminaire junction box via 1/2" knock-out, and a tilemount sensor on 54-inch whip; for ceiling installation by direct-mount spring clips or via mounting bracket in octagon ceiling boxes.
- The WTA and WTK tilemount sensor kits may be ordered as factory installed on the luminaire, or ordered separately as a field installed accessory kit.
- **Note: WaveLinx PRO devices are only compatible with the WaveLinx PRO system.**
- **Note: WaveLinx LITE devices are only compatible with the WaveLinx LITE system.**

### Junction Box

- Galvanized steel junction box
- 20 in<sup>3</sup> internal volume excluding voltage barrier
- 25 in<sup>3</sup> internal total volume
- Voltage barrier for 0-10V dimming wires (occupies one 1/2" pry-out space)
- Listed for eight #12 AWG (four in, four out) 90°C conductors and feed-thru branch wiring
- Three 1/2" and two 3/4" trade size pry-outs available
- Three 4-port push wire nuts for mains voltage with 1-port for fixture connection

### Compliance

- cULus Certified to UL 1598 / C22.2 No. 250.0, suitable for damp locations and wet locations in covered ceilings only
- Emergency options provided with UL Listed emergency drivers to UL 924 / C22.2 No. 141, suitable for indoor/damp locations
- IP20 - Above finished ceiling; IP65 - Below finished ceiling
- Non-Insulated ceiling (Non-IC) rated for 2500, 3000, 3500, 4000, 4500, 5000, 5500, 6000 lumen models (insulation must be kept 3" from top and sides)
- Insulated ceiling (IC) rated for 500, 750, 1000, 1500, 2000 lumen models and suitable for direct contact with air permeable insulation\* (IC models are also suitable for Non-IC installations)
- Non-IC marked spacing required for 4500, 5000, 5500, 6000 lumen models
  - Marked Spacing Center to Center of Adjacent Luminaires = 36"
  - Center of Luminaire to Building Member = 18"
  - Minimum overhead = 0.5"
- Airtight per ASTM-E283-04
- Suitable for use in clothes closets when installed in accordance with the NEC 410.16 spacing requirements
- EMI/RFI emissions FCC CFR Title 47 Part 15 Class A at 120/277V
- Contains no mercury or lead and RoHS compliant
- Photometric testing completed in accordance of IES LM-79-08
- Lumen maintenance projection in accordance of IES LM-80-08 and TM-21-11
- 500, 750, 1,000, 1,500 and 2,000 lumen, 90 CRI, ICAT models may be used to comply with State of California Title 24 residential code, per JA8 certification standards
- May be used to comply with State of California Title 24 non-residential code as a dimmable LED luminaire
- ENERGY STAR® certified, reference certified light fixtures database
- \*Not for use in direct contact with spray foam insulation, consult NEMA LSD57-2013

### Warranty



- Five year limited warranty, consult website for details. [www.cooperlighting.com/legal](http://www.cooperlighting.com/legal)


## Photometric Data

 View IES files

### NARROW DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

NARROW (55° BEAM*)	
Test Number	P581878
Housing	HC620D010
Module	HM60525835
Reflector	61NDC
Lumens	2228 Lm
Efficacy	111.4 Lm/W
SC	0.93
UGR	11.7

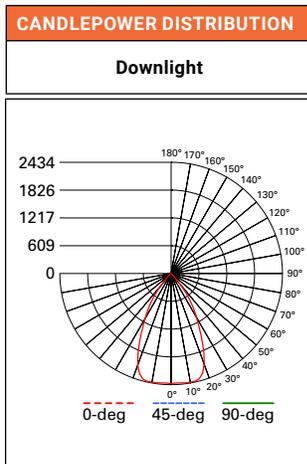CONE OF LIGHT				
				
MH	FC	L	W	
5.5'	80.2	5	5	
7'	49.5	6.4	6.4	
8'	37.9	7.4	7.4	
9'	30	8.2	8.2	
10'	24.3	9.2	9.2	
12'	16.9	11	11	



CANDELA TABLE	
Degrees Vertical	Candela
0	2427
5	2422
15	2405
25	1621
35	761
45	118
55	12
65	3
75	2
85	0
90	0


ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1636	73.4
0-40	2098	94.2
0-60	2223	99.8
0-90	2228	100
90-180	0	0
0-180	2228	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	9187
55	1118
65	376
75	318
85	0

### MEDIUM DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

MEDIUM (60° BEAM*)	
Test Number	P581875
Housing	HC620D010
Module	HM60525835
Reflector	61MDC
Lumens	2307 Lm
Efficacy	115.3 Lm/W
SC	1.06
UGR	11.8

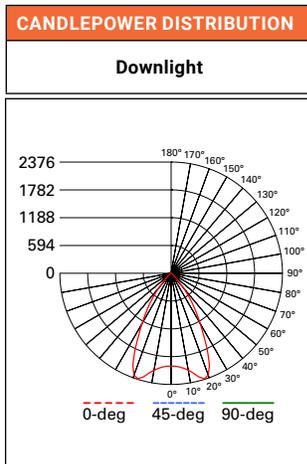CONE OF LIGHT				
				
MH	FC	L	W	
5.5'	68.7	5.6	5.6	
7'	42.4	7.2	7.2	
8'	32.5	8.2	8.2	
9'	25.7	9.4	9.4	
10'	20.8	10.4	10.4	
12'	14.4	12.4	12.4	

CANDELA TABLE	
Degrees Vertical	Candela
0	1998
5	2022
15	2307
25	1842
35	796
45	126
55	15
65	4
75	2
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1671	72.4
0-40	2163	93.8
0-60	2301	99.7
0-90	2307	100
90-180	0	0
0-180	2307	100


LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	9753
55	1395
65	571
75	318
85	0

## Photometric Data

[View IES files](#)

### WIDE DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

WIDE (65° BEAM*)	
Test Number	P581885
Housing	HC620D010
Module	HM60525835
Reflector	61WDC
Lumens	2359 Lm
Efficacy	118 Lm/W
SC	1.28
UGR	11.6

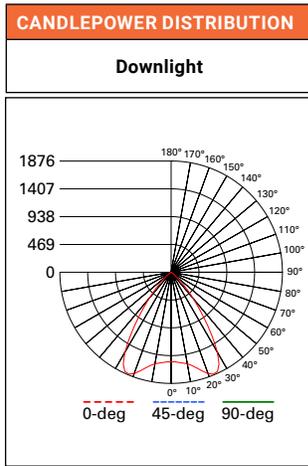

CONE OF LIGHT				
MH	FC	L	W	
5.5'	50.5	7	7	
7'	31.2	8.8	8.8	
8'	23.9	10.2	10.2	
9'	18.8	11.4	11.4	
10'	15.3	12.8	12.8	
12'	10.6	15.4	15.4	

CANDELA TABLE	
Degrees Vertical	Candela
0	1526
5	1540
15	1685
25	1861
35	1027
45	252
55	32
65	6
75	2
85	0
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	1461	61.9
0-40	2105	89.2
0-60	2351	99.6
0-90	2359	100
90-180	0	0
0-180	2359	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	19506
55	3078
65	765
75	318
85	0

\*Value are nominal with specular clear reflectors, other finishes and field results may vary.  
 SC = Spacing Criteria  
 UGR = Unified Glare Rating

#### Photometric Multipliers (Nominal Lumen Values)

500 Lumen	750 Lumen	1000 Lumen	1500 Lumen	2000 Lumen	2500 Lumen	3000 Lumen	3500 Lumen
0.33	0.44	0.54	0.74	1.00	1.12	1.46	1.76

4000 Lumen	4500 Lumen	5000 Lumen	5500 Lumen	6000 Lumen
1.81	2.17	2.28	2.38	2.65

Multipliers for relative lumen values with other series models.

#### Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.92	0.91	0.82

Multipliers for relative lumen values with other color finishes.

#### CCT Multipliers – 80CRI

2700K	3000K	3500K	4000K	5000K
0.92	0.98	1.00	1.03	1.03

Multipliers for relative lumen values with other series color temperatures.

#### CCT Multipliers – 90CRI

2700K	3000K	3500K	4000K	5000K
0.77	0.84	0.89	0.90	0.90

Multipliers for relative lumen values with other series color temperatures.



Note: Refer to IES files for more product data.

## Photometric Data

[View IES files](#)

### WALL WASH DISTRIBUTION - SPECULAR CLEAR FINISH, 2000 LUMEN MODEL, 80 CRI, 3500K

WALL WASH	
Test Number	P581882
Housing	HC620D010
Module	HM60525835
Reflector	61RWWC
Lumens	2179 Lm
Efficacy	109 Lm/W
SC	1.15

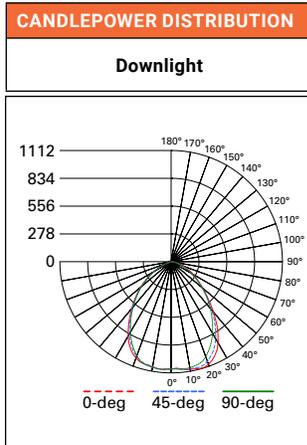

CANDELA TABLE	
Degrees Vertical	Candela
0	1080
5	1081
15	1112
25	1034
35	800
45	514
55	319
65	184
75	85
85	12
90	0

ZONAL LUMEN SUMMARY		
Zone	Lumens	% Fixture
0-30	849	39
0-40	1313	60.2
0-60	1978	90.8
0-90	2179	100
90-180	0	0
0-180	2179	100

LUMINANCE	
Average Candela Degrees	Average 0° Luminance
45	39810
55	30479
65	23907
75	17983
85	7359

SC = Spacing Criteria, nominal for specular clear reflector, other finishes and field results may vary.

SINGLE UNIT FOOTCANDLES								
2.5' from wall (distance from fixture along wall)								
1	19.3	13.8	6.1	2.2	0.7	0.3	0.1	
2	29.1	22.6	12.3	5.7	2.5	1.2	0.6	
3	27.6	22.5	13.8	7.3	3.7	1.9	1	
4	21	18.2	12.4	7.4	4.2	2.4	1.4	
5	14.4	13.1	9.9	6.6	4.1	2.5	1.6	
6	9.7	9.1	7.5	5.5	3.7	2.5	1.6	
7	6.7	6.4	5.5	4.3	3.2	2.2	1.5	
8	4.7	4.6	4.1	3.4	2.7	2	1.4	
9	3.4	3.3	3.1	2.7	2.2	1.7	1.3	
10	2.5	2.5	2.4	2.1	1.8	1.4	1.1	

MULTIPLE UNIT FOOTCANDLES								
2.5' from wall (Distance from fixture along 3')						2.5' from wall (Distance from fixture along 4')		
1	21.5	19.1	21.5	20	12.1	20		
2	34.7	34.4	34.7	31.6	24.6	31.6		
3	34.9	36	34.9	31.3	27.6	31.3		
4	28.4	30.7	28.4	25.2	24.8	25.2		
5	21	23.2	21	18.6	19.8	18.6		
6	15.2	16.8	15.2	13.4	15	13.4		
7	11	12	11	9.9	11	9.9		
8	8.1	8.7	8.1	7.4	8.2	7.4		
9	6.1	6.5	6.1	5.6	6.2	5.6		
10	4.6	4.9	4.6	4.3	4.7	4.3		

#### Photometric Multipliers (Nominal Lumen Values)

500 Lumen	750 Lumen	1000 Lumen	1500 Lumen	2000 Lumen	2500 Lumen	3000 Lumen	3500 Lumen
0.33	0.44	0.54	0.74	1.00	1.12	1.46	1.76

4000 Lumen	4500 Lumen	5000 Lumen	5500 Lumen	6000 Lumen
1.81	2.17	2.28	2.38	2.65

Multipliers for relative lumen values with other series models.

#### Color Finish Multipliers

Finish code	C	H	W/WB	BB
Finish	Specular Clear	Semi-Specular	Matte White White Baffle	Black Baffle
Multiplier	1.00	0.92	0.91	0.82

Multipliers for relative lumen values with other color finishes.

#### CCT Multipliers - 80CRI

2700K	3000K	3500K	4000K	5000K
0.92	0.98	1.00	1.03	1.03

Multipliers for relative lumen values with other series color temperatures.

#### CCT Multipliers - 90CRI



2700K	3000K	3500K	4000K	5000K
0.77	0.84	0.89	0.90	0.90

Multipliers for relative lumen values with other series color temperatures.

Note: Refer to IES files for more product data.

## Energy & Performance Data

### COLOR METRICS - TM-30-15 & CRI/CIE (3500K)

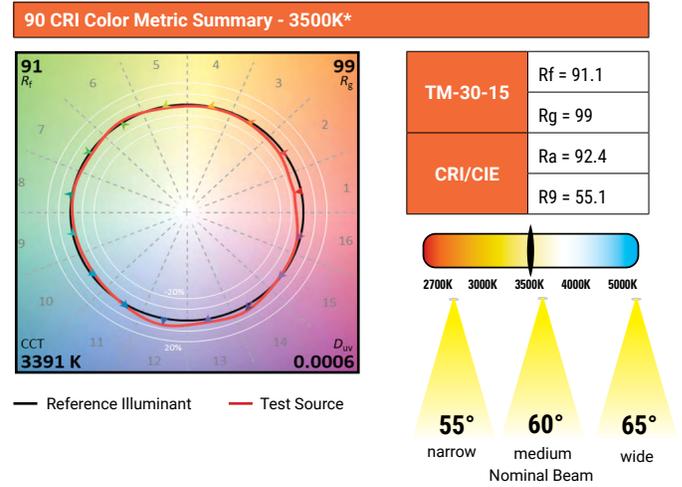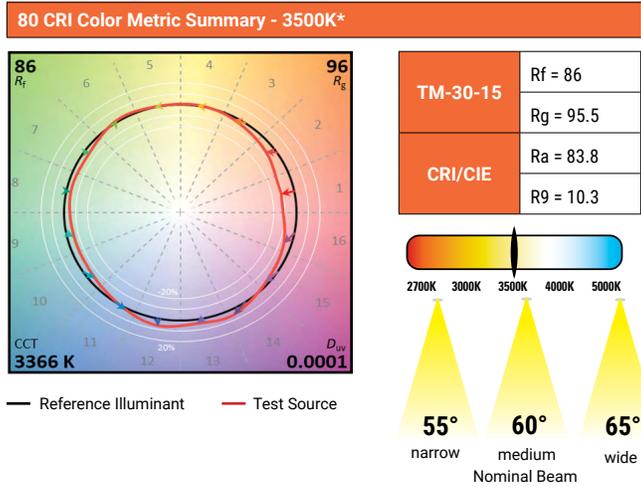

\* Color values are based on 61WDWB reflector, other finishes and field results may vary.

### ENERGY DATA

Series	500 lumen		750 lumen		1000 lumen		1500 lumen		2000 lumen	
	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V	120V	277V	120V	277V
Input Current (A)	0.051	0.026	0.067	0.036	0.083	0.039	0.119	0.053	0.171	0.077
Input Power (W)	6.1	6.5	7.9	8.3	10	10.4	14.5	14.5	20.9	20.6
In-rush (A)	1.9	8.4	2	8.4	2.2	8.5	2.7	8.5	2.1	9.7
Inrush duration (µs)	251	135	237	133	250	134	250	139	245	131
THD (%)	6.2	13.5	7.4	8.8	5.4	10.3	10	6.7	6.5	7.9
PF	≥ 0.99	≥ 0.9	≥ 0.98	≥ 0.92	≥ 0.99	≥ 0.95	≥ 0.99	≥ 0.97	≥ 0.99	≥ 0.96

Series	2500 lumen		3000 lumen		3500 lumen		4000 lumen		4500 lumen	
	120V	277V								
Input Voltage 120-277VAC	120V	277V								
Input Current (A)	0.23	0.103	0.24	0.107	0.292	0.152	0.351	0.159	0.384	0.172
Input Power (W)	27.5	27.5	28.6	28.5	34.6	35.1	42.1	42.1	45.9	45.6
In-rush (A)	2.5	5.6	2.5	11.6	3.4	13.9	3.1	14.7	3.1	14.8
Inrush duration (µs)	232	123	216	111	183	95	200	98	202	100
THD (%)	6.5	8.1	7.8	8.3	5.6	10	4.1	9.5	4.5	8.5
PF	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.93	≥ 0.99	≥ 0.94	≥ 0.99	≥ 0.95

Series	5000 lumen		5500 lumen		6000 lumen	
	120V	277V	120V	277V	120V	277V
Input Voltage 120-277VAC	120V	277V	120V	277V	120V	277V
Input Current (A)	0.419	0.186	0.457	0.201	0.489	0.214
Input Power (W)	50.1	49.5	54.6	53.7	58.4	57.4
In-rush (A)	3.1	15	3.2	14.8	3.4	14.8
Inrush duration (µs)	202	117	196	131	192	121
THD (%)	5.5	7.6	7	7.2	8.1	7.2
PF	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.96	≥ 0.99	≥ 0.97

Minimum starting temperature -30°C (-22°F)\*  
(Nominal input 120-277VAC & 100% of rated output power)


Sound Rating: Class A standards

#### Notes:

\* Emergency Battery packs are rated for a minimum starting temperature of 0°C.

## Dimensional and Mounting Details

### NEW CONSTRUCTIONS - LOW LUMEN 500 – 2500 LUMENS

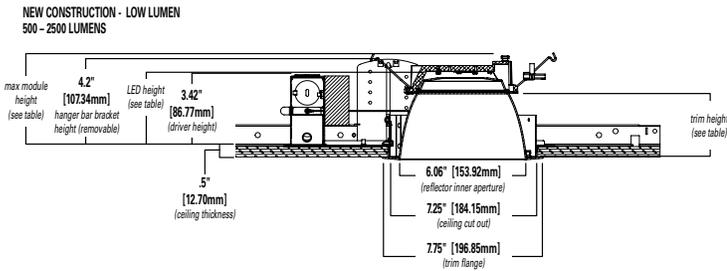

#### Low Lumen (500 – 2500 Lumens)\*


Distribution	Max. Module Height	Trim Height	LED Height
Narrow	4.5"	3.4"	3.8"
Medium	4.6"	3.5"	3.9"
Wide	4.4"	3.3"	3.7"
Baffle	4.4"	3.3"	3.7"



Low Lumen Module

\*Max. height w/removable hanger bar bracket 4.2"

### NEW CONSTRUCTIONS - MID LUMEN 3000 – 4000 LUMENS

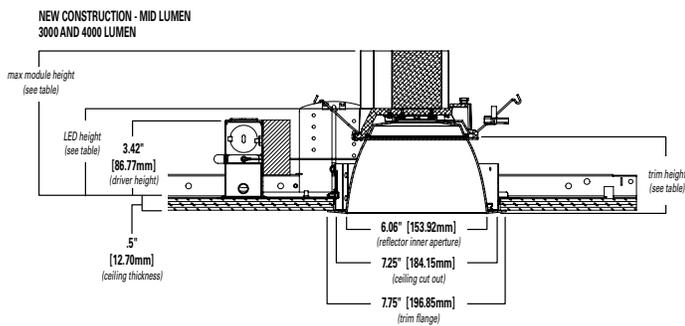


#### Mid Lumen (3000 – 4000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.6"	3.4"	3.8"
Medium	6.7"	3.5"	3.9"
Wide	6.5"	3.3"	3.7"
Baffle	6.5"	3.3"	3.7"



Mid Lumen Module

### NEW CONSTRUCTIONS - HIGH LUMEN 4500 – 6000 LUMENS

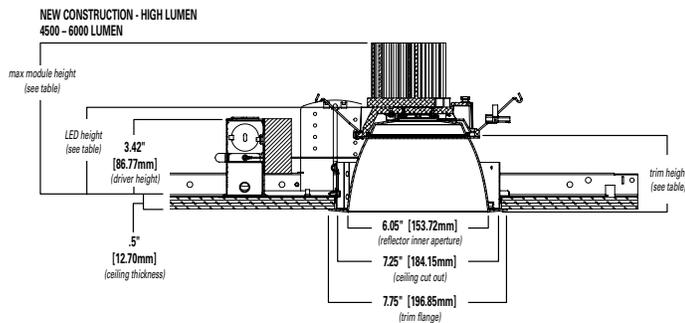

#### High Lumen (4500 – 6000 Lumens)

Distribution	Max. Module Height	Trim Height	LED Height
Narrow	6.9"	3.4"	3.8"
Medium	7.0"	3.5"	3.9"
Wide	6.8"	3.3"	3.7"
Baffle	6.8"	3.3"	3.7"



High Lumen Module

## Connected Solutions

### WaveLinx LITE - WTK Tilemount Sensor


WaveLinx LITE devices only compatible with the WaveLinx LITE system.



- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinx LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Automatic occupancy or vacancy, sensor sensitivity, daylight dimming, etc. configurable through the app
- Refer to the WaveLinx system specifications for details



#### WaveLinx LITE WTK Tilemount Wiring Diagram

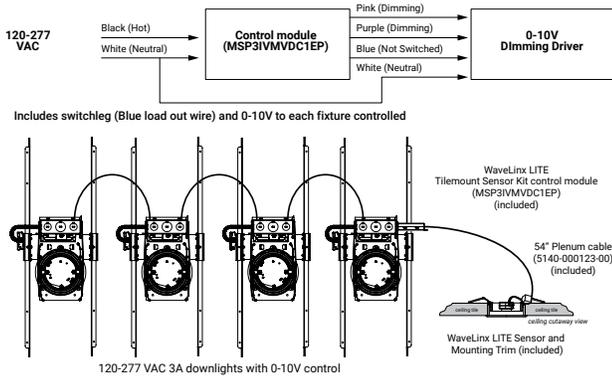

#### WaveLinx LITE Bluetooth Enabled System



### WaveLinx PRO – WTA Tilemount Sensor

WaveLinx PRO devices only compatible with the WaveLinx PRO system.



- WaveLinx PRO tilemount functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with Wireless Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations


**Downlights with tilemount sensor**  
Highly efficient LED fixtures

**WaveLinx Area Controller**  
Provides centralized coordination of multiple area control options


**Wireless Wall Station/Receptacle**  
Provides customized wireless control of each area

**Mobile Applications**  
Provides personalized, local control from a tablet or smartphone


#### WaveLinx mobile app settings

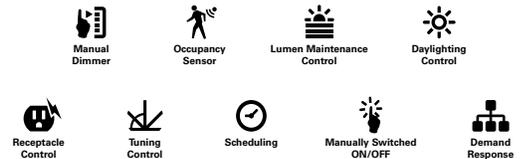

#### WaveLinx WTA Tilemount Wiring Diagram

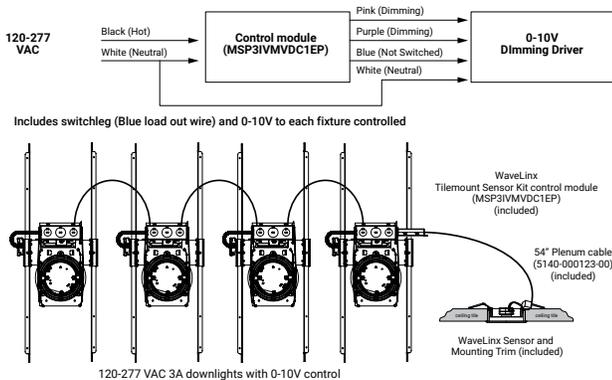

#### WaveLinx CORE Building Management Integration

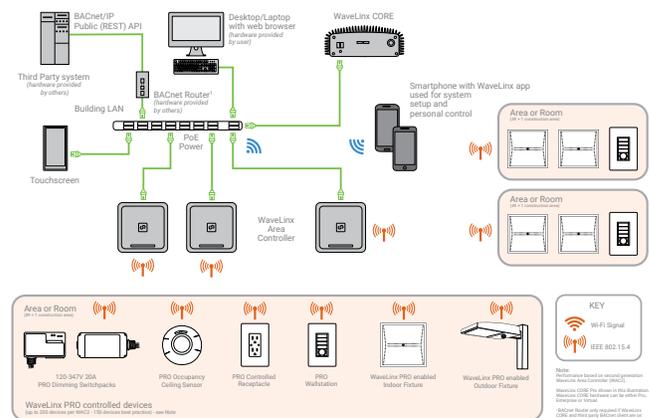

## Connected Solutions



### WaveLinX LITE Wireless Node - WLN


WaveLinX LITE devices only compatible with the WaveLinX LITE system.

- Intuitive Android™ or Apple® iOS® app for basic system code compliant set up and configuration via Bluetooth
- Up to 28 unique areas per project site (WaveLinX LITE Bluetooth network)
- Up to 50 devices for an area, any one of 16 control zones, up to 6 occupancy sets, and custom lighting scenes
- Refer to the WaveLinX system specifications for details

#### WaveLinX mobile app settings



#### WaveLinX LITE Wireless Node (WLN) Wiring Diagram

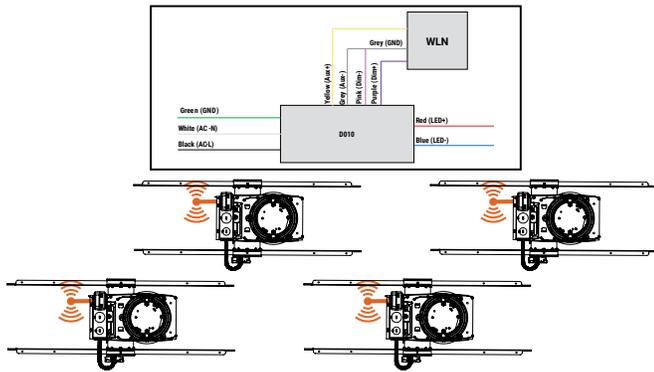

#### WaveLinX LITE Bluetooth Enabled System



### WaveLinX PRO Wireless Node - WPN


WaveLinX PRO devices only compatible with the WaveLinX PRO system.

- WaveLinX Wireless functionality configures zones and customizes settings from one secure mobile app
- Automatic code commissioning that meets the strictest codes
- Fixtures and sensors integrate with WaveLinX Area Controller, Wall Stations, and Control Devices
- Stand-Alone Offices or Entire Building Network Installations


#### WaveLinX mobile app settings



#### WaveLinX PRO Wireless Node (WPN) Wiring Diagram

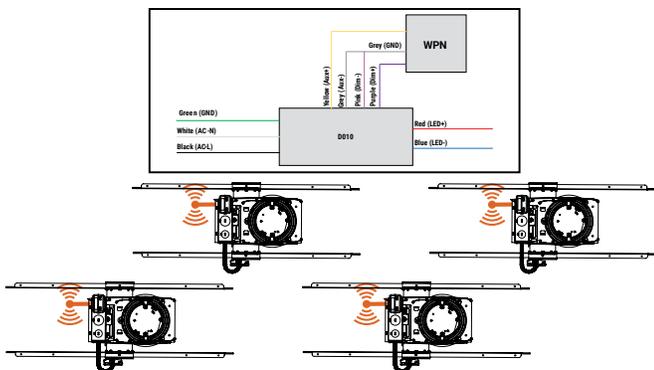

#### WaveLinX CORE Building Management Integration

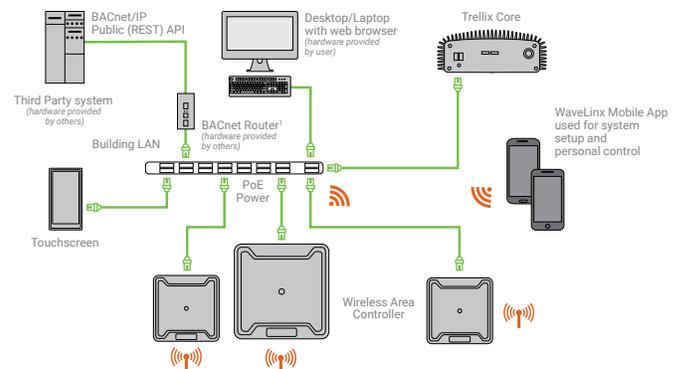



# MERU Series

LED GENERAL & EMERGENCY LIGHTING



PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PRODUCT DESCRIPTION

The MERU Series is an architectural, low-profile outdoor light, offering “normally On” AC and emergency lighting with powerful LED illumination. The housing is fully sealed and gasketed, and has an IP65 rating. Designed for wall mounting with universal K/O pattern in back-plate for easy installation to most standard size junction boxes. Includes a single 1/2” NPT conduit entry in the top, center of the housing. Illumination provided by 8 high power LEDs which achieve 1,800 lumens in AC and 600 lumens in emergency. LED color at 4000K.

## PRODUCT SPECIFICATIONS

### CONSTRUCTION

Die cast aluminum housing with superior heat sink • Scratch resistant Polyester powder coat finish • UV resistant polycarbonate lens • Snap-fit housing and mounting plate are held together by four stainless steel clips • Universal mounting pattern molded into the back plate • 1/2" threaded top access for surface conduit installation • Silicone rubber seal with hollow center, shape adaptive design protects the electrical components • Junction box neoprene seal is attached to the back plate for a weather proof installation • Dark Bronze or White textured finish.

### ELECTRICAL

Dual Voltage 120-277V 60Hz input • Solid state charging and switching • Battery low voltage disconnect • AC power indicator and test switch at the bottom of the unit • Standard with Self Diagnostics to monitor proper operation.

### LAMPS

Supplied with eight (8) LG SMD 4000K LED'S • L70 > 72,000hours • 17 Watts total (32 Watts with IH option) • 1800 Lumens in AC mode, 600 Lumens in Emergency mode • Full cut-off optics for Dark Sky compliance

### BATTERY

Maintenance-free, long-life rechargeable NiCad battery will operate fixture for a minimum of 90 minutes in the event of a power outage • 24 hour recharge after 90 minute discharge.

### CODE COMPLIANCE

UL924 • Listed for wet location applications (0°C-50°C) • Optional "IH" cold weather package for (-40°C-50°C) • IP65 Rated • NFPA 101 Life Safety Code compliant • NFPA 70 • NEC and OSHA compliant • DLC Listed • RoHS Compliant

### WARRANTY

5-year warranty. Product specifications subject to change without notice.


## INSTALLATION

### MOUNTING

Suitable for indoor or outdoor wall mounting on junction box, or with surface conduit using the supplied 1/2" threaded top access • Mounting plate has molded universal mounting pattern for simple mounting over junction box.

## ORDERING INFORMATION

model	operation mode	housing color	options
MERU-LED	ACEM = General & Emergency Lighting AC = General Lighting	DB = Dark Bronze WH = White BK = Black NK = Nickel	Self-Diagnostics & Photocell (Included Standard) IH = Internal Heater
Ordering Example: MERU-ACEM-DB			

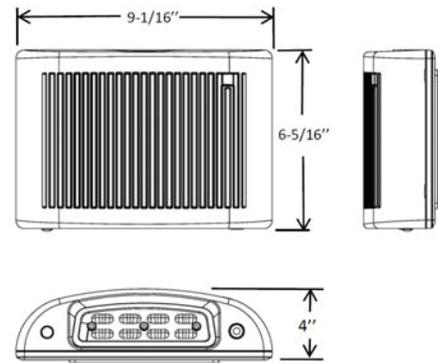

### ACEM Model (NiCad Battery Backup)

**Integral photocell:** Unit operates as a dusk to dawn luminaire and in the event of a power failure as an emergency light.

**Remote Switched:** The integral photocell can be defeated to allow remote switching for normal operation. In the event of a power failure unit operates as an emergency light.

### BUG Rating: B1-U1-G0





# MERU Series


LED GENERAL & EMERGENCY LIGHTING




PROJECT: \_\_\_\_\_  
 FIXTURE TYPE: \_\_\_\_\_  
 LOCATION: \_\_\_\_\_  
 CONTACT/PHONE: \_\_\_\_\_

## PHOTOMETRICS

### 3ft Path Spacing

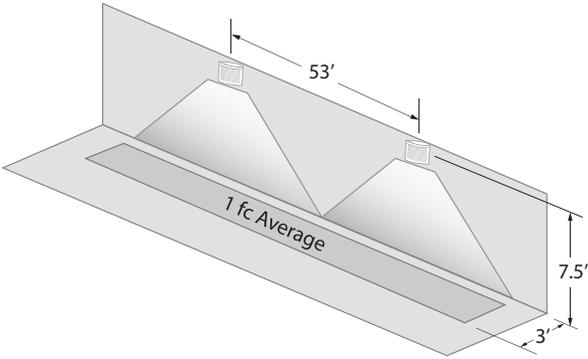

### 6ft Path Spacing

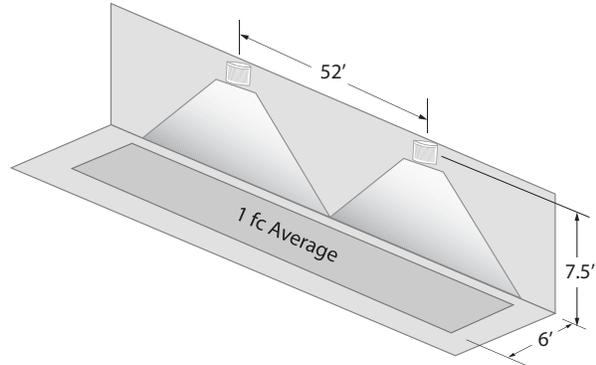

## SELF DIAGNOSTICS

### Included Self Diagnostic

<b>Diagnostic Indicator / Test Switch</b>	<span style="color: green;">●</span> Ready	<b>Manual Testing</b> Press button once - 1 minute test Press button twice - 5 minute test Press button 3 times - 30 minute test Press button 4 times - 90 minute test
	<span style="color: green;">●</span> In Test	
	<span style="color: red;">●</span> Battery Circuit Fault	
	<span style="color: red;">●</span> Battery Capacity Failure	
	<span style="color: red;">●</span> Charger Failure	
	<span style="color: red;">●</span> Transformer Fault	
<span style="color: red;">●</span> Lamp Failure		

*Full self-test, self-diagnostic system is standard in every unit, performs a monthly, test as well as continuously monitoring all functions to ensure reliability, a manual test may be initiated at any time*





LOCATION		DATE
PREPARED BY		QUANTITY
COMMENTS		FIXTURE TYPE
CATALOG NUMBER		

## Rhea LED Outdoor Sconce REAW Series

### Features

This outdoor LED light is ideal for security and general lighting.  
Vertical or horizontal mounting. Fixture mounts to standard junction box (not included).



### Emergency Back-Up (Optional '-BB')

- 90 minute run-time
- 9.6VDC LiFePO4 battery
- 8 watts

### Construction

Durable metal construction with powder coat finish. Standard mounting holes and hardware are included. Power supply connections must be made inside a junction box (not included).

### Finish

Black finish.

### Diffuser

White acrylic diffusers.

### Electrical

Input 120-277 VAC 60 HZ.  
0-10V dimming (120-277V), TRIAC (120V).  
Minimum starting temp -4° F / -20°C

### Lamping

Fixture includes a LED modules capable of producing:  
20W = 900 delivered lumens  
25W = 1200 delivered lumens  
30W = 1500 delivered lumens  
40W = 2000 delivered lumens  
Adjustable Choice 2700K, 3000K, 3500K, 4000K, 5000K (CCT).  
Rated for 50,000 Hrs., 90 CRI.

### Certification

All fixtures are cETLus listed for wet locations.  
Title 24/JA8 Compliant



### Warranty

Limited warranty: This fixture is free from defects in materials and workmanship for a period of 5 years from date of purchase.

**Specifications and dimensions  
subject to change without notice.**


### Ordering Information:

Black	LED	Delivered Lumens	Adjustable CCT	H	W	D
REAW0518LAJUBNDK	20W	900	2700K/3000K/3500K/4000K/5000K	18"	5"	2-1/8"
REAW0518LAJUBNDK-BB	20W	900	2700K/3000K/3500K/4000K/5000K	18"	5"	2-1/8"
REAW0524LAJUBNDK	25W	1200	2700K/3000K/3500K/4000K/5000K	24"	5"	2-1/8"
REAW0524LAJUBNDK-BB	25W	1200	2700K/3000K/3500K/4000K/5000K	24"	5"	2-1/8"
REAW0536LAJUBNDK	30W	1500	2700K/3000K/3500K/4000K/5000K	36"	5"	2-1/8"
REAW0536LAJUBNDK-BB	30W	1500	2700K/3000K/3500K/4000K/5000K	36"	5"	2-1/8"
REAW0548LAJUBNDK	40W	2000	2700K/3000K/3500K/4000K/5000K	48"	5"	2-1/8"
REAW0548LAJUBNDK-BB	40W	2000	2700K/3000K/3500K/4000K/5000K	48"	5"	2-1/8"

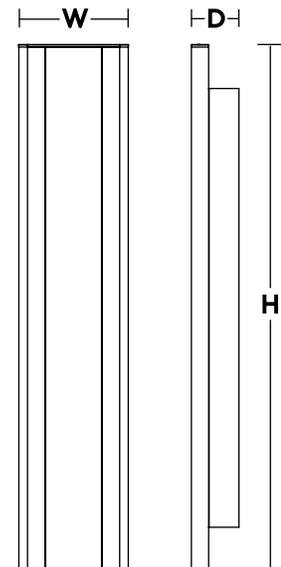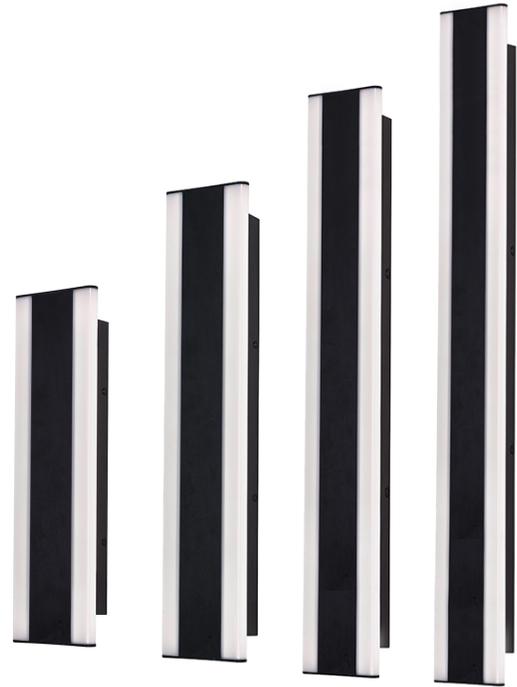

# STP204 LED

## Recessed Wall Luminaires

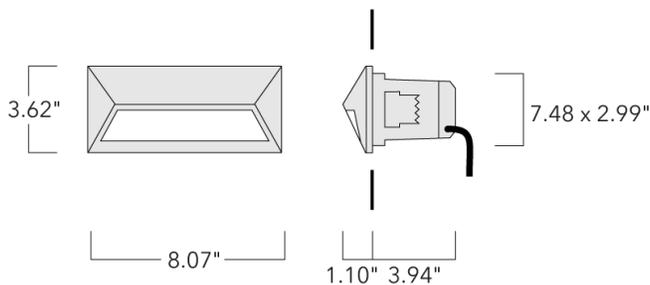

### Description

Low glare steplight.

ADA (American Disabilities Act) Compliant.

IP55. Class I. IK10. Marine-grade, die-cast aluminum alloy. 5CE superior corrosion protection including PCS hardware. Silicone CCG® Controlled Compression Gasket. Polycarbonate main lens. Two cable entries. Integral driver. Factory-installed LED circuit board. 0-10V Dimming standard.

A pre-installation blockout is available and recommended for mounting in concrete walls; to be ordered separately.

Specify product with 7 Digit product code - Finish Color. Accessories, such as mounting, optical, and electrical, must be specified separately.

Example: XXX-XXXX-9004 (Black)  
+ XXX-XXXX (Accessory 1)

### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/12/2024

# STP204 LED

## Recessed Wall Luminaires

### Specifications

#### Material description

---

Body	Luminaire body and lens frame constructed in die cast aluminum.
Lens	Prismatic polycarbonate lens.
Colors	 RAL9004 Black  RAL9007 Grey Metallic  RAL9016 White  RAL8019 Dark Bronze
Gasket	Silicone rubber gasket
Fasteners	PCS polymer coated stainless steel
Ingress protection	IP55
Impact resistance	IK10
Corrosion resistance	5CE

---

#### Electrical description

---

Power supply	Integral [ECG] electronic driver 120V-277V. 0-10V dimmable, to be specified with order.
Driver / Ballast	Integral EC electronic converter

---

#### Additional information

---

Listings	ETL listed. Suitable for wet locations.
----------	---

---

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/12/2024

# STP204 LED

## Recessed Wall Luminaires



### Options

#### Light distribution



asymmetric, forward-throw [A60]

#### Color temperature



3000 K



4000 K



2700 K

#### Nominal Watt

7 W

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030  
customersupport.usa@we-ef.com - <https://we-ef.com/us>


Subject to technical changes and errors. - Generated on 07/12/2024

# STP204 LED

## Recessed Wall Luminaires



### Configurations

Light distribution	Part ID	Light source	Rated lumens	Rated input power	CRI	Weight (lb)
asymmetric, forward-throw [A60] 	133-0338	LED-4/4W / 350 mA - 3000 K	141	5.5 W	80	2.00
	133-0339	LED-4/4W / 350 mA - 4000 K	154.6	5.5 W	80	2.00
	133-0455	LED-4/4W / 350 mA - 2700 K	131.9	5.5 W	80	2.00

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/12/2024


# STP204 LED

## Recessed Wall Luminaires

### Mounting Accessories

#### Installation blackout

Description	Part ID	A	B	C1	C
Installation blackout BST20-I	133-0075	8.74"	4.29"	4.13"	105

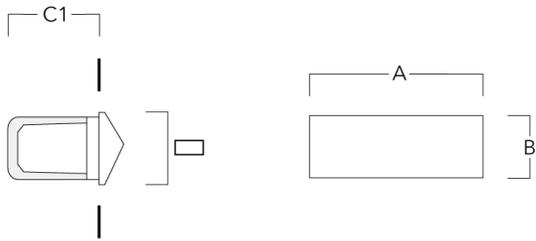

#### WE-EF LIGHTING USA, LLC

410-D Keystone Drive, 15086 Warrendale, PA 15086 - Phone: +1 724 742 0030

customersupport.usa@we-ef.com - <https://we-ef.com/us>

Subject to technical changes and errors. - Generated on 07/12/2024

**STP204 LED**  
**Recessed Wall Luminaires**

**WE-EF LIGHTING USA, LLC**

410-D Keystone Drive, 15086 Warrendale, PA 15086  
Phone: +1 724 742 0030

customersupport.usa@we-ef.com  
<https://we-ef.com/us>

Subject to technical changes and errors.  
Generated on 07/12/2024



# T652LEDB

LED FULL CUT-OFF WALL PACK

## JOB INFORMATION

Type: \_\_\_\_\_  
 Catalog No: \_\_\_\_\_  
 Project Name: \_\_\_\_\_  
 Comments: \_\_\_\_\_  
 Prepared by: \_\_\_\_\_

## FEATURES

### USE OF PRODUCT

The intended use of this product is for any outdoor commercial or industrial building accent, pedestrian walkways, public access areas, or recreation areas.

### HOUSING

Rugged die cast aluminum housing with hinged frame. 1/2" Coin plugs with O-rings for conduit & photocell.

### FINISH

Matt-finished, architectural bronze powdercoat over a precise chromate conversion coating. Available in standard dark polyester bronze or consult factory for made to order architectural finishes.

### OPTICS

Tempered UV coated flat lens provide outstanding performance, uniformity, and glare control.

### LED

LED engine available in 3000K, 4000K, 5000K. Color temperature may be modified in field or preset by factory. LED Mounted to aluminum heat sink for maximum life output and thermal management.

### DRIVER

Durable and long lasting LED driver operates at 120-277V and boasts a 90% power factor at 50 to 60 Hz with 0-10V Dimming Constant Current. Fixture available in two packages. LS1 (1300, 2600, 3900, 5200lm) & LS3 (3900, 7800, 11700, 15600lm). Watts may be modified in field or preset by factory available upon request -30°C Min Temp. 45°C Max Temp.

### MOUNTING

Cast-in template for mounting directly over a 4" recessed outlet box or 1/2" surface conduit.

### LISTINGS/COMPLIANCE

- DLC.
- UL - Listed for wet location.
- Dark Sky Compliant
- CEC compliant emergency driver.

## PERFORMANCE DATA

Wattage	Delivered Lumens	Voltage	CRI
10W	1300lm	120-277V	70
20W	2600lm	120-277V	70
30W	3900lm	120-277V	70
40W	5200lm	120-277V	70

130 lm per watt

Wattage	Delivered Lumens	Voltage	CRI
30W	3900lm	120-277V	70
60W	7800lm	120-277V	70
90W	11700lm	120-277V	70
120W	15600lm	120-277V	70

130 lm per watt



## ORDERING INFO


SERIES	WATT/LUMENS	VOLTAGE	COLOR TEMPERATURE	OPTICS	FINISH	OPTIONS
T652LEDB	<b>WS1</b> - Wattage Selectable (10W, 20W, 30W, 40W) 10W - Lumens set at 10W 20W - Lumens set at 20W 30W - Lumens set at 30W 40W - Lumens set at 40W	UNV - 120V-277V	<b>CTS</b> - Color Temperature Selectable (3000K, 4000K, 5000K) 30K - Color Temp. set at 3000K 40K - Color Temp. set at 4000K 50K - Color Temp. set at 5000K	<b>T2</b> - Type 2 <b>T3<sup>1</sup></b> - Type 3 <b>T4</b> - Type 4	<b>BZ</b> - Bronze <b>MTO</b> - Made to order <b>MGTO</b> - Marine grade made to order	<b>PC</b> - Photocell 120-277V <b>EM</b> - Emergency battery <b>MW</b> - Microwave Motion sensor <b>MSR</b> - Standard PIR remote motion sensor <b>MFR</b> - FSP311 PIR remote motion sensor <b>SP10</b> - Surge protector
	<b>WS2</b> - Wattage Selectable (30W, 60W, 90W, 120W) 30W - Lumens set at 30W 60W - Lumens set at 60W 90W - Lumens set at 90W 120W Lumens set at 120W					

Notes  
 1. Standard


# T652LEDB

LED FULL CUT\_OFF WALL PACK

## DIMENSIONS

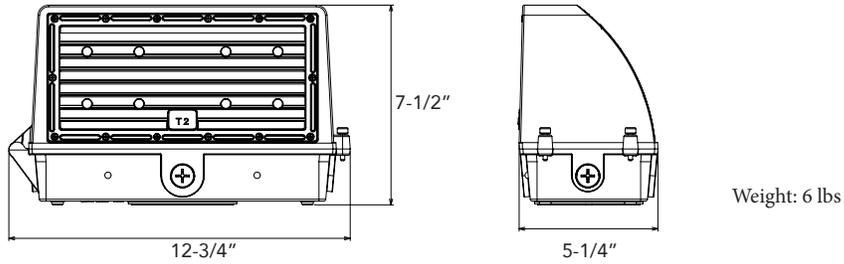

## MOTION SENSOR DIMENSIONS

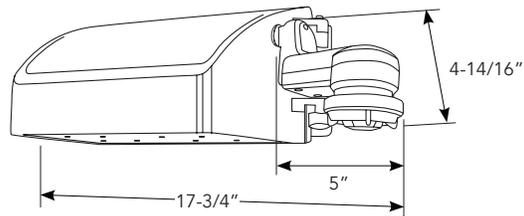

MFR - FSP311 PIR remote motion sensor

# WS1 - Wattage Selectable (10W,20W,30W,40W)


## 10W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	10
Rated Voltage	120
Nominal Flux (lm)	1858.4
Test Voltage (V)	120
Imax (cd)	743.2
LOR(%)	100
Total Flux (lm)	1858.4
CIE Class	Direct
Type:	Low

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

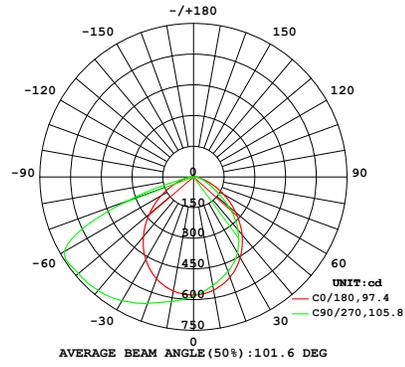


### AAI Figure

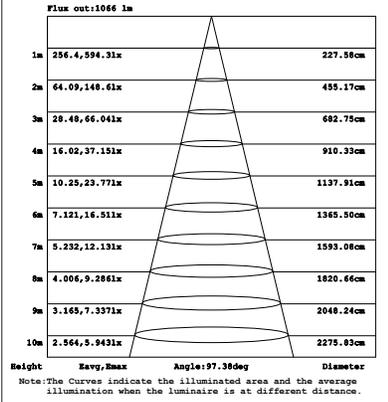

### Co plane Isolux Diagram

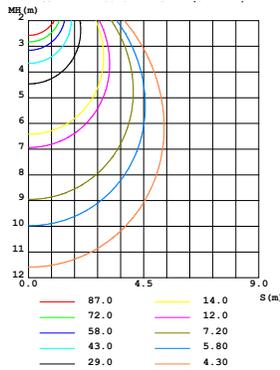

### Isocandela Diagram

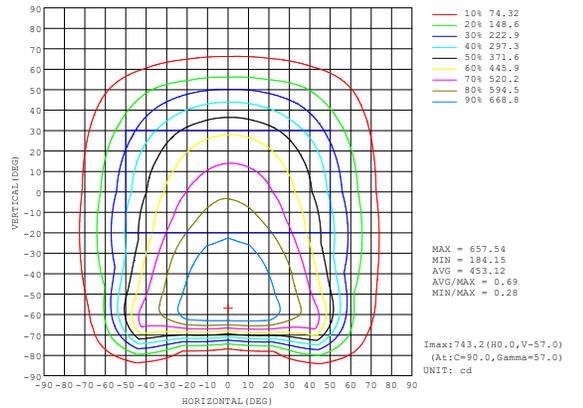


## 20W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	30
Rated Voltage	120
Nominal Flux (lm)	3612.48
Test Voltage (V)	120
Imax (cd)	1446
LOR(%)	100
Total Flux (lm)	3612.5
CIE Class	Direct
Type:	20W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

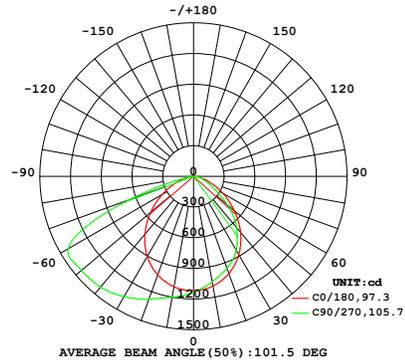


### AAI Figure

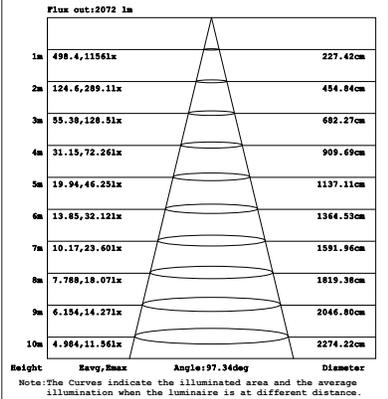

### Co plane Isolux Diagram

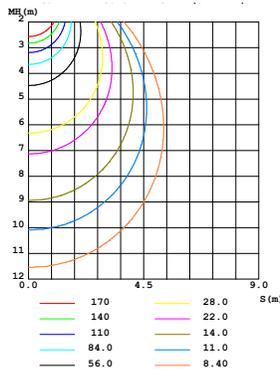

### Isocandela Diagram

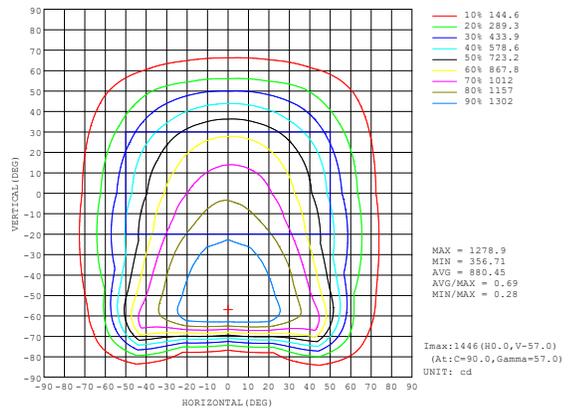

# WS1 - Wattage Selectable (10W,20W,30W,40W)


## 30W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	30
Rated Voltage	120
Nominal Flux (lm)	5124.2
Test Voltage (V)	120
Imax (cd)	2058
LOR(%)	100
Total Flux (lm)	5124.2
CIE Class	Direct
Type:	30W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

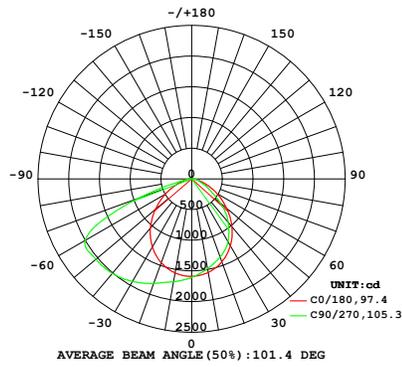


### AAI Figure

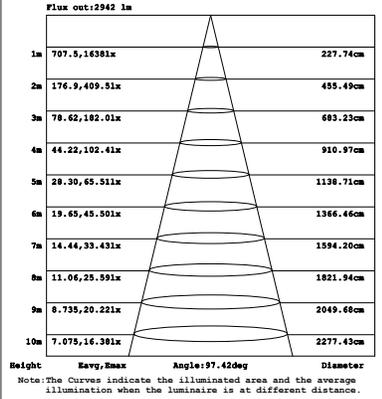

### Co plane Isolux Diagram

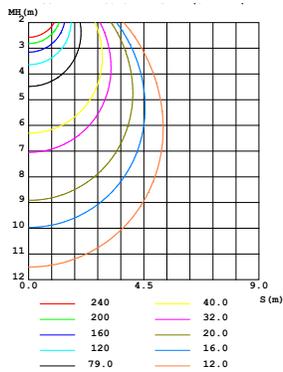

### Isocandela Diagram

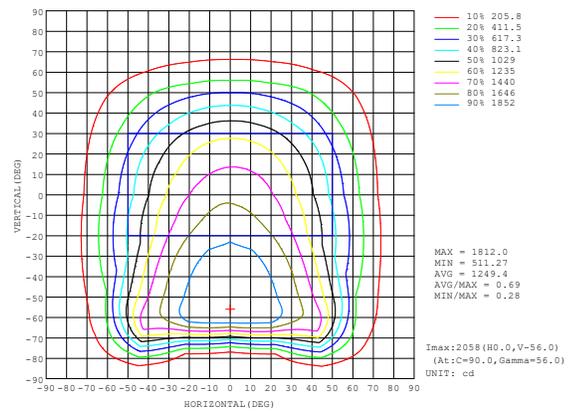


## 40W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	40
Rated Voltage	120
Nominal Flux (lm)	6094.3
Test Voltage (V)	120
Imax (cd)	2449
LOR(%)	100
Total Flux (lm)	6094.3
CIE Class	Direct
Type:	40W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

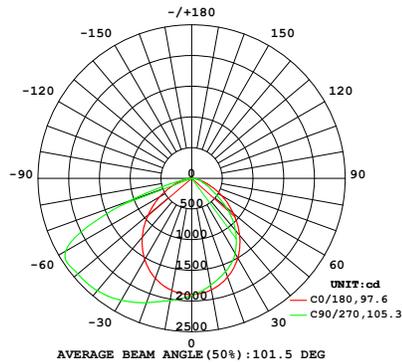


### AAI Figure

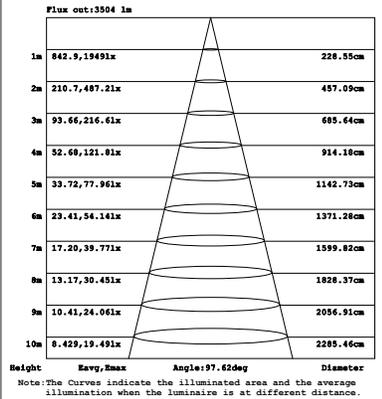

### Co plane Isolux Diagram

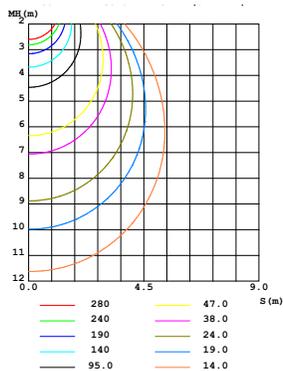

### Isocandela Diagram

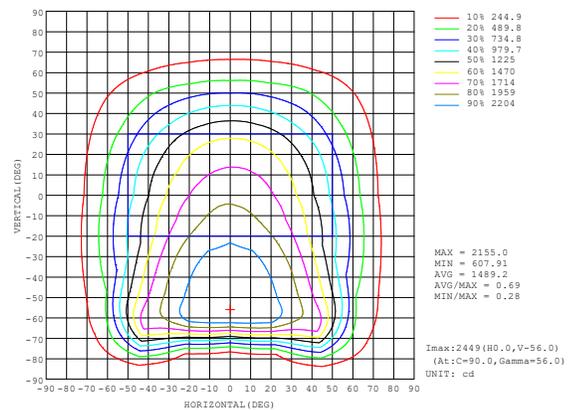

# WS2 - Wattage Selectable (30W,60W,90W,120W)


## 30W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	30
Rated Voltage	120
Nominal Flux (lm)	4891.4
Test Voltage (V)	120
Imax (cd)	2067
LOR(%)	100
Total Flux (lm)	4891.5
CIE Class	Direct
Type:	30W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

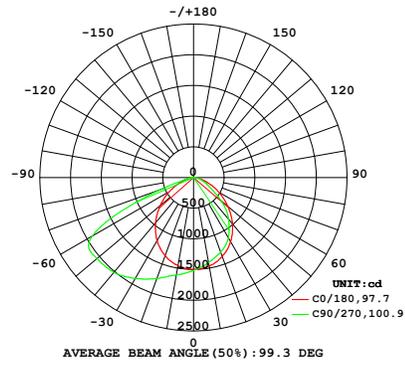


### AAI Figure

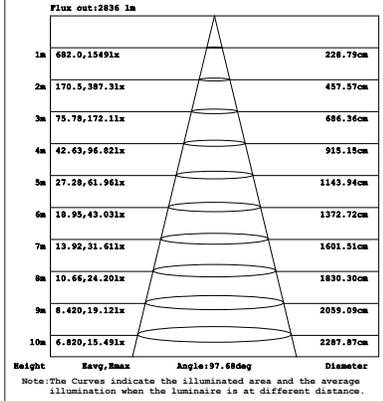

### Co plane Isolux Diagram

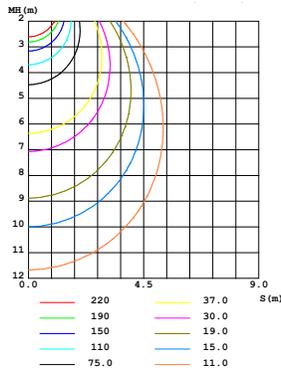

### Isocandela Diagram

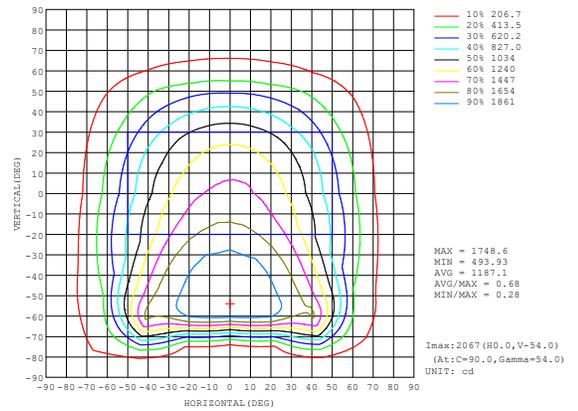


## 60W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	60
Rated Voltage	120
Nominal Flux (lm)	9230.4
Test Voltage (V)	120
Imax (cd)	3937
LOR(%)	100
Total Flux (lm)	9230.4
CIE Class	Direct
Type:	60W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

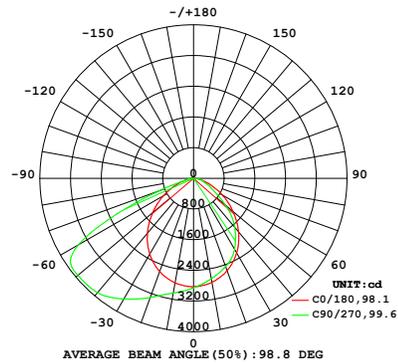


### AAI Figure

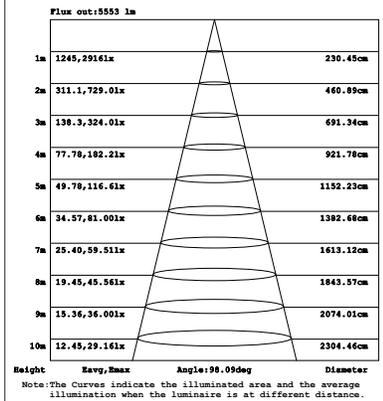

### Co plane Isolux Diagram

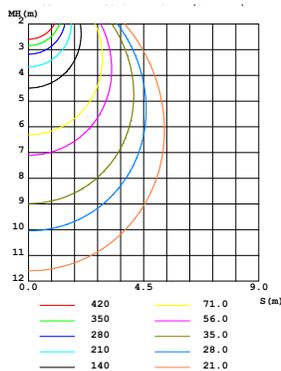

### Isocandela Diagram

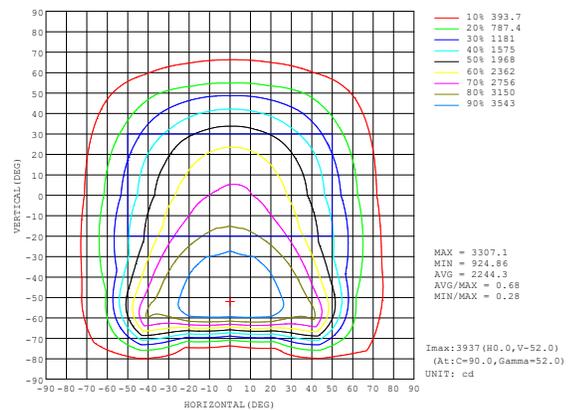

# WS2 - Wattage Selectable (30W,60W,90W,120W)


## 90W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	90
Rated Voltage	120
Nominal Flux (lm)	12643.4
Test Voltage (V)	120
Imax (cd)	5553
LOR(%)	100
Total Flux (lm)	12643
CIE Class	Direct
Type:	90W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

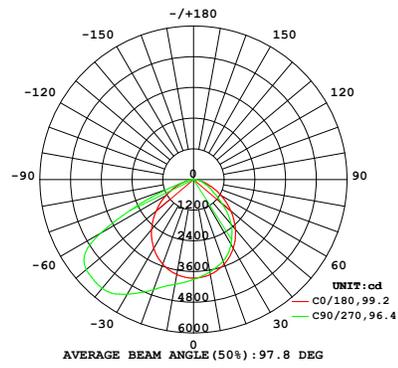


### AAI Figure

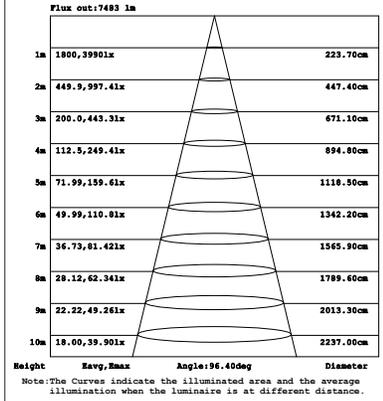

### Co plane Isolux Diagram

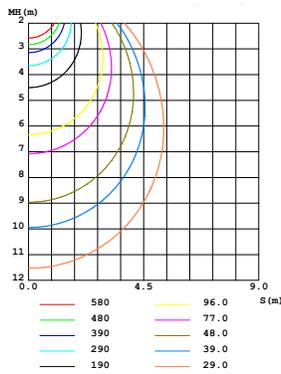

### Isocandela Diagram

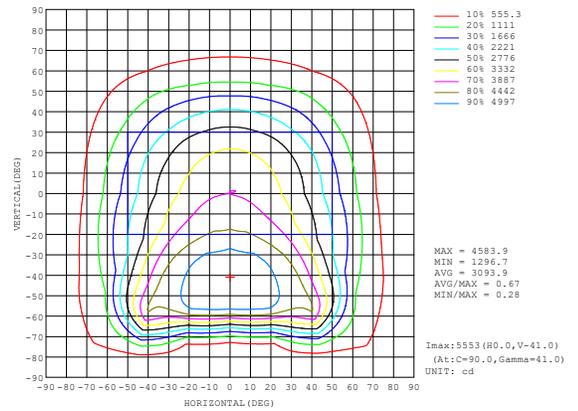


## 120W

### Characteristics


Color Temperature	4000K
Nominal Power(W)	120
Rated Voltage	120
Nominal Flux (lm)	16104.9
Test Voltage (V)	120
Imax (cd)	6867
LOR(%)	100
Total Flux (lm)	16105
CIE Class	Direct
Type:	120W

Test Date 7Apr23  
Series T652LEDB


### Luminous intensity distribution diagram

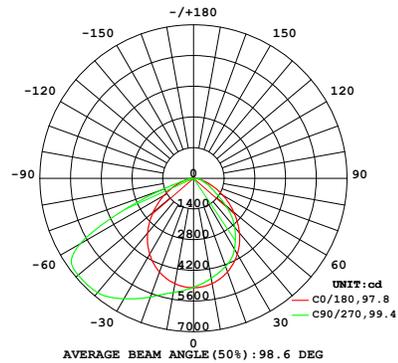

### AAI Figure

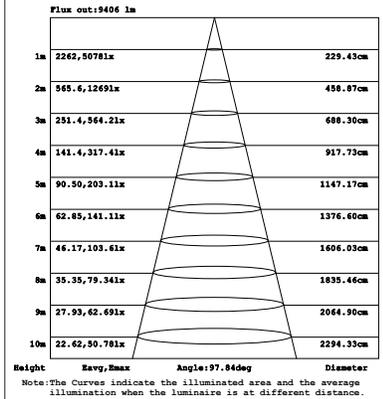

### Co plane Isolux Diagram

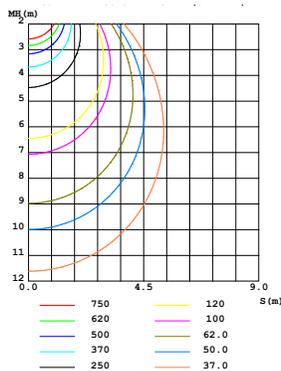

### Isocandela Diagram

