


PLOT DATE:

SITE LOCATION MAP

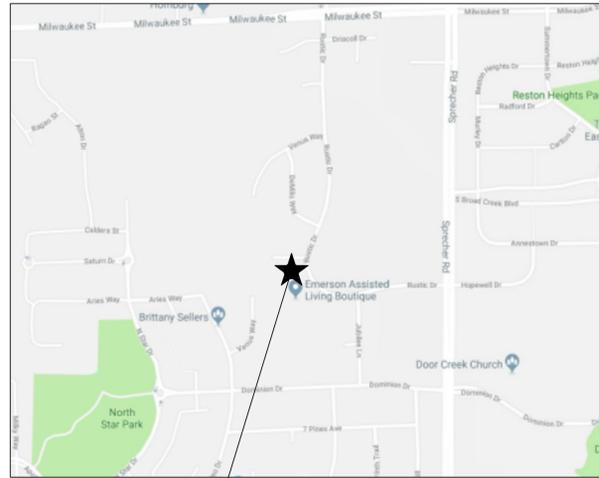

BUILDING LOCATION

ADDRESS:
402 RUSTIC DRIVE
MADISON, WI 53717



EMERSON LIVING EXPANSION

LIFESONG LIVING, LLC



PROJECT DIRECTORY

DESIGN-BUILDER

ICONICA, INC.
901 DEMING WAY
MADISON, WISCONSIN 53717
PHONE: (608) 664-3500
FAX : (608) 664-3535

OWNER

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

CIVIL CONSULTANT

AYRES ASSOCIATES
5201 EAST TERRACE DRIVE
SUITE 200
MADISON, WI 53718
PHONE: (608) 255-0800



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com

EMERSON SENIOR LIVING EXPANSION
402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18

RFI/SI DATE:

INDEX OF DRAWINGS


SHEET	TITLE	SHEET	TITLE	SHEET	TITLE	SHEET	TITLE	SHEET	TITLE	SHEET	TITLE
A001	TITLE SHEET										
CIVIL/LANDSCAPE											
C100	EXISTING CONDITIONS PLAN										
C101	DEMOLITION PLAN										
C200	SITE LAYOUT PLAN										
C300	SITE GRADING PLAN										
C400	LANDSCAPING PLAN										
C500	DETAILS										
C501	DETAILS										
C502	DETAILS										
ARCHITECTURE											
A100	SITE PLAN										
A101	FIRE ACCESS PLAN										
A200	BASEMENT FLOOR PLAN										
A201	FIRST FLOOR PLAN										
A202	SECOND FLOOR PLAN										
A203	ROOF PLAN										
A301	EXTERIOR ELEVATIONS										

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER

A001

File: P:\52-1000\52-0101.00 Madison Rustic Road\CAD\P-EX.dwg Layout: C100 User: techniks Plotted: Feb 19, 2018 - 10:03am

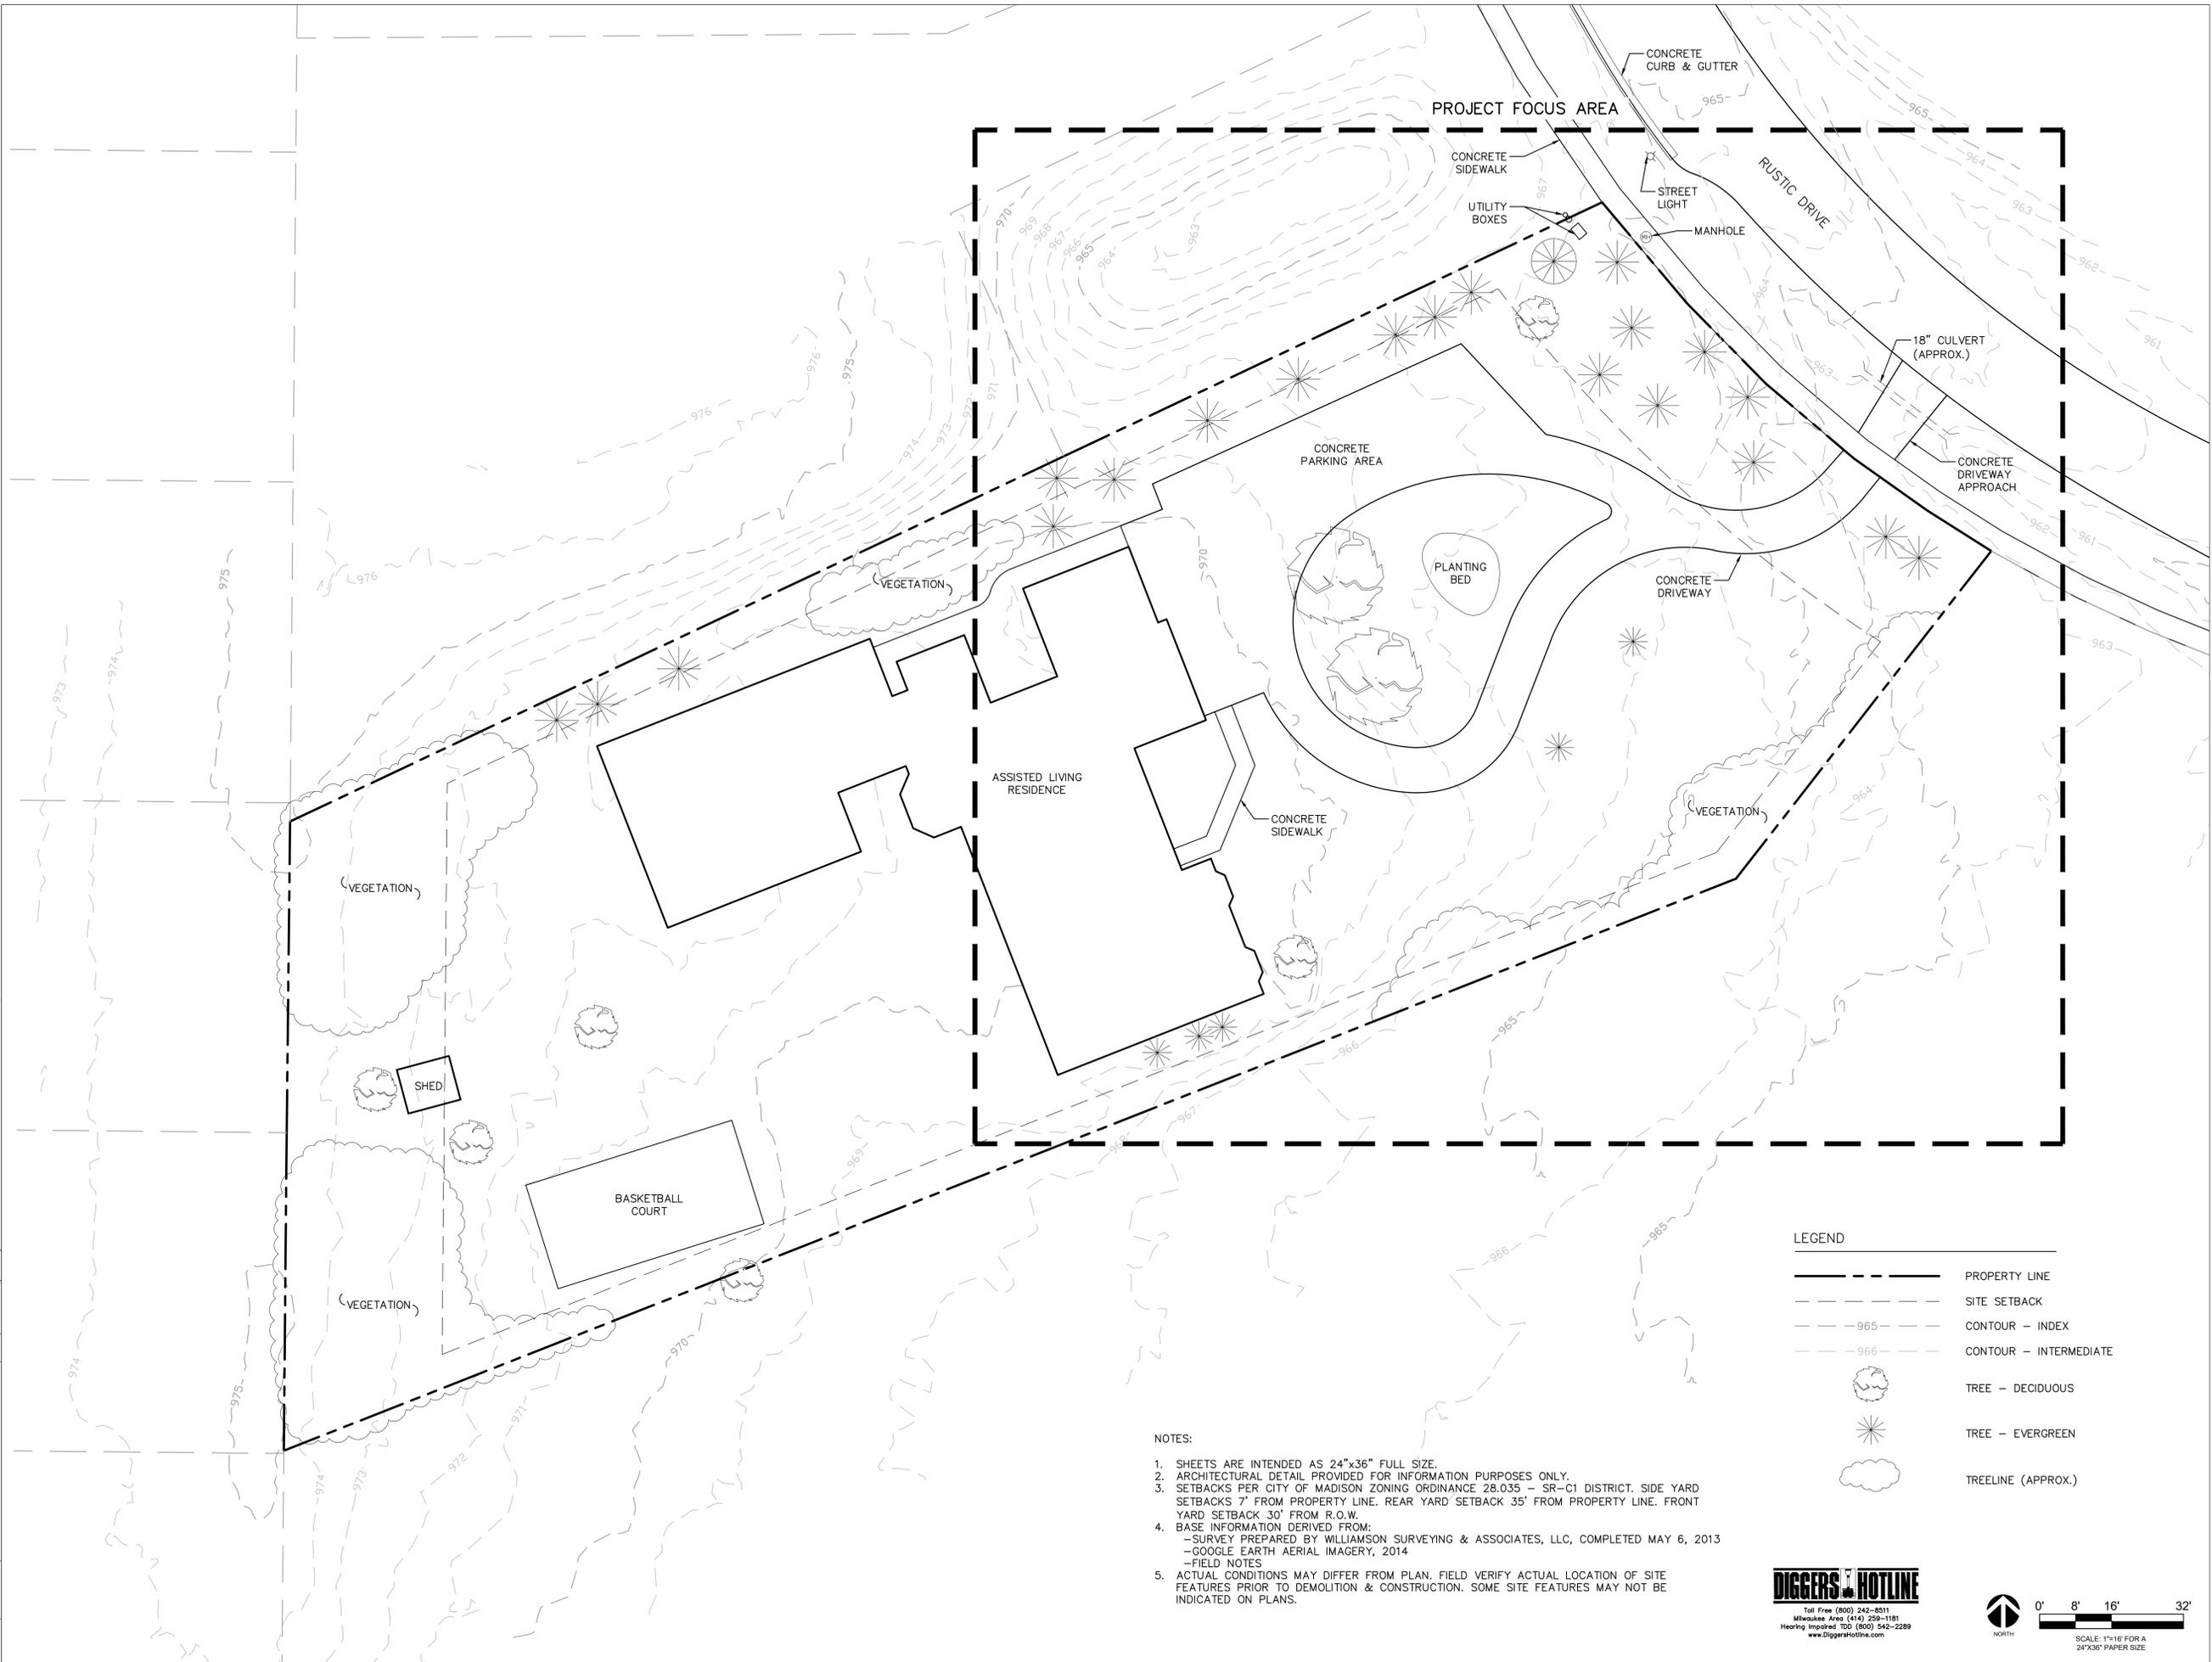

- NOTES:
1. SHEETS ARE INTENDED AS 24"x36" FULL SIZE.
 2. ARCHITECTURAL DETAIL PROVIDED FOR INFORMATION PURPOSES ONLY.
 3. SETBACKS PER CITY OF MADISON ZONING ORDINANCE 28.035 - SR-C1 DISTRICT. SIDE YARD SETBACKS 7' FROM PROPERTY LINE. REAR YARD SETBACK 35' FROM PROPERTY LINE. FRONT YARD SETBACK 30' FROM R.O.W.
 4. BASE INFORMATION DERIVED FROM:
 -SURVEY PREPARED BY WILLIAMSON SURVEYING & ASSOCIATES, LLC, COMPLETED MAY 6, 2013
 -GOOGLE EARTH AERIAL IMAGERY, 2014
 -FIELD NOTES
 5. ACTUAL CONDITIONS MAY DIFFER FROM PLAN. FIELD VERIFY ACTUAL LOCATION OF SITE FEATURES PRIOR TO DEMOLITION & CONSTRUCTION. SOME SITE FEATURES MAY NOT BE INDICATED ON PLANS.

LEGEND

	PROPERTY LINE
	SITE SETBACK
	CONTOUR - INDEX
	CONTOUR - INTERMEDIATE
	TREE - DECIDUOUS
	TREE - EVERGREEN
	TREELINE (APPROX.)

DIGGERS HOTLINE
 Toll Free (800) 242-8511
 Milwaukee Area (414) 259-1181
 Hearing Impaired TDD (800) 542-2289
 www.diggershotline.com

NORTH

0' 8' 16' 32'

SCALE: 1"=16' FOR A 24"x36" PAPER SIZE

ICONICA
 True Design-Build

901 Deming Way // Madison, WI 53717
 Ph: 608.664.3500 // Fx: 608.664.3535
 iconicacreates.com

AYRES ASSOCIATES
 5201 East Terrace Drive
 Suite 200
 Madison, WI 53718
 608.255.0800
 www.AyresAssociates.com

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
 MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
 402 RUSTIC DRIVE
 MADISON, WI 53718

ISSUE DATES:

CITY SUB #1: 02-21-18

RF/ISI DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610

SHEET NUMBER


EXISTING CONDITIONS

C100

©2017 Iconica, Inc.

EROSION CONTROL GENERAL NOTES:

1. SUGGESTED LOCATIONS FOR INSTALLATION OF EROSION CONTROL ITEMS ARE SHOWN IN THE PLANS. FINAL LOCATIONS SHALL BE DETERMINED IN THE FIELD BY THE CONTRACTOR AND APPROVED BY THE ENGINEER. EROSION CONTROL ITEMS SHALL BE IN PLACE PRIOR TO CONSTRUCTION. EROSION CONTROL ITEMS SHALL BE MAINTAINED UNTIL SUCH TIME THAT THE ENGINEER DEEMS THE DEVICES NO LONGER NECESSARY.
2. SOIL DISTURBANCE SHALL BE CONDUCTED IN SUCH A MANNER AS TO MINIMIZE EROSION. SOIL STABILIZATION MEASURES SHALL CONSIDER THE TIME OF YEAR, SITE CONDITIONS AND THE USE OF TEMPORARY OR PERMANENT MEASURES. ALL DISTURBED AREAS OF LAWN SHALL BE PATCHED WITH SEED FERTILIZER AND MULCH/MAT.
3. ALL DISTURBED AREAS SHALL BE STABILIZED WITH TEMPORARY OR PERMANENT MEASURES WITHIN 7 CALENDAR DAYS OF THE END OF ACTIVE HYDROLOGIC DISTURBANCE, OR RE-DISTURBANCE. THE CONTRACTOR SHALL USE EROSION MATTING ON ALL SLOPES STEEPER THAN 5:1 (20%).
4. ALL TEMPORARY EROSION AND SEDIMENT CONTROL MEASURES SHALL BE REMOVED WITHIN 30 DAYS AFTER FINAL SITE STABILIZATION IS ACHIEVED OR AFTER THE TEMPORARY MEASURES ARE NO LONGER NEEDED.
5. THE EROSION CONTROL MEASURES INDICATED ON THE PLANS ARE THE MINIMUM REQUIREMENTS. ADDITIONAL MEASURES MAY BE REQUIRED AS DIRECTED BY THE ENGINEER OR GOVERNING AGENCY.
6. SITE ENTRANCE SHALL BE CLEANED UP FROM DIRT AND TRACKED MUD AT THE END OF EACH DAY.

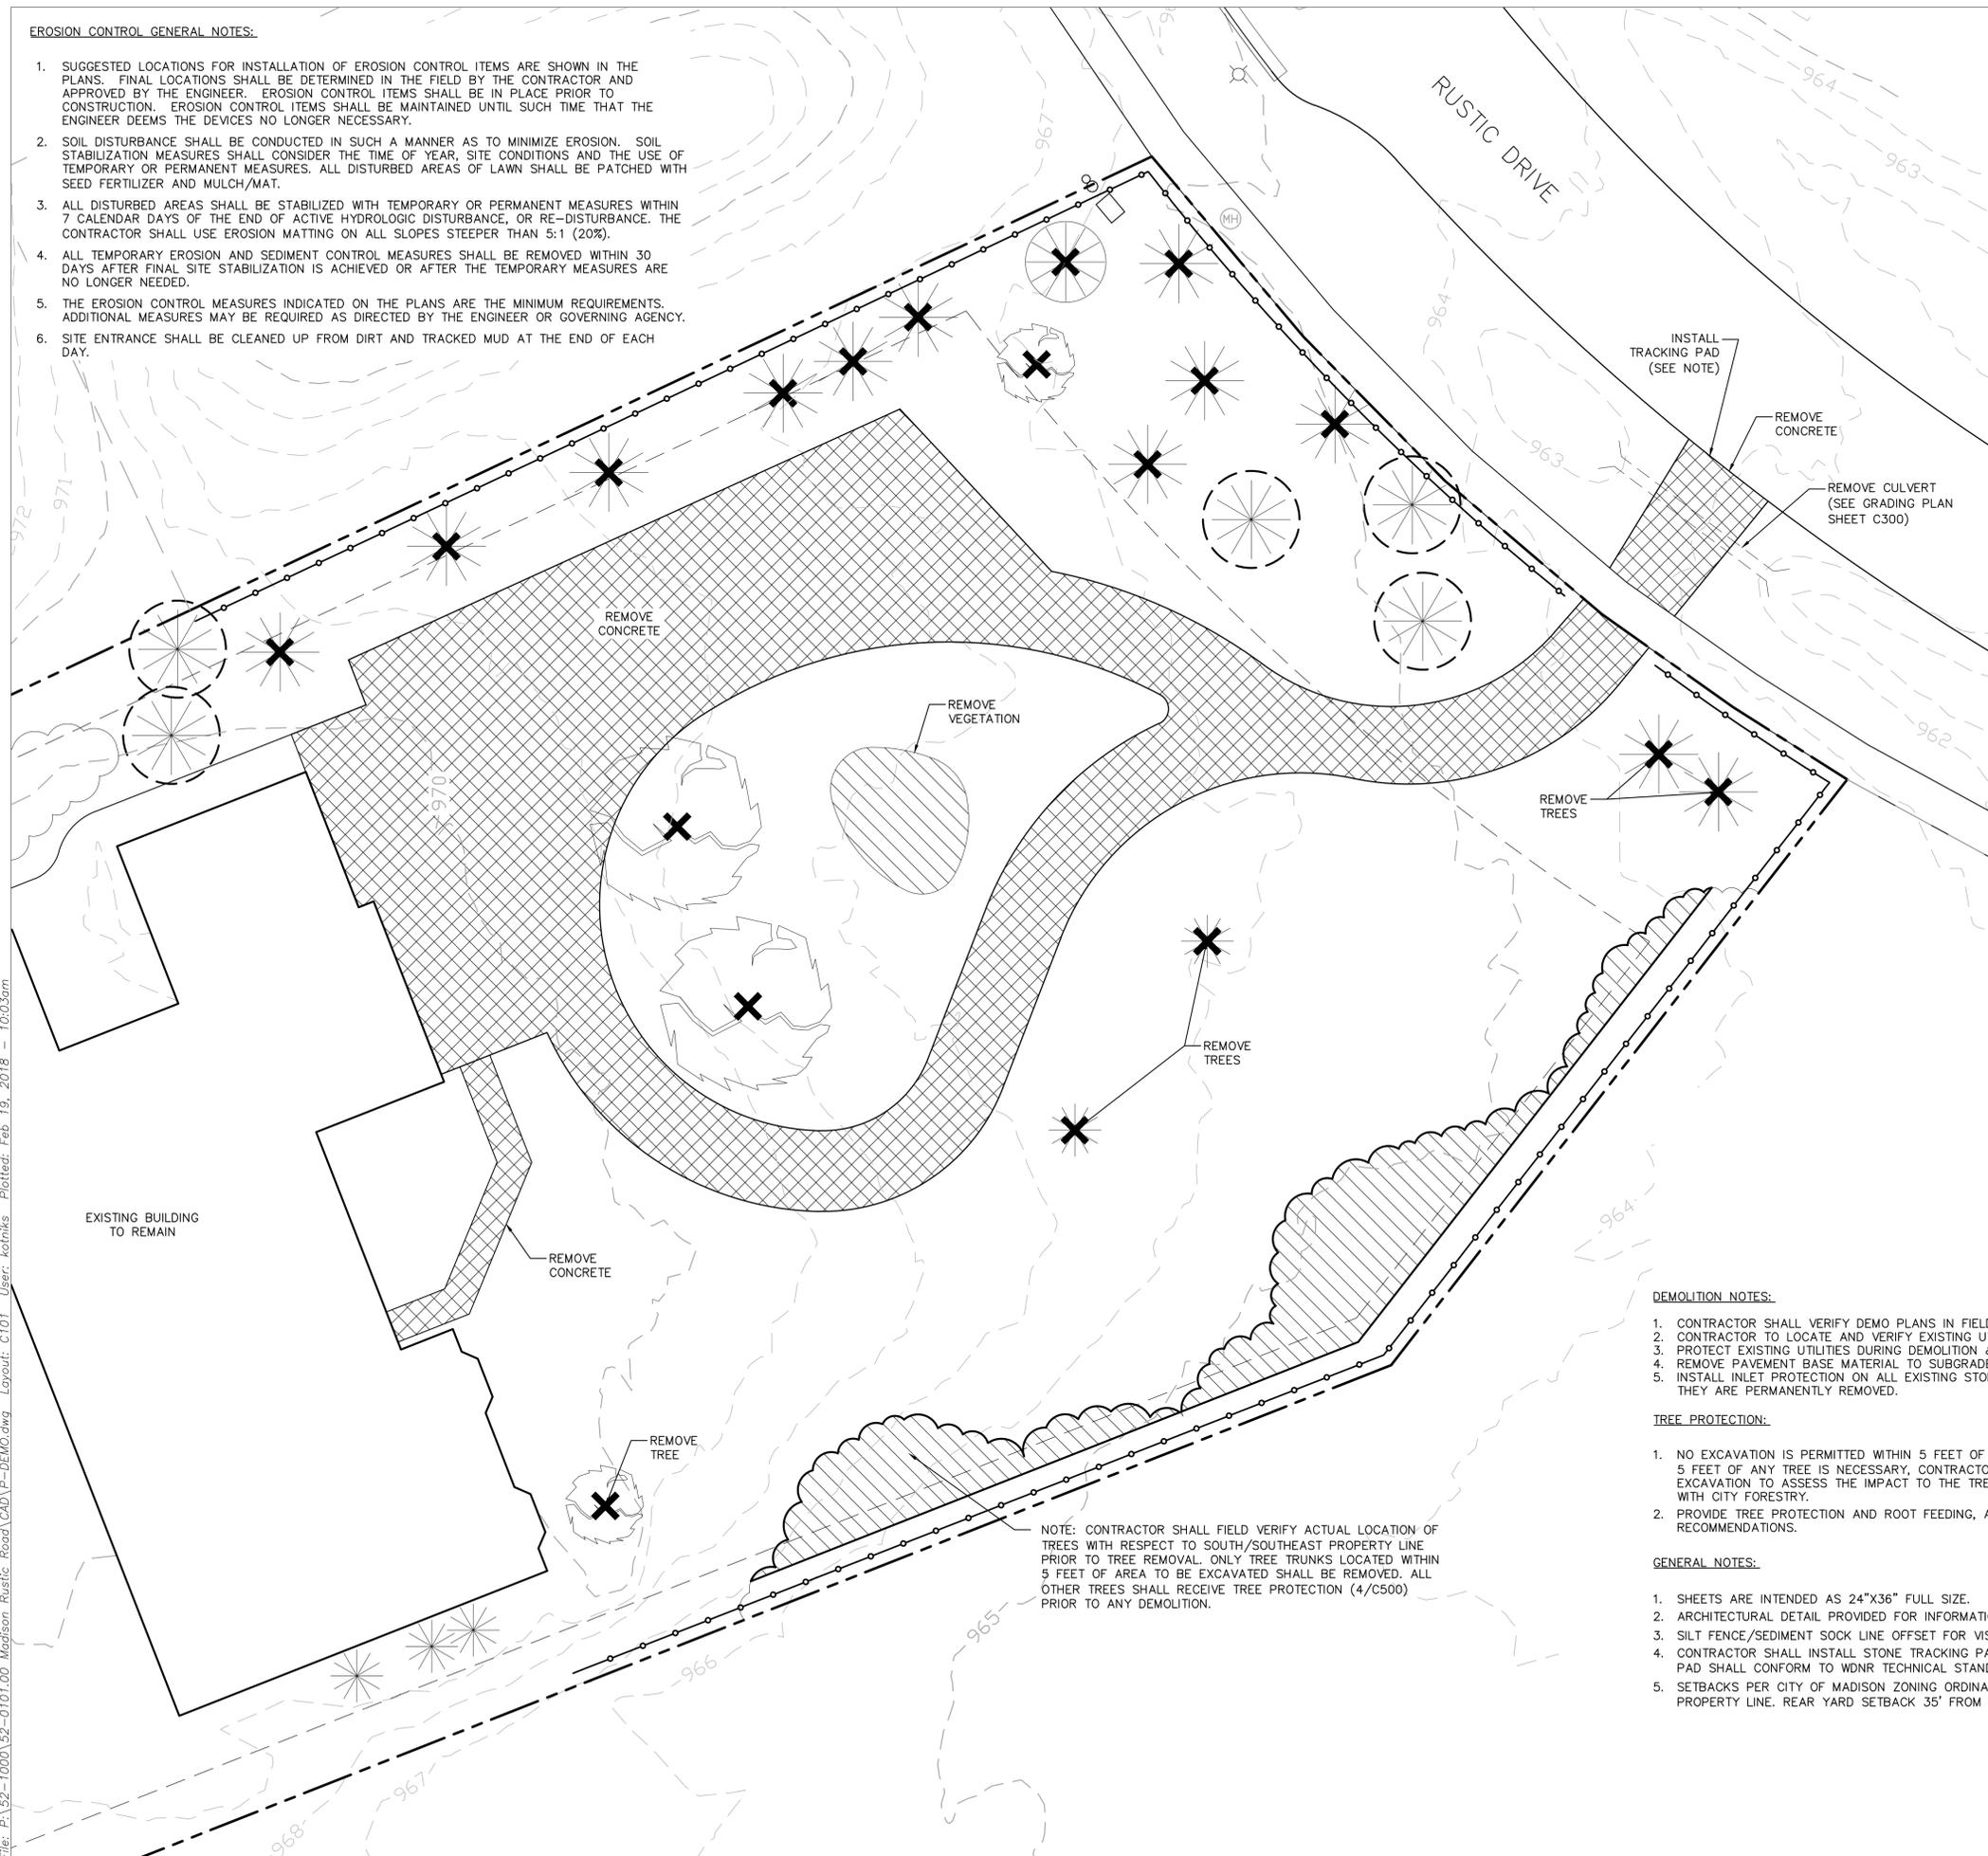

INSTALL TRACKING PAD (SEE NOTE)

REMOVE CONCRETE

REMOVE CULVERT (SEE GRADING PLAN SHEET C300)

REMOVE CONCRETE

REMOVE VEGETATION

REMOVE TREES

REMOVE TREES

REMOVE CONCRETE

REMOVE TREE

NOTE: CONTRACTOR SHALL FIELD VERIFY ACTUAL LOCATION OF TREES WITH RESPECT TO SOUTH/SOUTHEAST PROPERTY LINE PRIOR TO TREE REMOVAL. ONLY TREE TRUNKS LOCATED WITHIN 5 FEET OF AREA TO BE EXCAVATED SHALL BE REMOVED. ALL OTHER TREES SHALL RECEIVE TREE PROTECTION (4/C500) PRIOR TO ANY DEMOLITION.

LEGEND

- PROPERTY LINE
- - - SITE SETBACK
- o-o- SILT FENCE OR SEDIMENT SOCK (1/C500)
- [Hatched Box] TRACKING PAD (3/C500)
- [Cross-hatched Box] REMOVE CONCRETE AND BASE MATERIAL
- [Wavy Line Box] REMOVE VEGETATION
- [X] REMOVE TREE
- [Circle with X] TREE PROTECTION (4/C500)

DEMOLITION NOTES:

1. CONTRACTOR SHALL VERIFY DEMO PLANS IN FIELD PRIOR TO DEMOLITION.
2. CONTRACTOR TO LOCATE AND VERIFY EXISTING UTILITY LOCATIONS PRIOR TO BEGINNING DEMOLITION.
3. PROTECT EXISTING UTILITIES DURING DEMOLITION & CONSTRUCTION.
4. REMOVE PAVEMENT BASE MATERIAL TO SUBGRADE IN AREAS TO RECEIVE LAWN OR PLANTINGS.
5. INSTALL INLET PROTECTION ON ALL EXISTING STORMWATER INLETS TO BE REMOVED, UNTIL SUCH TIME THAT THEY ARE PERMANENTLY REMOVED.

TREE PROTECTION:

1. NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE OUTSIDE EDGE OF A TREE TRUNK. IF EXCAVATION WITHIN 5 FEET OF ANY TREE IS NECESSARY, CONTRACTOR SHALL CONTACT CITY FORESTRY (608-266-4816) PRIOR TO EXCAVATION TO ASSESS THE IMPACT TO THE TREE AND ROOT SYSTEM. TREE PRUNING SHALL BE COORDINATED WITH CITY FORESTRY.
2. PROVIDE TREE PROTECTION AND ROOT FEEDING, AND PRUNING IN ACCORDANCE WITH WRITTEN ARBORIST RECOMMENDATIONS.

GENERAL NOTES:

1. SHEETS ARE INTENDED AS 24"x36" FULL SIZE.
2. ARCHITECTURAL DETAIL PROVIDED FOR INFORMATION PURPOSES ONLY.
3. SILT FENCE/SEDIMENT SOCK LINE OFFSET FOR VISUAL CLARITY.
4. CONTRACTOR SHALL INSTALL STONE TRACKING PAD AT THE SITE ACCESS POINT ON RUSTIC DRIVE. TRACKING PAD SHALL CONFORM TO WDN TECHNICAL STANDARD 1057 AND CITY REQUIREMENTS. SEE DETAIL 3/C500.
5. SETBACKS PER CITY OF MADISON ZONING ORDINANCE 28.035 - SR-C1 DISTRICT. SIDE YARD SETBACKS 7' FROM PROPERTY LINE. REAR YARD SETBACK 35' FROM PROPERTY LINE. FRONT YARD SETBACK 30' FROM R.O.W.

File: P:\52-1000\52-0101.00 Madison Rustic Road\CAD\F-DEMO.dwg Layout: C101 User: kohniks Plotted: Feb 19, 2018 - 10:03am



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com



EMERSON SENIOR LIVING EXPANSION
402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18


RF/IS/ DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER
DEMOLITION PLAN
C101


©2017 Iconica, Inc.

- NOTES:**
1. MEDIUM BROOM FINISH, PERPENDICULAR TO DIRECTION OF TRAVEL, UNLESS NOTED OTHERWISE.
 2. PROVIDE EXPANSION JOINTS 30' ALL WAYS, MINIMUM
 3. PROVIDE TOOLED JOINTS AT ±5'-0" O.C. UNLESS NOTED OTHERWISE
 4. STANDARD COLOR CONCRETE

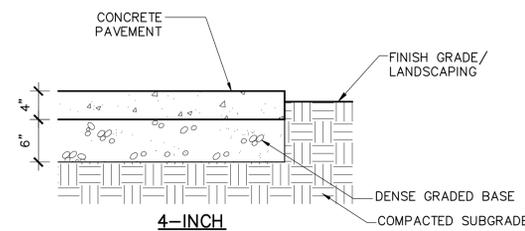


5
C500 CONCRETE PAVEMENT NTS


- NOTES:**
1. MEDIUM BROOM FINISH, PERPENDICULAR TO DIRECTION OF TRAVEL, UNLESS NOTED OTHERWISE.
 2. PROVIDE EXPANSION JOINTS 30' ALL WAYS, MINIMUM.
 3. ALL CONTROL JOINTS TO BE SAW CUT AND FINISHED COMPLETELY TO EDGES OF SLAB WITH A HAND SAW. NO 'OVER-CUTS' OR 'SHORT' CUTS WILL BE ALLOWED. CONTRACTOR TO PROVIDE JOINTING AND SCORING PLAN PRIOR TO INSTALL.
 - 4.

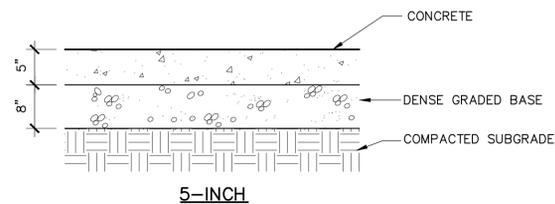


NTS

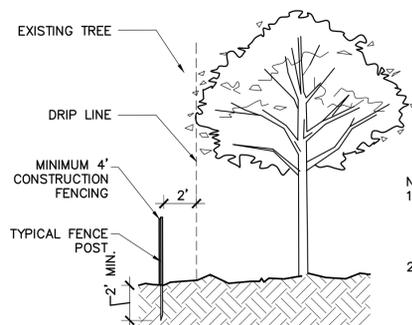


4
C500 TREE PROTECTION NTS

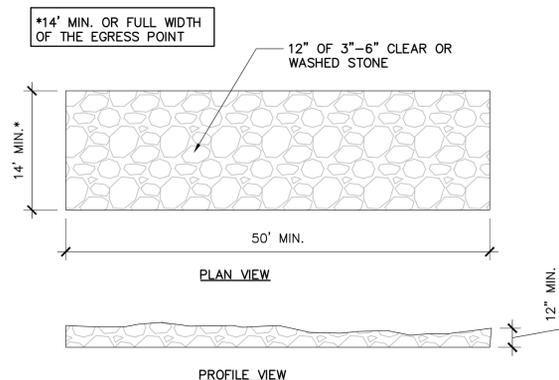


3
C500 TRACKING PAD (IF APPLICABLE) NTS

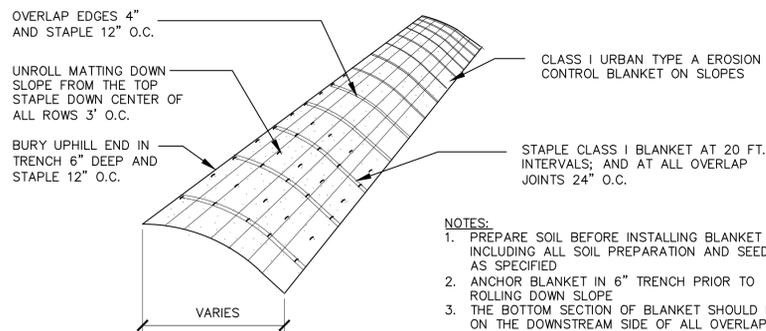


2
C500 EROSION CONTROL MAT NTS

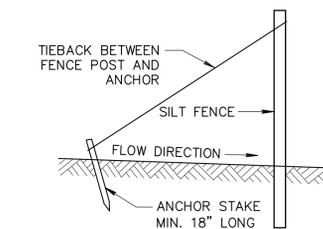


SILT FENCE TIE BACK (WHEN REQUIRED BY THE ENGINEER)

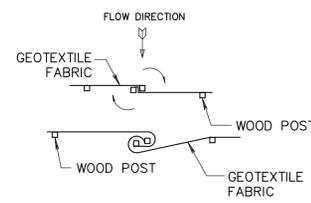


JOINING TWO LENGTHS OF SILT FENCE (TWIST METHOD)

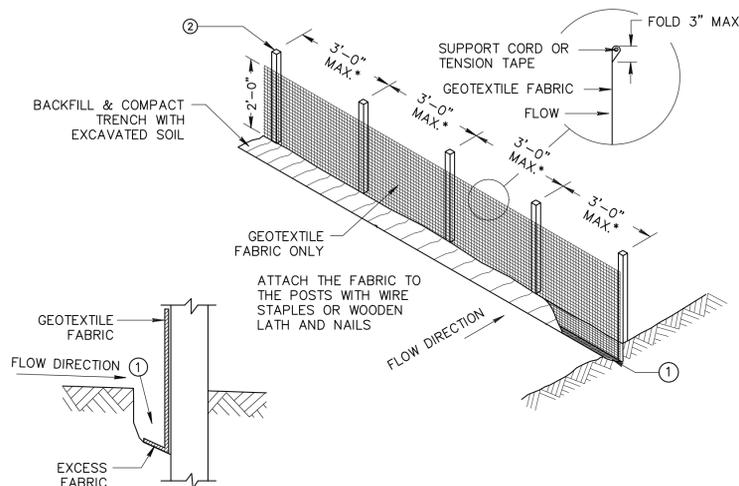


TRENCH DETAIL

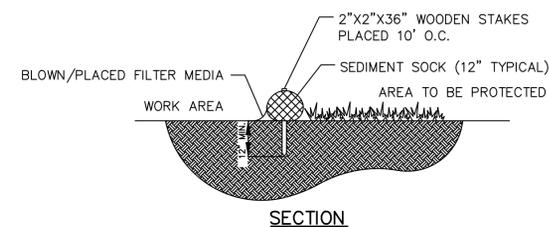

SECTION

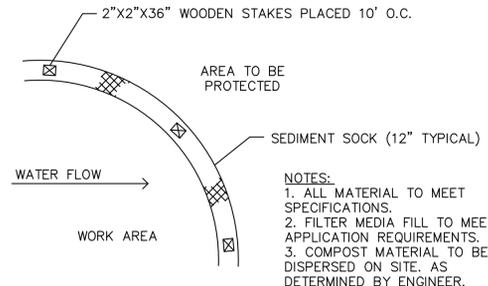

PLAN

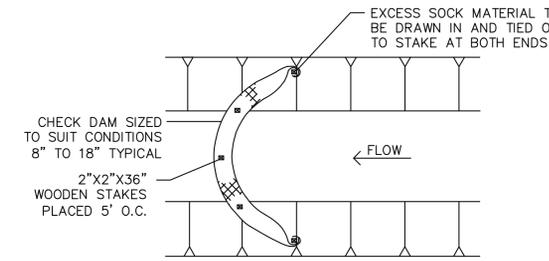


- NOTES:**
1. ALL MATERIAL TO MEET SPECIFICATIONS.
 2. SEDIMENT SHOULD BE REMOVED FROM BEHIND CHECK DAM ONCE THE ACCUMULATED HEIGHT HAS REACHED 1/2 THE HEIGHT OF THE CHECK DAM.
 3. CHECK DAM CAN BE DIRECT SEEDING AT THE TIME OF INSTALLATION.

GENERAL NOTES:


1. FOR MANUAL INSTALLATIONS THE TRENCH SHALL BE A MINIMUM OF 4" WIDE & 6" DEEP TO BURY AND ANCHOR THE GEOTEXTILE FABRIC. FOLD MATERIAL TO FIT TRENCH AND BACKFILL & COMPACT TRENCH WITH EXCAVATED SOIL.
2. WOOD POSTS SHALL BE A MINIMUM SIZE OF 3" LENGTH OF OAK OR HICKORY
3. ADDITIONAL POST DEPTH OR TIE BACKS MAY BE REQUIRED IN UNSTABLE SOILS
4. DETAILS OF CONSTRUCTION NOT SHOWN ON THIS DRAWING SHALL CONFORM TO THE PERTINENT REQUIREMENTS OF THE STANDARD SPECIFICATIONS AND APPLICABLE SPECIAL PROVISIONS.
5. THE MAXIMUM SPACING OF POSTS FOR WOVEN FABRIC SILT FENCE SHALL BE 8 FEET AND FOR NON-WOVEN FABRIC, 3 FEET.
6. 8" OF FENCE FABRIC REQUIRED BELOW GRADE IN TRENCH PER DNR TECH STD. 1056
7. MANUFACTURED ALTERNATIVES APPROVED AND LISTED ON THE WDOT PRODUCT ACCEPTABILITY LIST MAY BE SUBSTITUTED.
8. FINISHED SIZE, INCLUDING FLAP POCKETS WHERE REQUIRED, SHALL EXTEND A MINIMUM OF 10" AROUND THE PERIMETER TO FACILITATE MAINTENANCE OR REMOVAL.
9. FLAP POCKETS SHALL BE LARGE ENOUGH TO ACCEPT WOOD 2"x4".
10. EROSION CONTROL SHALL BE PROVIDED IN ACCORDANCE WITH WDNR TECHNICAL STANDARD.
11. CROSS BRACE WITH 2" X 4" WOODEN FRAME OR EQUIVALENT AT TOP OF POSTS AS DIRECTED BY THE ENGINEER.
12. MINIMUM 14 GAUGE WIRE REQUIRED, FOLD FABRIC 3" OVER THE WIRE AND STAPLE OR PLACE WIRE RINGS ON 12" C.C.
13. WIRE SUPPORT FENCE SHALL BE 14 GAUGE MINIMUM WOVEN WIRE WITH A MAXIMUM MESH SPACING OF 6". SECURE TOP OF GEOTEXTILE FABRIC TO TOP OF FENCE WITH STAPLES OR WIRE RINGS AT 12" C.C. (TYPE B)
14. GEOTEXTILE FABRIC SHALL BE REINFORCED WITH AN INDUSTRIAL POLYPROPYLENE NETTING WITH A MAXIMUM MESH SPACING OF 3/4" OR EQUAL. A HEAVY DUTY NYLON TOP SUPPORT CORD OR EQUIVALENT IS REQUIRED. (TYPE A)
15. STEEL POSTS SHALL BE STUDDED "TEE" OR "U" TYPE WITH A MINIMUM WEIGHT OF 1.28 LBS./LIN. FT. (WITHOUT ANCHOR) FIN ANCHORS SUFFICIENT TO RESIST POST MOVEMENT ARE REQUIRED. WOOD POSTS SHALL BE A MINIMUM SIZE OF 1 1/8" X 1 1/8" OF OAK OR HICKORY.
16. CONSTRUCT SILT FENCE FROM A CONTINUOUS ROLL, IF POSSIBLE, BY CUTTING LENGTHS TO AVOID JOINTS. IF A JOINT IS NECESSARY, USE ONE OF THE FOLLOWING TWO METHODS: A.) TWIST METHOD -- OVERLAP THE END POSTS AND TWIST, OR ROTATE, AT LEAST 180 DEGREES, B.) HOOK METHOD -- HOOK THE END OF EACH SILT FENCE LENGTH.

1
C500 SILT FENCE AND SEDIMENT SOCK NTS

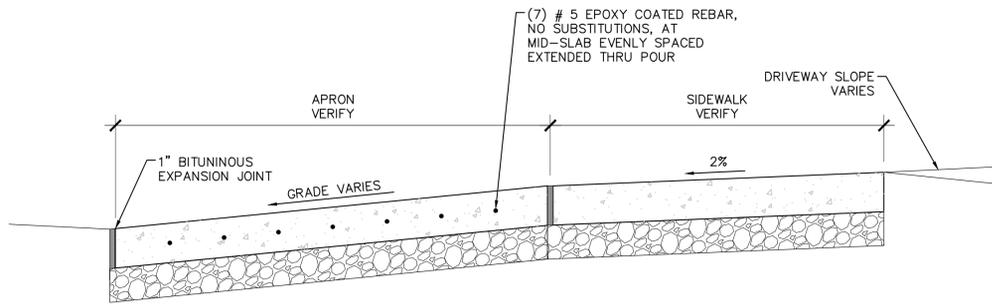

GENERAL NOTES:
EARTHWORK CONTRACTOR SHALL REMOVE EXISTING PUBLIC SIDEWALK AS REQUIRED TO ACHIEVE THE DRIVE APPROACH GRADES AS SHOWN.

A DRIVEWAY ENTRANCE SLOPE

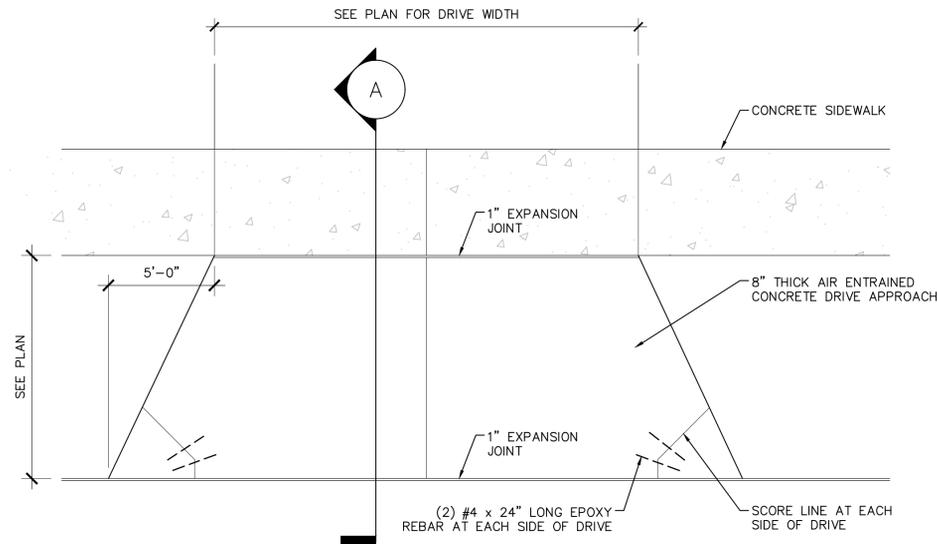

GENERAL NOTES:
1. FLASHING BARRICADES TO BE PROVIDED BY EARTHWORK CONTRACTOR.
2. CURB CONTRACTOR MAY BE REQUIRED TO POUR APPROACH IN TWO HALVES. REBAR TO EXTEND 24" BEYOND CENTERLINE AND LAP.
3. CURB CONTRACTOR SHALL USE 4,000 PSI WITH 0.42 WATER/CEMENT RATIO WITH 1% HIGH EARLY CONCRETE ADDITIVE.
4. DRIVE APPROACH MUST COMPLY WITH LOCAL REQUIREMENTS.


9 CONCRETE DRIVEWAY ENTRANCE



"VAN ACCESSIBLE" TO BE PLACED ADJACENT TO 8' WIDTH STRIPED AREAS ONLY

SIGNAGE



NOTE:
SYMBOL TO BE PAINTED IN ALL ACCESSIBLE PARKING SPACES.

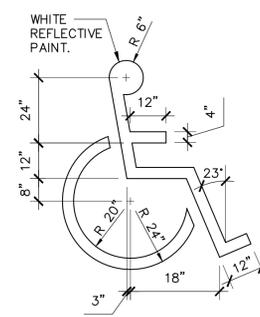

PAVEMENT MARKING


NOTES:
1. MOUNT TO RAILING PER SPECIFICATIONS WITH TAMPER PROOF BOLTS. APPLY ROSETTES OVER BOLT HEADS PAINTED TO MATCH COLOR OF LETTERS/LINES.
2. SIGN SHALL BE MANUFACTURED WITH MOUNTING HOLES AS REQUIRED.

8 ACCESSIBLE PARKING SIGNAGE AND PAVEMENT MARKING

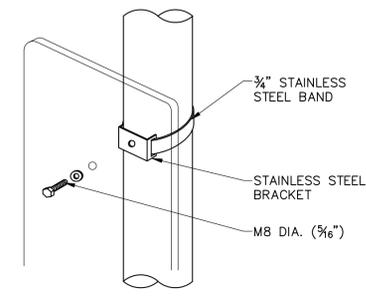


SIGN POST ATTACHMENT


7 STOP SIGN

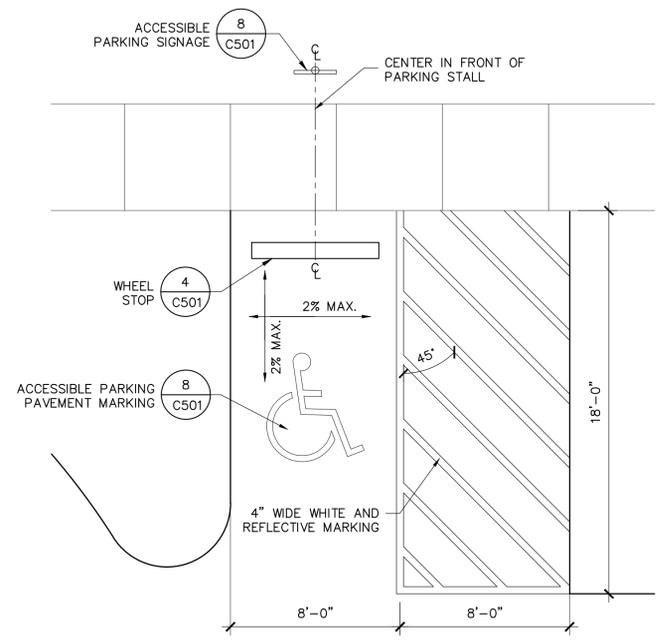

6 ACCESSIBLE PARKING AND STRIPING

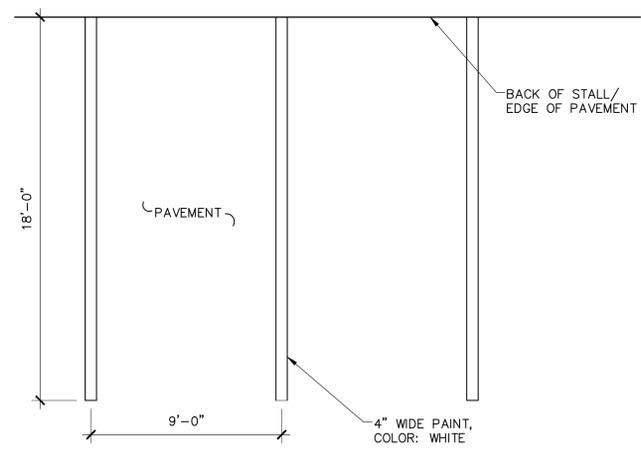


5 PARKING STRIPING

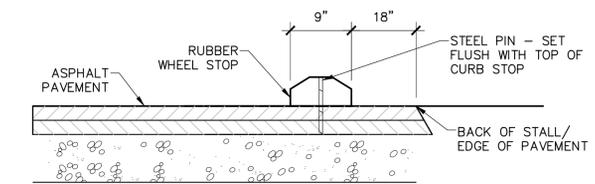


NOTE: CENTER WHEEL STOP IN PARKING SPACE WIDTH

4 WHEEL STOP

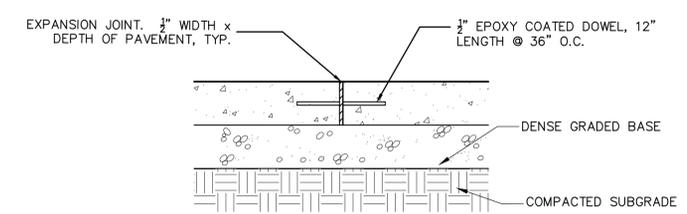


3 PAVEMENT DOWEL

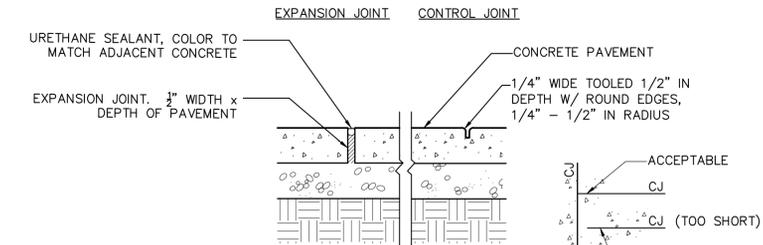

NOTES:
1. PROVIDE EXPANSION JOINTS 30' OC MAX. ALL WAYS
2. ALL JOINTS SHALL BE CONTINUOUS, STRAIGHT AND COMPLETE, DO NOT LEAVE JOINTS SHORT OR CONTINUE JOINTS TOO LONG.

PLAN VIEW

2 EXPANSION/CONTROL JOINTS

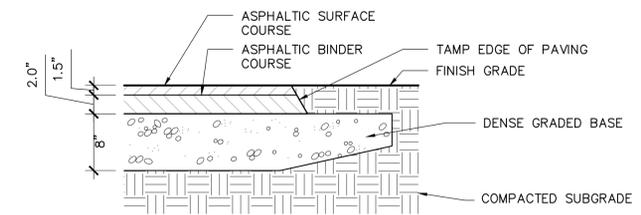

1 ASPHALT PAVEMENT



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com



EMERSON SENIOR LIVING EXPANSION
402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18

RF/IS/ DATE:


This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER

DETAILS
C501

©2017 Iconica, Inc.

File: P:\52-1000-0101.00 Madison Rustic Road\CAD\P-D.dwg Layout: C501 User: katniks Plotted: Feb 19, 2018 10:04am

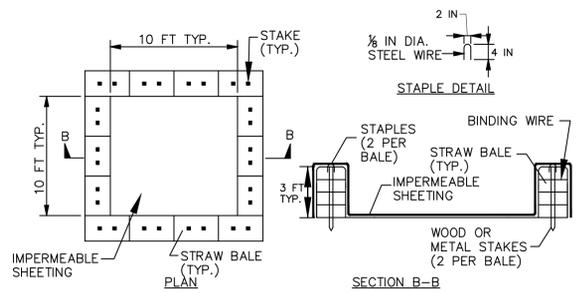


NOTE: CAN BE TWO STACKED BALES OR PARTIALLY EXCAVATED TO REACH 3 FT DEPTH

CONSTRUCTION SPECIFICATIONS


1. LOCATE WASHOUT STRUCTURE A MINIMUM OF 50 FEET AWAY FROM OPEN CHANNELS, STORM DRAIN INLETS, SENSITIVE AREAS, WETLANDS, BUFFERS AND WATER COURSES AND AWAY FROM CONSTRUCTION TRAFFIC.
2. SIZE WASHOUT STRUCTURE FOR VOLUME NECESSARY TO CONTAIN WASH WATER AND SOLIDS AND MAINTAIN AT LEAST 4 INCHES OF FREEBOARD. TYPICAL DIMENSIONS ARE 10 FEET X 10 FEET X 3 FEET DEEP.
3. PREPARE SOIL BASE FREE OF ROCKS OR OTHER DEBRIS THAT MAY CAUSE TEARS OR HOLES IN THE LINER. FOR LINER, USE 10 MIL OR THICKER UV RESISTANT, IMPERMEABLE SHEETING, FREE OF HOLES AND TEARS OR OTHER DEFECTS THAT COMPROMISE IMPERMEABILITY OF THE MATERIAL.
4. PROVIDE A SIGN FOR THE WASHOUT IN CLOSE PROXIMITY TO THE FACILITY.
5. KEEP CONCRETE WASHOUT STRUCTURE WATER TIGHT. REPLACE IMPERMEABLE LINER IF DAMAGED (E.G., RIPPED OR PUNCTURED). EMPTY OR REPLACE WASHOUT STRUCTURE THAT IS 75 PERCENT FULL, AND DISPOSE OF ACCUMULATED MATERIAL PROPERLY. DO NOT REUSE PLASTIC LINER. WET-VACUUM STORED LIQUIDS THAT HAVE NOT EVAPORATED AND DISPOSE OF IN AN APPROVED MANNER. PRIOR TO FORECASTED RAINSTORMS, REMOVE LIQUIDS OR COVER STRUCTURE TO PREVENT OVERFLOWS. REMOVE HARDENED SOLIDS, WHOLE OR BROKEN UP, FOR DISPOSAL OR RECYCLING. MAINTAIN RUNOFF DIVERSION AROUND EXCAVATED WASHOUT STRUCTURE UNTIL STRUCTURE IS REMOVED.

9 ONSITE CONCRETE WASHOUT STRUCTURE
C502 NTS

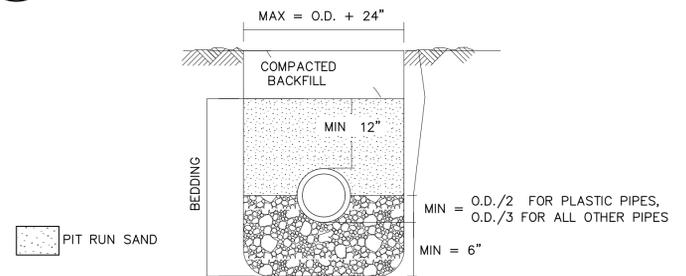


NOTES:
UNLESS OTHERWISE SPECIFIED, ALL SANITARY AND STORM SEWER PIPES, INCLUDING LATERALS AND LEADS, SHALL BE INSTALLED WITH THE TYPE AND SIZE OF PIPE INSTALLED.
ALL TRENCHES SHALL BE HAND BACKFILLED TO A POINT 12" ABOVE THE TOP OF THE PIPE. ALL BEDDING SHALL BE MECHANICALLY COMPACTED.
THE MAXIMUM ALLOWABLE TRENCH WIDTH SHALL BE O.D. + 24", AND SHALL APPLY FROM THE BOTTOM OF THE TRENCH TO A POINT 12" ABOVE THE TOP OF THE PIPE. WHERE THIS WIDTH IS EXCEEDED, THE CONTRACTOR SHALL FURNISH AND INSTALL A HIGHER TYPE OF BEDDING AT NO EXTRA COST. THE TYPE OF BEDDING SHALL BE DETERMINED BY THE ENGINEER.
O.D. EQUALS THE OUTSIDE DIAMETER OF THE PIPE. THE MINIMUM DISTANCE OF O.D./2 IS SPECIFIED FOR PLASTIC SEWER PIPE.


8 PIPE BEDDING
C502 NTS

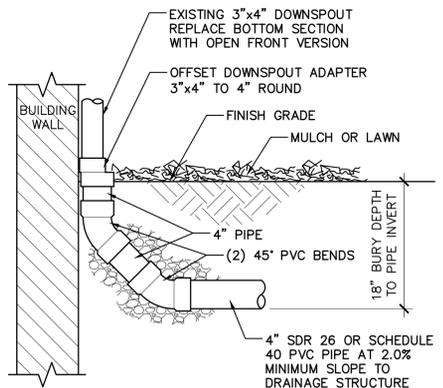


7 DOWNSPOUT CONNECTOR
C502 NTS

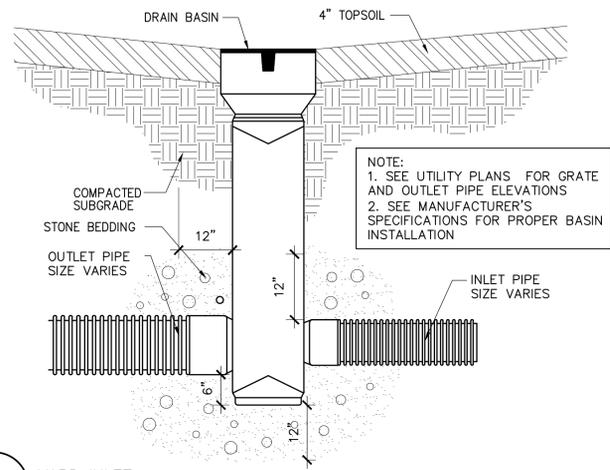


6 YARD INLET
C502 NTS

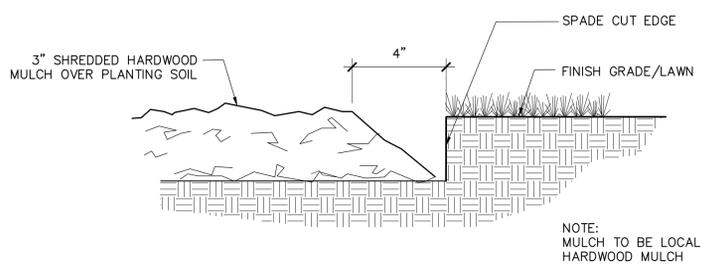


5 SHOVEL CUT EDGE
C502 NTS

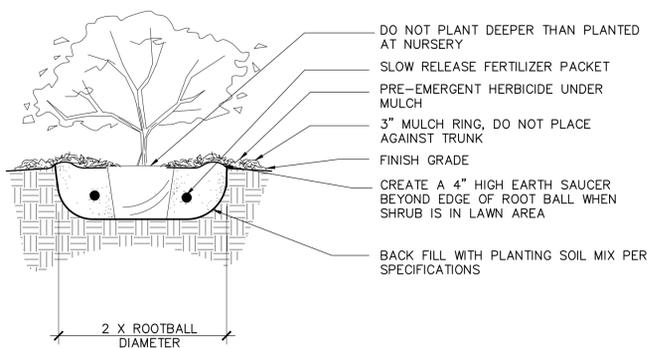



4 CONTAINER SHRUB PLANTING DETAIL
C502 NTS

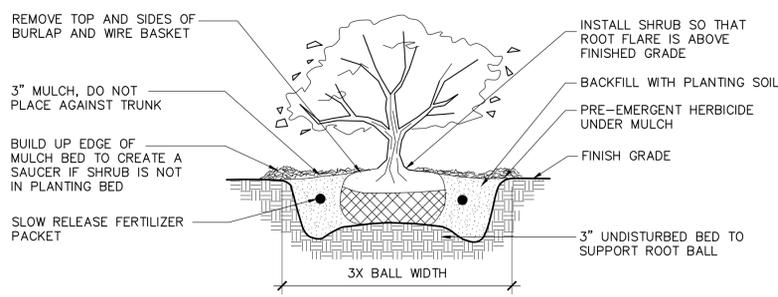

3 B&B SHRUB PLANTING DETAIL
C502 NTS

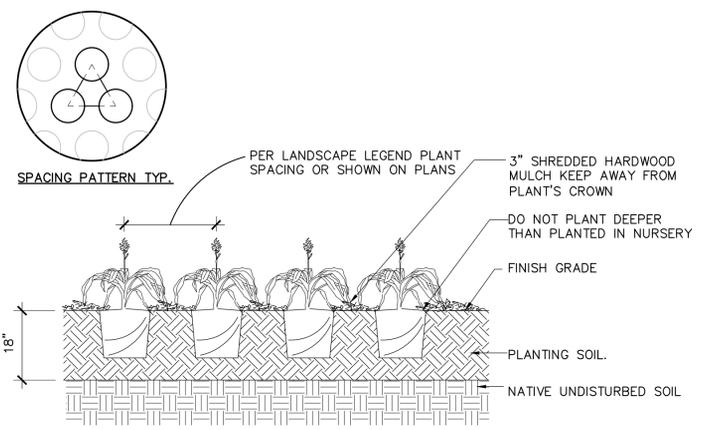

2 GROUNDCOVER/PERENNIAL/BULB PLANTING DETAIL
C502 NTS

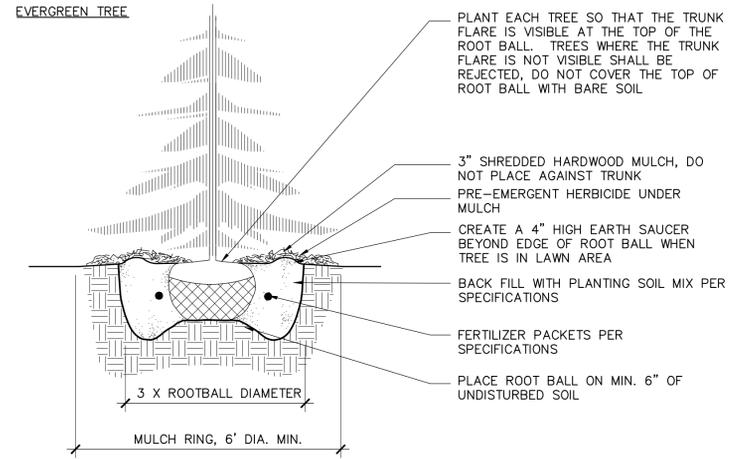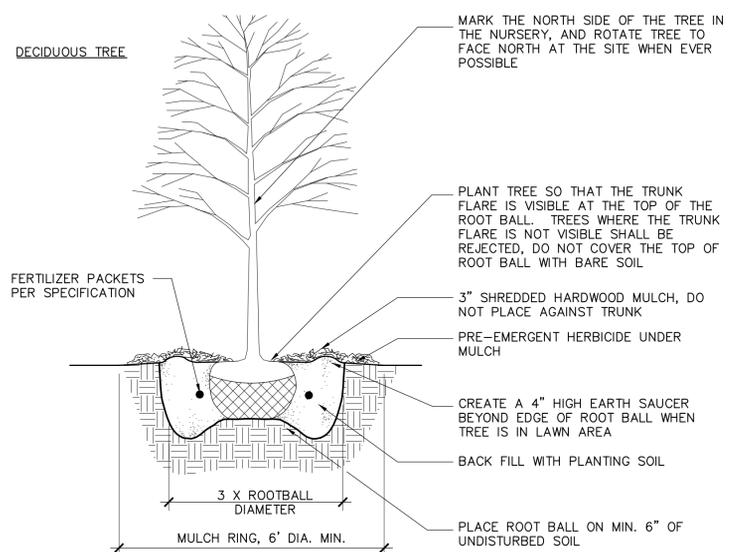

NOTES:
1. DO NOT HEAVILY PRUNE THE TREE AT PLANTING, PRUNE ONLY CROSSOVER LIMBS, CO-DOMINANT LEADERS, AND BROKEN OR DEAD BRANCHES. SOME INTERIOR TWIGS AND LATERAL BRANCHES MAY BE PRUNED; HOWEVER, DO NOT REMOVE THE TERMINAL BUDS OF BRANCHES THAT EXTEND TO THE EDGE OF THE CROWN
2. STAKE TREES ONLY UPON THE APPROVAL OF THE LANDSCAPE ARCHITECT
3. WRAP TREE TRUNKS ONLY UPON THE APPROVAL OF THE LANDSCAPE ARCHITECT
4. REMOVE ALL TWINE, ROPE, WIRE AND BURLAP FROM TOP AND SIDES OF ROOT BALL.

1 B&B TREE PLANTING DETAILS
C502 NTS

PLOT DATE:



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18


RFI/SI DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER


A100

©2018 Iconica, Inc.

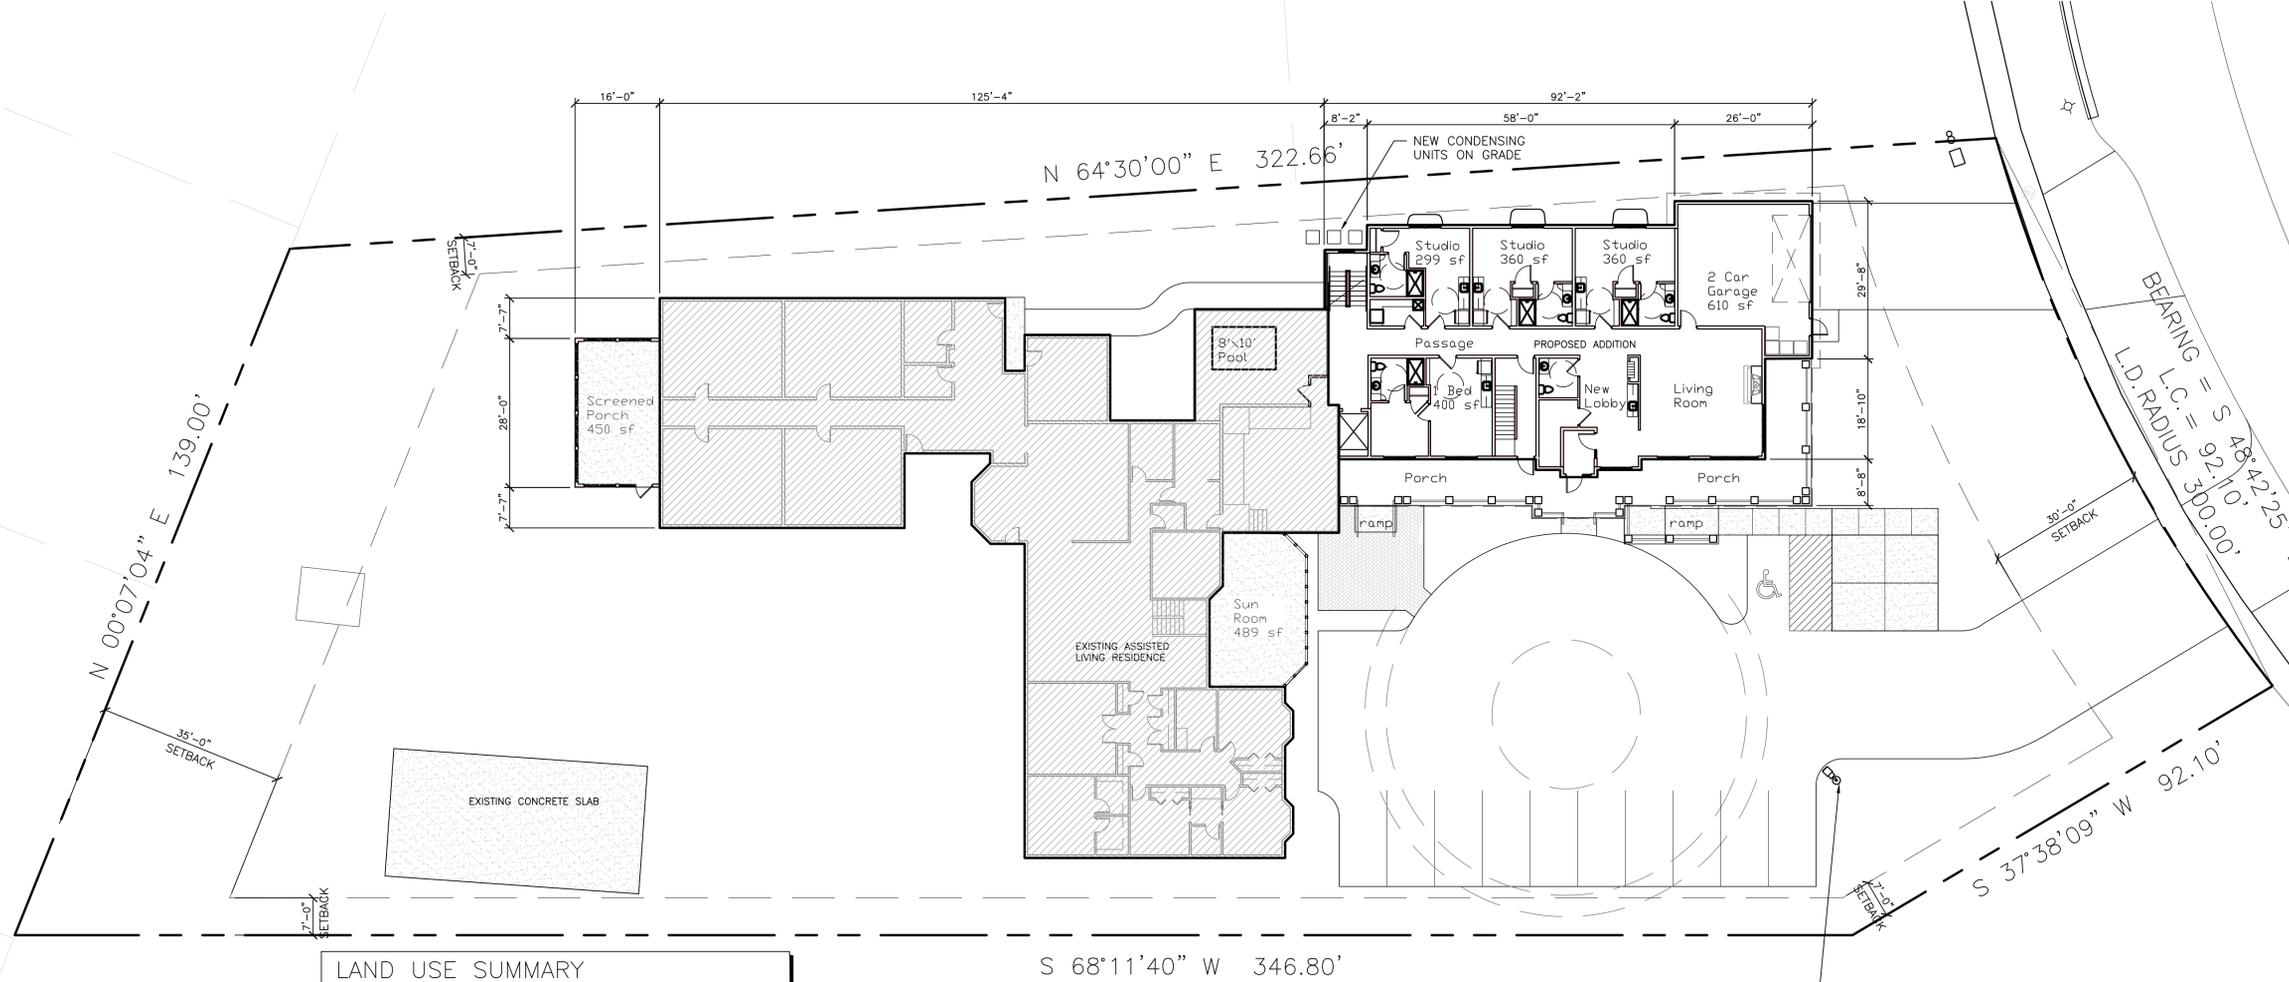

LAND USE SUMMARY	
LOT AREA =	51,057 SF
BUILDING FOOTPRINT =	11,855 SF
IMPERVIOUS AREA =	23,832 SF
PERCENT IMPERVIOUS =	46.7%
USEABLE OPEN AREA =	27,255 SF
11 PARKING STALLS (1 ACCESSIBLE) + 2 STALLS IN GARAGE =	13 TOTAL STALLS
TRASH WILL BE STORED IN	GARAGE
BIKE PARKING WILL BE PROVIDED WITHIN THE SECURE GARAGE FOR EMPLOYEES, RESIDENTS AND VISITORS	
LEGAL DESCRIPTION:	CERTIFIED SURVEY MAP NO 10078 AS RECORDED IN DANE COUNTY REGISTER OF DEEDS IN VOL 59 PAGE 40 OF CERTIFIED SURVEYS, LOT 1.

1 SITE PLAN
A100 SCALE: 1/16" = 1'-0"



PLOT DATE:



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
MADISON, WISCONSIN 53718
LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18


RF/IS/ DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER

A101

©2018 Iconica, Inc.

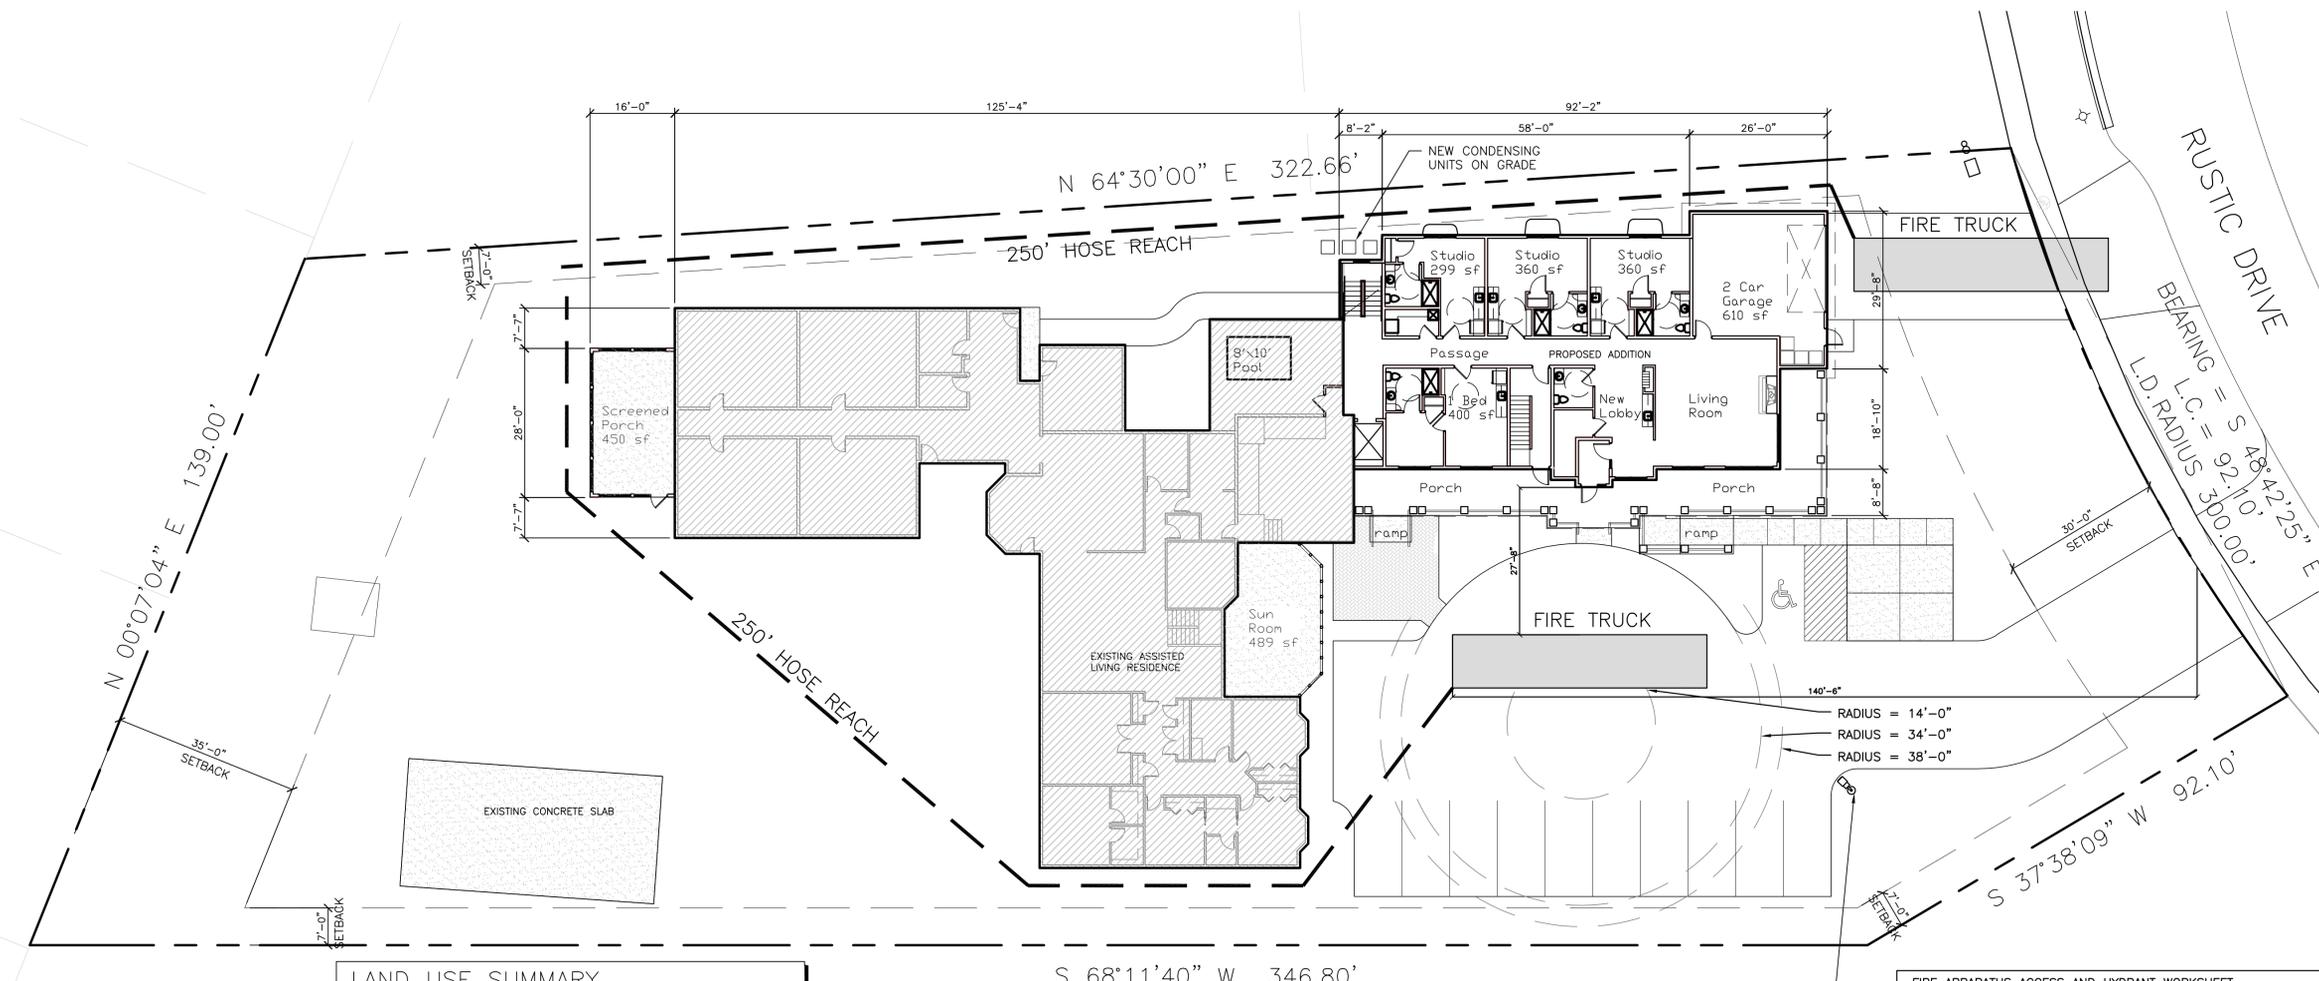

LAND USE SUMMARY	
LOT AREA =	51,057 SF
BUILDING FOOTPRINT =	11,855 SF
IMPERVIOUS AREA =	23,832 SF
PERCENT IMPERVIOUS =	46.7%
USEABLE OPEN AREA =	27,255 SF
11 PARKING STALLS (1 ACCESSIBLE) + 2 STALLS IN GARAGE =	13 TOTAL STALLS
TRASH WILL BE STORED IN	GARAGE
BIKE PARKING WILL BE PROVIDED WITHIN THE SECURE GARAGE FOR EMPLOYEES, RESIDENTS AND VISITORS	
LEGAL DESCRIPTION: CERTIFIED SURVEY MAP NO 10078 AS RECORDED IN DANE COUNTY REGISTER OF DEEDS IN VOL 59 PAGE 40 OF CERTIFIED SURVEYS, LOT 1.	

FIRE APPARATUS ACCESS AND HYDRANT WORKSHEET

FULL BUILDING TO BE SPRINKLED WITH NFPA 13R AUTOMATIC SPRINKLER SYSTEM. FIRE LANES ARE WITHIN 250' OF ALL PORTIONS OF THE EXTERIOR WALL.

FIRE LANES WILL SUPPORT 85,000 LBS, BE AT LEAST 20'-0" WIDE, HAVE VERTICAL CLEARANCE OF 13-1/2 FEET, NOT HAVE A SLOPE OF MORE THAN 8%, WILL HAVE A ROLLABLE CURB AND DOES NOT INCLUDE A PORTION OF SIDEWALK.

FIRE LANE WILL NOT BE OBSTRUCTED BY GATE OR BARRICADE.


FIRE LANE WILL NOT BE DEAD-ENDED WITH A LENGTH GREATER THAN 150'.

NO HIGH PILE STORAGE WILL OCCUR ON SITE.


BECAUSE THE PEAK OF THE BUILDING IS MORE THAN 30' ABOVE THE GRADE PLANE, APPARUS WILL HAVE ACCESS PARALLEL TO ONE SIDE OF THE TALL PORTION AND 25% OF THE ENTIRE BUILDING THAT IS WITHIN 30' OF THE BUILDING, THERE WILL BE NO OVERHEAD UTILITY LINES, WILL HAVE NO TREES CANOPIES IN CONFLICT AND BE 20' WIDE ALONG THE EDGE OF THE BUILDING.

ALL PORTIONS OF THE FIRE LANE WILL BE WITHIN 500' OF AT LEAST (2) HYDRANTS, THERE IS AT LEAST 40' FROM THE HYDRANTS TO THE BUILDING AND THERE ARE NO OBSTRUCTIONS NEAR THE HYDRANTS.

1 FIRE ACCESS PLAN
SCALE: 1/16" = 1'-0"

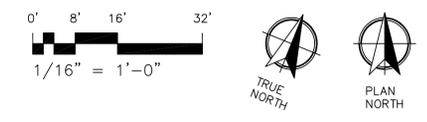

PLOT DATE:

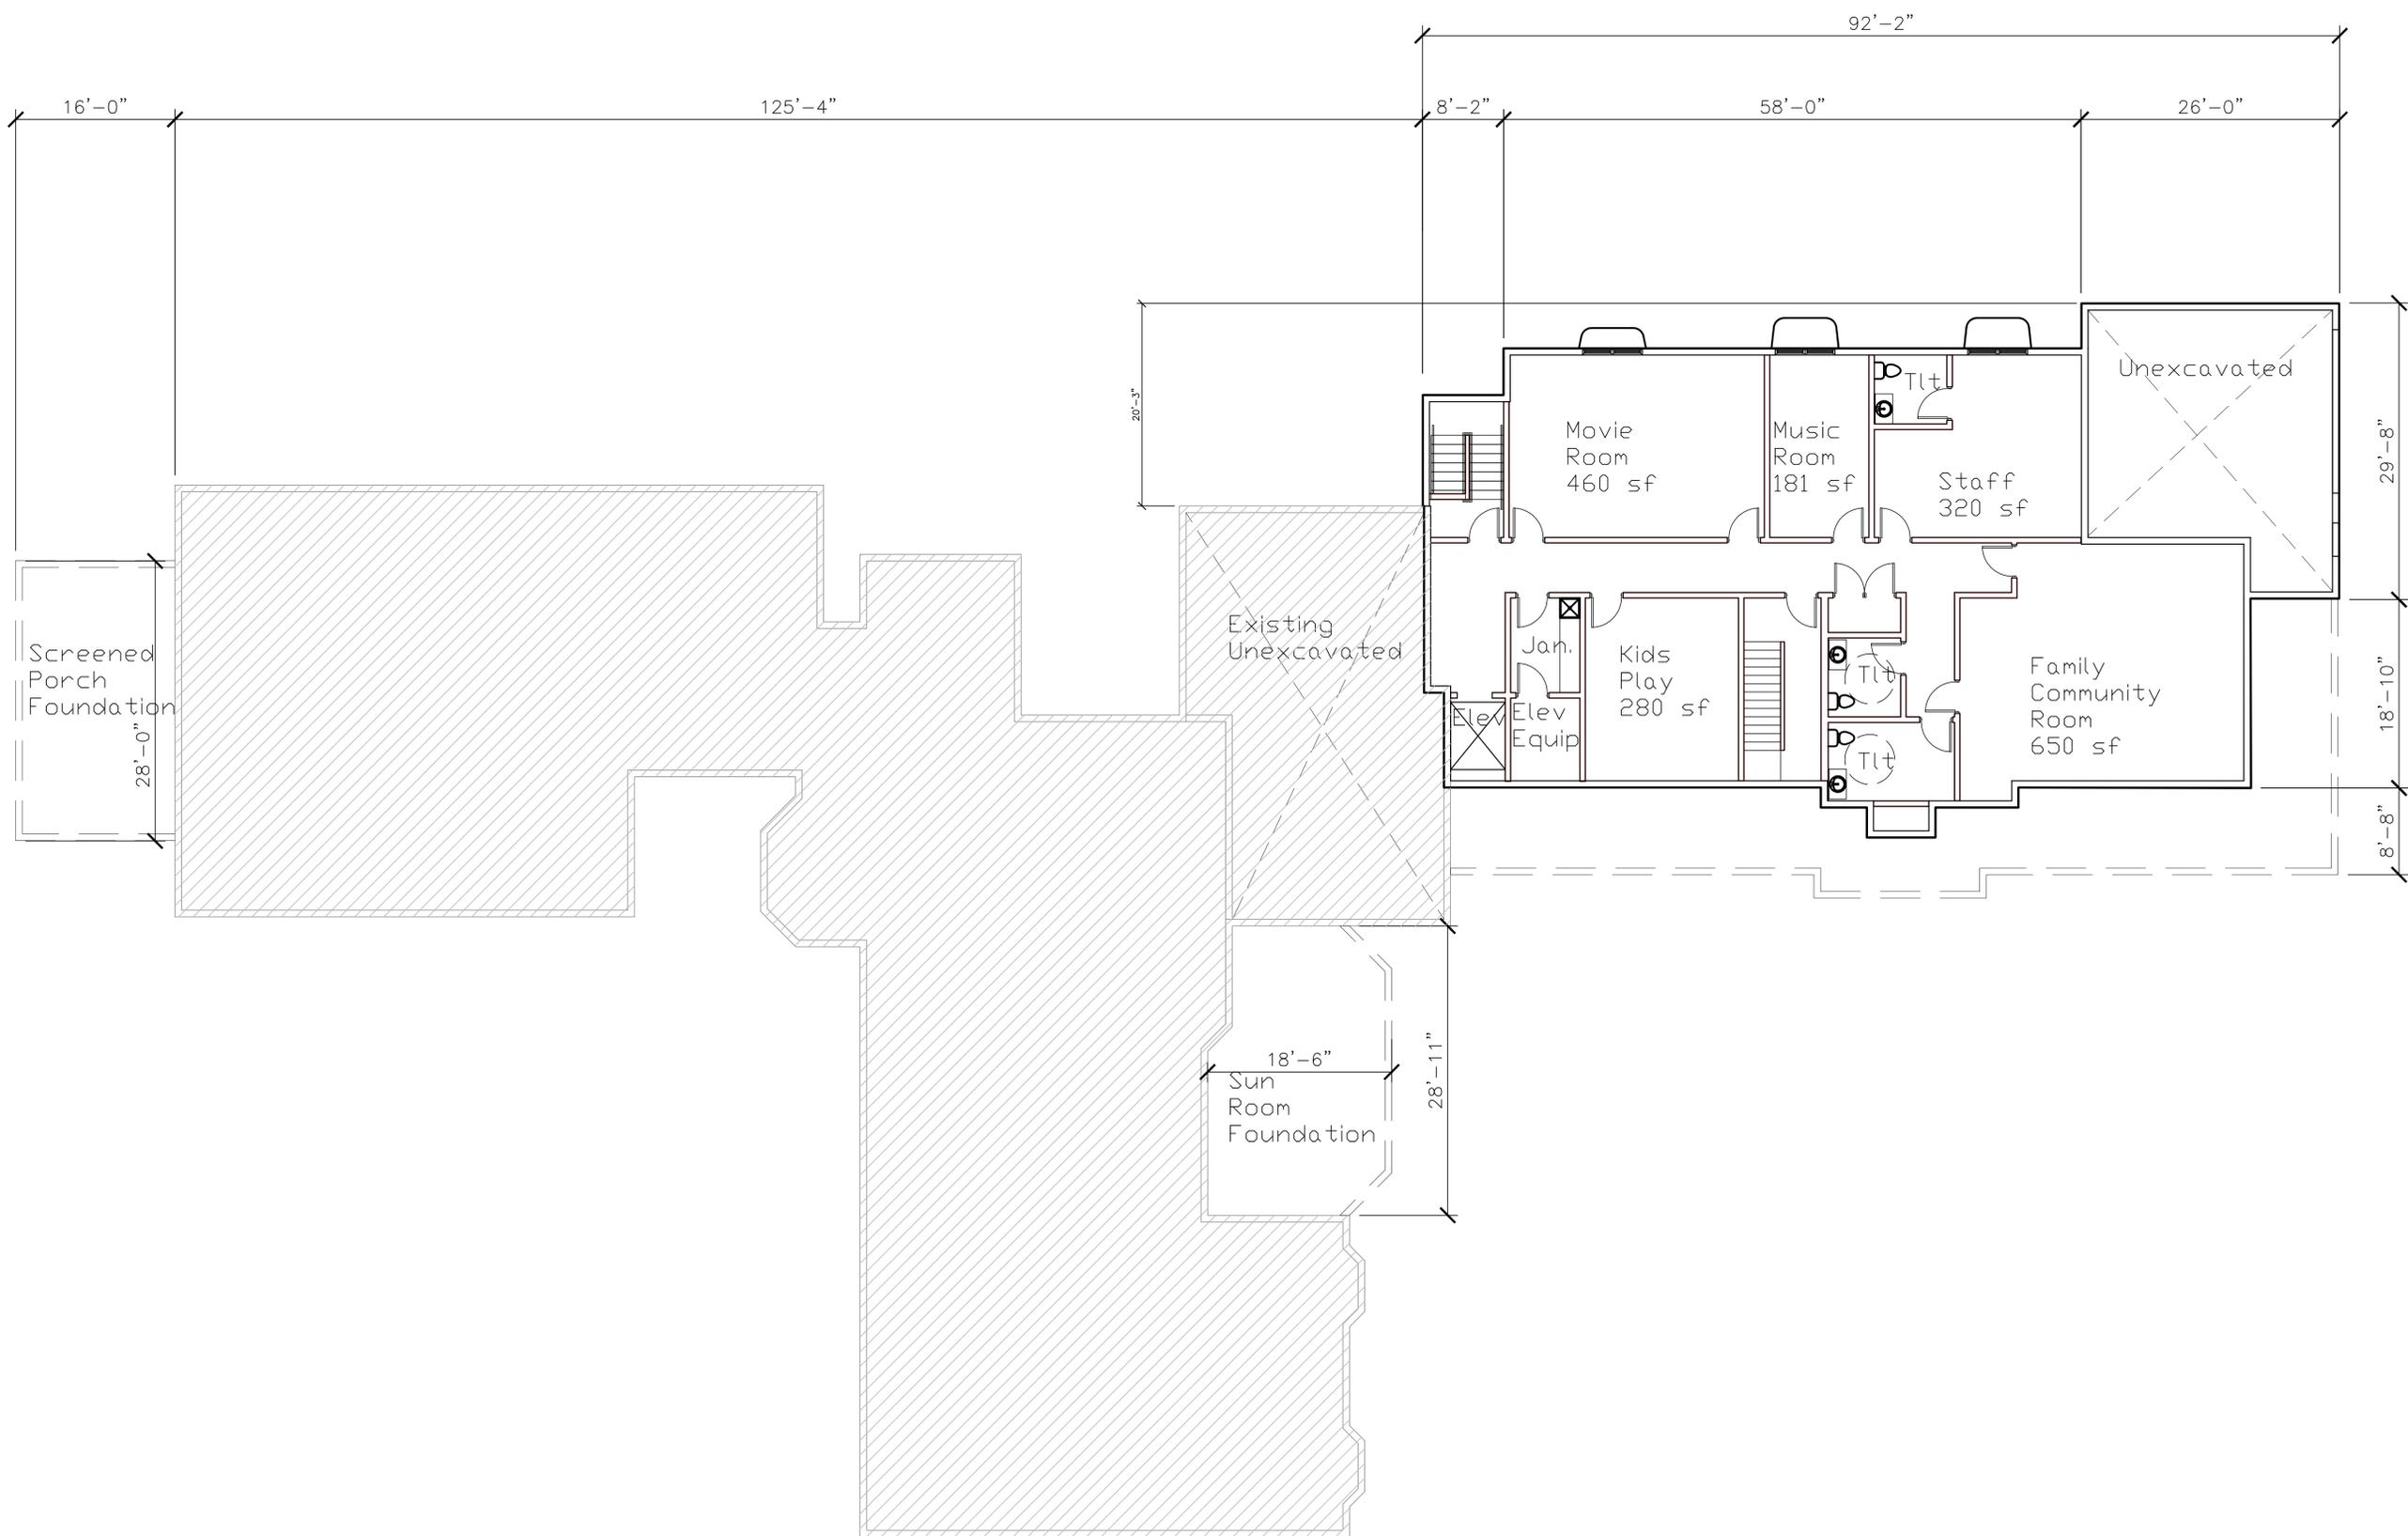

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18


RF/IS/ DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.


PROJECT #: 20170610
SHEET NUMBER

A200

1 BASEMENT FLOOR PLAN
A200 SCALE: 1/8" = 1'-0"



PLOT DATE:

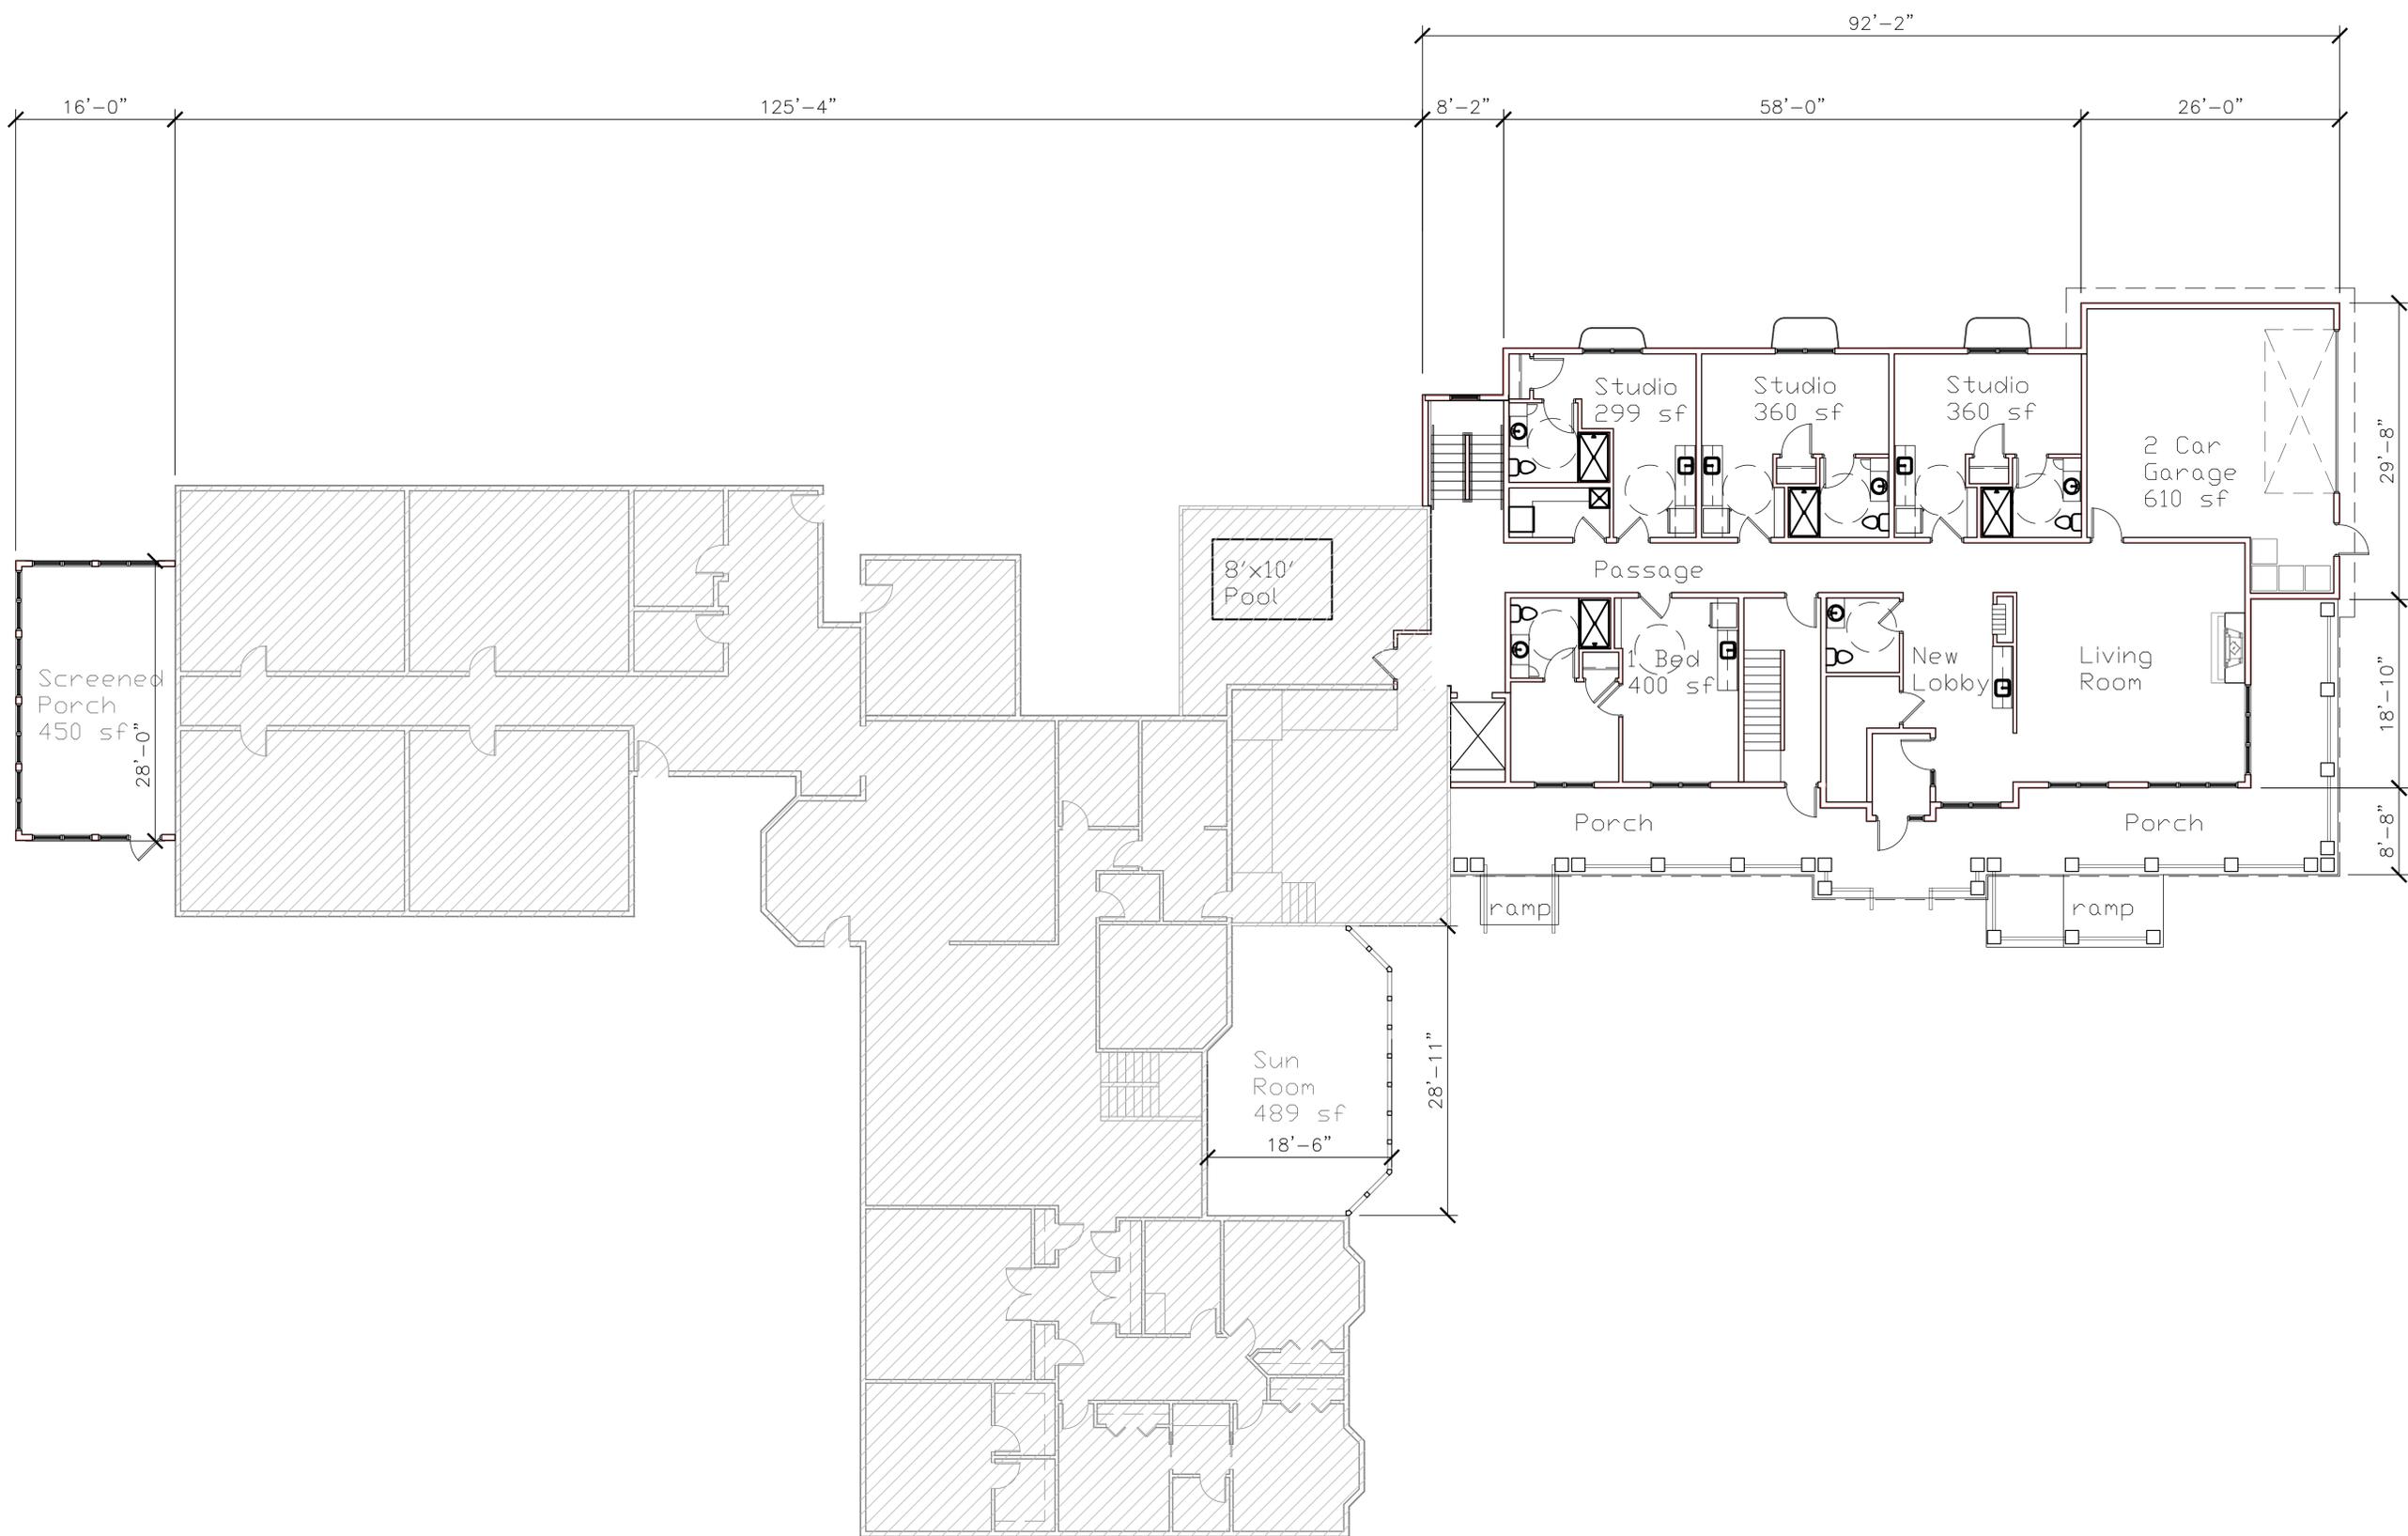

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18

RF/IS/ DATE:


This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER


A201

©2018 Iconica, Inc.

1 FIRST FLOOR PLAN
A201 SCALE: 1/8" = 1'-0"



PLOT DATE:

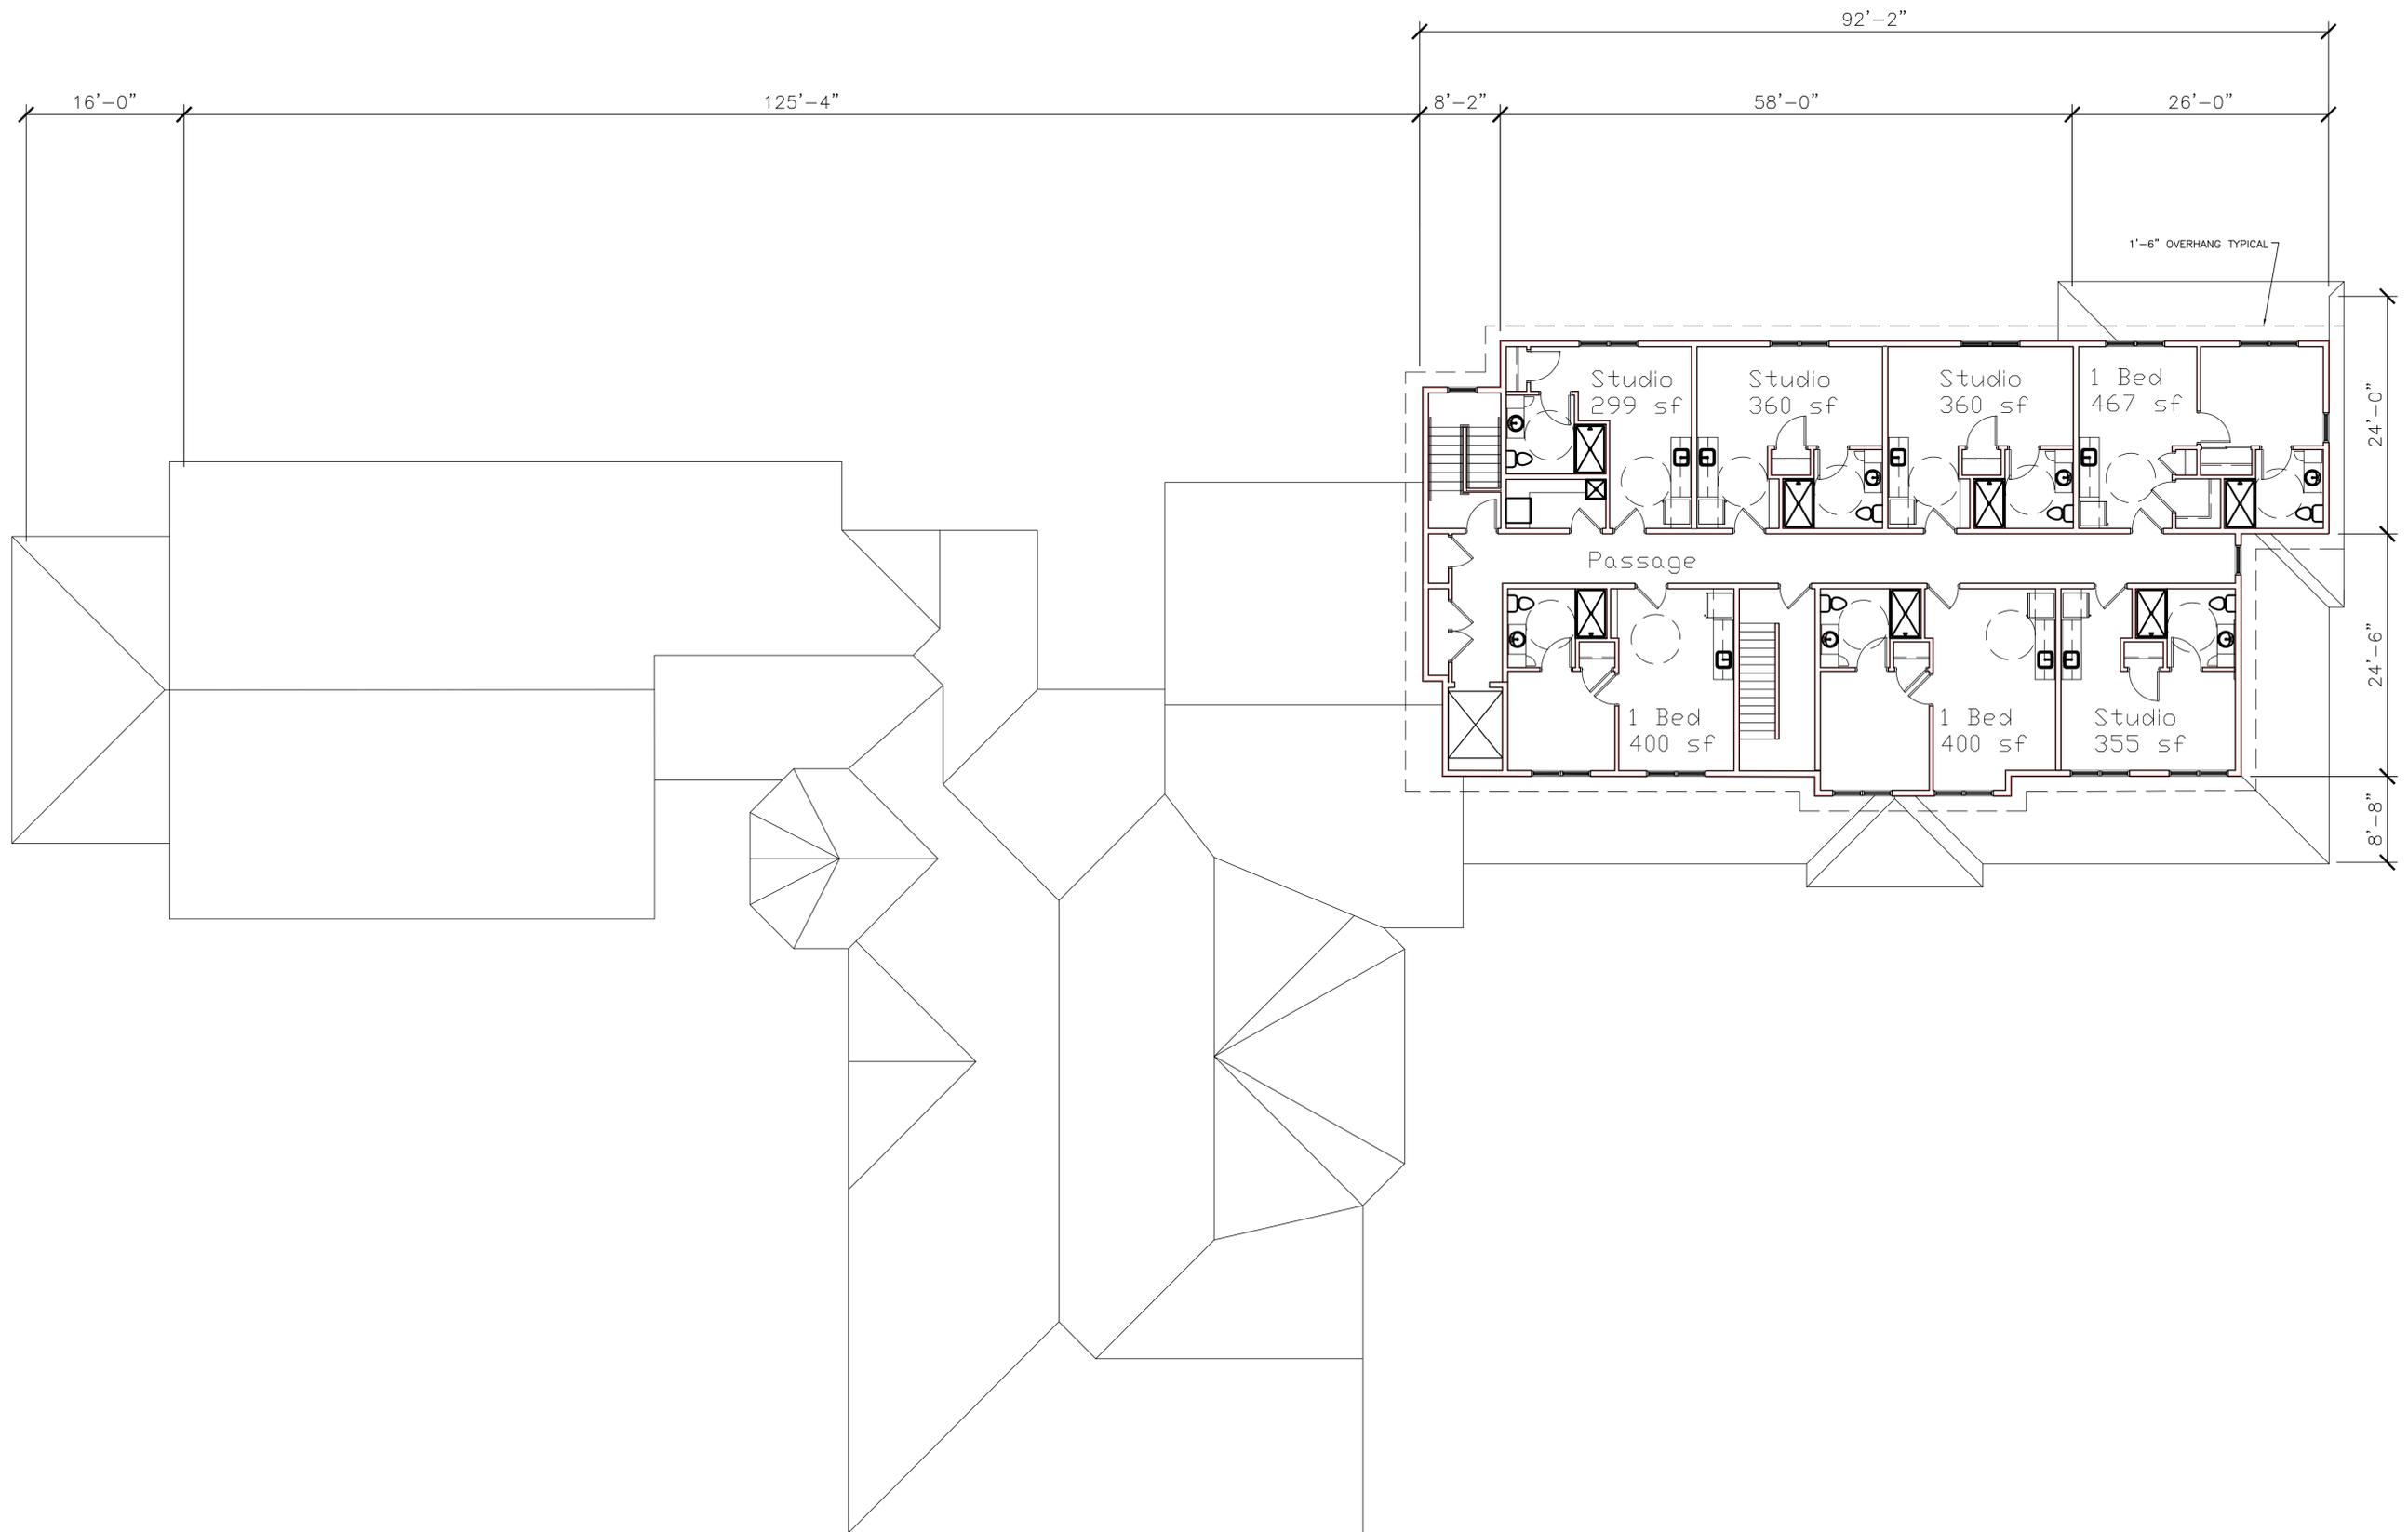

901 Deming Way // Madison, WI 53717
 Ph: 608.664.3500 // Fx: 608.664.3535
 iconicacreates.com

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
 MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
 402 RUSTIC DRIVE
 MADISON, WI 53718

ISSUE DATES:
 CITY SUB #1: 02-21-18

RF/ISI DATE:


This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
 SHEET NUMBER


A202

©2018 Iconica, Inc.


1 SECOND FLOOR PLAN
 A202 SCALE: 1/8" = 1'-0"



PLOT DATE:

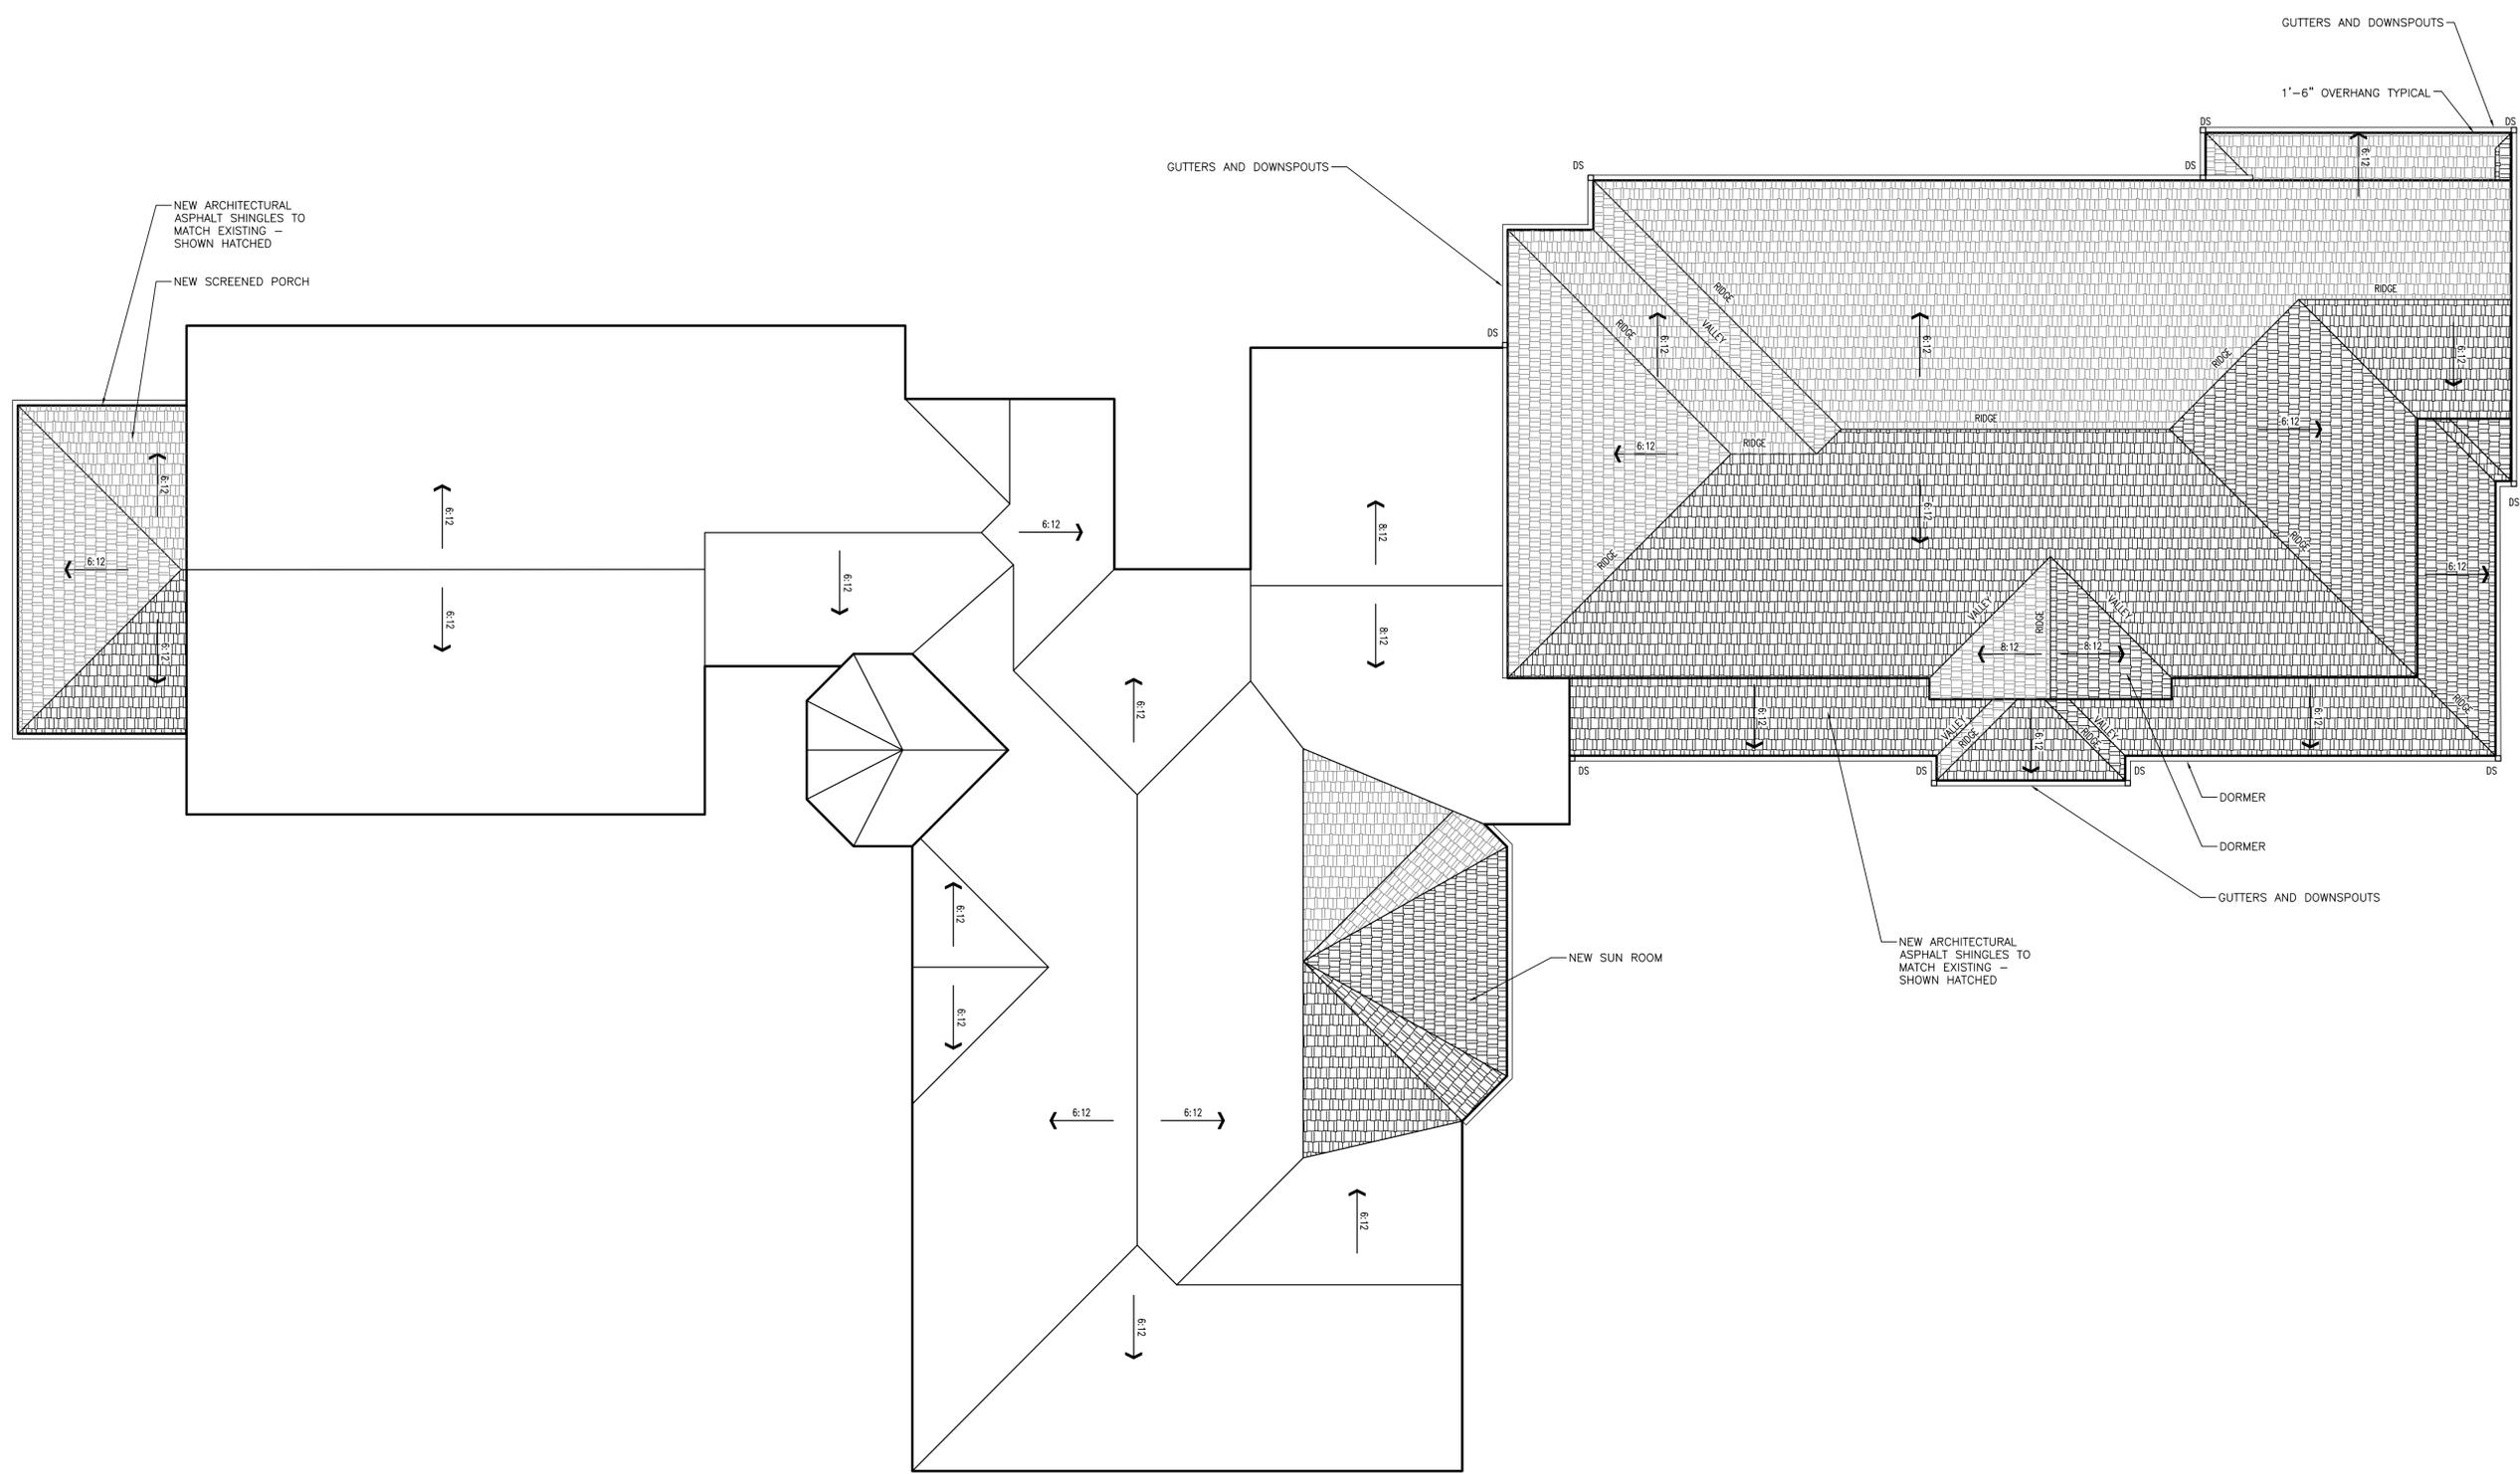

1 ROOF PLAN
 A203 SCALE: 1/8" = 1'-0"



901 Deming Way // Madison, WI 53717
 Ph: 608.664.3500 // Fx: 608.664.3535
 iconicacreates.com

EMERSON SENIOR LIVING EXPANSION
 402 RUSTIC DRIVE
 MADISON, WISCONSIN 53718

LIFESONG LIVING, LLC
 402 RUSTIC DRIVE
 MADISON, WI 53718

ISSUE DATES:
 CITY SUB #1: 02-21-18

RF/IS/DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

PROJECT #: 20170610
SHEET NUMBER

A203

©2018 Iconica, Inc.

PLOT DATE:



901 Deming Way // Madison, WI 53717
Ph: 608.664.3500 // Fx: 608.664.3535
iconicacreates.com

EMERSON SENIOR LIVING EXPANSION

402 RUSTIC DRIVE
MADISON, WISCONSIN 53718
LIFESONG LIVING, LLC
402 RUSTIC DRIVE
MADISON, WI 53718

ISSUE DATES:
CITY SUB #1: 02-21-18


RF/IS/ DATE:

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.



PROJECT #: 20170610
SHEET NUMBER

A301



©2018 Iconica, Inc.

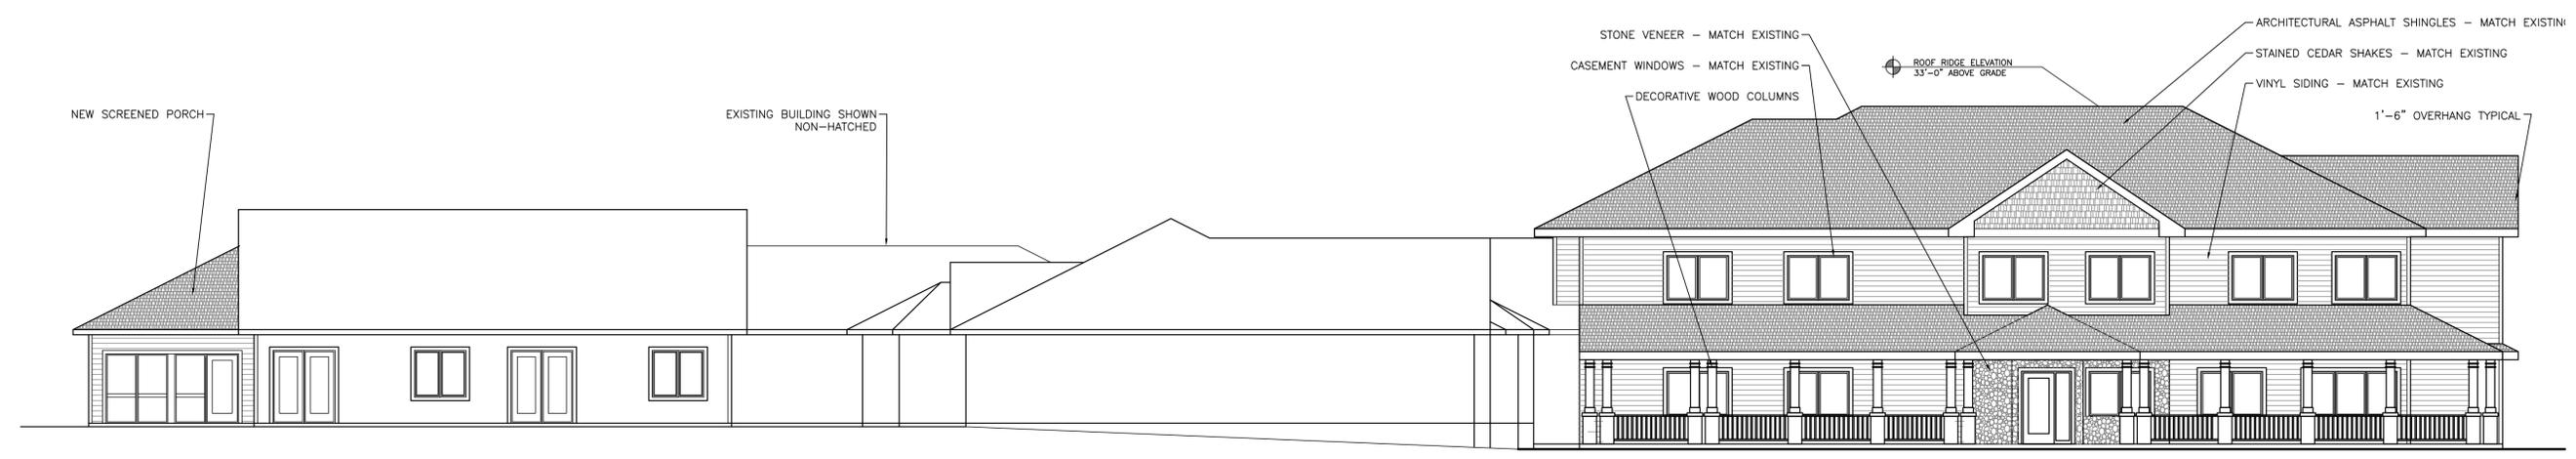


3 SOUTH ELEVATION
A301 SCALE: 1/8" = 1'-0"

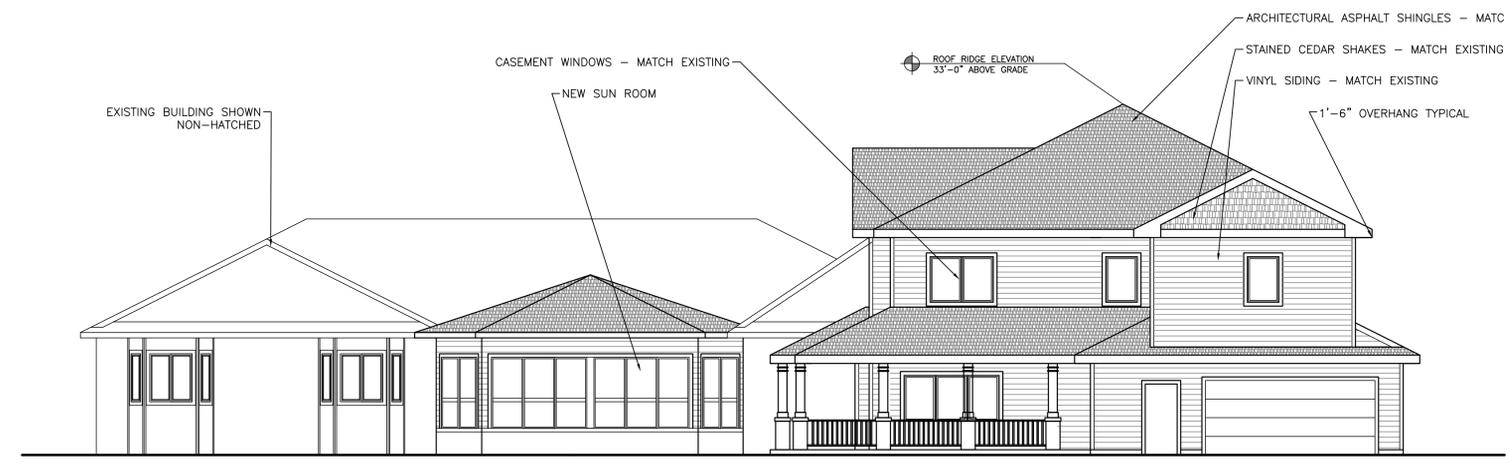

2 EAST ELEVATION
A301 SCALE: 1/8" = 1'-0"

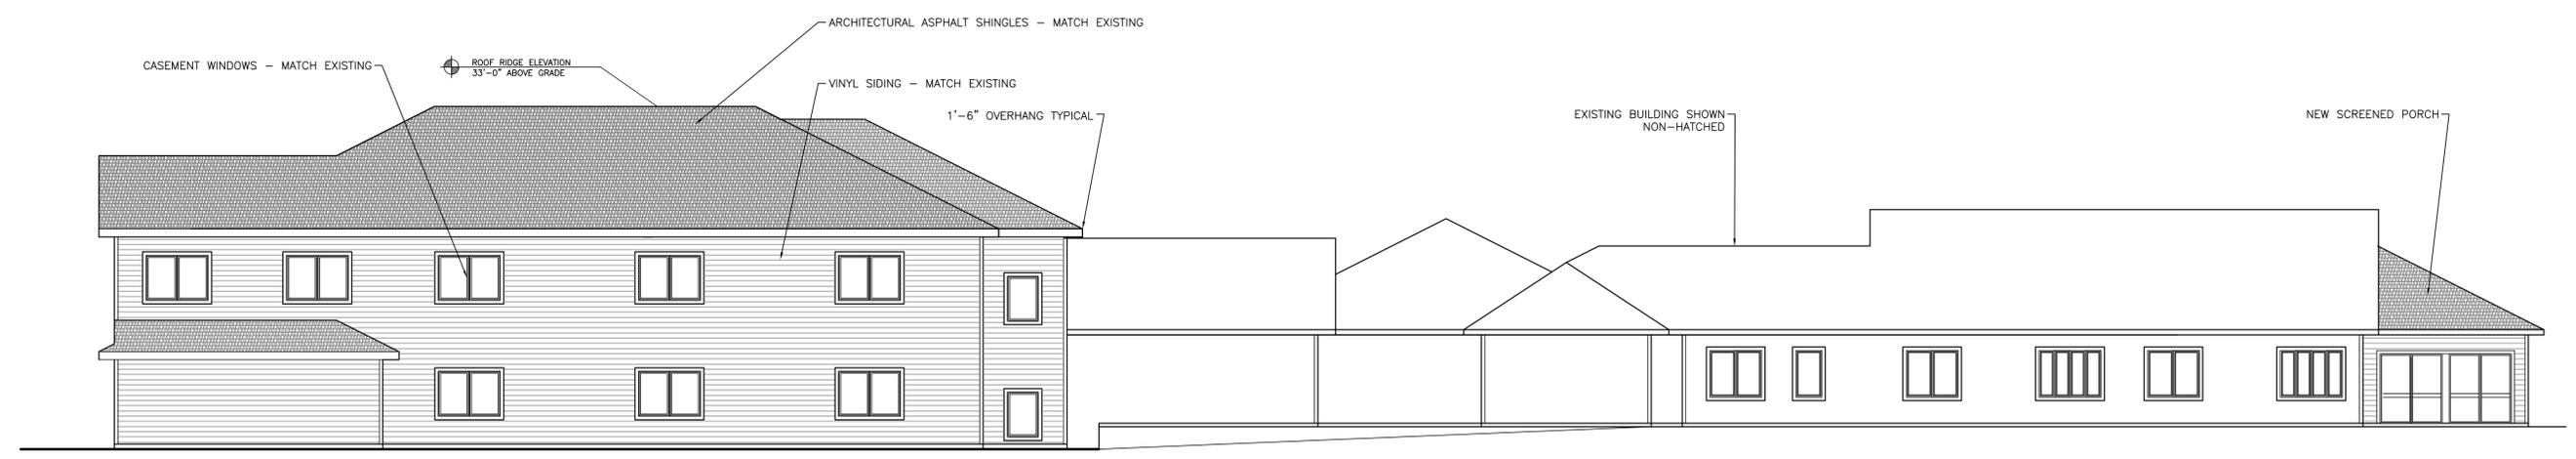

1 NORTH ELEVATION
A301 SCALE: 1/8" = 1'-0"





City of Madison Fire Department

314 W Dayton Street, Madison, WI 53703-2506
 Phone: 608-266-4420 • Fax: 608-267-1100 • E-mail: fire@cityofmadison.com

Project Address: 402 Rustic Drive, Madison, WI 53718

Contact Name & Phone #: Bob Feller (608) 664-3591

FIRE APPARATUS ACCESS AND FIRE HYDRANT WORKSHEET

1. Is the building completely protected by an NFPA 13 or 13R automatic fire sprinkler system? If non-sprinklered , fire lanes extend to within 150-feet of all portions of the exterior wall? If sprinklered , fire lanes are within 250-feet of all portions of the exterior wall?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No	<input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A <input type="checkbox"/> N/A
2. Is the fire lane constructed of concrete or asphalt, designed to support a minimum load of 85,000 lbs? a) Is the fire lane a minimum unobstructed width of at least 20-feet? b) Is the fire lane unobstructed with a vertical clearance of at least 13½-feet? c) Is the minimum inside turning radius of the fire lane at least 28-feet? d) Is the grade of the fire lane not more than a slope of 8%? e) Is the fire lane posted as fire lane? (Provide detail of signage.) f) Is a roll-able curb used as part of the fire lane? (Provide detail of curb.) g) Is part of a sidewalk used as part of the required fire lane? (Must support +85,000 lbs.)	<input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input type="checkbox"/> Yes <input type="checkbox"/> Yes	<input type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No <input checked="" type="checkbox"/> No <input type="checkbox"/> No <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> No	<input type="checkbox"/> N/A <input type="checkbox"/> N/A
3. Is the fire lane obstructed by security gates or barricades? If yes: a) Is the gate a minimum of 20-feet clear opening? b) Is an approved means of emergency operations installed, key vault, padlock or key switch?	<input type="checkbox"/> Yes <input type="checkbox"/> Yes <input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No	<input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A
4. Is the Fire lane dead-ended with a length greater than 150-feet? If yes, does the area for turning around fire apparatus comply with IFC D103?	<input type="checkbox"/> Yes <input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No	<input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A
5. Is any portion of the building to be used for high-piled storage in accordance with IFC Chapter 3206.6 If yes, see IFC 3206.6 for further requirements.	<input type="checkbox"/> Yes	<input checked="" type="checkbox"/> No	<input type="checkbox"/> N/A
6. Is any part of the building <u>greater than 30-feet</u> above the grade plane? If yes, answer the following questions: a) Is the aerial apparatus fire lane parallel to one entire side of the building and covering at least 25% of the perimeter? b) Is the near edge of the aerial apparatus fire lane between 15' and 30' from the building? c) Are there any overhead power or utility lines located across the aerial apparatus fire lane? d) Are there any tree canopies expected to grow across the aerial fire lane? (Based on mature canopy width of tree species) e) Does the aerial apparatus fire lane have a minimum unobstructed width of 26-feet? f) Is the space between the aerial lane and the building free of trees exceeding 20' in heights?	<input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No <input type="checkbox"/> No <input checked="" type="checkbox"/> No <input checked="" type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No	<input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A
7. Are all portions of the required fire lanes within 500-feet of at least (2) hydrants? <i>Note: Distances shall be measured along the path of the hose lay as it comes off the fire apparatus.</i> a) Is the fire lane at least 26' wide for at least 20-feet on each side of the hydrants? b) Is there at least 40' between a hydrant and the building? c) Are the hydrant(s) setback no less than 5-feet nor more than 10-feet from the curb or edge of the street or fire lane? d) Are hydrants located in parking lot islands a minimum of 3½-feet from the hydrant to the curb? e) Are there no obstructions, including but not limited to: power poles, trees, bushes, fences, posts located, or grade changes exceeding 1½-feet, within 5-feet of a fire hydrant?	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes <input type="checkbox"/> Yes <input checked="" type="checkbox"/> Yes	<input type="checkbox"/> No <input checked="" type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No <input type="checkbox"/> No	<input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A <input type="checkbox"/> N/A <input checked="" type="checkbox"/> N/A <input type="checkbox"/> N/A

Note: Hydrants shall be installed and in-service prior to combustible construction on the project site.

Attach an additional sheet if further explanation is required for any answers.

This worksheet is based on **MGO 34.503** and **IFC 2015 Edition Chapter 5 and Appendix D**; please see the codes for further information.

Parcel Number - 251/0710-024-0192-6

Current

This Parcel is in the City of Madison. For additional information, please visit the City of Madison website.

← Parcel Parents

Summary Report

Parcel Detail

Less -

Municipality Name	CITY OF MADISON
State Municipality Code	251
Parcel Description	CERTIFIED SURVEY MAP NO 10078 AS RECORDED IN DANE COUNTY REGISTER OF DEEDS IN VOL 59 PAGE 40 OF CERTIFIED SURVEYS, LOT 1. This property description is for tax purposes. It may be abbreviated. For the complete legal description please refer to the deed.
Current Owner	TRAVIS P STONE 
Primary Address	402 RUSTIC DR
Additional Address	402 RUSTIC DR UNIT 1 402 RUSTIC DR UNIT 2 402 RUSTIC DR UNIT 3 402 RUSTIC DR UNIT 4
Billing Address	402 RUSTIC DR MADISON WI 53718

Assessment Summary

More +

Assessment Year	2017
Valuation Classification	G2
Assessment Acres	0.000
Land Value	\$99,500.00
Improved Value	\$642,500.00
Total Value	\$742,000.00


Show Valuation Breakout

Show Assessment Contact Information ▼

Zoning Information

Contact your local city, village or town office for municipal zoning information.


Parcel Maps

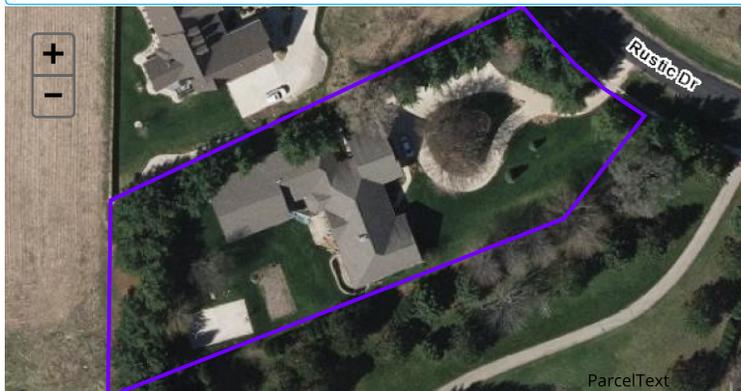

DCiMap

Google Map


Bing Map

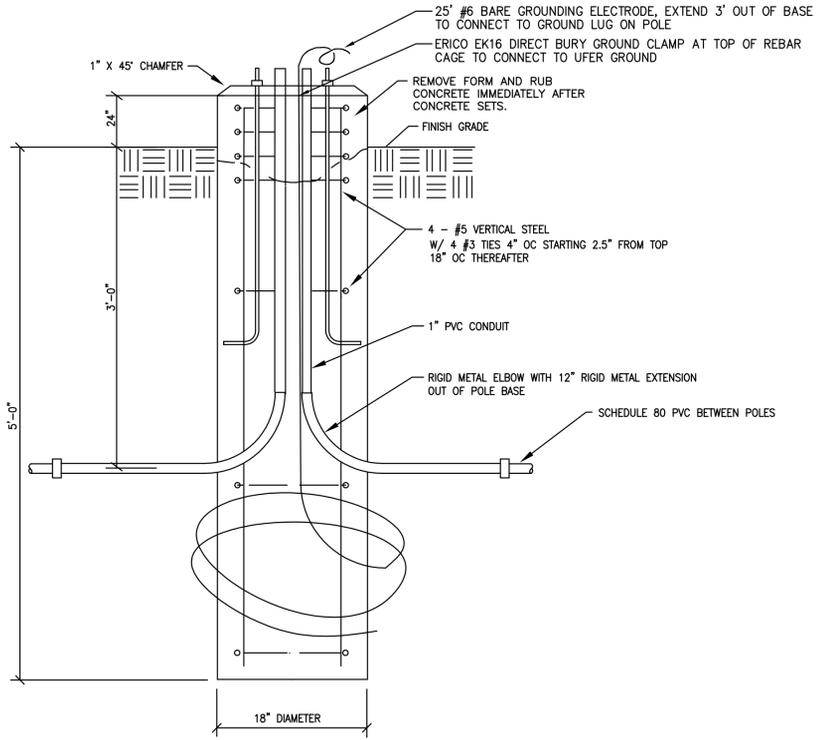


2 FIXTURE A - POLE BASE DETAIL
 E100 SCALE: NOT TO SCALE

LIGHT FIXTURE SCHEDULE									
ID	Description	Size	Manufacturer	Model #	Voltage	Lamps	Mounting	Remarks	
A	LED POLE MOUNT AREA LIGHT	13" x 33"	LITHONIA	DSX1LED P6 40K TFTM MVOLT SPA HS DBLXD	120	LED, 19038L, 163W, 4000K	15" SQUARE POLE	MOUNT ON 2' HIGH CONCRETE BASE	
B	LED WALL MOUNT AREA LIGHT	13.75" x 10"	LITHONIA	DSXW1 LED 10C 700 40K TFTM MVOLT DLXD	120	LED, 2808L, 26W, 4000K	SURFACE, 9" AFF		
C	LED WALL MOUNT AREA LIGHT	13.75" x 10"	LITHONIA	DSXW1 LED 10C 1000 40K TFTM MVOLT DLXD	120	LED, 6945L, 39W, 4000K	SURFACE, 9" AFF		

EXTERIOR LIGHTING POWER CALCULATION												
BUILDING TYPE: RESIDENTIAL ZONE: 2												
Description	Code	Area (sf)	Allowable (W)	Light Fixtures								
				ID	# Fixtures	Watts /Fixture	Total Watts	ID	# Fixtures	Watts /Fixture	Total Watts	
PARKING LOT & DRIVES	0.0600	W/SF	8,242	495	A	1	163	163	-	0	0	0
MAIN ENTRY	20	W/LF	3	60	B	5	26	130	-	0	0	0
OTHER DOORS	20	W/LF	6	120	C	1	39	39	-	0	0	0
BASE SITE ALLOWANCE	600	W	1	600								
WALKWAYS <10' WIDE	.7	W/LF	40	28								
TOTALS	LIGHTING ALLOWANCE		1303	DESIGN TOTAL		332						
	1303	>	332	EXTERIOR COMPLIES WITH THE ENERGY CODE								

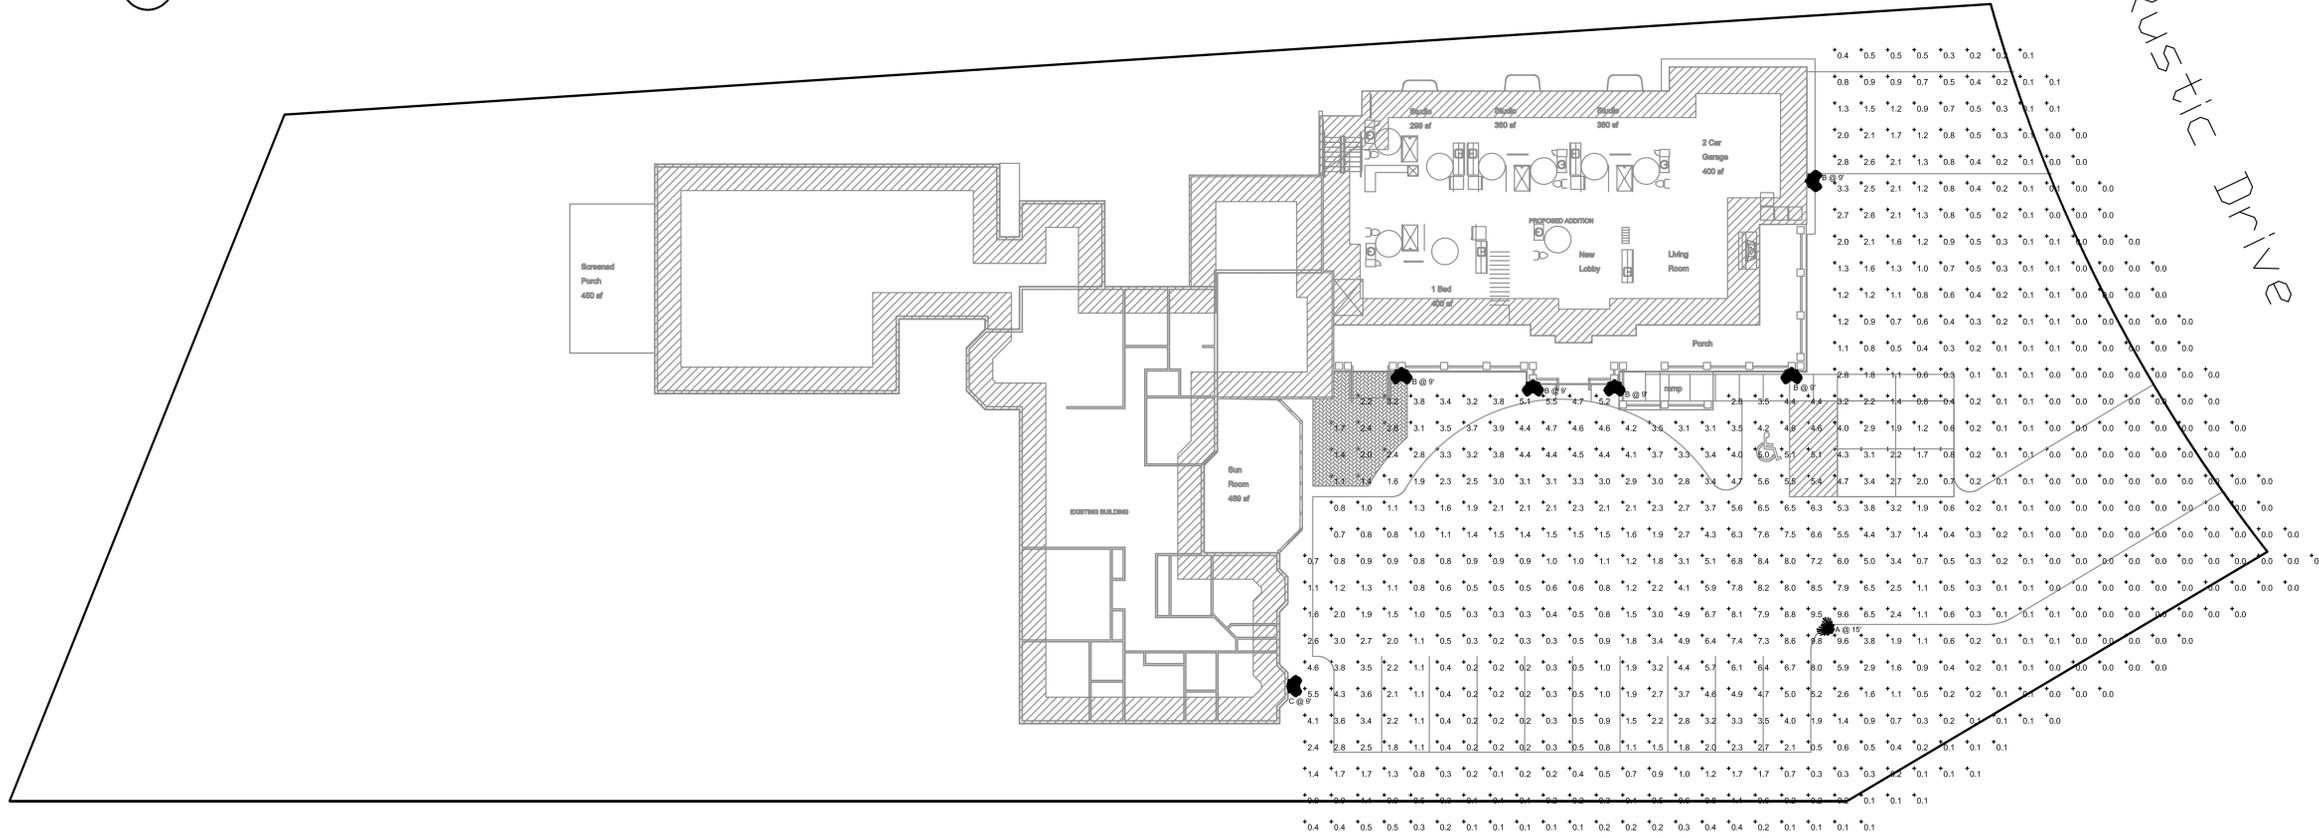

1 SITE PLAN - LIGHTING PHOTOMETRICS
 E100 SCALE: 1/16" = 1'-0"

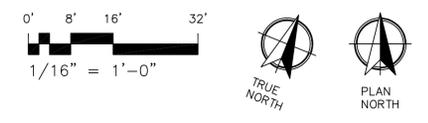

901 Deming Way // Madison, WI 53717
 Ph: 608.664.3500 // Fx: 608.664.3535
 iconicacreates.com

EMERSON SENIOR LIVING EXPANSION
 402 RUSTIC DRIVE
 MADISON, WISCONSIN 53718
LIFESONG LIVING, LLC
 402 RUSTIC DRIVE
 MADISON, WI 53718

ISSUE DATES:
 CITY SUB #1: 02-21-18

RFI/SI DATE:

PROJECT #: 20170610
 SHEET NUMBER

E100

©2018 Iconica, Inc.

This document contains confidential or proprietary information of Iconica. Neither the document nor the information herein is to be reproduced, distributed, used or disclosed, either in whole or in part, except as specifically authorized by Iconica.

EMERSON SENIOR LIVING EXPANSION
CITY SUBMITTAL
02-21-18

SITE LIGHTING FIXTURE CUTSHEETS



D-Series Size 1 LED Area Luminaire

d#series



TYPE A - POLE MOUNT 15' SQUARE POLE

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.


- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a shaded background. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a shaded background¹

To learn more about A+, visit www.acuitybrands.com/aplus.

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)

Specifications

EPA:	1.01 ft ² (0.09 m ²)
Length:	33" (83.8 cm)
Width:	13" (33.0 cm)
Height:	7-1/2" (19.0 cm)
Weight (max):	27 lbs (12.2 kg)

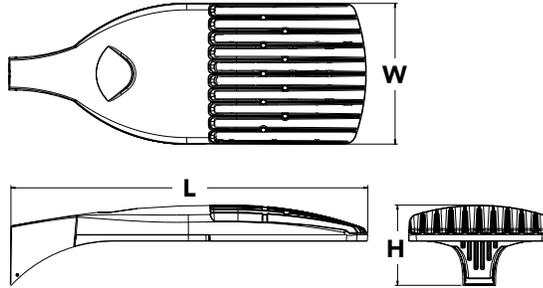

A+ Capable options indicated by this color background.

Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA DDBXD

Series	LEDs	Color temperature	Distribution	Voltage	Mounting	
DSX1 LED	Forward optics P1 P4 P7 P2 P5 P8 P3 P6 P9 Rotated optics P10 ¹ P12 ¹ P11 ¹ P13 ¹	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted ²	T1S Type I short T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium TSVS Type V very short	T5S Type V short T5M Type V medium T5W Type V wide BLC Backlight control ^{2,3} LCCO Left corner cutoff ^{2,3} RCCO Right corner cutoff ^{2,3}	MVOLT^{4,5} 120 ⁶ 208 ^{5,6} 240 ^{5,6} 277 ⁶ 347 ^{5,6,7} 480 ^{5,6,7}	Shipped included SPA Square pole mounting RPA Round pole mounting WBA Wall bracket SPUMBA Square pole universal mounting adaptor ⁸ RPUMBA Round pole universal mounting adaptor ⁸ Shipped separately KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ⁹

Control options	Other options	Finish (required)
Shipped installed PER NEMA twist-lock receptacle only (controls ordered separate) ¹⁰ PER5 Five-wire receptacle only (controls ordered separate) ^{10,11} PER7 Seven-wire receptacle only (controls ordered separate) ^{10,11} DMG 0-10V dimming extend out back of housing for external control (leads exit fixture) DS Dual switching ^{12,13} PIR Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 5fc ^{5,14,15} PIRH Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 5fc ^{5,14,15} PIR1FC3V Bi-level, motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ^{5,14,15}	PIRH1FC3V Bi-level, motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ^{5,14,15} BL30 Bi-level switched dimming, 30% ^{5,13,16} BL50 Bi-level switched dimming, 50% ^{5,13,16} PNMTDD3 Part night, dim till dawn ^{5,17} PNMT5D3 Part night, dim 5 hrs ^{5,17} PNMT6D3 Part night, dim 6 hrs ^{5,17} PNMT7D3 Part night, dim 7 hrs ^{5,17} FAO Field adjustable output ¹⁸	Shipped installed HS House-side shield¹⁹ SF Single fuse (120, 277, 347V) ⁶ DF Double fuse (208, 240, 480V) ⁶ L90 Left rotated optics ¹ R90 Right rotated optics ¹ BS Bird spikes EGS External glare shield
		DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



Ordering Information

Accessories

Ordered and shipped separately.


DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²⁰
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²⁰
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²⁰
DSHORT SBK U	Shorting cap ²⁰
DSX1HS 30C U	House-side shield for 30 LED unit ¹⁹
DSX1HS 40C U	House-side shield for 40 LED unit ¹⁹
DSX1HS 60C U	House-side shield for 60 LED unit ¹⁹
PUMBA DDBXD U*	Square and round pole universal mounting bracket (specify finish) ²¹
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ⁴

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES


- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- AMBPC is not available with BLC, LCCO, RCCO or P4, P7, P8, P9 or P13.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Any PIRx with BL30, BL50 or PNMT, is not available with 208V, 240V, 347V, 480V or MVOLT. It is only available in 120V or 277V specified.
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Not available in P1 or P10. Not available with BL30, BL50 or PNMT options.
- Existing drilled pole only. Available as a separate combination accessory; for retrofit use only: PUMBA (finish) U; 1.5 G vibration load rating per ANCI C136.31.
- Must order fixture with SPA option. Must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" mast arm (not included).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Not available with DS option. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Not available with DCR. Node with integral dimming. Shorting cap included.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3 or P4.
- Requires (2) separately switched circuits.
- Reference Motion Sensor table on page 3.
- Reference PER table on page 3 to see functionality.
- Not available with 347V, 480V, PNMT, DS. For PER5 or PER7, see PER Table on page 3.
- Not available with 347V, 480V, DS, BL30, BL50. For PER5 or PER7, see PER Table on page 3. Separate Dusk to Dawn required.
- Not available with other dimming controls options
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See PER Table on page 3.
- For retrofit use only.

External Glare Shield

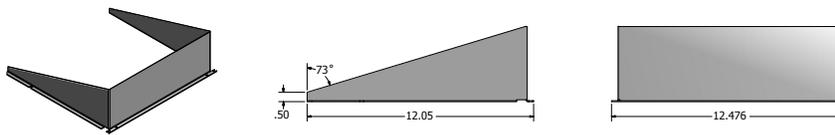

Drilling

HANDHOLE ORIENTATION

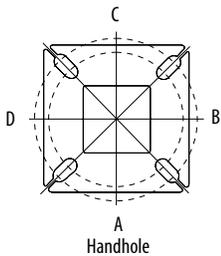


Tenon Mounting Slipfitter**

Tenon O.D.	Single Unit	2 at 180°	2 at 90°	3 at 120°	3 at 90°	4 at 90°
2-3/8"	AST20-190	AST20-280	AST20-290	AST20-320	AST20-390	AST20-490
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

Pole drilling nomenclature: # of heads at degree from handhole (default side A)						
DM19AS	DM28AS	DM29AS	DM32AS	DM39AS	DM49AS	
1 @ 90°	2 @ 280°	2 @ 90°	3 @ 120°	3 @ 90°	4 @ 90°	
Side B	Side B & D	Side B & C	Round pole only	Side B, C, & D	Sides A, B, C, D	

Note: Review luminaire spec sheet for specific nomenclature

Template #8

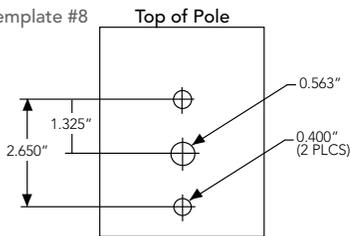


Pole top or tenon O.D.	4.5" @ 90°	4" @ 90°	3.5" @ 90°	3" @ 90°	4.5" @ 120°	4" @ 120°	3.5" @ 120°	3" @ 120°
DSX SPA	Y	Y	Y	N	-	-	-	-
DSX RPA	Y	Y	N	N	Y	Y	Y	Y
DSX SPUMBA	Y	N	N	N	-	-	-	-
DSX RPUMBA	N	N	N	N	Y	Y	Y	N

*3 fixtures @ 120 require round pole top/tenon.

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED 60C 1000 40K. Distances are in units of mounting height (25').

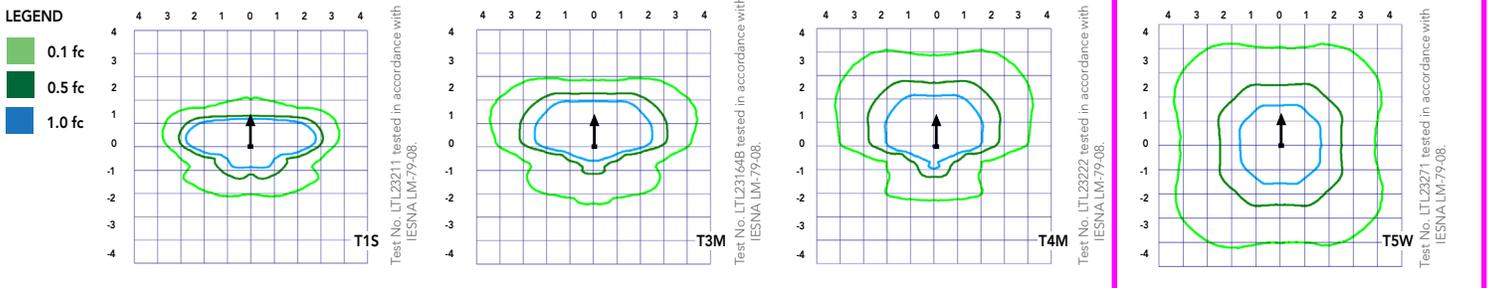

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25000	50000	100000
Lumen Maintenance Factor	1.00	0.96	0.92	0.85

Electrical Load

	Performance Package	LED Count	Drive Current	Wattage	Current (A)					
					120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	P6	40	1250	163	1.36	0.78	0.68	0.59	0.47	0.34
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use with Inline Dusk to Dawn or timer.

PER Table

Control	PER (3 wire)	PER5 (5 wire)		PER7 (7 wire)		
		Wire 4/Wire5	Wire 4/Wire5	Wire 4/Wire5	Wire 6/Wire7	
Photocontrol Only (On/Off)	✓	▲	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM	✗	✓	Wired to dimming leads on driver	▲	Wired to dimming leads on driver	Wires Capped inside fixture
ROAM with Motion (ROAM on/off only)	✗	▲	Wires Capped inside fixture	▲	Wires Capped inside fixture	Wires Capped inside fixture
Future-proof*	✗	▲	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture
Future-proof* with Motion	✗	▲	Wires Capped inside fixture	✓	Wires Capped inside fixture	Wires Capped inside fixture

✓ Recommended

✗ Will not work

▲ Alternate

*Future-proof means: Ability to change controls in the future.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics																								
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30	530	P1	54W	T1S	6,457	2	0	2	120	6,956	2	0	2	129	7,044	2	0	2	130	3,640	1	0	1	70
				T2S	6,450	2	0	2	119	6,949	2	0	2	129	7,037	2	0	2	130	3,813	1	0	1	73
				T2M	6,483	1	0	1	120	6,984	2	0	2	129	7,073	2	0	2	131	3,689	1	0	1	71
				T3S	6,279	2	0	2	116	6,764	2	0	2	125	6,850	2	0	2	127	3,770	1	0	1	73
				T3M	6,468	1	0	2	120	6,967	1	0	2	129	7,056	1	0	2	131	3,752	1	0	1	72
				T4M	6,327	1	0	2	117	6,816	1	0	2	126	6,902	1	0	2	128	3,758	1	0	1	72
				TFTM	6,464	1	0	2	120	6,963	1	0	2	129	7,051	1	0	2	131	3,701	1	0	1	71
				TSVS	6,722	2	0	0	124	7,242	3	0	0	134	7,334	3	0	0	136	3,928	2	0	0	76
				T5S	6,728	2	0	1	125	7,248	2	0	1	134	7,340	2	0	1	136	3,881	2	0	0	75
				T5M	6,711	3	0	1	124	7,229	3	0	1	134	7,321	3	0	2	136	3,930	2	0	1	76
				TSW	6,667	3	0	2	123	7,182	3	0	2	133	7,273	3	0	2	135	3,820	3	0	1	73
				BLC	5,299	1	0	1	98	5,709	1	0	2	106	5,781	1	0	2	107					
				LCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80					
				RCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80					
30	700	P2	70W	T1S	8,249	2	0	2	118	8,886	2	0	2	127	8,999	2	0	2	129	4,561	1	0	1	67
				T2S	8,240	2	0	2	118	8,877	2	0	2	127	8,989	2	0	2	128	4,777	1	0	1	70
				T2M	8,283	2	0	2	118	8,923	2	0	2	127	9,036	2	0	2	129	4,622	1	0	2	68
				T3S	8,021	2	0	2	115	8,641	2	0	2	123	8,751	2	0	2	125	4,724	1	0	1	69
				T3M	8,263	2	0	2	118	8,901	2	0	2	127	9,014	2	0	2	129	4,701	1	0	2	69
				T4M	8,083	2	0	2	115	8,708	2	0	2	124	8,818	2	0	2	126	4,709	1	0	2	69
				TFTM	8,257	2	0	2	118	8,896	2	0	2	127	9,008	2	0	2	129	4,638	1	0	2	68
				TSVS	8,588	3	0	0	123	9,252	3	0	0	132	9,369	3	0	0	134	4,922	2	0	0	72
				T5S	8,595	3	0	1	123	9,259	3	0	1	132	9,376	3	0	1	134	4,863	2	0	0	72
				T5M	8,573	3	0	2	122	9,236	3	0	2	132	9,353	3	0	2	134	4,924	3	0	1	72
				TSW	8,517	3	0	2	122	9,175	4	0	2	131	9,291	4	0	2	133	4,787	3	0	1	70
				BLC	6,770	1	0	2	97	7,293	1	0	2	104	7,386	1	0	2	106					
				LCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79					
				RCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79					
30	1050	P3	102W	T1S	11,661	2	0	2	114	12,562	3	0	3	123	12,721	3	0	3	125					
				T2S	11,648	2	0	2	114	12,548	3	0	3	123	12,707	3	0	3	125					
				T2M	11,708	2	0	2	115	12,613	2	0	2	124	12,773	2	0	2	125					
				T3S	11,339	2	0	2	111	12,215	3	0	3	120	12,370	3	0	3	121					
				T3M	11,680	2	0	2	115	12,582	2	0	2	123	12,742	2	0	2	125					
				T4M	11,426	2	0	3	112	12,309	2	0	3	121	12,465	2	0	3	122					
				TFTM	11,673	2	0	2	114	12,575	2	0	3	123	12,734	2	0	3	125					
				TSVS	12,140	3	0	1	119	13,078	3	0	1	128	13,244	3	0	1	130					
				T5S	12,150	3	0	1	119	13,089	3	0	1	128	13,254	3	0	1	130					
				T5M	12,119	4	0	2	119	13,056	4	0	2	128	13,221	4	0	2	130					
				TSW	12,040	4	0	3	118	12,970	4	0	3	127	13,134	4	0	3	129					
				BLC	9,570	1	0	2	94	10,310	1	0	2	101	10,440	1	0	2	102					
				LCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76					
				RCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76					
30	1250	P4	125W	T1S	13,435	3	0	3	107	14,473	3	0	3	116	14,657	3	0	3	117					
				T2S	13,421	3	0	3	107	14,458	3	0	3	116	14,641	3	0	3	117					
				T2M	13,490	2	0	2	108	14,532	3	0	3	116	14,716	3	0	3	118					
				T3S	13,064	3	0	3	105	14,074	3	0	3	113	14,252	3	0	3	114					
				T3M	13,457	2	0	2	108	14,497	2	0	2	116	14,681	2	0	2	117					
				T4M	13,165	2	0	3	105	14,182	2	0	3	113	14,362	2	0	3	115					
				TFTM	13,449	2	0	3	108	14,488	2	0	3	116	14,672	2	0	3	117					
				TSVS	13,987	4	0	1	112	15,068	4	0	1	121	15,259	4	0	1	122					
				T5S	13,999	3	0	1	112	15,080	3	0	1	121	15,271	3	0	1	122					
				T5M	13,963	4	0	2	112	15,042	4	0	2	120	15,233	4	0	2	122					
				TSW	13,872	4	0	3	111	14,944	4	0	3	120	15,133	4	0	3	121					
				BLC	11,027	1	0	2	88	11,879	1	0	2	95	12,029	1	0	2	96					
				LCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72					
				RCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72					
30	1400	P5	138W	T1S	14,679	3	0	3	106	15,814	3	0	3	115	16,014	3	0	3	116					
				T2S	14,664	3	0	3	106	15,797	3	0	3	114	15,997	3	0	3	116					
				T2M	14,739	3	0	3	107	15,878	3	0	3	115	16,079	3	0	3	117					
				T3S	14,274	3	0	3	103	15,377	3	0	3	111	15,572	3	0	3	113					
				T3M	14,704	2	0	3	107	15,840	3	0	3	115	16,040	3	0	3	116					
				T4M	14,384	2	0	3	104	15,496	3	0	3	112	15,692	3	0	3	114					
				TFTM	14,695	2	0	3	106	15,830	3	0	3	115	16,030	3	0	3	116					
				TSVS	15,283	4	0	1	111	16,464	4	0	1	119	16,672	4	0	1	121					
				T5S	15,295	3	0	1	111	16,477	4	0	1	119	16,686	4	0	1	121					
				T5M	15,257	4	0	2	111	16,435	4	0	2	119	16,644	4	0	2	121					
				TSW	15,157	4	0	3	110	16,328	4	0	3	118	16,534	4	0	3	120					
				BLC	12,048	1	0	2	87	12,979	1	0	2	94	13,143	1	0	2	95					
				LCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1								

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics																								
LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
					60	530	P10	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134
				T2S	12,967	4	0	4	122	13,969	4	0	4	132	14,146	4	0	4	133	7,507	2	0	2	76
				T2M	13,201	3	0	3	125	14,221	3	0	3	134	14,401	3	0	3	136	7,263	2	0	2	73
				T3S	12,766	4	0	4	120	13,752	4	0	4	130	13,926	4	0	4	131	7,424	2	0	2	75
				T3M	13,193	4	0	4	124	14,213	4	0	4	134	14,393	4	0	4	136	7,387	2	0	2	75
				T4M	12,944	4	0	4	122	13,945	4	0	4	132	14,121	4	0	4	133	7,400	2	0	2	75
				TFTM	13,279	4	0	4	125	14,305	4	0	4	135	14,486	4	0	4	137	7,288	1	0	2	74
				T5VS	13,372	3	0	1	126	14,405	4	0	1	136	14,588	4	0	1	138	7,734	3	0	1	78
				T5S	13,260	3	0	1	125	14,284	3	0	1	135	14,465	3	0	1	136	7,641	3	0	0	77
				T5M	13,256	4	0	2	125	14,281	4	0	2	135	14,462	4	0	2	136	7,737	3	0	2	78
				T5W	13,137	4	0	3	124	14,153	4	0	3	134	14,332	4	0	3	135	7,522	3	0	2	76
				BLC	10,906	3	0	3	103	11,749	3	0	3	111	11,898	3	0	3	112					
				LCCO	7,789	1	0	3	73	8,391	1	0	3	79	8,497	1	0	3	80					
				RCCO	7,779	4	0	4	73	8,380	4	0	4	79	8,486	4	0	4	80					
60	700	P11	137W	T1S	16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132	8,952	2	0	2	68
				T2S	16,461	4	0	4	120	17,733	4	0	4	129	17,957	4	0	4	131	9,377	2	0	2	72
				T2M	16,758	4	0	4	122	18,053	4	0	4	132	18,281	4	0	4	133	9,072	2	0	2	69
				T3S	16,205	4	0	4	118	17,457	4	0	4	127	17,678	4	0	4	129	9,273	2	0	2	71
				T3M	16,748	4	0	4	122	18,042	4	0	4	132	18,271	4	0	4	133	9,227	2	0	2	70
				T4M	16,432	4	0	4	120	17,702	4	0	4	129	17,926	4	0	4	131	9,243	2	0	2	71
				TFTM	16,857	4	0	4	123	18,159	4	0	4	133	18,389	4	0	4	134	9,103	2	0	2	69
				T5VS	16,975	4	0	1	124	18,287	4	0	1	133	18,518	4	0	1	135	9,661	3	0	1	74
				T5S	16,832	4	0	1	123	18,133	4	0	2	132	18,362	4	0	2	134	9,544	3	0	1	73
				T5M	16,828	4	0	2	123	18,128	4	0	2	132	18,358	4	0	2	134	9,665	3	0	2	74
				T5W	16,677	4	0	3	122	17,966	5	0	3	131	18,193	5	0	3	133	9,395	4	0	2	72
				BLC	13,845	3	0	3	101	14,915	3	0	3	109	15,103	3	0	3	110					
				LCCO	9,888	1	0	3	72	10,652	2	0	3	78	10,787	2	0	3	79					
				RCCO	9,875	4	0	4	72	10,638	4	0	4	78	10,773	4	0	4	79					
60	1050	P12	207W	T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121					
				T2S	22,864	4	0	4	110	24,631	5	0	5	119	24,943	5	0	5	120					
				T2M	23,277	4	0	4	112	25,075	4	0	4	121	25,393	4	0	4	123					
				T3S	22,509	4	0	4	109	24,248	5	0	5	117	24,555	5	0	5	119					
				T3M	23,263	4	0	4	112	25,061	4	0	4	121	25,378	4	0	4	123					
				T4M	22,824	5	0	5	110	24,588	5	0	5	119	24,899	5	0	5	120					
				TFTM	23,414	5	0	5	113	25,223	5	0	5	122	25,543	5	0	5	123					
				T5VS	23,579	5	0	1	114	25,401	5	0	1	123	25,722	5	0	1	124					
				T5S	23,380	4	0	2	113	25,187	4	0	2	122	25,506	4	0	2	123					
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123					
				T5W	23,165	5	0	4	112	24,955	5	0	4	121	25,271	5	0	4	122					
				BLC	19,231	4	0	4	93	20,717	4	0	4	100	20,979	4	0	4	101					
				LCCO	13,734	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72					
				RCCO	13,716	4	0	4	66	14,776	4	0	4	71	14,963	4	0	4	72					
60	1250	P13	231W	T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120					
				T2S	25,254	5	0	5	109	27,205	5	0	5	118	27,550	5	0	5	119					
				T2M	25,710	4	0	4	111	27,696	4	0	4	120	28,047	4	0	4	121					
				T3S	24,862	5	0	5	108	26,783	5	0	5	116	27,122	5	0	5	117					
				T3M	25,695	5	0	5	111	27,680	5	0	5	120	28,031	5	0	5	121					
				T4M	25,210	5	0	5	109	27,158	5	0	5	118	27,502	5	0	5	119					
				TFTM	25,861	5	0	5	112	27,860	5	0	5	121	28,212	5	0	5	122					
				T5VS	26,043	5	0	1	113	28,056	5	0	1	121	28,411	5	0	1	123					
				T5S	25,824	4	0	2	112	27,819	5	0	2	120	28,172	5	0	2	122					
				T5M	25,818	5	0	3	112	27,813	5	0	3	120	28,165	5	0	3	122					
				T5W	25,586	5	0	4	111	27,563	5	0	4	119	27,912	5	0	4	121					
				BLC	21,241	4	0	4	92	22,882	4	0	4	99	23,172	4	0	4	100					
				LCCO	15,170	2	0	4	66	16,342	2	0	4	71	16,549	2	0	4	72					
					15,150	5	0	5	66	16,321	5	0	5	71	16,527	5	0	5	72					

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1

electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). Optional terminal block and NEMA photocontrol receptacle are also available.

LISTINGS

UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.





D-Series Size 1 LED Wall Luminaire



Catalog
Number

TYPE B - WALL MOUNT
TYPE C - WALL MOUNT

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		

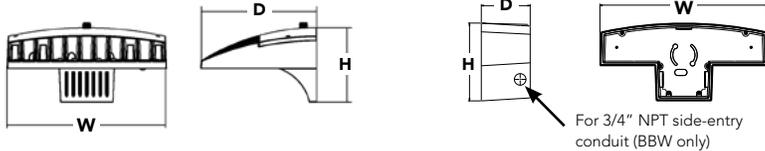

Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines) ¹	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A) ¹	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium ASYDF Asymmetric diffuse	MVOLT ² 208 ³ 240 ³ 277 ³ 347 ^{3,4} 480 ^{3,4}	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ⁵	Shipped installed PE Photoelectric cell, button type ⁶ DMG 0-10V dimming driver (no controls; wires pulled outside fixture) PIR 180° motion/ambient light sensor, <15' mtg ht ^{1,7} PIRH 180° motion/ambient light sensor, 15-30' mtg ht ^{1,7} PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ^{1,7} PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ^{1,7} ELCW Emergency battery backup (includes external component enclosure), non CEC compliant ^{8,9}

Other Options	Finish (required)
Shipped installed SF Single fuse (120, 277 or 347V) ^{3,9} DF Double fuse (208, 240 or 480V) ^{3,9} HS House-side shield ¹⁰ SPD Separate surge protection	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DBBTD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory

NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70CRI)					40K (4000 K, 70CRI)					50K (5000 K, 70CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
10C (10 LEDs)	350mA	13W	T2S	1,415	0	0	1	109	1,520	0	0	1	117	1,530	0	0	1	118	894	0	0	1	69
			T2M	1,349	0	0	1	104	1,448	0	0	1	111	1,458	0	0	1	112	852	0	0	1	66
			T3S	1,399	0	0	1	108	1,503	0	0	1	116	1,512	0	0	1	116	884	0	0	1	68
			T3M	1,385	0	0	1	107	1,488	0	0	1	114	1,497	0	0	1	115	876	0	0	1	67
			T4M	1,357	0	0	1	104	1,458	0	0	1	112	1,467	0	0	1	113	858	0	0	1	66
			TFTM	1,411	0	0	1	109	1,515	0	0	1	117	1,525	0	0	1	117	892	0	0	1	69
	530 mA	19W	ASYDF	1,262	1	0	1	97	1,354	1	0	1	104	1,363	1	0	1	105	797	0	0	1	61
			T2S	2,053	1	0	1	108	2,205	1	0	1	116	2,220	1	0	1	117	1,264	0	0	1	67
			T2M	1,957	1	0	1	103	2,102	1	0	1	111	2,115	1	0	1	111	1,205	0	0	1	63
			T3S	2,031	1	0	1	107	2,181	1	0	1	115	2,194	1	0	1	115	1,250	0	0	1	66
			T3M	2,010	1	0	1	106	2,159	1	0	1	114	2,172	1	0	1	114	1,237	0	0	1	65
			T4M	1,970	1	0	1	104	2,115	1	0	1	111	2,129	1	0	1	112	1,212	0	0	1	64
	700 mA	26W	TFTM	2,047	0	0	1	108	2,198	1	0	1	116	2,212	1	0	1	116	1,260	0	0	1	66
			ASYDF	1,831	1	0	1	96	1,966	1	0	1	103	1,978	1	0	1	104	1,127	0	0	1	59
			T2S	2,623	1	0	1	101	2,816	1	0	1	108	2,834	1	0	1	109	1,544	0	0	1	59
			T2M	2,499	1	0	1	96	2,684	1	0	1	103	2,701	1	0	1	104	1,472	0	0	1	57
			T3S	2,593	1	0	1	100	2,785	1	0	1	107	2,802	1	0	1	108	1,527	0	0	1	59
			T3M	2,567	1	0	1	99	2,757	1	0	1	106	2,774	1	0	1	107	1,512	0	0	1	58
	1000 mA	39W	T4M	2,515	1	0	1	97	2,701	1	0	1	104	2,718	1	0	1	105	1,481	0	0	1	57
			TFTM	2,614	1	0	1	101	2,808	1	0	1	108	2,825	1	0	1	109	1,539	0	0	1	59
			ASYDF	2,337	1	0	1	90	2,510	1	0	1	97	2,525	1	0	1	97	1,376	1	0	1	53
			T2S	3,685	1	0	1	94	3,957	1	0	1	101	3,982	1	0	1	102	2,235	1	0	1	57
			T2M	3,512	1	0	1	90	3,771	1	0	1	97	3,794	1	0	1	97	2,130	1	0	1	55
			T3S	3,644	1	0	1	93	3,913	1	0	1	100	3,938	1	0	1	101	2,210	1	0	1	57
20C (20 LEDs)	350mA	23W	T3M	3,607	1	0	1	92	3,873	1	0	1	99	3,898	1	0	1	100	2,187	1	0	1	56
			T4M	3,534	1	0	2	91	3,796	1	0	2	97	3,819	1	0	2	98	2,143	1	0	1	55
			TFTM	3,673	1	0	1	94	3,945	1	0	1	101	3,969	1	0	1	102	2,228	1	0	1	57
			ASYDF	3,284	1	0	2	84	3,527	1	0	2	90	3,549	1	0	2	91	1,992	1	0	1	51
			T2S	2,820	1	0	1	123	3,028	1	0	1	132	3,047	1	0	1	132	1,777	1	0	1	77
			T2M	2,688	1	0	1	117	2,886	1	0	1	125	2,904	1	0	1	126	1,693	1	0	1	74
	530 mA	35W	T3S	2,789	1	0	1	121	2,994	1	0	1	130	3,014	1	0	1	131	1,757	0	0	1	76
			T3M	2,760	1	0	1	120	2,965	1	0	1	129	2,983	1	0	1	130	1,739	1	0	1	76
			T4M	2,704	1	0	1	118	2,905	1	0	1	126	2,922	1	0	1	127	1,704	1	0	1	74
			TFTM	2,811	1	0	1	122	3,019	1	0	1	131	3,038	1	0	1	132	1,771	0	0	1	77
			ASYDF	2,514	1	0	1	109	2,699	1	0	1	117	2,716	1	0	1	118	1,584	1	0	1	69
			T2S	4,079	1	0	1	117	4,380	1	0	1	125	4,407	1	0	1	126	2,504	1	0	1	72
	700 mA	46W	T2M	3,887	1	0	1	111	4,174	1	0	1	119	4,201	1	0	1	120	2,387	1	0	1	68
			T3S	4,033	1	0	1	115	4,331	1	0	1	124	4,359	1	0	1	125	2,477	1	0	1	71
			T3M	3,993	1	0	2	114	4,288	1	0	2	123	4,315	1	0	2	123	2,451	1	0	1	70
			T4M	3,912	1	0	2	112	4,201	1	0	2	120	4,227	1	0	2	121	2,402	1	0	1	69
			TFTM	4,066	1	0	2	116	4,366	1	0	2	125	4,394	1	0	2	126	2,496	1	0	1	71
			ASYDF	3,636	1	0	2	104	3,904	1	0	2	112	3,928	1	0	2	112	2,232	1	0	1	64
	1000 mA	73W	T2S	5,188	1	0	1	113	5,572	1	0	1	121	5,607	1	0	1	122	3,065	1	0	1	67
			T2M	4,945	1	0	2	108	5,309	1	0	2	115	5,343	1	0	2	116	2,921	1	0	1	64
			T3S	5,131	1	0	2	112	5,510	1	0	2	120	5,544	1	0	2	121	3,031	1	0	1	66
			T3M	5,078	1	0	2	110	5,454	1	0	2	119	5,487	1	0	2	119	3,000	1	0	1	65
			T4M	4,975	1	0	2	108	5,343	1	0	2	116	5,376	1	0	2	117	2,939	1	0	1	64
			TFTM	5,172	1	0	2	112	5,554	1	0	2	121	5,589	1	0	2	122	3,055	1	0	1	66
1000 mA	73W	ASYDF	4,624	1	0	2	101	4,965	1	0	2	108	4,996	1	0	2	109	2,732	1	0	1	59	
		T2S	7,204	1	0	2	99	7,736	2	0	2	106	7,784	2	0	2	107	4,429	1	0	1	61	
		T2M	6,865	1	0	2	94	7,373	2	0	2	101	7,419	2	0	2	102	4,221	1	0	1	58	
		T3S	7,125	1	0	2	98	7,651	1	0	2	105	7,698	1	0	2	105	4,380	1	0	1	60	
		T3M	7,052	1	0	2	97	7,573	2	0	2	104	7,620	2	0	2	104	4,335	1	0	2	59	
		T4M	6,909	1	0	2	95	7,420	1	0	2	102	7,466	1	0	2	102	4,248	1	0	2	58	
TFTM	7,182	1	0	2	98	7,712	1	0	2	106	7,761	1	0	2	106	4,415	1	0	2	60			
ASYDF	6,421	2	0	2	88	6,896	2	0	3	94	6,938	2	0	3	95	3,947	1	0	2	54			

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88

Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17

Motion Sensor Default Settings


Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
*PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use with Inline Dusk to Dawn or timer

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isofootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

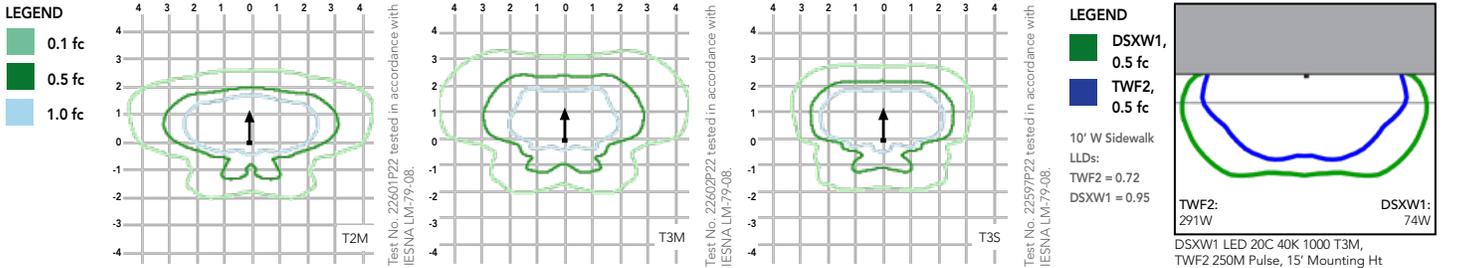

Options and Accessories



T3M (left), ASYDF (right) lenses



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a

power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

WARRANTY

Five-year limited warranty. Complete warranty terms located at www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

