Mounting brackets
 14' apart. Electrical supply concealed within.





## TWO-SIDED BLADE SIGN -

To be mounted to the buildings' structure; not to surface finishes. Internal structure of the sign to be designed by the signmaker to withstand normal loads and severe wind loads. The main body of the sign is to be clad in aluminum; front and back. The edges are to be black acrylic.

LETTERS - 24" (19" Opt B) tall backs of letters to be cut in brushed aluminum plate spaced with a gap to the body of the sign. 20" (16" Opt B) fronts of letters are to spaced with a gap from the backs and internally illuminated with LEDs to create a halo effect. Sides formed in aluminum to create 3-D letters 4" deep. Fronts of letters to be burgundy red acrylic internally illuminated by LEDs.

FONT - Arno Pro, Bold.

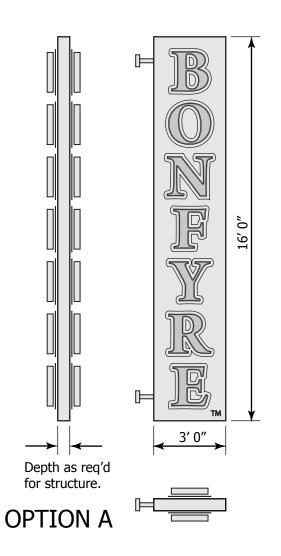

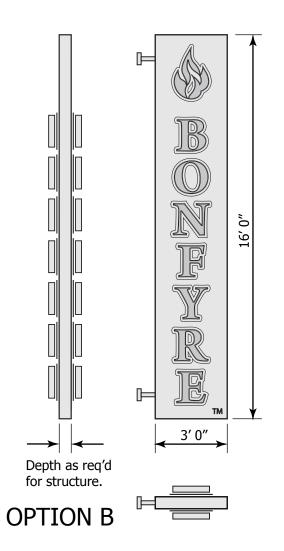



2551 PARMENTER STREET MIDDLETON, WI 53562

www.foodconcepts.com

608-831-5006 608-831-2257 (fax)

Client Bonfyre Grille

Project Ti

Restaurant at 2601 W. Beltline Hwy. Madison, WI

Drawing T

Exterior Signage BLADE SIGN Specification

	Specification			
	Drawn By DMJ		Approved By	
	7.22.2009		Scale	4 (0)
			1/4" =	1′0″
	Job No Drav		ving No	Revision
	905071	E	S-07	

e information contained in this drawing is the sole proper food Concepts Inc. Any reproduction in part or as a who hout written permission is prohibited. All rights to design