



PROJECT SUMMARY AND FACT SHEET:

East Washington Avenue & Livingston St Intersection Improvements - 2013

Project Engineer: Glen Yoerger 261-9177

Alder: Bridget Maniaci, Dist 2

Project Limits: East Washington Ave from 300' NE of Blount Street to 200' SW of Paterson Street

Project Summary: The proposed project includes the construction of a median break with a half signal at the E Washington Ave and Livingston Street intersection, which will allow left-turns to Livingston Street from E Washington Ave. The construction of the median break and associated turn lanes will require widening E Washington Ave to the north and replacement of approximately 800 lineal feet of concrete pavement on the westbound lanes of E Washington Ave. The City agreed to install these improvements as a condition of the purchase and sale agreement associated with the sale and redevelopment of the properties located at 754 E Washington Ave and 741 E Mifflin St.

East Washington Avenue	Existing	Proposed
Project Type		Intersection Improvement
Last Surfaced	2004	2012
Pavement Rating	9	
Surface Type	10" Concrete Pavement	10" Concrete Pavement
Sidewalk	Existing to remain on south side of E Wash Ave	New sidewalk on north side of E Wash Ave
Storm Sewer	Existing	Proposed
Work Required	None	Add 54" storm sewer and adjust inlet locations.
Parking	Existing	Proposed
Parking Conditions	Parking Allowed Both Sides	Parking Allowed Both Sides
Street Lighting	Existing	Proposed
Street Lighting	Street Light Poles	Adjust Existing Street Light Poles as necessary to accommodate new geometry.
Cost		
Total Cost - City of Madison	\$941,000	

Assessment Policy

Project is not assessable.


Schedule

Start Date 3/5/2013
Project Duration Approximately Three Months

Tree Information: (6) Trees need to be removed in north terrace - Developer is to replant adjacent to Development
(17) Ornamental trees need to be removed in E Washington Landscaped Median Areas

Correspondence:

Project Location:

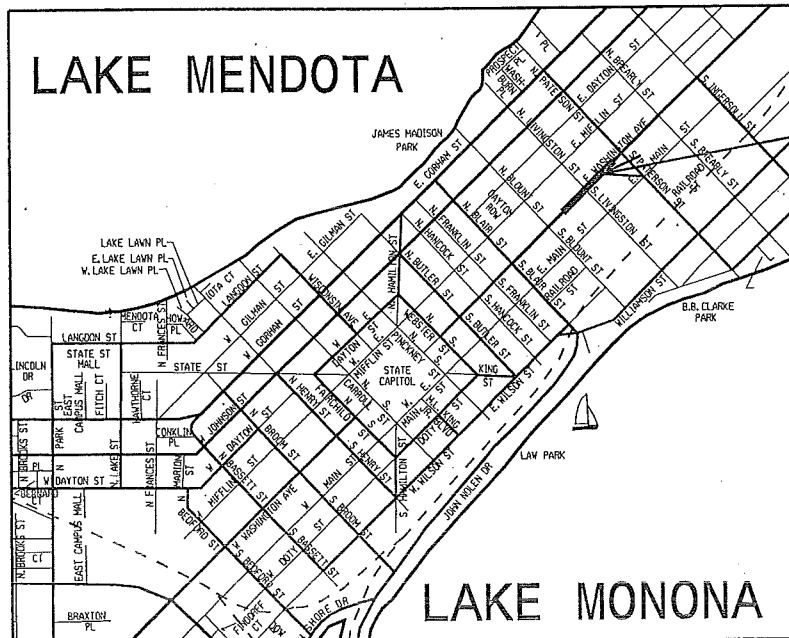

PROJECT LOCATION