




















NOTES:

- Customers are responsible for confirming mounting heights, fixture suspension types/ lengths, color temperature, CRI, linear fixture lengths, pole lengths, and bollard heights/ lengths prior to ordering.
- Mounting height (MH) is measured from the bottom of the fixture to the floor.
- This Lighting layout assumes the following unless values are specified and must be confirmed by the customer prior to ordering.
  - Room reflectance of 80, 50, 20 for standard ceilings and 50, 50, 20 for exposed ceilings
  - Wall sconces are mounted at 7' for calculation purposes. Customer must confirm desired mounting height before rough in.

Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
PROPERTY LINE	Illuminance	Fc	0.08	0.47	0.00	N.A.	N.A.
SITE	Illuminance	Fc	1.97	36.13	0.00	N.A.	N.A.
PARKING & DRIVES	Illuminance	Fc	2.66	14.7	0.5	5.32	29.40
PICKLEBALL COURT	Illuminance	Fc	32.37	36.1	27.5	1.18	1.31

Qty	Label	Arrangement	LLF	MFR	Description	Lum. Watts	Total Watts	Lum. Lumens
5	QA4-H	Single	0.950	LITHONIA	DSX1 LED P3 xxK 70CRI TFTM (Voltage) (Mounting) HS (Finish) -20FT POLE + 3FT BASE	102.1727	510.863	11794
2	QA0	Single	0.950	LITHONIA	DSX2 LED P7 xxK 80CRI BLC3 (Voltage) (Mounting) (Finish) -20FT POLE + 3FT BASE	409.13	818.26	37424
11	OC1	SINGLE	0.950	FC OUTDOOR	FCC400-10-SF-9xx-10L-(Finish)-72-LD	11.58	127.38	1035
6	OW4	SINGLE	0.950	LITHONIA	ARC1 LED P1 xxK MVOLT (Finish)	10.8751	65.251	1454
4	OW5	SINGLE	0.950	G-LIGHTING	GL-6550-E4-(Finish)	13	52	489
2	OW9	Single	0.950	LITHONIA	DSX2 LED P7 xxK 80CRI BLC3 (Voltage) WBA (Finish)	409.13	818.26	37424

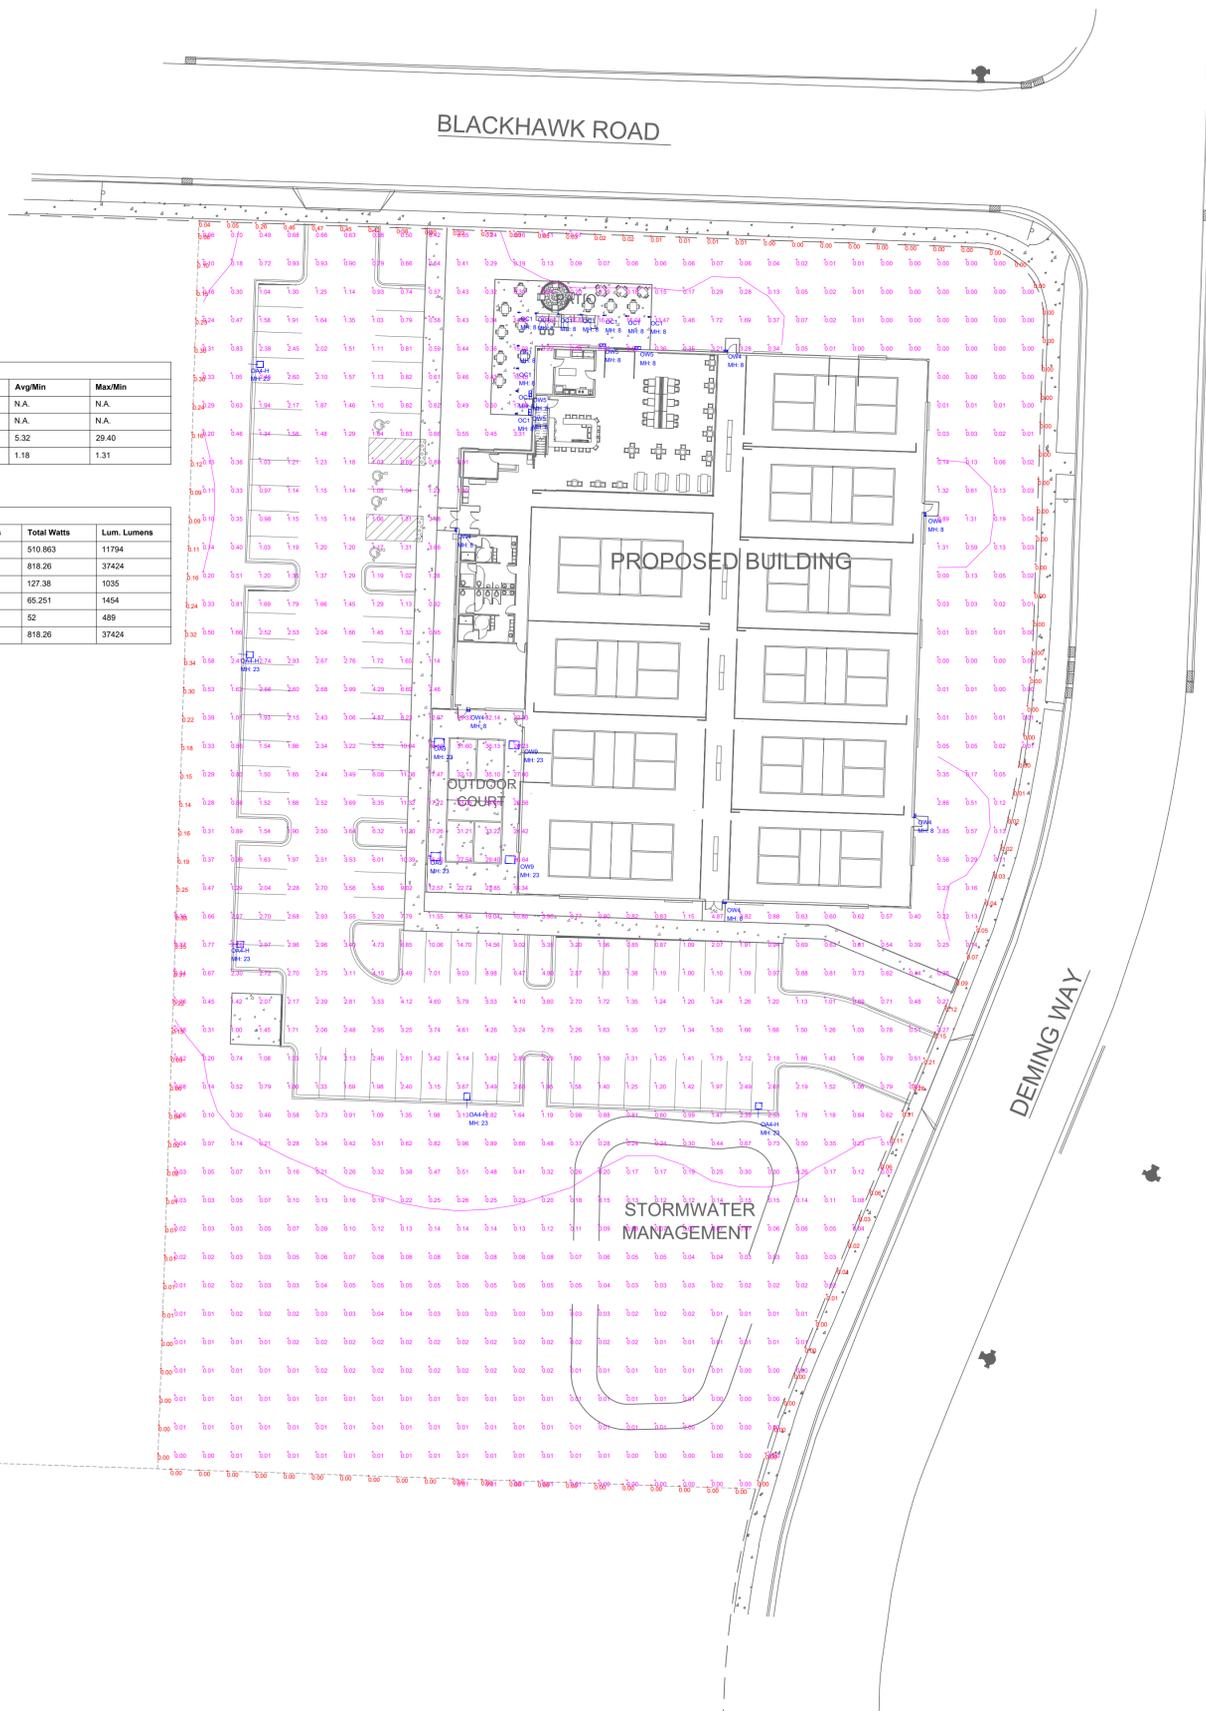

#	DATE	COMMENTS
REVISIONS		

DRAWN BY : DC  
 DATE : FEB 24, 2025  
 SCALE : 1" = 30'-0"


COURT & CORK  
 MADISON, WISCONSIN  
 LIGHTING LAYOUT  
 OUTDOOR COURT ON

NOTES:

- Customers are responsible for confirming mounting heights, fixture suspension types/ lengths, color temperature, CRI, linear fixture lengths, pole lengths, and bollard heights/ lengths prior to ordering.
- Mounting height (MH) is measured from the bottom of the fixture to the floor.
- This Lighting layout assumes the following unless values are specified and must be confirmed by the customer prior to ordering.
  - Room reflectance of 80, 50, 20 for standard ceilings and 50, 50, 20 for exposed ceilings
  - Wall sconces are mounted at 7' for calculation purposes. Customer must confirm desired mounting height before rough in.

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	Avg/Min	Max/Min
PROPERTY LINE	Illuminance	Fc	0.08	0.47	0.00	N.A.	N.A.
SITE	Illuminance	Fc	0.79	17.01	0.00	N.A.	N.A.
PARKING & DRIVES	Illuminance	Fc	1.40	2.8	0.5	2.80	5.60
PICKLEBALL COURT	Illuminance	Fc	0.95	2.7	0.5	1.90	5.40

Luminaire Schedule								
Qty	Label	Arrangement	LLF	MFR	Description	Lum. Watts	Total Watts	Lum. Lumens
5	OAA-H	Single	0.950	LITHONIA	DSX1 LED P3 xxX 70CRI TTFM (Voltage) (Mounting) HS (Finish) -20FT POLE + 3FT BASE	102.1727	\$10.963	11794
2	OAG	Single	0.950	LITHONIA	DSX2 LED P7 xxX 80CRI BLC3 (Voltage) (Mounting) (Finish) -20FT POLE + 3FT BASE	409.13	\$18.26	37424
11	OC1	SINGLE	0.950	FC OUTDOOR	FCC400-10-SF-0w-10L-(Finish)-72-LD	11.58	127.38	1035
6	OW4	SINGLE	0.950	LITHONIA	ARC1 LED P1 xxX MVOLT (Finish)	10.8751	\$5.251	1454
4	OWS	SINGLE	0.950	GL-LIGHTING	GL-6550-E4-(Finish)	13	\$2	489
2	OW9	Single	0.950	LITHONIA	DSX2 LED P7 xxX 80CRI BLC3 (Voltage) WBA (Finish)	409.13	\$18.26	37424

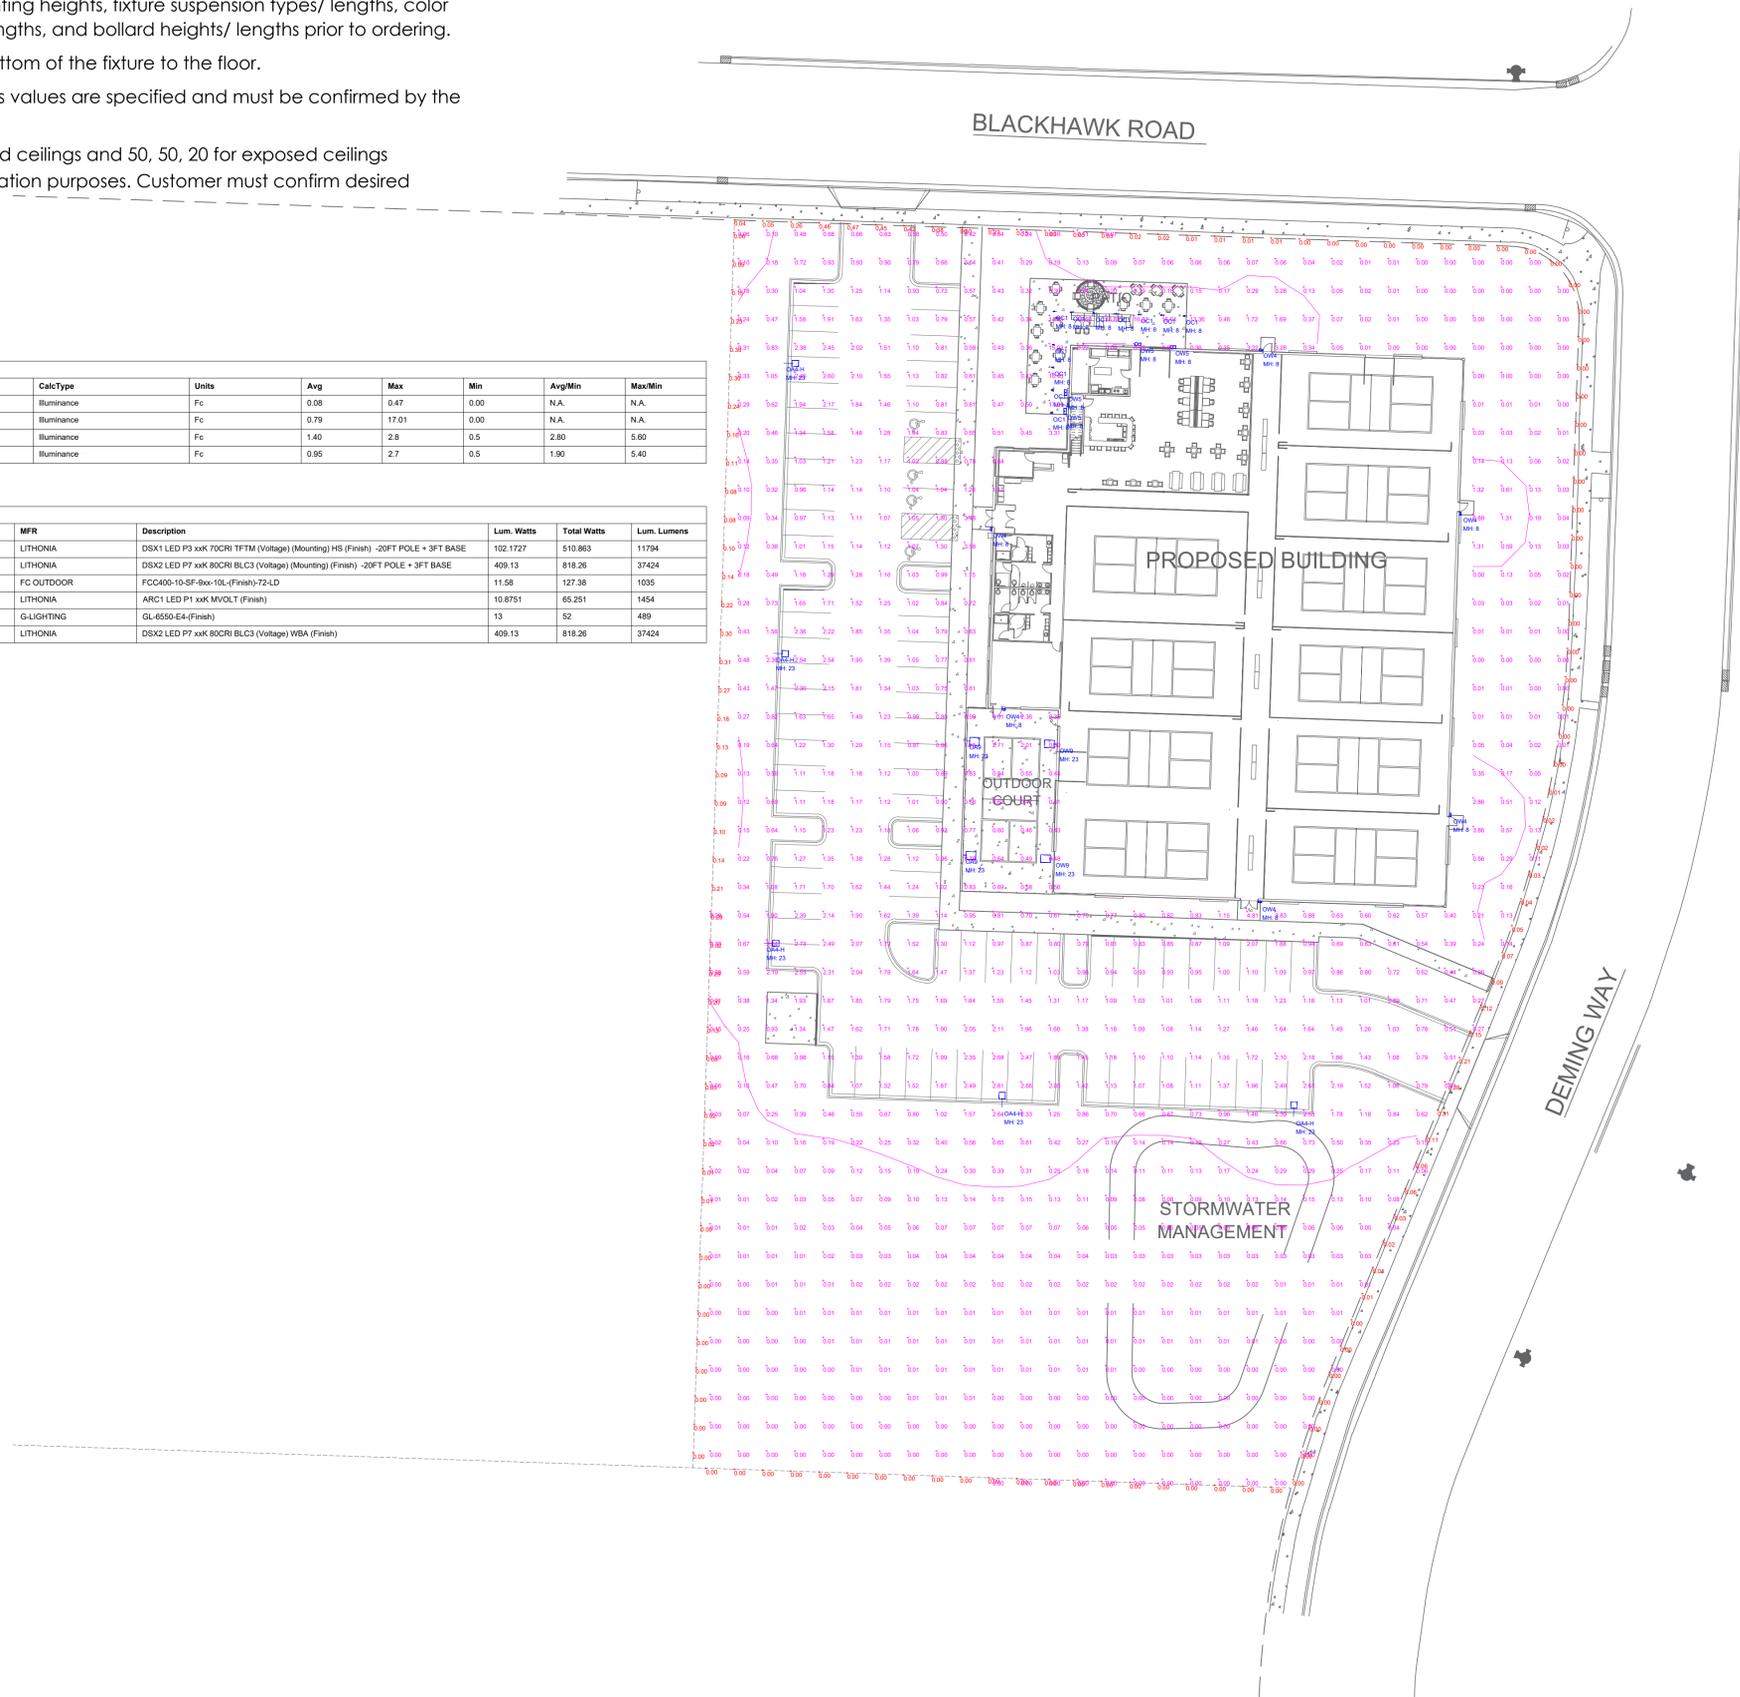

#	DATE	COMMENTS
REVISIONS		

DRAWN BY : DC	DATE : FEB 24, 2025	SCALE : 1" = 30'-0"
---------------	---------------------	---------------------

COURT & CORK	MADISON, WISCONSIN	LIGHTING LAYOUT OUTDOOR COURT - OFF
--------------	--------------------	--









D



D1 3D EXTERIOR NORTH WEST

C



C1 3D EXTERIOR NORTH EAST

B



B1 3D EXTERIOR SOUTH WEST

A



A1 3D EXTERIOR SOUTH EAST

COURT & CORK

NEW FACILITY  
DEMING WAY  
MADISON, WI

Project Status

2025.03.14	REVIEW

PROJ. #: 25001-01  
© SKETCHWORKS ARCHITECTURE 2025

EXTERIOR VIEWS

A900

C:\Users\michael.court and cova\Documents\Court and Cova\PolkMad\_2025\_mad030717.rvt 3/11/2025 4:29:08 PM

D



NORTHWEST ELEVATION

C



NORTHEAST ELEVATION

B



SOUTHEAST ELEVATION

A



SOUTHWEST ELEVATION

**COURT & CORK**

NEW FACILITY  
DEMING WAY  
MADISON, WI

**Project Status**

2025.03.14	REVIEW

PROJ. #: 25001-01  
© SKETCHWORKS ARCHITECTURE 2025

**EXTERIOR RENDERING VIEWS**

**A901**

C:\Users\mead\Documents\Court and Cork\PolandWI\_2025\_madison\A901.rvt  
3/14/2025 4:29:29 PM

# Exterior Materials

## NOTES

- Pearl Gray Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Charcoal Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Slate Gray Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Royal Blue Insulated Metal Panel
  - NUCOR Buildings - Striated
- Echo – Premier Masonry Unit
  - County Materials
  - 8"x16"x4" Burnished CMU
- Speckled Frost – Premier Masonry Unit
  - Country Materials
  - 8"x16"x4" Burnished CMU
- Painted Steel with Wood Slat Trellis
  - Black Finish



Pearl Gray



Charcoal



Slate Gray



Royal Blue



Echo (63-251B)



Speckled Frost (63-297C)


# CF MESA

## INSULATED METAL WALL PANEL

*Metl-Span's CF Mesa insulated metal panel is well suited for exterior and interior walls and ceiling applications. The lightly corrugated profile on both faces creates symmetry on the outside of the building and room to room within. The minor rib provides a flattened appearance. Mesa panels are ideal for commercial, institutional and industrial applications.*

**LOCK & GROOVE SYSTEM**

**PANEL**

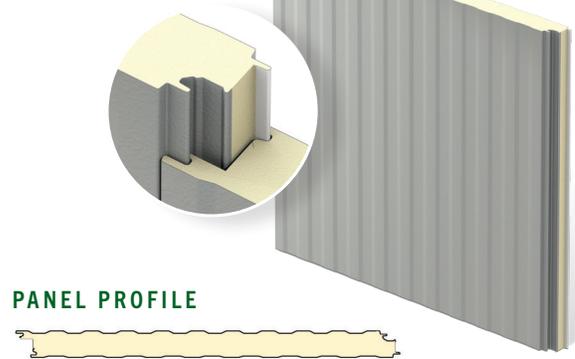

**PANEL PROFILE**

### PRODUCT SPECIFICATIONS

**WIDTH** • 30", 36", 42"

**THICKNESS** • 2", 2½", 3", 4", 5", 6", 8"

<b>LENGTH</b>	NON-DIRECTIONAL EMBOSSED	UNEMBOSSED
	8'-0" to 32'-0" Horizontal	8'-0" to 16'-0" Horizontal
	8'-0" to 52'-0" Vertical	8'-0" to 40'-0" Vertical

**EXTERIOR PROFILE** • Longitudinal planks spaced at nominal 4" on center, nominal ⅛" deep, embossed or unembossed

**EXTERIOR FACE** • G-90 galvanized or AZ-50 aluminum-zinc coated steel in 26, 24 and 22 Ga.

**INTERIOR PROFILE** • Mesa, nominal ⅛" deep or Light Mesa, nominal ⅛" deep, embossed or unembossed

**INTERIOR FACE** • G-90 galvanized or AZ-50 aluminum-zinc coated steel or 304 or 316 stainless steel in 26, 24 and 22" Ga.

**JOINT** • Offset double tongue-and-groove with extended metal shelf for positive face fastening

**CORE** • Foamed-in-place, zero ozone depleting (zero ODP) Class 1 foam

### U-FACTORS AND R-VALUES\*

**U-FACTOR (BTU/h-ft<sup>2</sup>·°F)**

**R-VALUE (h-ft<sup>2</sup>·°F/BTU)**

PANEL WIDTH: 42"		PANEL WIDTH: 42"	
	35°		35°
2"	0.059	2"	17.5
2.5"	0.046	2.5"	21.9
3"	0.039	3"	26.2
4"	0.029	4"	35.0
5"	0.023	5"	43.7
6"	0.019	6"	52.5
8"	0.014	8"	70.0

\*\* Based on ASTM C518, ASTM C1363 and thermal modeling

~ 22 Ga not available for stainless steel

### DESIGN FEATURES & BENEFITS

- Consistent high quality with foamed-in-place panel manufacturing
- Easily washable
- Utilizes concealed clips and eliminates thermal short circuits
- Easy and fast installation, with reduced construction labor costs
- Interior and exterior applications

# TESTING: CF MESA INSULATED METAL WALL PANEL


TEST/ APPROVAL	TEST METHOD	TEST TITLE	RESULTS
<b>Fire US</b>	ASTM E84	Surface Burning Characteristics of Building Materials	Flame spread <25, smoke developed <450
	ASTM E119	Fire Tests of Building Construction Materials	One hour non-load bearing rating with two layers of Type X Gypsum Vertical or horizontal installation
	FM 4880	Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels	Product approved Exterior wall requires FM 4881 approval
	NFPA 259	Test Method for Potential Heat of Building Materials	Potential heat of foam plastic insulation contained in the assembly tested in accordance with NFPA 285
	NFPA 285-19	Evaluation of Fire Propagation Characteristics of Exterior Non-Load Bearing Wall Assemblies	Panel assembly met the requirements of the standard
	NFPA 286	Fire Tests for Evaluating Contribution of Wall and Ceiling Finish to Roof Fire Growth	Test specimen met the criteria of the IBC Section 803.1.2.1
<b>Fire Canada</b>	CAN/ULC S101	Fire Endurance Tests of Building Construction and Materials	One hour non-load bearing fire rating with two layers of Type X Gypsum
	CAN/ULC S101	Fire Endurance Tests of Building Construction and Materials	Meets 15 minute stay-in-place requirements
	CAN/ULC S102	Surface Burning Characteristics of Building Materials and Assemblies	Meets the National Building Code of Canada requirements
	CAN/ULC S134	Fire Test of Exterior Wall Assemblies	Complies with the fire-spread and heat-flux limitations required by the National Building Code of Canada
<b>Structural</b>	CAN/ULC S138	Fire Growth of Insulated Building Panels in a Full-Scale Room Configuration	Met the criteria of the standard
	ASTM E72	Strength Tests of Panels for Building Construction	See Load Chart
	ASTM E1592	Structural Performance of Metal Roof and Siding Systems by Uniform Static Air Pressure Differences	See Load Chart
<b>Thermal Performance</b>	FM 4881	Class 1 Exterior Wall Structural Performance	See FM Wall Load Chart
	ASTM C518	Steady-State Thermal Transmission Properties by Means of the Heat-Flow Meter Apparatus	K-Factor of 0.114 BTU.in/hr.ft <sup>2</sup> .°F at 35° F mean core
<b>Air Infiltration</b>	ASTM C1363	Thermal Performance of Building Materials and Envelope Assemblies	See Thermal Performance Guide
	ASTM E283	Rate of Air Leakage Through Curtain Walls Under Specified Pressure Differences	<0.01 cfm/ft <sup>2</sup> at 20 psf Vertical or horizontal installation
<b>Water Infiltration</b>	ASTM E331	Water Penetration of Exterior Walls by Uniform Static Air Pressure Differences	No uncontrolled leakage when tested to a static pressure of 20 psf Vertical or horizontal installation
<b>Special Approval</b>	Miami-Dade NOA	Product Approval for City of Miami and Dade County	Product has City of Miami and Dade County Notice of Acceptance
	State of Florida	Product Approval for the State of Florida	Product has State of Florida approval

**Note: Miami Dade and Florida testing is not available on 8" thickness.** Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metl-Span reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit Metl-Span's website at [metlspan.com](http://metlspan.com).

# CF STRIATED

## INSULATED METAL WALL PANEL

Metl-Span's CF Striated insulated metal panel is an attractive alternative to typical flat wall panels. The exterior face is lightly profiled with narrow longitudinal striations, which create a subtle shadow effect but exhibit a virtually flat appearance from a short distance away. The Striated wall panel is an exceptional value, combining the aesthetics of a flat wall panel with the high insulation ratings of an insulated foam core.

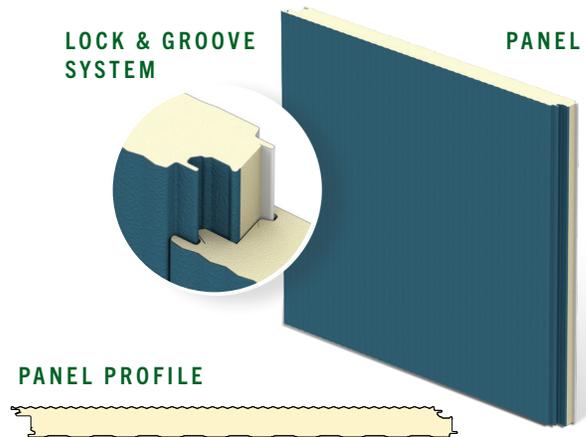

### PRODUCT SPECIFICATIONS

**WIDTH** • 24", 30", 36", 42"

**THICKNESS** • 2", 2½", 2¾", 3", 4"

**LENGTH** NON-DIRECTIONAL EMBOSSED  
8'-0" to 32'-0" Horizontal  
8'-0" to 40'-0" for 24", 30", 36" Vertical  
8'-0" to 32'-0" for 42" Vertical

UNEMBOSSED  
8'-0" to 16'-0" Horizontal  
8'-0" to 16'-0" Vertical

**EXTERIOR PROFILE** • Longitudinal striations, nominal ½" deep, embossed or unembossed

**EXTERIOR FACE** • G-90 galvanized or AZ-50 aluminum-zinc coated steel in 24 and 22 Ga.

**INTERIOR PROFILE** • Light Mesa, nominal ¼" deep, embossed or unembossed

**INTERIOR FACE** • G-90 galvanized or AZ-50 aluminum-zinc coated steel in 26, 24 and 22 Ga.

**JOINT** • Offset double tongue-and-groove with extended metal shelf for positive face fastening

**REVEAL** • Up to 1" reveal in ¼" increments

**U-FACTOR (BTU/h-ft<sup>2</sup>·°F)\*\***

PANEL WIDTH: 42"

	35°
2"	0.059
2½"	0.045
3"	0.038
4"	0.028

**R-VALUE (h-ft<sup>2</sup>·°F/BTU)\*\***

PANEL WIDTH: 42"

	35°
2"	17.5
2½"	21.9
3"	26.2
4"	35.0

\*Available only from Nevada plant

\*\*Based on ASTM C518, ASTM C1363 and thermal modeling

### DESIGN FEATURES & BENEFITS

- Minor striations provide up-close interest, with a flat appearance at a distance
- Utilizes concealed clips and eliminates thermal short circuits

- Easy and fast installation, with reduced construction labor costs
- Interior and exterior applications
- Can be used in conjunction with other Metl-Span joint profiles

# TESTING: CF STRIATED INSULATED METAL WALL PANEL

TEST/ APPROVAL	TEST METHOD	TEST TITLE	RESULTS
<b>Fire US</b>	ASTM E84	Surface Burning Characteristics of Building Materials	Flame spread <25, smoke developed <450
	ASTM E119	Fire Tests of Building Construction Materials	One hour non-load bearing rating with two layers of Type X Gypsum Vertical or horizontal installation
	FM 4880	Class 1 Fire Rating of Insulated Wall, Ceiling and Roof Panels	Product approved Exterior wall requires FM 4881 approval
	NFPA 259	Test Method for Potential Heat of Building Materials	Potential heat of foam plastic insulation contained in the assembly tested in accordance with NFPA 285
	NFPA 285-19	Evaluation of Fire Propagation Characteristics of Exterior Non-Load Bearing Wall Assemblies	Panel assembly met the requirements of the standard
	NFPA 286	Fire Tests for Evaluating Contribution of Wall and Ceiling Finish to Roof Fire Growth	Test specimen met the criteria of the IBC Section 803.1.2.1
<b>Fire Canada</b>	CAN/ULC S101	Fire Endurance Tests of Building Construction and Materials	One hour non-load bearing fire rating with two layers of Type X Gypsum
	CAN/ULC S101	Fire Endurance Tests of Building Construction and Materials	Meets 15 minute stay-in-place requirements
	CAN/ULC S102	Surface Burning Characteristics of Building Materials and Assemblies	Meets the National Building Code of Canada requirements
	CAN/ULC S134	Fire Test of Exterior Wall Assemblies	Complies with the fire-spread and heat-flux limitations required by the National Building Code of Canada
	CAN/ULC S138	Fire Growth of Insulated Building Panels in a Full-Scale Room Configuration	Met the criteria of the standard
<b>Structural</b>	ASTM E72	Strength Tests of Panels for Building Construction	See Load Chart
	ASTM E1592	Structural Performance of Metal Roof and Siding Systems by Uniform Static Air Pressure Differences	See Load Chart
	FM 4881	Class 1 Exterior Wall Structural Performance	See FM Wall Load Chart
<b>Thermal Performance</b>	ASTM C518	Steady-State Thermal Transmission Properties by Means of the Heat-Flow Meter Apparatus	K-Factor of 0.126 BTU.in/hr.ft <sup>2</sup> .°F at 40° F mean core
	ASTM C1363	Thermal Performance of Building Materials and Envelope Assemblies	See Thermal Performance Guide
<b>Air Infiltration</b>	ASTM E283	Rate of Air Leakage Through Curtain Walls Under Specified Pressure Differences	<0.01 cfm/ft <sup>2</sup> at 20 psf Vertical or horizontal installation
<b>Water Infiltration</b>	ASTM E331	Water Penetration of Exterior Walls by Uniform Static Air Pressure Differences	No uncontrolled leakage when tested to a static pressure of 20 psf Vertical or horizontal installation
<b>Special Approval</b>	Miami-Dade NOA	Product Approval for City of Miami and Dade County	Product has City of Miami and Dade County Notice of Acceptance
	State of Florida	Product Approval for the State of Florida	Product has State of Florida approval

Descriptions and specifications contained herein were in effect at the time this publication was approved for printing. In a continuing effort to refine and improve products, Metl-Span reserves the right to discontinue products at any time or change specifications and/or designs without incurring obligation. To ensure you have the latest information available, please inquire or visit Metl-Span's website at [metlspan.com](http://metlspan.com).

## Exterior Materials

### NOTES

- Pearl Gray Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Charcoal Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Slate Gray Insulated Metal Panel
  - NUCOR Buildings - Mesa
- Royal Blue Insulated Metal Panel
  - NUCOR Buildings - Striated



### Mesa Insulated Metal Wall Panel

Especially suited for long-length walls, **Mesa insulated wall panel offers a modern look**, adding a visual interest to the flat expanse of metal on large projects, making it an ideal choice for commercial and industrial buildings, including cold storage. The lightly corrugated profile on both faces creates symmetry on the outside of the building and room to room within. The minor rib provides a flattened appearance. Mesa panels are ideal for commercial, institutional & industrial applications.

#### [Mesa Panel Specifications](#)



### Striated Insulated Metal Wall Panel

An attractive alternative to flat wall panels, the **Striated insulated metal panel is lightly profiled with narrow longitudinal striations**. The subtle shadow effect created by the striations provide up-close interest, yet exhibit a virtually flat appearance from a distance. The Striated wall panel is an exceptional value, combining the aesthetics of a flat wall panel with the high insulation ratings of a polyurethane core. This panel is a perfect solution for buildings that must meet stricter codes regarding insulation, while maintaining a modern style & appearance.

#### [Striated Panel Specifications](#)




# D-Series Size 1 LED Area Luminaire



d#series

## Specifications

<b>EPA:</b>	0.69 ft <sup>2</sup> (0.06 m <sup>2</sup> )
<b>Length:</b>	32.71" (83.1 cm)
<b>Width:</b>	14.26" (36.2 cm)
<b>Height H1:</b>	7.88" (20.0 cm)
<b>Height H2:</b>	2.73" (6.9 cm)
<b>Weight:</b>	34 lbs (15.4 kg)

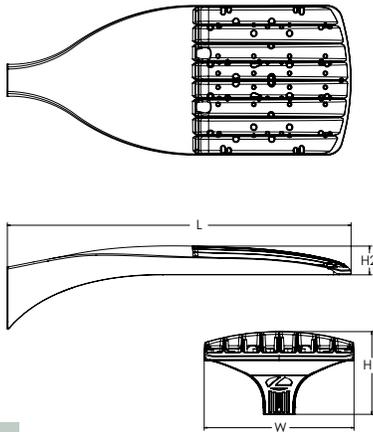

**ds** Design Select options indicated by this color background.

Catalog Number
Notes
Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX1 LED P7 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting
<b>DSX1 LED</b>	<b>Forward optics</b>	(this section 70CRI only)		<b>AFR</b> Automotive front row	<b>TSM</b> Type V medium	<b>Shipped included</b>
	P1 P6	30K 3000K	70CRI	<b>T1S</b> Type I short	<b>T5LG</b> Type V low glare	<b>SPA</b> Square pole mounting (#8 drilling)
	P2 P7	40K 4000K	70CRI	<b>T2M</b> Type II medium	<b>T5W</b> Type V wide	<b>RPA</b> Round pole mounting (#8 drilling)
	P3 P8	50K 5000K	70CRI	<b>T3M</b> Type III medium	<b>BLC3</b> Type III backlight control <sup>3</sup>	<b>SPA5</b> Square pole mounting #5 drilling <sup>9</sup>
	P4 P9	(this section 80CRI only, extended lead times apply)		<b>T3LG</b> Type III low glare <sup>3</sup>	<b>BLC4</b> Type IV backlight control <sup>3</sup>	<b>RPA5</b> Round pole mounting #5 drilling <sup>9</sup>
	<b>Rotated optics</b>	27K 2700K	80CRI	<b>T4M</b> Type IV medium	<b>LCCO</b> Left corner cutoff <sup>3</sup>	<b>SPA8N</b> Square narrow pole mounting #8 drilling
	P10 <sup>1</sup> P12 <sup>1</sup>	30K 3000K	80CRI	<b>T4LG</b> Type IV low glare <sup>3</sup>	<b>RCCO</b> Right corner cutoff <sup>3</sup>	<b>WBA</b> Wall bracket <sup>10</sup>
	P11 <sup>1</sup> P13 <sup>1</sup>	35K 3500K	80CRI	<b>TFTM</b> Forward throw medium		<b>MA</b> Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)
		40K 4000K	80CRI			
		50K 5000K	80CRI			

Control options	Other options	Finish (required)
<b>Shipped installed</b>	<b>Shipped installed</b>	<b>DDBXD</b> Dark Bronze
<b>NLTAIR2 PIRHN</b> nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 20, 21</sup>	<b>SPD20KV</b> 20KV surge protection	<b>DBLXD</b> Black
<b>PIR</b> High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>13, 20, 21</sup>	<b>HS</b> Houseside shield (black finish standard) <sup>22</sup>	<b>DNAXD</b> Natural Aluminum
<b>PER</b> NEMA twist-lock receptacle only (controls ordered separately) <sup>14</sup>	<b>L90</b> Left rotated optics <sup>1</sup>	<b>DWHXD</b> White
<b>PERS</b> Five-pin receptacle only (controls ordered separate) <sup>14, 21</sup>	<b>R90</b> Right rotated optics <sup>1</sup>	<b>DBBTD</b> Textured dark bronze
<b>PER7</b> Seven-pin receptacle only (controls ordered separate) <sup>14, 21</sup>	<b>CCE</b> Coastal Construction <sup>23</sup>	<b>DBLXD</b> Textured black
<b>FAO</b> Field adjustable output <sup>15, 21</sup>	<b>HA</b> 50°C ambient operation <sup>24</sup>	<b>DNATXD</b> Textured natural aluminum
<b>BL30</b> Bi-level switched dimming, 30% <sup>16, 21</sup>	<b>BAA</b> Buy America(n) Act and/or Build America Buy America Qualified	<b>DWHGXD</b> Textured white
<b>BL50</b> Bi-level switched dimming, 50% <sup>16, 21</sup>	<b>SF</b> Single fuse (120, 277, 347V) <sup>25</sup>	
<b>DMG</b> 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>	<b>DF</b> Double fuse (208, 240, 480V) <sup>26</sup>	
<b>DS</b> Dual switching <sup>18, 19, 21</sup>	<b>Shipped separately</b>	
	<b>EGSR</b> External Glare Shield (reversible, field install required, matches housing finish)	
	<b>BSDB</b> Bird Spikes (field install required)	



## Ordering Information

### Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) <sup>25</sup>
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) <sup>25</sup>
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) <sup>25</sup>
DSHORT SBK	Shorting cap <sup>25</sup>
DSX1HS P#	House-side shield (enter package number 1-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSX1EGSR (FINISH)	External glare shield (specify finish)
DSX1BSDB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- 1 Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.
- 2 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- 3 T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- 4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- 5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- 6 HVOLT not available with package P1 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- 7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- 8 XVOLT not available in packages P1 or P10. XVOLT not available with fusing (SF or DF).
- 9 SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- 10 WBA cannot be combined with Type 5 distributions plus photocell (PER).
- 11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight AIR2 visit this [link](#).
- 12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50, DMG and DS. NLTAIR2 PIRHN not available with P1 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1 and P10 using XVOLT.
- 13 PIR not available with NLTAIR2 PIRHN, PER, PER5, PER7, FAO BL30, BL50, DMG and DS. PIR not available with P1 and P10 using HVOLT. PIR not available with P1 and P10 using XVOLT.
- 14 PER/PER5/PER7 not available with NLTAIR2 PIRHN, PIR, BL30, BL50, FAO, DMG and DS. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- 15 FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, DMG and DS.
- 16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO, DMG and DS. BL30 or BL50 must specify 120 or 277V.
- 17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DS.
- 18 DS not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DMG.
- 19 DS requires (2) separately switched circuits. DS provides 50/50 fixture operation via (2) different sets of leads using (2) drivers. DS only available with packages P8, P9, P10, P11, P12 and P13.
- 20 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 21 Reference Controls Options table on page 4.
- 22 HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 23 CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- 24 Option HA not available with performance packages P4, P5, P7, P8, P9 and P13.
- 25 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- 26 Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).

## Shield Accessories





External Glare Shield (EGSR)

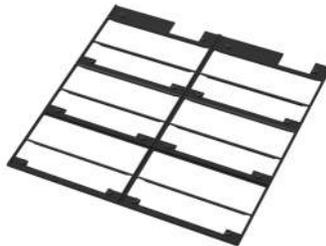

House Side Shield (HS)

## Drilling

### HANDHOLE ORIENTATION

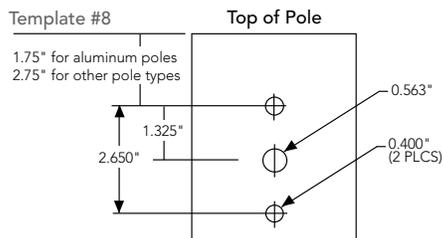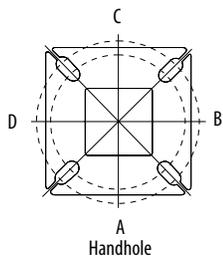

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
<b>Minimum Acceptable Outside Pole Dimension</b>							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX1 Area Luminaire - EPA


\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX1 with SPA	0.69	1.38	1.23	1.54	---	1.58
DSX1 with SPA5, SPA8N	0.70	1.40	1.30	1.66	---	1.68
DSX1 with RPA, RPA5	0.70	1.40	1.30	1.66	1.60	1.68
DSX1 with MA	0.83	1.66	1.50	2.09	2.09	2.09

# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](#).

Isofootcandle plots for the DSX1 LED P9 40K 70CRI. Distances are in units of mounting height (25').

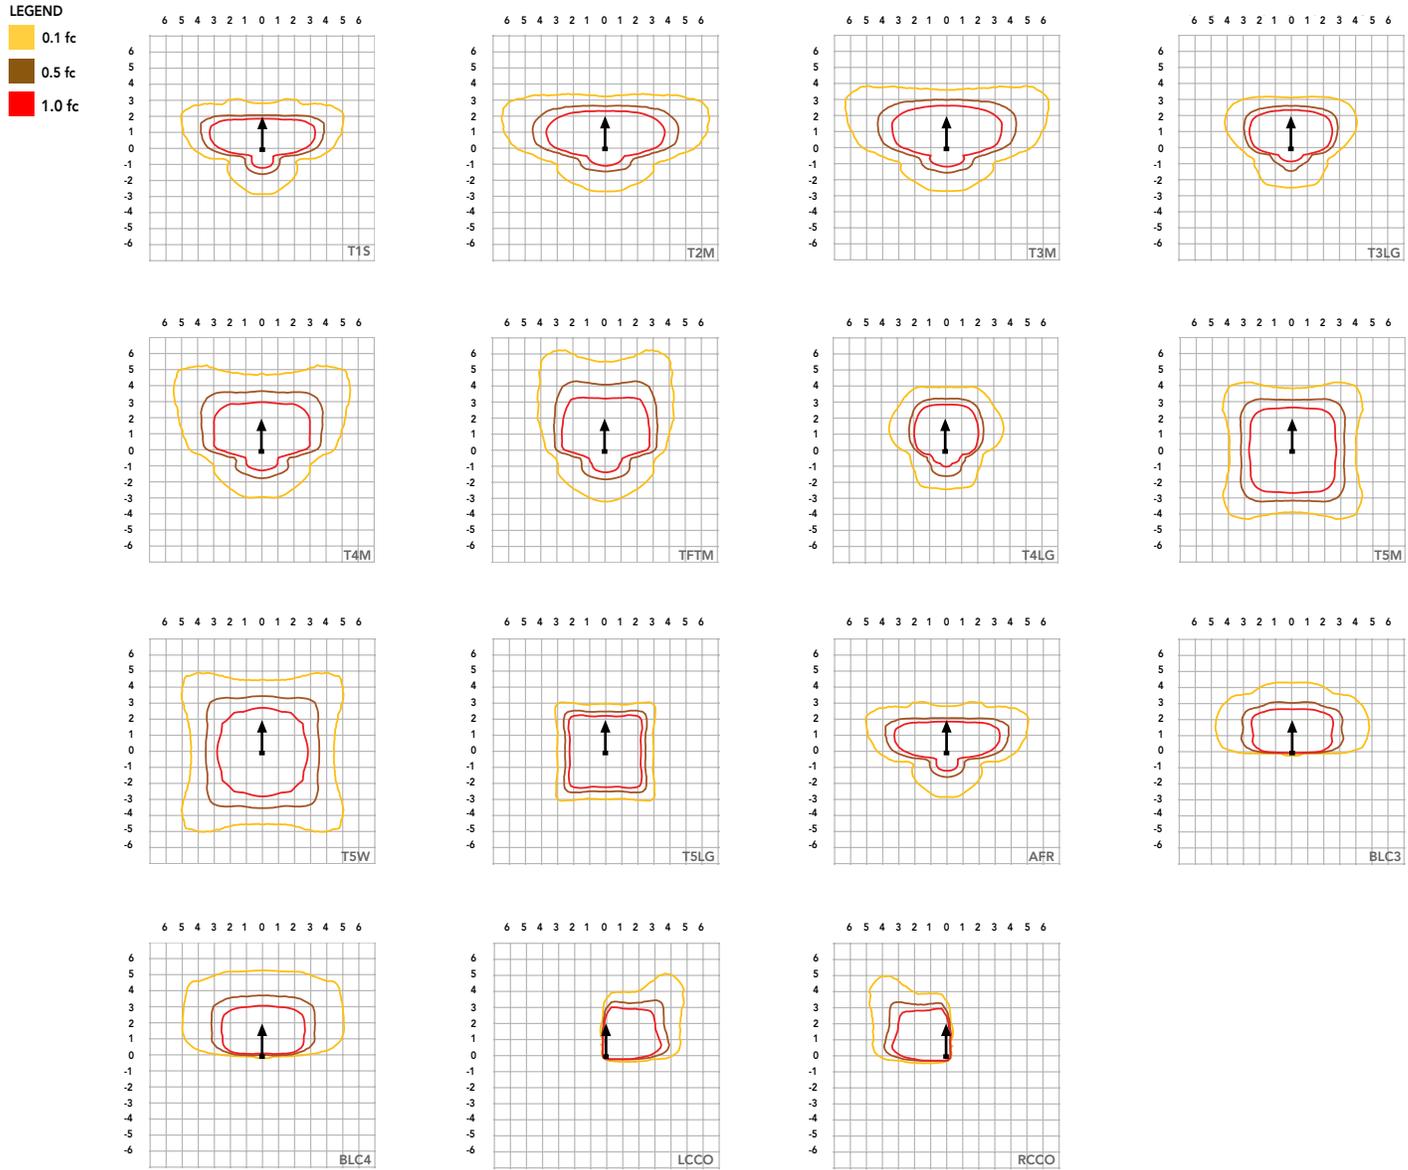

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°C</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.95
50,000	0.90
100,000	0.81

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use maximum published values by package listed on specification sheet (input watts and lumens by optic type).

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Elypse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P2	30	700	68	0.56	0.33	0.28	0.24	0.20	0.14
	P3	30	1050	104	0.85	0.49	0.43	0.37	0.29	0.21
	P4	30	1250	125	1.03	0.60	0.52	0.45	0.36	0.26
	P5	30	1400	142	1.15	0.66	0.58	0.50	0.40	0.29
	P6	40	1250	167	1.38	0.79	0.69	0.60	0.48	0.34
	P7	40	1400	188	1.54	0.89	0.77	0.67	0.53	0.38
	P8	60	1100	216	1.80	1.04	0.90	0.78	0.62	0.45
	P9	60	1400	279	2.31	1.33	1.15	1.00	0.80	0.58
Rotated Optics (Requires L90 or R90)	P10	60	530	101	0.84	0.49	0.42	0.37	0.29	0.21
	P11	60	700	135	1.12	0.65	0.56	0.49	0.39	0.28
	P12	60	1050	206	1.72	0.99	0.86	0.74	0.59	0.43
	P13	60	1400	279	2.30	1.33	1.15	1.00	0.79	0.57

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	51W	30	530	T1S	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162				
				T2M	7,203	1	0	3	142	7,507	2	0	3	147	7,653	2	0	3	150				
				T3M	7,287	1	0	3	143	7,594	1	0	3	149	7,742	1	0	3	152				
				T3LG	6,509	1	0	1	128	6,783	1	0	1	133	6,916	1	0	1	136				
				T4M	7,395	1	0	3	145	7,707	1	0	3	151	7,857	1	0	3	154				
				T4LG	6,726	1	0	1	132	7,010	1	0	1	138	7,146	1	0	1	140				
				TFTM	7,446	1	0	3	146	7,760	1	0	3	152	7,912	1	0	3	155				
				T5M	7,609	3	0	2	149	7,930	3	0	2	156	8,084	3	0	2	159				
				T5W	7,732	3	0	2	152	8,058	4	0	2	158	8,215	4	0	2	161				
				T5LG	7,631	3	0	1	150	7,953	3	0	1	156	8,108	3	0	1	159				
				BLC3	5,300	0	0	2	104	5,524	0	0	2	109	5,631	0	0	2	111				
				BLC4	5,474	0	0	3	108	5,705	0	0	3	112	5,816	0	0	3	114				
				RCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112				
				LCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112				
				AFR	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162				
				P2	68W	30	700	T1S	9,997	1	0	2	147	10,418	1	0	2	154	10,621	1	0	2	157
								T2M	9,260	2	0	3	137	9,651	2	0	3	142	9,839	2	0	3	145
T3M	9,368	2	0					3	138	9,763	2	0	3	144	9,953	2	0	3	147				
T3LG	8,368	1	0					2	123	8,721	1	0	2	129	8,891	1	0	2	131				
T4M	9,507	2	0					3	140	9,909	2	0	3	146	10,102	2	0	3	149				
T4LG	8,647	1	0					2	128	9,012	1	0	2	133	9,187	1	0	2	136				
TFTM	9,573	2	0					3	141	9,977	2	0	3	147	10,172	2	0	3	150				
T5M	9,782	4	0					2	144	10,195	4	0	2	150	10,393	4	0	2	153				
T5W	9,940	4	0					2	147	10,360	4	0	2	153	10,562	4	0	2	156				
T5LG	9,810	3	0					1	145	10,224	3	0	1	151	10,423	3	0	1	154				
BLC3	6,814	0	0					2	101	7,101	0	0	2	105	7,240	0	0	2	107				
BLC4	7,038	0	0					3	104	7,334	0	0	3	108	7,477	0	0	3	110				
RCCO	6,875	1	0					2	101	7,165	1	0	2	106	7,305	1	0	2	108				
LCCO	6,875	1	0					2	101	7,165	1	0	2	106	7,305	1	0	2	108				
AFR	9,997	1	0					2	147	10,418	1	0	2	154	10,621	1	0	2	157				
P3	102W	30	1050					T1S	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147
								T2M	13,055	2	0	3	128	13,605	2	0	3	133	13,871	2	0	3	136
				T3M	13,206	2	0	4	129	13,763	2	0	4	135	14,031	2	0	4	137				
				T3LG	11,797	2	0	2	115	12,294	2	0	2	120	12,534	2	0	2	123				
				T4M	13,403	2	0	4	131	13,968	2	0	4	137	14,241	2	0	4	139				
				T4LG	12,190	2	0	2	119	12,704	2	0	2	124	12,952	2	0	2	127				
				TFTM	13,496	2	0	4	132	14,065	2	0	4	138	14,339	2	0	4	140				
				T5M	13,790	4	0	2	135	14,371	4	0	2	141	14,652	4	0	2	143				
				T5W	14,013	4	0	3	137	14,605	4	0	3	143	14,889	4	0	3	146				
				T5LG	13,830	3	0	2	135	14,413	3	0	2	141	14,694	3	0	2	144				
				BLC3	9,606	0	0	2	94	10,011	0	0	2	98	10,206	0	0	2	100				
				BLC4	9,921	0	0	3	97	10,340	0	0	3	101	10,541	0	0	3	103				
				RCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101				
				LCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101				
				AFR	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																			
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K				
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
P4	124W	30	1250	T1S	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141
				T2M	15,207	3	0	4	123	15,849	3	0	4	128	16,158	3	0	4	130
				T3M	15,383	2	0	4	124	16,032	2	0	4	129	16,345	2	0	4	132
				T3LG	13,742	2	0	2	111	14,321	2	0	2	116	14,600	2	0	2	118
				T4M	15,613	2	0	4	126	16,272	2	0	4	131	16,589	2	0	4	134
				T4LG	14,200	2	0	2	115	14,799	2	0	2	119	15,087	2	0	2	122
				TFTM	15,721	2	0	4	127	16,384	2	0	4	132	16,703	2	0	4	135
				T5M	16,063	4	0	2	130	16,741	4	0	2	135	17,067	4	0	2	138
				T5W	16,324	5	0	3	132	17,013	5	0	3	137	17,344	5	0	3	140
				T5LG	16,110	3	0	2	130	16,790	4	0	2	135	17,117	4	0	2	138
				BLC3	11,190	0	0	3	90	11,662	0	0	3	94	11,889	0	0	3	96
				BLC4	11,557	0	0	3	93	12,044	0	0	3	97	12,279	0	0	3	99
				RCCO	11,291	1	0	3	91	11,767	1	0	3	95	11,996	1	0	3	97
				LCCO	11,291	1	0	3	91	11,767	1	0	3	95	11,996	1	0	3	97
				AFR	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141
				P5	138W	30	1400	T1S	18,052	2	0	3	131	18,814	2	0	3	136	19,180
T2M	16,723	3	0					4	121	17,428	3	0	4	126	17,768	3	0	4	129
T3M	16,917	3	0					4	122	17,630	3	0	4	128	17,974	3	0	4	130
T3LG	15,111	2	0					2	109	15,749	2	0	2	114	16,055	2	0	2	116
T4M	17,169	3	0					5	124	17,893	3	0	5	130	18,242	3	0	5	132
T4LG	15,615	2	0					2	113	16,274	2	0	2	118	16,591	2	0	2	120
TFTM	17,288	2	0					4	125	18,017	2	0	5	130	18,368	3	0	5	133
T5M	17,664	5	0					3	128	18,410	5	0	3	133	18,768	5	0	3	136
T5W	17,951	5	0					3	130	18,708	5	0	3	135	19,073	5	0	3	138
T5LG	17,716	4	0					2	128	18,463	4	0	2	134	18,823	4	0	2	136
BLC3	12,305	0	0					3	89	12,824	0	0	3	93	13,074	0	0	3	95
BLC4	12,709	0	0					4	92	13,245	0	0	4	96	13,503	0	0	4	98
RCCO	12,416	1	0					3	90	12,940	1	0	3	94	13,192	1	0	3	95
LCCO	12,416	1	0					3	90	12,940	1	0	3	94	13,192	1	0	3	95
AFR	18,052	2	0					3	131	18,814	2	0	3	136	19,180	2	0	3	139
P6	165W	40	1250					T1S	21,031	2	0	3	127	21,918	2	0	3	133	22,345
				T2M	19,482	3	0	4	118	20,303	3	0	4	123	20,699	3	0	4	125
				T3M	19,708	3	0	5	119	20,539	3	0	5	124	20,939	3	0	5	127
				T3LG	17,604	2	0	2	107	18,347	2	0	2	111	18,704	2	0	2	113
				T4M	20,001	3	0	5	121	20,845	3	0	5	126	21,251	3	0	5	129
				T4LG	18,191	2	0	2	110	18,959	2	0	2	115	19,328	2	0	2	117
				TFTM	20,140	3	0	5	122	20,989	3	0	5	127	21,398	3	0	5	129
				T5M	20,579	5	0	3	125	21,447	5	0	3	130	21,865	5	0	3	132
				T5W	20,912	5	0	3	127	21,795	5	0	3	132	22,219	5	0	3	134
				T5LG	20,638	4	0	2	125	21,509	4	0	2	130	21,928	4	0	2	133
				BLC3	14,335	0	0	3	87	14,940	0	0	3	90	15,231	0	0	3	92
				BLC4	14,805	0	0	4	90	15,430	0	0	4	93	15,731	0	0	4	95
				RCCO	14,464	1	0	3	88	15,074	1	0	3	91	15,368	1	0	3	93
				LCCO	14,464	1	0	3	88	15,074	1	0	3	91	15,368	1	0	3	93
				AFR	21,031	2	0	3	127	21,918	2	0	3	133	22,345	2	0	3	135

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P7	184W	40	1400	T1S	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131				
				T2M	21,066	3	0	4	114	21,955	3	0	4	119	22,383	3	0	4	121				
				T3M	21,311	3	0	5	116	22,210	3	0	5	120	22,642	3	0	5	123				
				T3LG	19,036	2	0	2	103	19,839	2	0	3	108	20,226	2	0	3	110				
				T4M	21,628	3	0	5	117	22,541	3	0	5	122	22,980	3	0	5	125				
				T4LG	19,671	2	0	2	107	20,501	2	0	3	111	20,900	2	0	3	113				
				TFTM	21,778	3	0	5	118	22,697	3	0	5	123	23,139	3	0	5	125				
				T5M	22,252	5	0	3	121	23,191	5	0	3	126	23,643	5	0	3	128				
				T5W	22,613	5	0	3	123	23,567	5	0	4	128	24,027	5	0	4	130				
				T5LG	22,317	4	0	2	121	23,258	4	0	2	126	23,712	4	0	2	129				
				BLC3	15,501	0	0	3	84	16,155	0	0	4	88	16,470	0	0	4	89				
				BLC4	16,010	0	0	4	87	16,685	0	0	4	90	17,010	0	0	4	92				
				RCCO	15,641	1	0	3	85	16,301	1	0	3	89	16,619	1	0	3	90				
				LCCO	15,641	1	0	3	85	16,301	1	0	3	89	16,619	1	0	3	90				
				AFR	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131				
				P8	216W	60	1100	T1S	28,701	3	0	3	133	29,912	3	0	4	139	30,495	3	0	4	141
								T2M	26,587	3	0	5	123	27,709	3	0	5	128	28,249	3	0	5	131
T3M	26,895	3	0					5	125	28,030	3	0	5	130	28,576	3	0	5	132				
T3LG	24,025	3	0					3	111	25,038	3	0	3	116	25,526	3	0	3	118				
T4M	27,296	3	0					5	127	28,448	3	0	5	132	29,002	3	0	5	134				
T4LG	24,826	3	0					3	115	25,873	3	0	3	120	26,378	3	0	3	122				
TFTM	27,485	3	0					5	127	28,645	3	0	5	133	29,203	3	0	5	135				
T5M	28,084	5	0					4	130	29,269	5	0	4	136	29,839	5	0	4	138				
T5W	28,539	5	0					4	132	29,743	5	0	4	138	30,323	5	0	4	141				
T5LG	28,165	4	0					2	131	29,354	4	0	2	136	29,926	4	0	2	139				
BLC3	19,563	0	0					4	91	20,388	0	0	4	94	20,786	0	0	4	96				
BLC4	20,205	0	0					5	94	21,057	0	0	5	98	21,468	0	0	5	99				
RCCO	19,740	1	0					4	91	20,572	1	0	4	95	20,973	1	0	4	97				
LCCO	19,740	1	0					4	91	20,572	1	0	4	95	20,973	1	0	4	97				
AFR	28,701	3	0					3	133	29,912	3	0	4	139	30,495	3	0	4	141				
P9	277W	60	1400					T1S	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134
								T2M	32,255	3	0	5	116	33,616	3	0	5	121	34,271	3	0	5	124
				T3M	32,629	3	0	5	118	34,006	3	0	5	123	34,668	3	0	5	125				
				T3LG	29,146	3	0	3	105	30,376	3	0	4	110	30,968	3	0	4	112				
				T4M	33,116	3	0	5	120	34,513	3	0	5	125	35,185	3	0	5	127				
				T4LG	30,119	3	0	3	109	31,389	3	0	4	113	32,001	3	0	4	116				
				TFTM	33,345	3	0	5	120	34,751	3	0	5	125	35,429	3	0	5	128				
				T5M	34,071	5	0	4	123	35,509	5	0	4	128	36,201	5	0	4	131				
				T5W	34,624	5	0	4	125	36,084	5	0	4	130	36,788	5	0	4	133				
				T5LG	34,170	5	0	3	123	35,612	5	0	3	129	36,306	5	0	3	131				
				BLC3	23,734	0	0	4	86	24,735	0	0	4	89	25,217	0	0	4	91				
				BLC4	24,513	0	0	5	88	25,547	0	0	5	92	26,045	0	0	5	94				
				RCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92				
				LCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92				
				AFR	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134				


# Performance Data

## Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	101W	60	530	T1S	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	159				
				T2M	14,047	4	0	4	139	14,640	4	0	4	145	14,925	4	0	4	147				
				T3M	14,208	4	0	4	140	14,807	4	0	4	146	15,096	4	0	4	149				
				T3LG	12,693	3	0	3	125	13,229	3	0	3	131	13,487	3	0	3	133				
				T4M	14,420	4	0	4	142	15,028	4	0	4	148	15,321	4	0	4	151				
				T4LG	13,115	3	0	3	129	13,668	3	0	3	135	13,934	3	0	3	138				
				TFTM	14,522	4	0	4	143	15,134	4	0	4	149	15,429	4	0	4	152				
				T5M	14,836	4	0	2	146	15,462	4	0	2	153	15,763	4	0	2	156				
				T5W	15,076	4	0	3	149	15,712	5	0	3	155	16,019	5	0	3	158				
				T5LG	14,879	3	0	2	147	15,507	3	0	2	153	15,809	3	0	2	156				
				BLC3	10,335	3	0	3	102	10,771	4	0	4	106	10,981	4	0	4	108				
				BLC4	10,674	4	0	4	105	11,124	4	0	4	110	11,341	4	0	4	112				
				RCCO	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	109				
				LCCO	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	109				
				AFR	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	159				
				P11	135W	60	700	T1S	19,437	4	0	4	144	20,257	4	0	4	150	20,651	4	0	4	153
								T2M	18,005	4	0	4	133	18,765	4	0	4	139	19,131	4	0	4	142
T3M	18,211	4	0					4	135	18,980	4	0	4	141	19,350	4	0	4	143				
T3LG	16,270	3	0					3	121	16,957	3	0	3	126	17,287	4	0	4	128				
T4M	18,483	4	0					4	137	19,263	5	0	5	143	19,638	5	0	5	146				
T4LG	16,810	3	0					3	125	17,519	3	0	3	130	17,861	3	0	3	132				
TFTM	18,614	4	0					4	138	19,399	4	0	4	144	19,777	5	0	5	147				
T5M	19,017	5	0					3	141	19,819	5	0	3	147	20,205	5	0	3	150				
T5W	19,325	5	0					3	143	20,140	5	0	3	149	20,533	5	0	3	152				
T5LG	19,072	4	0					2	141	19,876	4	0	2	147	20,264	4	0	2	150				
BLC3	13,247	4	0					4	98	13,806	4	0	4	102	14,075	4	0	4	104				
BLC4	13,682	4	0					4	101	14,259	4	0	4	106	14,537	4	0	4	108				
RCCO	13,367	1	0					3	99	13,931	1	0	3	103	14,203	1	0	3	105				
LCCO	13,367	1	0					3	99	13,931	1	0	3	103	14,203	1	0	3	105				
AFR	19,437	4	0					4	144	20,257	4	0	4	150	20,651	4	0	4	153				
P12	206W	60	1050					T1S	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	142
								T2M	25,436	5	0	5	124	26,509	5	0	5	129	27,025	5	0	5	131
				T3M	25,727	5	0	5	125	26,812	5	0	5	130	27,335	5	0	5	133				
				T3LG	22,984	4	0	4	112	23,954	4	0	4	116	24,421	4	0	4	119				
				T4M	26,110	5	0	5	127	27,212	5	0	5	132	27,742	5	0	5	135				
				T4LG	23,747	4	0	4	115	24,749	4	0	4	120	25,231	4	0	4	123				
				TFTM	26,295	5	0	5	128	27,404	5	0	5	133	27,938	5	0	5	136				
				T5M	26,864	5	0	4	130	27,997	5	0	4	136	28,543	5	0	4	139				
				T5W	27,299	5	0	4	133	28,451	5	0	4	138	29,006	5	0	4	141				
				T5LG	26,942	4	0	2	131	28,078	4	0	2	136	28,626	4	0	2	139				
				BLC3	18,714	4	0	4	91	19,504	4	0	4	95	19,884	4	0	4	97				
				BLC4	19,327	5	0	5	94	20,143	5	0	5	98	20,535	5	0	5	100				
				RCCO	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	97				
				LCCO	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	97				
				AFR	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	142				
				P13	276W	60	1400	T1S	34,436	5	0	5	125	35,889	5	0	5	130	36,588	5	0	5	133
								T2M	31,900	5	0	5	116	33,246	5	0	5	121	33,894	5	0	5	123
T3M	32,265	5	0					5	117	33,626	5	0	5	122	34,282	5	0	5	124				
T3LG	28,826	4	0					4	105	30,042	4	0	4	109	30,628	4	0	4	111				
T4M	32,746	5	0					5	119	34,128	5	0	5	124	34,793	5	0	5	126				
T4LG	29,782	4	0					4	108	31,039	4	0	4	113	31,644	5	0	4	115				
TFTM	32,978	5	0					5	120	34,369	5	0	5	125	35,039	5	0	5	127				
T5M	33,692	5	0					4	122	35,113	5	0	4	127	35,797	5	0	4	130				
T5W	34,238	5	0					4	124	35,682	5	0	4	129	36,378	5	0	4	132				
T5LG	33,789	5	0					3	122	35,215	5	0	3	128	35,901	5	0	3	130				
BLC3	23,471	5	0					5	85	24,461	5	0	5	89	24,937	5	0	5	90				
BLC4	24,240	5	0					5	88	25,262	5	0	5	92	25,755	5	0	5	93				
RCCO	23,683	1	0					4	86	24,682	1	0	4	89	25,163	1	0	4	91				
LCCO	23,683	1	0					4	86	24,682	1	0	4	89	25,163	1	0	4	91				
AFR	34,436	5	0					5	125	35,889	5	0	5	130	36,588	5	0	5	133				



# Dimensions

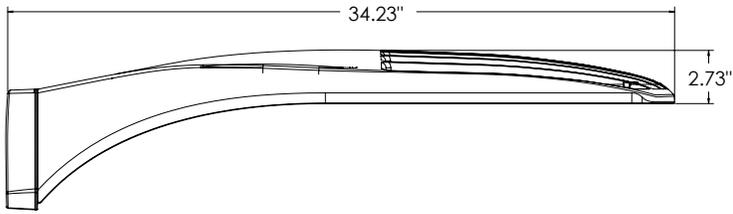


**DSX1 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 36 lbs**

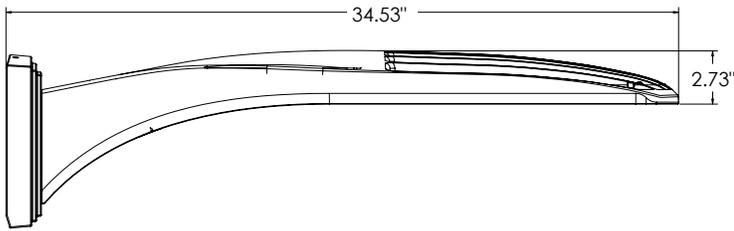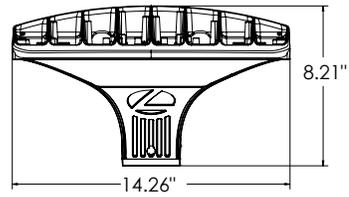


**DSX1 with WBA mount**  
**Weight: 38 lbs**

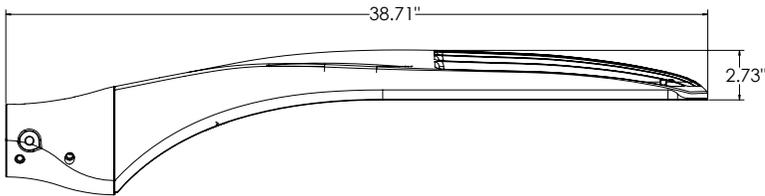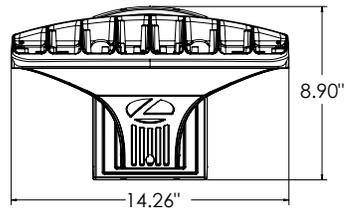


**DSX1 with MA mount**  
**Weight: 39 lbs**

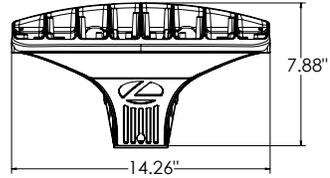


**SPA (STANDARD ARM)**

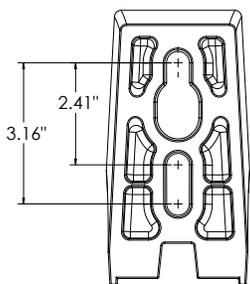


**RPA**

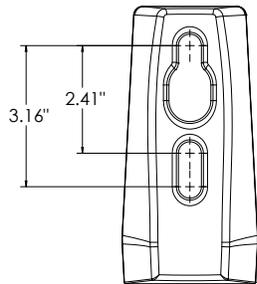


**SPA5**

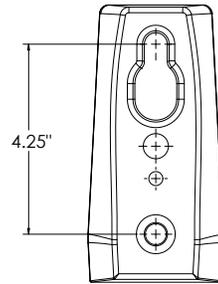

**RPA5**


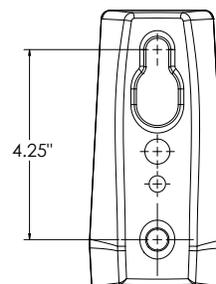


**SPA8N**

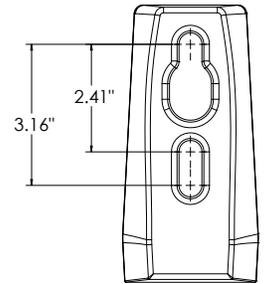

## nLight Sensor Coverage Pattern

NLTAIR2 PIRHN

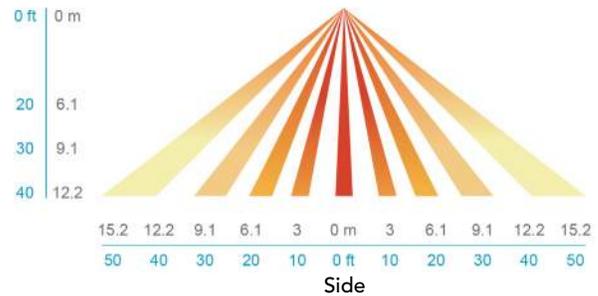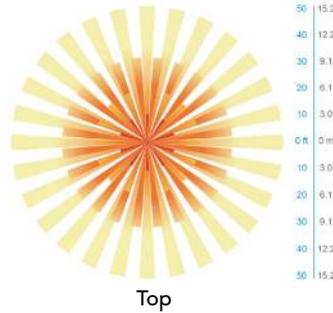

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G for SPA and MA. 1.5G for mountings RPA, RPA5, SPA5 and SPA8N. Low EPA (0.69 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### Coastal Construction (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L81/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. DSX Size 1, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensor with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found here.

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.




# D-Series Size 2 LED Area Luminaire



d#series

## Specifications

<b>EPA:</b>	1.06 ft <sup>2</sup> (0.10 m <sup>2</sup> )
<b>Length:</b>	40.59" (103.1 cm)
<b>Width:</b>	16.76" (42.6 cm)
<b>Height H1:</b>	8.11" (20.6 cm)
<b>Height H2:</b>	3.96" (10.1 cm)
<b>Weight:</b>	46 lbs (20.9 kg)

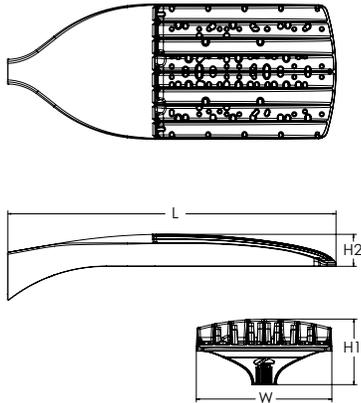

**ds** Design Select options indicated by this color background.

Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

## Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of up to 80% vs. 1000W HID and expected service life of over 100,000 hours.



Items marked by a shaded background qualify for the Design Select program and ship in 15 days or less. To learn more about Design Select, visit [www.acuitybrands.com/designselect](http://www.acuitybrands.com/designselect).  
\*See ordering tree for details

## Ordering Information

**EXAMPLE: DSX2 LED P7 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD**

DSX2 LED	Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting	
	DSX2 LED	<b>Forward optics</b> P1 P5 P2 P6 P3 P7 P4 P8 <b>Rotated optics</b> P10 <sup>1</sup> P13 <sup>1</sup> P11 <sup>1</sup> P14 <sup>1</sup> P12 <sup>1</sup>	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K  (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI  80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare <sup>3</sup> T4M Type IV medium T4LG Type IV low glare <sup>3</sup> TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> BLC4 Type IV backlight control <sup>3</sup> LCCO Left corner cutoff <sup>3</sup> RCCO Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V - 480V) <sup>7,8</sup> 120 <sup>16, 26</sup> 208 <sup>16, 26</sup> 240 <sup>16, 26</sup> 277 <sup>16, 26</sup> 347 <sup>16, 26</sup> 480 <sup>16, 26</sup>	<b>Shipped included</b> SPA Square pole mounting (#8 drilling) RPA Round pole mounting (#8 drilling) SPAS Square pole mounting #5 drilling <sup>9</sup> 208 Round pole mounting #5 drilling <sup>9</sup> SPA8N Square narrow pole mounting #8 drilling WBA Wall bracket <sup>10</sup> MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)

Control options	Other options	Finish (required)
<p><b>Shipped installed</b></p> <p>NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc.<sup>11, 12, 20, 21</sup></p> <p>PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc.<sup>13, 20, 21</sup></p> <p>PER NEMA twist-lock receptacle only (controls ordered separate)<sup>14</sup></p> <p>PER5 Five-pin receptacle only (controls ordered separate)<sup>14, 21</sup></p> <p>PER7 Seven-pin receptacle only (controls ordered separate)<sup>14, 21</sup></p> <p>FAO Field adjustable output<sup>15, 21</sup></p> <p>BL30 Bi-level switched dimming, 30%<sup>16, 21</sup></p> <p>BL50 Bi-level switched dimming, 50%<sup>16, 21</sup></p> <p>DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately)<sup>17</sup></p> <p>DS Dual switching<sup>18, 19, 21</sup></p>	<p><b>Shipped installed</b></p> <p>SPD20KV 20KV surge protection</p> <p>HS Houseside shield (black finish standard)<sup>22</sup></p> <p>L90 Left rotated optics<sup>1</sup></p> <p>R90 Right rotated optics<sup>1</sup></p> <p>CCE Coastal Construction<sup>23</sup></p> <p>HA 50°C ambient operation<sup>24</sup></p> <p>BAA Buy America(n) Act and/or Build America Buy America Qualified</p> <p>SF Single fuse (120, 277, 347V)<sup>26</sup></p> <p>DF Double fuse (208, 240, 480V)<sup>26</sup></p> <p>3G Vibration rated for 3G<sup>27</sup></p>	<p><b>Shipped separately</b></p> <p>EGSR External Glare Shield (reversible, field install required, matches housing finish)</p> <p>BSDB Bird Spikes (field install required)</p> <p>DDBXD Dark Bronze</p> <p>DBLXD Black</p> <p>DNAXD Natural Aluminum</p> <p>DWHXD White</p> <p>DDBTXD Textured dark bronze</p> <p>DBLTXD Textured black</p> <p>DNATXD Textured natural aluminum</p> <p>DWHGXD Textured white</p>



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2011-2025 Acuity Brands Lighting, Inc. All rights reserved.

DSX2-LED  
Rev. 01/28/25  
Page 1 of 10

## Ordering Information

### Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photozell - SSL twist-lock (120-277V) <sup>25</sup>
DLL347F 1.5 CUL JU	Photozell - SSL twist-lock (347V) <sup>25</sup>
DLL480F 1.5 CUL JU	Photozell - SSL twist-lock (480V) <sup>25</sup>
DSHORT SBK	Shorting cap <sup>25</sup>
DSX2HS P#	House-side shield (enter package number 1-13 in place of #)
DSXRPA (FINISH)	Round pole adapter (#8 drilling, specify finish)
DSXSPA5 (FINISH)	Square pole adapter #5 drilling (specify finish)
DSXRPA5 (FINISH)	Round pole adapter #5 drilling (specify finish)
DSX2EGSR (FINISH)	External glare shield (specify finish)
DSX2B5DB (FINISH)	Bird spike deterrent bracket (specify finish)


### NOTES

- Rotated optics available with packages P10, P11, P12, P13 and P14. Must be combined with option L90 or R90.
- 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).
- HVOLT not available with package P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz).
- XVOLT not available in package P10. XVOLT not available with fusing (SF or DF).
- SPA5 and RPA5 for use with #5 drilling only (Not for use with #8 drilling).
- WBA cannot be combined with Type 5 distributions plus photocell (PER).
- NLTAIR2 and PIRHN must be ordered together. For more information on nLight AIR2 visit this [link](#).
- NLTAIR2 PIRHN not available with other controls including PIR, PER, PER5, PER7, FAO, BL30, BL50, DMG and DS. NLTAIR2 PIRHN not available with P10 using HVOLT. NLTAIR2 PIRHN not available with P10 using XVOLT.
- PIR not available with NLTAIR2 PIRHN, PER, PER5, PER7, FAO BL30, BL50, DMG and DS. PIR not available with P10 using HVOLT. PIR not available with P10 using XVOLT.
- 14) PER/PER5/PER7 not available with NLTAIR2 PIRHN, PIR, BL30, BL50, FAO, DMG and DS. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.
- FAO not available with other dimming control options NLTAIR2 PIRHN, PIR, PER5, PER7, BL30, BL50, DMG and DS.
- BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO, DMG and DS. BL30 or BL50 must specify 120 or 277V.
- DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DS.
- DS not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, BL30, BL50, FAO and DMG.
- DS requires (2) separately switched circuits. DS provides 50/50 fixture operation via (2) different sets of leads on P1, P2, P3, P4, P5 (2 drivers). Note: Provides 60/40 operation using (2) different sets of leads on P6, P7, P8, P9, P10, P11, P12, P13, P14 (3 drivers).
- Reference Motion Sensor Default Settings table on page 4 to see functionality.
- Reference Controls Options table on page 4.
- HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- CCE option not available with option BS and EGSR. Contact Technical Support for availability.
- Option HA not available with performance packages P5, P6, P7, P8, P13 and P14.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.
- Single fuse (SF) requires 120V, 277V, or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).
- Option 3G for use with (MA) mast arm mount only when 3G vibration is required.

## Shield Accessories




External Glare Shield (EGSR)

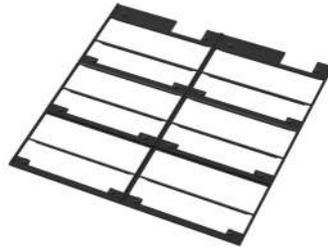

House Side Shield (HS)


## Drilling

### HANDHOLE ORIENTATION

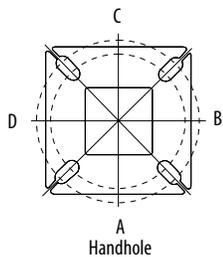

Handhole

Template #8

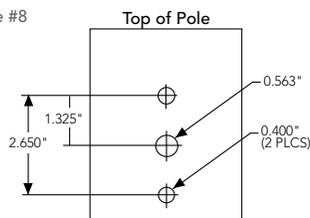

### Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
<b>Minimum Acceptable Outside Pole Dimension</b>							
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

### DSX2 Area Luminaire - EPA


\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX2 with SPA	1.06	2.12	1.84	2.32	---	2.33
DSX2 with SPA5, SPA8N	1.07	2.14	1.90	2.43	---	2.44
DSX2 with RPA, RPA5	1.07	2.14	1.90	2.43	2.31	2.44
DSX2 with MA	1.20	2.40	2.12	3.00	2.92	3.00

# Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [homepage](#).

Isofootcandle plots for the DSX2 LED P8 40K 70CRI. Distances are in units of mounting height (40').

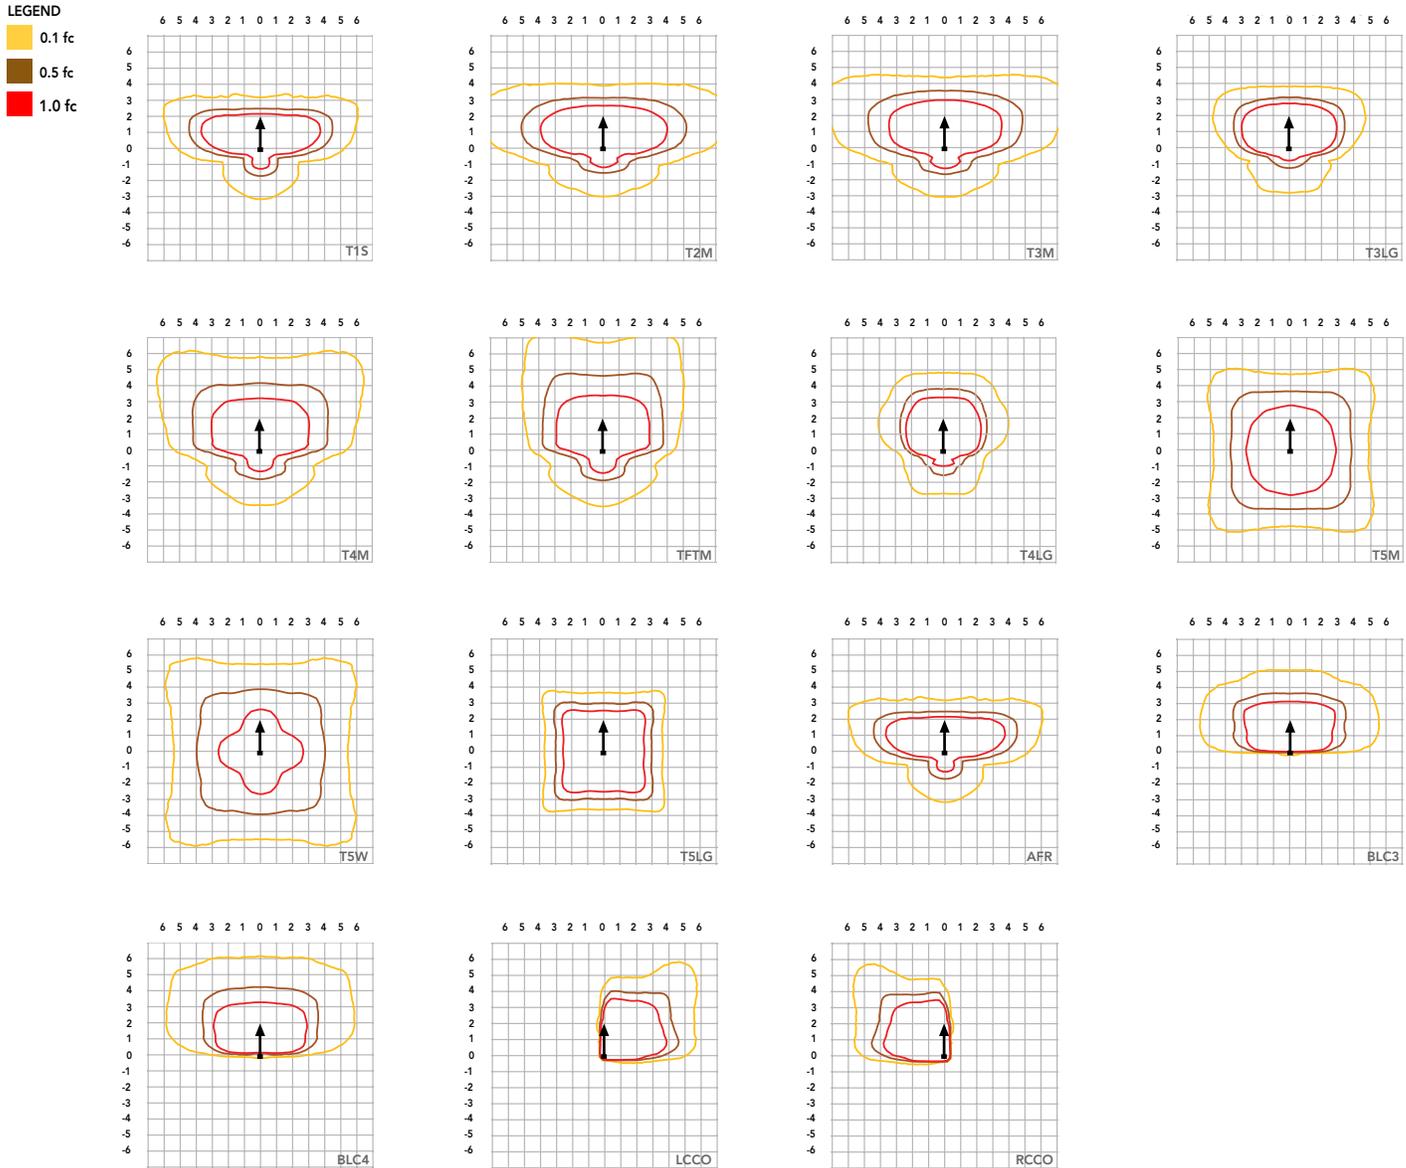

## Performance Data

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.03
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
<b>25°C</b>	<b>77°F</b>	<b>1.00</b>
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.95
50,000	0.90
100,000	0.82

### FAO Dimming Settings

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

### Electrical Load

	Performance Package	LED Count	Drive Current (mA)	Wattage	Current (A)					
					120V	208V	240V	277V	347V	480V
Forward Optics (Non-Rotated)	P1	80	530	135	1.12	0.65	0.56	0.49	0.39	0.28
	P2	80	700	181	1.49	0.86	0.75	0.65	0.52	0.37
	P3	80	850	222	1.83	1.05	0.91	0.79	0.63	0.46
	P4	80	1050	277	2.27	1.31	1.14	0.98	0.79	0.57
	P5	80	1250	333	2.72	1.57	1.36	1.18	0.94	0.68
	P6	100	1050	345	2.85	1.64	1.42	1.23	0.98	0.71
	P7	100	1250	414	3.41	1.97	1.70	1.48	1.18	0.85
	P8	100	1400	466	3.85	2.22	1.93	1.67	1.33	0.96
Rotated Optics (Requires L90 or R90)	P10	90	530	152	1.27	0.73	0.63	0.55	0.44	0.32
	P11	90	700	203	1.69	0.97	0.84	0.73	0.58	0.42
	P12	90	850	249	2.06	1.19	1.03	0.89	0.71	0.52
	P13	90	1200	358	2.95	1.70	1.47	1.28	1.02	0.74
	P14	90	1400	421	3.46	2.00	1.73	1.50	1.20	0.87

### LED Color Temperature / Color Rendering Multipliers

	70 CRI		80CRI		90CRI	
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)

Note: Some LED types are available as per special request. Contact Technical Support for more information.

### Motion Sensor Default Settings

Option	Unoccupied Dimmed Level	High Level (when occupied)	Photocell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

### Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P1	135W	80	530	T1S	19,946	2	0	3	148	20,787	2	0	3	155	21,192	2	0	3	158				
				T2M	18,477	3	0	4	137	19,256	3	0	4	143	19,632	3	0	4	146				
				T3M	18,691	3	0	5	139	19,480	3	0	5	145	19,859	3	0	5	148				
				T3LG	16,696	2	0	2	124	17,400	2	0	2	129	17,740	2	0	2	132				
				T4M	18,970	3	0	5	141	19,770	3	0	5	147	20,155	3	0	5	150				
				T4LG	17,253	2	0	2	128	17,981	2	0	2	134	18,331	2	0	2	136				
				TFTM	19,101	3	0	5	142	19,907	3	0	5	148	20,295	3	0	5	151				
				T5M	19,517	5	0	3	145	20,341	5	0	3	151	20,737	5	0	3	154				
				T5W	19,834	5	0	3	147	20,670	5	0	3	154	21,073	5	0	3	157				
				T5LG	19,574	4	0	2	146	20,400	4	0	2	152	20,797	4	0	2	155				
				BLC3	13,595	0	0	3	101	14,169	0	0	3	105	14,445	0	0	3	107				
				BLC4	14,042	0	0	4	104	14,634	0	0	4	109	14,919	0	0	4	111				
				RCCO	13,718	1	0	3	102	14,297	1	0	3	106	14,576	1	0	3	108				
				LCCO	13,718	1	0	3	102	14,297	1	0	3	106	14,576	1	0	3	108				
				AFR	19,946	2	0	3	148	20,787	2	0	3	155	21,192	2	0	3	158				
				P2	179W	80	700	T1S	25,520	3	0	3	142	26,597	3	0	3	148	27,116	3	0	3	151
								T2M	23,641	3	0	5	132	24,638	3	0	5	137	25,118	3	0	5	140
T3M	23,915	3	0					5	133	24,924	3	0	5	139	25,410	3	0	5	142				
T3LG	21,363	3	0					3	119	22,264	3	0	3	124	22,698	3	0	3	127				
T4M	24,272	3	0					5	135	25,296	3	0	5	141	25,789	3	0	5	144				
T4LG	22,075	3	0					3	123	23,006	3	0	3	128	23,455	3	0	3	131				
TFTM	24,440	3	0					5	136	25,471	3	0	5	142	25,967	3	0	5	145				
T5M	24,972	5	0					3	139	26,026	5	0	3	145	26,533	5	0	4	148				
T5W	25,377	5	0					4	142	26,448	5	0	4	148	26,963	5	0	4	150				
T5LG	25,045	4	0					2	140	26,101	4	0	2	146	26,610	4	0	2	148				
BLC3	17,395	0	0					4	97	18,129	0	0	4	101	18,482	0	0	4	103				
BLC4	17,966	0	0					4	100	18,724	0	0	5	104	19,089	0	0	5	107				
RCCO	17,552	1	0					4	98	18,293	1	0	4	102	18,649	1	0	4	104				
LCCO	17,552	1	0					4	98	18,293	1	0	4	102	18,649	1	0	4	104				
AFR	25,520	3	0					3	142	26,597	3	0	3	148	27,116	3	0	3	151				
P3	219W	80	850					T1S	30,127	3	0	4	137	31,398	3	0	4	143	32,010	3	0	4	146
								T2M	27,908	3	0	5	127	29,085	3	0	5	133	29,652	3	0	5	135
				T3M	28,232	3	0	5	129	29,423	3	0	5	134	29,996	3	0	5	137				
				T3LG	25,218	3	0	3	115	26,282	3	0	3	120	26,794	3	0	3	122				
				T4M	28,652	3	0	5	131	29,861	3	0	5	136	30,443	3	0	5	139				
				T4LG	26,059	3	0	3	119	27,159	3	0	3	124	27,688	3	0	3	126				
				TFTM	28,851	3	0	5	132	30,068	3	0	5	137	30,654	3	0	5	140				
				T5M	29,479	5	0	4	134	30,723	5	0	4	140	31,322	5	0	4	143				
				T5W	29,957	5	0	4	137	31,221	5	0	4	142	31,830	5	0	4	145				
				T5LG	29,565	4	0	2	135	30,812	5	0	2	140	31,413	5	0	2	143				
				BLC3	20,535	0	0	4	94	21,401	0	0	4	98	21,818	0	0	4	99				
				BLC4	21,209	0	0	5	97	22,104	0	0	5	101	22,534	0	0	5	103				
				RCCO	20,720	1	0	4	94	21,594	1	0	4	98	22,015	1	0	4	100				
				LCCO	20,720	1	0	4	94	21,594	1	0	4	98	22,015	1	0	4	100				
				AFR	30,127	3	0	4	137	31,398	3	0	4	143	32,010	3	0	4	146				
				P4	273W	80	1050	T1S	35,879	3	0	4	132	37,392	3	0	4	137	38,121	3	0	4	140
								T2M	33,236	3	0	5	122	34,638	3	0	5	127	35,313	3	0	5	130
T3M	33,622	3	0					5	123	35,040	3	0	5	129	35,723	3	0	5	131				
T3LG	30,033	3	0					4	110	31,300	3	0	4	115	31,910	3	0	4	117				
T4M	34,123	3	0					5	125	35,562	3	0	5	130	36,255	3	0	5	133				
T4LG	31,035	3	0					4	114	32,344	3	0	4	119	32,974	3	0	4	121				
TFTM	34,359	3	0					5	126	35,808	3	0	5	131	36,506	3	0	5	134				
T5M	35,108	5	0					4	129	36,589	5	0	4	134	37,302	5	0	4	137				
T5W	35,677	5	0					4	131	37,182	5	0	5	136	37,907	5	0	5	139				
T5LG	35,209	5	0					3	129	36,695	5	0	3	135	37,410	5	0	3	137				
BLC3	24,456	0	0					4	90	25,487	0	0	4	93	25,984	0	0	5	95				
BLC4	25,258	0	0					5	93	26,324	0	0	5	97	26,837	0	0	5	98				
RCCO	24,676	1	0					4	91	25,717	1	0	4	94	26,218	1	0	4	96				
LCCO	24,676	1	0					4	91	25,717	1	0	4	94	26,218	1	0	4	96				
AFR	35,879	3	0					4	132	37,392	3	0	4	137	38,121	3	0	4	140				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P5	327W	80	1250	T1S	41,149	3	0	4	126	42,885	3	0	4	131	43,721	3	0	4	134				
				T2M	38,118	4	0	5	117	39,727	4	0	5	122	40,501	4	0	5	124				
				T3M	38,561	3	0	5	118	40,187	3	0	5	123	40,971	3	0	5	125				
				T3LG	34,445	3	0	4	105	35,898	3	0	4	110	36,598	3	0	4	112				
				T4M	39,135	3	0	5	120	40,786	3	0	5	125	41,581	3	0	5	127				
				T4LG	35,594	3	0	4	109	37,095	3	0	4	114	37,818	3	0	4	116				
				TFTM	39,406	3	0	5	121	41,069	3	0	5	126	41,869	3	0	5	128				
				T5M	40,265	5	0	4	123	41,964	5	0	4	128	42,782	5	0	5	131				
				T5W	40,918	5	0	5	125	42,644	5	0	5	131	43,475	5	0	5	133				
				T5LG	40,382	5	0	3	124	42,085	5	0	3	129	42,906	5	0	3	131				
				BLC3	28,048	0	0	5	86	29,231	0	0	5	90	29,801	0	0	5	91				
				BLC4	28,969	0	0	5	89	30,191	0	0	5	92	30,779	0	0	5	94				
				RCCO	28,301	2	0	5	87	29,495	2	0	5	90	30,070	2	0	5	92				
				LCCO	28,301	2	0	5	87	29,495	2	0	5	90	30,070	2	0	5	92				
				AFR	41,149	3	0	4	126	42,885	3	0	4	131	43,721	3	0	4	134				
				P6	342W	100	1050	T1S	45,968	3	0	4	135	47,907	3	0	5	140	48,841	3	0	5	143
								T2M	42,582	4	0	5	125	44,379	4	0	5	130	45,244	4	0	5	132
T3M	43,076	4	0					5	126	44,894	4	0	5	131	45,769	4	0	5	134				
T3LG	38,479	3	0					4	113	40,102	3	0	4	117	40,884	3	0	4	120				
T4M	43,719	4	0					5	128	45,563	4	0	5	133	46,451	4	0	5	136				
T4LG	39,762	3	0					4	116	41,439	3	0	4	121	42,247	3	0	4	124				
TFTM	44,021	3	0					5	129	45,878	4	0	5	134	46,772	4	0	5	137				
T5M	44,980	5	0					5	132	46,878	5	0	5	137	47,792	5	0	5	140				
T5W	45,710	5	0					5	134	47,638	5	0	5	139	48,566	5	0	5	142				
T5LG	45,111	5	0					3	132	47,014	5	0	3	138	47,930	5	0	3	140				
BLC3	31,333	0	0					5	92	32,655	0	0	5	96	33,291	0	0	5	97				
BLC4	32,361	0	0					5	95	33,726	0	0	5	99	34,384	0	0	5	101				
RCCO	31,615	2	0					5	93	32,949	2	0	5	96	33,591	2	0	5	98				
LCCO	31,615	2	0					5	93	32,949	2	0	5	96	33,591	2	0	5	98				
AFR	45,968	3	0					4	135	47,907	3	0	5	140	48,841	3	0	5	143				
P7	409W	100	1250					T1S	52,692	3	0	5	129	54,915	3	0	5	134	55,986	3	0	5	137
								T2M	48,811	4	0	5	119	50,871	4	0	5	124	51,862	4	0	5	127
				T3M	49,378	4	0	5	121	51,461	4	0	5	126	52,464	4	0	5	128				
				T3LG	44,107	3	0	4	108	45,968	3	0	4	112	46,864	3	0	5	115				
				T4M	50,114	4	0	5	122	52,228	4	0	5	128	53,246	4	0	5	130				
				T4LG	45,579	3	0	4	111	47,501	3	0	4	116	48,427	3	0	4	118				
				TFTM	50,460	4	0	5	123	52,589	4	0	5	129	53,614	4	0	5	131				
				T5M	51,560	5	0	5	126	53,735	5	0	5	131	54,783	5	0	5	134				
				T5W	52,396	5	0	5	128	54,607	5	0	5	133	55,671	5	0	5	136				
				T5LG	51,710	5	0	4	126	53,891	5	0	4	132	54,941	5	0	4	134				
				BLC3	35,916	1	0	5	88	37,431	1	0	5	91	38,161	1	0	5	93				
				BLC4	37,095	0	0	5	91	38,660	0	0	5	94	39,413	0	0	5	96				
				RCCO	36,240	2	0	5	89	37,769	2	0	5	92	38,505	2	0	5	94				
				LCCO	36,240	2	0	5	89	37,769	2	0	5	92	38,505	2	0	5	94				
				AFR	52,692	3	0	5	129	54,915	3	0	5	134	55,986	3	0	5	137				
				P8	462W	100	1400	T1S	57,662	3	0	5	125	60,094	4	0	5	130	61,266	4	0	5	132
								T2M	53,415	4	0	5	116	55,668	4	0	5	120	56,753	4	0	5	123
T3M	54,034	4	0					5	117	56,314	4	0	5	122	57,412	4	0	5	124				
T3LG	48,267	3	0					5	104	50,304	3	0	5	109	51,284	4	0	5	111				
T4M	54,840	4	0					5	119	57,154	4	0	5	124	58,268	4	0	5	126				
T4LG	49,877	3	0					5	108	51,981	3	0	5	112	52,994	3	0	5	115				
TFTM	55,219	4	0					5	119	57,549	4	0	5	124	58,671	4	0	5	127				
T5M	56,423	5	0					5	122	58,803	5	0	5	127	59,949	5	0	5	130				
T5W	57,338	5	0					5	124	59,757	5	0	5	129	60,921	5	0	5	132				
T5LG	56,586	5	0					4	122	58,974	5	0	4	128	60,123	5	0	4	130				
BLC3	39,303	1	0					5	85	40,962	1	0	5	89	41,760	1	0	5	90				
BLC4	40,593	0	0					5	88	42,306	0	0	5	91	43,130	0	0	5	93				
RCCO	39,658	2	0					5	86	41,331	2	0	5	89	42,137	2	0	5	91				
LCCO	39,658	2	0					5	86	41,331	2	0	5	89	42,137	2	0	5	91				
AFR	57,662	3	0					5	125	60,094	4	0	5	130	61,266	4	0	5	132				

# Performance Data

## Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P10	152W	90	530	T1S	22,798	4	0	4	150	23,760	4	0	4	156	24,223	4	0	4	159				
				T2M	21,119	5	0	5	139	22,010	5	0	5	145	22,439	5	0	5	148				
				T3M	21,361	5	0	5	141	22,262	5	0	5	147	22,696	5	0	5	149				
				T3LG	19,084	4	0	4	126	19,889	4	0	4	131	20,277	4	0	4	133				
				T4M	21,679	5	0	5	143	22,594	5	0	5	149	23,034	5	0	5	152				
				T4LG	19,717	4	0	4	130	20,549	4	0	4	135	20,950	4	0	4	138				
				TFTM	21,833	5	0	5	144	22,754	5	0	5	150	23,197	5	0	5	153				
				T5M	22,305	5	0	3	147	23,246	5	0	3	153	23,699	5	0	3	156				
				T5W	22,667	5	0	3	149	23,623	5	0	4	155	24,084	5	0	4	158				
				T5LG	22,370	4	0	2	147	23,314	4	0	2	153	23,768	4	0	2	156				
				BLC3	15,539	4	0	4	102	16,194	4	0	4	107	16,510	4	0	4	109				
				BLC4	16,048	4	0	4	106	16,725	4	0	4	110	17,051	4	0	4	112				
				RCCO	15,679	1	0	3	103	16,340	1	0	3	108	16,659	1	0	3	110				
				LCCO	15,679	1	0	3	103	16,340	1	0	3	108	16,659	1	0	3	110				
				AFR	22,798	4	0	4	150	23,760	4	0	4	156	24,223	4	0	4	159				
				P11	203W	90	700	T1S	29,222	4	0	4	144	30,455	4	0	4	150	31,048	4	0	4	153
								T2M	27,070	5	0	5	134	28,212	5	0	5	139	28,762	5	0	5	142
T3M	27,380	5	0					5	135	28,535	5	0	5	141	29,091	5	0	5	144				
T3LG	24,462	4	0					4	121	25,493	4	0	4	126	25,990	4	0	4	128				
T4M	27,788	5	0					5	137	28,960	5	0	5	143	29,525	5	0	5	146				
T4LG	25,273	4	0					4	125	26,339	4	0	4	130	26,853	4	0	4	133				
TFTM	27,985	5	0					5	138	29,165	5	0	5	144	29,734	5	0	5	147				
T5M	28,591	5	0					4	141	29,797	5	0	4	147	30,377	5	0	4	150				
T5W	29,054	5	0					4	143	30,280	5	0	4	149	30,870	5	0	4	152				
T5LG	28,673	4	0					2	142	29,883	4	0	2	148	30,465	5	0	2	150				
BLC3	19,917	4	0					4	98	20,757	4	0	4	102	21,162	4	0	4	104				
BLC4	20,570	5	0					5	102	21,437	5	0	5	106	21,855	5	0	5	108				
RCCO	20,097	1	0					4	99	20,945	1	0	4	103	21,353	1	0	4	105				
LCCO	20,097	1	0					4	99	20,945	1	0	4	103	21,353	1	0	4	105				
AFR	29,222	4	0					4	144	30,455	4	0	4	150	31,048	4	0	4	153				
P12	248W	90	850					T1S	34,526	5	0	5	139	35,983	5	0	5	145	36,684	5	0	5	148
								T2M	31,984	5	0	5	129	33,333	5	0	5	135	33,983	5	0	5	137
				T3M	32,350	5	0	5	131	33,715	5	0	5	136	34,372	5	0	5	139				
				T3LG	28,902	4	0	4	117	30,121	4	0	4	122	30,708	4	0	4	124				
				T4M	32,832	5	0	5	133	34,217	5	0	5	138	34,884	5	0	5	141				
				T4LG	29,861	4	0	4	121	31,120	4	0	4	126	31,727	5	0	4	128				
				TFTM	33,064	5	0	5	134	34,459	5	0	5	139	35,131	5	0	5	142				
				T5M	33,780	5	0	4	136	35,205	5	0	4	142	35,891	5	0	4	145				
				T5W	34,327	5	0	4	139	35,776	5	0	4	145	36,473	5	0	4	147				
				T5LG	33,878	5	0	3	137	35,307	5	0	3	143	35,995	5	0	3	145				
				BLC3	23,532	5	0	5	95	24,525	5	0	5	99	25,003	5	0	5	101				
				BLC4	24,303	5	0	5	98	25,328	5	0	5	102	25,822	5	0	5	104				
				RCCO	23,745	1	0	4	96	24,747	1	0	4	100	25,229	1	0	4	102				
				LCCO	23,745	1	0	4	96	24,747	1	0	4	100	25,229	1	0	4	102				
				AFR	34,526	5	0	5	139	35,983	5	0	5	145	36,684	5	0	5	148				


## Performance Data

### Lumen Output



Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																							
Performance Package	System Watts	LED Count	Drive Current (mA)	Distribution Type	30K					40K					50K								
					(3000K, 70 CRI)					(4000K, 70 CRI)					(5000K, 70 CRI)								
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW				
P13	354W	90	1200	T1S	45,748	5	0	5	129	47,678	5	0	5	135	48,608	5	0	5	137				
				T2M	42,380	5	0	5	120	44,168	5	0	5	125	45,029	5	0	5	127				
				T3M	42,865	5	0	5	121	44,673	5	0	5	126	45,544	5	0	5	129				
				T3LG	38,296	5	0	5	108	39,911	5	0	5	113	40,689	5	0	5	115				
				T4M	43,503	5	0	5	123	45,339	5	0	5	128	46,222	5	0	5	131				
				T4LG	39,566	5	0	5	112	41,235	5	0	5	117	42,039	5	0	5	119				
				TFTM	43,811	5	0	5	124	45,659	5	0	5	129	46,549	5	0	5	132				
				T5M	44,760	5	0	5	126	46,648	5	0	5	132	47,557	5	0	5	134				
				T5W	45,485	5	0	5	129	47,404	5	0	5	134	48,328	5	0	5	137				
				T5LG	44,889	5	0	3	127	46,783	5	0	3	132	47,695	5	0	3	135				
				BLC3	31,181	5	0	5	88	32,496	5	0	5	92	33,130	5	0	5	94				
				BLC4	32,202	5	0	5	91	33,561	5	0	5	95	34,215	5	0	5	97				
				RCCO	31,463	2	0	5	89	32,790	2	0	5	93	33,429	2	0	5	94				
				LCCO	31,463	2	0	5	89	32,790	2	0	5	93	33,429	2	0	5	94				
				AFR	45,748	5	0	5	129	47,678	5	0	5	135	48,608	5	0	5	137				
				P14	415W	90	1400	T1S	51,272	5	0	5	123	53,435	5	0	5	129	54,476	5	0	5	131
								T2M	47,497	5	0	5	114	49,500	5	0	5	119	50,465	5	0	5	121
T3M	48,040	5	0					5	116	50,067	5	0	5	121	51,043	5	0	5	123				
T3LG	42,919	5	0					5	103	44,730	5	0	5	108	45,602	5	0	5	110				
T4M	48,756	5	0					5	117	50,813	5	0	5	122	51,803	5	0	5	125				
T4LG	44,343	5	0					5	107	46,214	5	0	5	111	47,115	5	0	5	113				
TFTM	49,101	5	0					5	118	51,172	5	0	5	123	52,169	5	0	5	126				
T5M	50,164	5	0					5	121	52,280	5	0	5	126	53,299	5	0	5	128				
T5W	50,977	5	0					5	123	53,127	5	0	5	128	54,163	5	0	5	130				
T5LG	50,309	5	0					4	121	52,432	5	0	4	126	53,453	5	0	4	129				
BLC3	34,945	5	0					5	84	36,420	5	0	5	88	37,130	5	0	5	89				
BLC4	36,090	5	0					5	87	37,613	5	0	5	91	38,346	5	0	5	92				
RCCO	35,261	2	0					5	85	36,749	2	0	5	88	37,465	2	0	5	90				
LCCO	35,261	2	0					5	85	36,749	2	0	5	88	37,465	2	0	5	90				
AFR	51,272	5	0					5	123	53,435	5	0	5	129	54,476	5	0	5	131				



# Dimensions

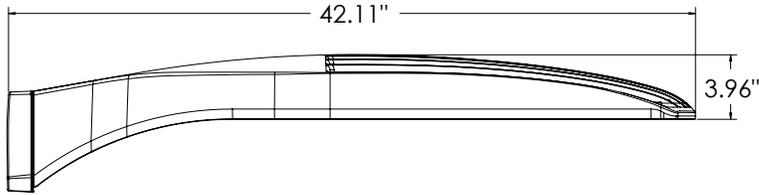


**DSX2 with RPA, RPA5, SPA5, SPA8N mount**  
**Weight: 48 lbs**

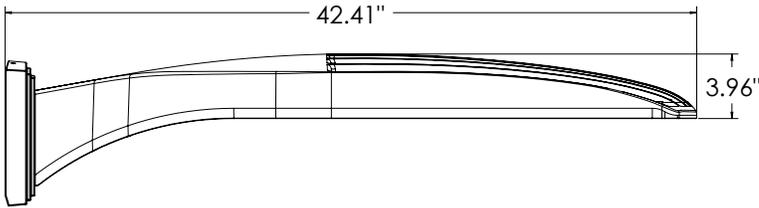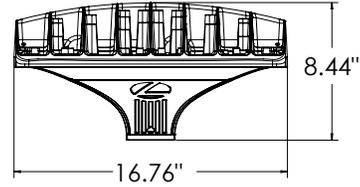


**DSX2 with WBA mount**  
**Weight: 50 lbs**

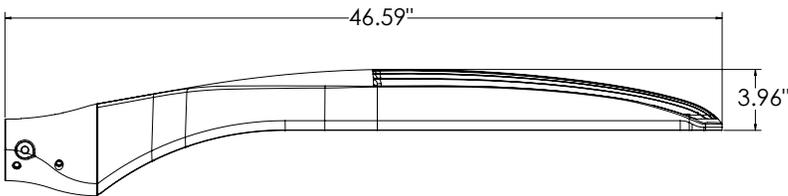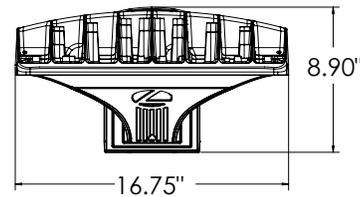


**DSX2 with MA mount**  
**Weight: 50 lbs**

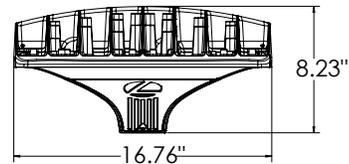


**SPA (STANDARD ARM)**

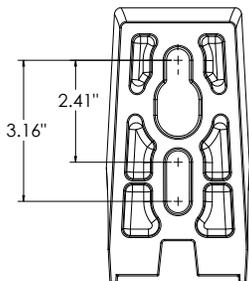


**RPA**

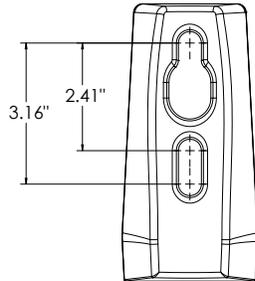


**SPA5**

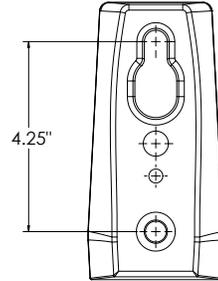

**RPA5**


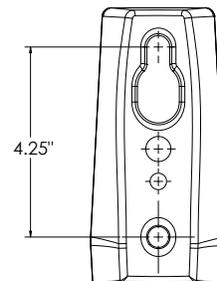


**SPA8N**

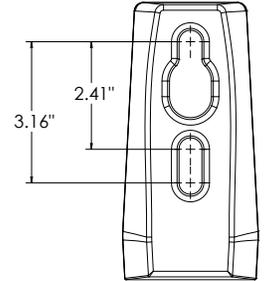

## nLight Sensor Coverage Pattern

NLTAIR2 PIRHN

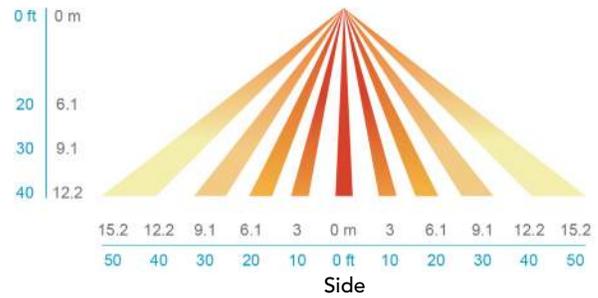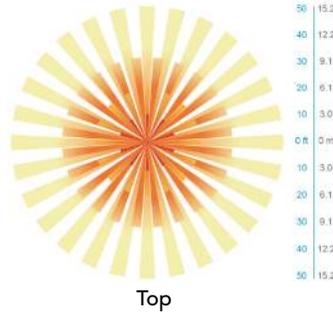

## FEATURES & SPECIFICATIONS

### INTENDED USE

The sleek design of the D-Series Area Size 2 reflects the embedded high performance LED technology. It is ideal for applications like car dealerships and large parking lots adjacent to malls, transit stations, grocery stores, home centers, and other big-box retailers.

### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 1.5G. 3G vibration rated available for (MA) mast arm mount when specifying option 3G. Low EPA (1.06 ft<sup>2</sup>) for optimized pole wind loading.

### FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

### Coastal Construction (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K, or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 2 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L82/100,000 hrs at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily-serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### STANDARD CONTROLS

The DSX2 LED area luminaire has a number of control options. DSX Size 2, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensor with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

### nLIGHT AIR CONTROLS

The DSX2 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

### GOVERNMENT PROCUREMENT

BAA – Buy America(n) Act: Product with the BAA option qualifies as a domestic end product under the Buy American Act as implemented in the FAR and DFARS. Product with the BAA option also qualifies as manufactured in the United States under DOT Buy America regulations.

BABA – Build America Buy America: Product with the BAA option also qualifies as produced in the United States under the definitions of the Build America, Buy America Act.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

# FCC400 Four-Inch Round Cylinder – Wall, Pendant, or Surface Mount Down Lighting

## Standard Drivers without Battery Backup



### FEATURES

- Up to 3500 lumens (4000K)
- Multiple mounting options
- Clear lens with anti-glare tempered glass (IK08)
- The Soft Field Lens option provides diffusion, reduces glare, and enhances visual comfort.
- Multiple housing colors
- 0-10V 1% Dimming (Standard)
- 93 CRI with 2 SDCM

### PERFORMANCE

**Beam Spread:** 15°, 25°, 50°, 72°, 90°  
**CCT Options:** 2700K, 3000K, 3500K, 4000K  
**CRI:** 93 CRI  
**Consistency:** 2 SDCM (Luminaire to Luminaire)  
**Lumens:** 500 - 3500 lumens (nominal)  
**Lumen Maintenance:** L70 > 70,000 hours

### PHYSICAL

**Mounting:** Mounts directly to standard recessed junction box with wall mount or twist-lock canopy. Additional holes allow unit to be attached directly to mounting surface. Not intended for open ceilings or surface mount conduit j-box applications. Recessed j-box must be flush with finished wall or ceiling surface.

**Housing:** Heavy-walled, extruded aluminum housing with high pressure die-cast lens ring and cap with stainless steel hardware.

**Finish:** Available in Black, Bronze, Graphite Grey, Silver, White and Custom Colors. Six stage chemical iron phosphate conversion pre-treatment. Polyester powder coat finish, 18 µm minimum, 5,000 hour salt spray test (ASTM B117) compliant with Florida / AAMA 2604 specification.

**Warranty:** 5-Year limited warranty

**Lens:** IK08 impact compliant, clear anti-glare tempered glass

**Ingress Protection:** Continuous silicone gasket to seal out contaminants, IP65 rated for dry, damp or wet locations. SF option rated IP65 for cover ceiling application only.

**Weight:** 8-12 lbs (Depending on Length)

**Operating Temperature:** -22°F to 122°F (-30°C to 50°C)

### ELECTRICAL

**Voltage:** Universal 120 - 277 VAC, 347 VAC optional

**Power Supply:** Integral Class II, electronic high-power factor >.90, THD < 20%, FCC Title 47 Part 15 Class A.

**Power Consumption:** Maximum 46W


**Dimming: Standard:** 0-10V, 1%, **Optional:** ELV, TRIAC, dim to off

**Standards:**

- cETLus Listed, CE, NOM, and RoHS Compliant.
- Wet location listed for wall or ceiling mount IP65 Ingress protection.
- 1.5G (ANSI C136.31) Vibration resistance rated.
- IK08 (IEC6226) Impact resistance rated.
- IESNA LM79 Photometric testing by NVLAP accredited test lab.
- IESNA LM80 LED testing by NVLAP accredited test lab.
- IESNA TM21 Luminaire lumen depreciation projection to > 70,000 hours.

### PHYSICAL DIMENSIONS

Luminaire	Height
FCC400-10	10.95" Height
FCC400-12	12.95" Height
FCC400-14	14.95" Height
FCC400-16	16.95" Height
FCC400-18	18.95" Height
FCC400-20	20.95" Height

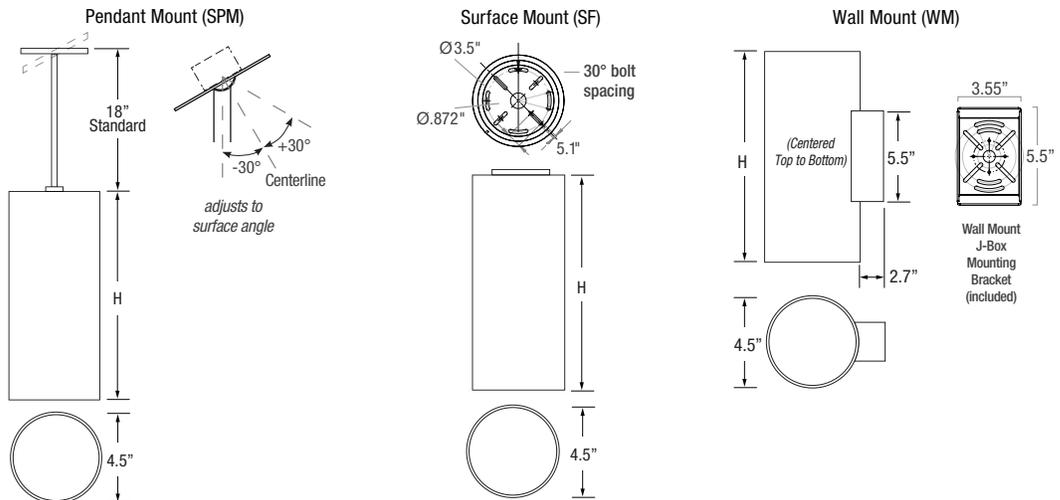

Date: \_\_\_\_\_  
 Type: \_\_\_\_\_  
 Fixture: \_\_\_\_\_  
 Project: \_\_\_\_\_

Approved: \_\_\_\_\_

# FCC400 Four-Inch Round Cylinder Down Lighting

## PRODUCT CODE

EXAMPLE: FCC400-10-SPM-18-UNV-927-05L-BKE-25-ET-CV

MODEL	HEIGHT	MOUNTING	SUSP. LENGTH	VOLTAGE	COLOR	LUMENS	FINISH	OPTIC	DIMMING	OPTIONS
FCC400										

<p><b>MODEL</b> FCC400</p>	<p><b>HEIGHT</b></p> <table border="0"> <tr><td>10</td><td>10.95" Height</td></tr> <tr><td>12</td><td>12.95" Height</td></tr> <tr><td>14</td><td>14.95" Height</td></tr> <tr><td>16</td><td>16.95" Height</td></tr> <tr><td>18</td><td>18.95" Height</td></tr> <tr><td>20</td><td>20.95" Height</td></tr> </table>	10	10.95" Height	12	12.95" Height	14	14.95" Height	16	16.95" Height	18	18.95" Height	20	20.95" Height	<p><b>MOUNTING</b></p> <table border="0"> <tr><td><b>SPM</b></td><td>Slope Pendant</td></tr> <tr><td><b>SF</b></td><td>Surface</td></tr> <tr><td><b>WM</b></td><td>Wall</td></tr> </table>	<b>SPM</b>	Slope Pendant	<b>SF</b>	Surface	<b>WM</b>	Wall	<p><b>COLOR</b></p> <table border="0"> <tr><td><b>927</b></td><td>(93CRI) 2700K</td></tr> <tr><td><b>930</b></td><td>(93CRI) 3000K</td></tr> <tr><td><b>935</b></td><td>(93CRI) 3500K</td></tr> <tr><td><b>940</b></td><td>(93CRI) 4000K</td></tr> </table> <p>Other CCT/CRI available upon request.</p>	<b>927</b>	(93CRI) 2700K	<b>930</b>	(93CRI) 3000K	<b>935</b>	(93CRI) 3500K	<b>940</b>	(93CRI) 4000K	<p><b>LUMENS nominal</b></p> <table border="0"> <tr><td><b>05L</b></td><td>500 lm</td></tr> <tr><td><b>10L</b></td><td>1000 lm</td></tr> <tr><td><b>15L</b></td><td>1500 lm</td></tr> <tr><td><b>20L</b></td><td>2000 lm</td></tr> <tr><td><b>25L</b></td><td>2500 lm</td></tr> <tr><td><b>30L</b></td><td>3000 lm (Minimum 14")</td></tr> <tr><td><b>35L</b></td><td>3500 lm (Minimum 14")</td></tr> </table>	<b>05L</b>	500 lm	<b>10L</b>	1000 lm	<b>15L</b>	1500 lm	<b>20L</b>	2000 lm	<b>25L</b>	2500 lm	<b>30L</b>	3000 lm (Minimum 14")	<b>35L</b>	3500 lm (Minimum 14")	<p><b>FINISH</b></p> <table border="0"> <tr><td><b>BKE</b></td><td>Black</td></tr> <tr><td><b>BRE</b></td><td>Bronze</td></tr> <tr><td><b>GRE</b></td><td>Graphite Grey</td></tr> <tr><td><b>SLE</b></td><td>Silver</td></tr> <tr><td><b>WHE</b></td><td>White</td></tr> <tr><td><b>CCE</b></td><td>Custom Color</td></tr> </table>	<b>BKE</b>	Black	<b>BRE</b>	Bronze	<b>GRE</b>	Graphite Grey	<b>SLE</b>	Silver	<b>WHE</b>	White	<b>CCE</b>	Custom Color	<p><b>OPTIC nominal</b></p> <table border="0"> <tr><td><b>15</b></td><td>Spot (15°) (Max 30L)</td></tr> <tr><td><b>25</b></td><td>Narrow Flood (25°)</td></tr> <tr><td><b>50</b></td><td>Flood (50°)</td></tr> <tr><td><b>72</b></td><td>Wide Flood (72°)</td></tr> <tr><td><b>90</b></td><td>Flat (90°)</td></tr> </table> <p><b>w/SOFT FIELD</b></p> <table border="0"> <tr><td><b>15S</b></td><td>Spot (15°) (Max 30L)</td></tr> <tr><td><b>25S</b></td><td>Narrow Flood (25°)</td></tr> <tr><td><b>50S</b></td><td>Flood (50°)</td></tr> <tr><td><b>72S</b></td><td>Wide Flood (72°)</td></tr> <tr><td><b>90S</b></td><td>Flat (90°)</td></tr> </table> <p><i>Soft Field average light loss factor is 0.97</i></p>	<b>15</b>	Spot (15°) (Max 30L)	<b>25</b>	Narrow Flood (25°)	<b>50</b>	Flood (50°)	<b>72</b>	Wide Flood (72°)	<b>90</b>	Flat (90°)	<b>15S</b>	Spot (15°) (Max 30L)	<b>25S</b>	Narrow Flood (25°)	<b>50S</b>	Flood (50°)	<b>72S</b>	Wide Flood (72°)	<b>90S</b>	Flat (90°)	<p><b>DIMMING</b></p> <table border="0"> <tr><td><b>ET</b></td><td>ELV or TRIAC Driver (120V Phase Dimming w/ UNV Driver) (05L - 35L options only)*</td></tr> <tr><td><b>LD</b></td><td>0-10V Dimming, 1% (Standard)</td></tr> </table> <p><i>*15 and 15S Beam Angle maximum 30L on ET Option</i></p>	<b>ET</b>	ELV or TRIAC Driver (120V Phase Dimming w/ UNV Driver) (05L - 35L options only)*	<b>LD</b>	0-10V Dimming, 1% (Standard)	<p><b>OPTIONS</b></p> <table border="0"> <tr><td><b>CV</b></td><td>Cut-Off Visor</td></tr> </table>	<b>CV</b>	Cut-Off Visor
10	10.95" Height																																																																																					
12	12.95" Height																																																																																					
14	14.95" Height																																																																																					
16	16.95" Height																																																																																					
18	18.95" Height																																																																																					
20	20.95" Height																																																																																					
<b>SPM</b>	Slope Pendant																																																																																					
<b>SF</b>	Surface																																																																																					
<b>WM</b>	Wall																																																																																					
<b>927</b>	(93CRI) 2700K																																																																																					
<b>930</b>	(93CRI) 3000K																																																																																					
<b>935</b>	(93CRI) 3500K																																																																																					
<b>940</b>	(93CRI) 4000K																																																																																					
<b>05L</b>	500 lm																																																																																					
<b>10L</b>	1000 lm																																																																																					
<b>15L</b>	1500 lm																																																																																					
<b>20L</b>	2000 lm																																																																																					
<b>25L</b>	2500 lm																																																																																					
<b>30L</b>	3000 lm (Minimum 14")																																																																																					
<b>35L</b>	3500 lm (Minimum 14")																																																																																					
<b>BKE</b>	Black																																																																																					
<b>BRE</b>	Bronze																																																																																					
<b>GRE</b>	Graphite Grey																																																																																					
<b>SLE</b>	Silver																																																																																					
<b>WHE</b>	White																																																																																					
<b>CCE</b>	Custom Color																																																																																					
<b>15</b>	Spot (15°) (Max 30L)																																																																																					
<b>25</b>	Narrow Flood (25°)																																																																																					
<b>50</b>	Flood (50°)																																																																																					
<b>72</b>	Wide Flood (72°)																																																																																					
<b>90</b>	Flat (90°)																																																																																					
<b>15S</b>	Spot (15°) (Max 30L)																																																																																					
<b>25S</b>	Narrow Flood (25°)																																																																																					
<b>50S</b>	Flood (50°)																																																																																					
<b>72S</b>	Wide Flood (72°)																																																																																					
<b>90S</b>	Flat (90°)																																																																																					
<b>ET</b>	ELV or TRIAC Driver (120V Phase Dimming w/ UNV Driver) (05L - 35L options only)*																																																																																					
<b>LD</b>	0-10V Dimming, 1% (Standard)																																																																																					
<b>CV</b>	Cut-Off Visor																																																																																					

**SPM LENGTH**

Specify the optional suspension length in inches. (Top of luminaire to ceiling) (SPM 18" Standard, 6"-120" Max; 61"-120" w/LD & ET Only and stem comes in 2 sections) \*Consult factory & price guide for other lengths.

**VOLTAGE**

**UNV** Universal 120 - 277 AC  
**347V** 347 VAC (20L - 35L options only; for 15 degree, 20L - 25L options only)

# FCC400 Four-Inch Round Cylinder Down Lighting

## LUMENS / WATTAGE nominal

Model	Watts	Lumens
FCC400	6.4 W	500 lm
15°	12 W	1000 lm
	19 W	1500 lm
	26 W	2000 lm
	34 W	2500 lm
	46 W	3000 lm

Model	Watts	Lumens
FCC400	6.4 W	500 lm
25°, 50°, 72°, 90°	12 W	1000 lm
	17 W	1500 lm
	23 W	2000 lm
	30 W	2500 lm
	36 W	3000 lm
	42 W	3500 lm

Lifetime Calculations				
Model	L70	L70	L90	L90
	Calculated	Reported	Calculated	Reported
FCC400	133600	>60500	41200	41200

\*Specific Lumen Output Lifetime available upon request.  
\*All lifetimes based on B50.






IES Multiplier	
Color	Multiplier
927	0.92
930	0.95
935	0.98
940	1.00

\*83CR1s1.15 Consult factory.

TRIAC & ELV Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Glyder GLV-600
	Diva DVLV-600P
	Diva DV-600P
	Diva DVELV-600P(303)
	Maestro MALV-600
	Nova T NT-1000
	Nova T NTELV-600
Leviton	SureSlide 6633
	illumatech IPE04

0-10V Approved Dimmer List	
Manufacturer	Manufacturer Part Number
Lutron	Diva DVSTV-XX
	Diva DVSTV-453PH-WH1
Leviton	illumatech 010-IP710-DLZ

## PHOTOMETRICS

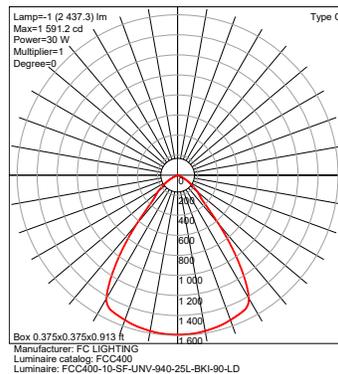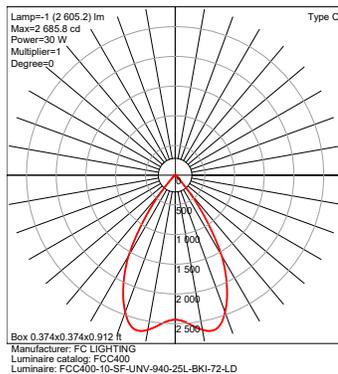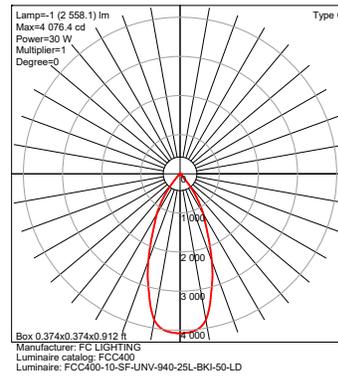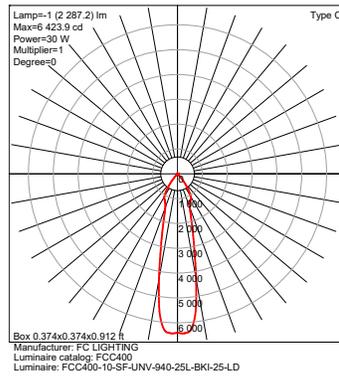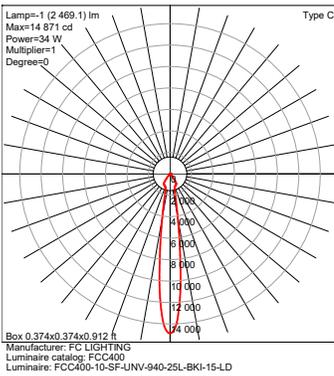

Due to continuous development and improvements, specifications are subject to change without notice.

Product use certifies agreement to FC Lighting, Inc. terms and conditions.

© FC Lighting, Inc. 3609 Swenson Ave • St. Charles, IL • 60174 | fclighting.com | 800.900.1730


US Commercial Lighting Manufacturer Since 1982

JC-DM-060724

# FCC400 4" Round Down Lighting

## OPTIONS

Cut-Off Visor (CV)

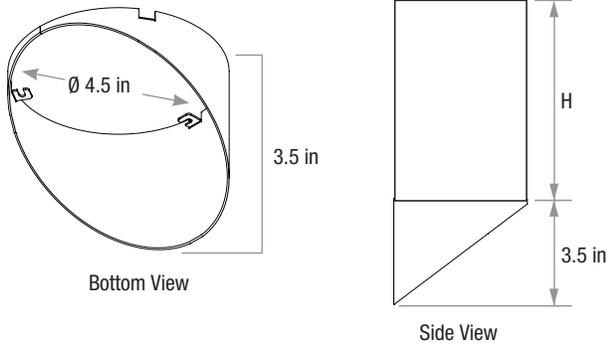



# ARC1 LED

## Architectural Wall Luminaire



Catalog Number



Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

### Specifications

- Depth (D1):** 6.5"
- Depth (D2):** 4.75"
- Height:** 5"
- Width:** 11"
- Weight:** 7 lbs  
(without options)

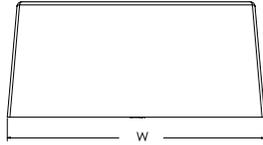

### Introduction

The Lithonia Lighting ARC LED wall-mounted luminaires provide both architectural styling and visually comfortable illumination while providing the high energy savings and low initial costs for quick financial payback.

ARC1 delivers up to 3,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. The compact size of ARC1, with its integrated emergency battery backup option, is ideal for over-the-door applications.

### ARC LED Family Overview

Luminaire	Standard EM, 0°C	Cold EM, -20°C	Approximate Lumens (4000K)				
			P1	P2	P3	P4	P5
ARC1 LED	4W	--	1,500	2,000	3,000	--	--
ARC2 LED	4W	8W	1,500	2,000	3,000	4,000	6,500

### Ordering Information

**EXAMPLE: ARC1 LED P2 40K MVOLT PE DDBXD**

Series	Package	Color Temperature	Voltage	Options	Finish
ARC1 LED	P1 1,500 Lumens	30K 3000K	MVOLT 347 <sup>1</sup>	E4WH Emergency battery backup, CEC compliant (4W, 0°C min) <sup>1</sup>	DDBXD Dark bronze
	P2 2,000 Lumens	40K 4000K		PE Button type photocell for dusk-to-dawn operation	DBLXD Black
	P3 3,000 Lumens	50K 5000K		DMG 0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>2</sup>	DNAXD Natural aluminum
				SPD6KV 6kV surge protection	DWHXD White
				FAO Field adjustable light output device. Allows for easy adjustment to the desired light levels, from 20% to 100% <sup>2</sup>	DSSXD Sandstone
				LDS18 18" Fixture leads	DDBTXD Textured dark bronze
					DBLBDX Textured black
					DNATXD Textured natural aluminum
					DWHGXD Textured white
					DSSTXD Textured sandstone

### Accessories

Ordered and shipped separately.

- WSBBW DDBXD U Surface - mounted back box (specify finish)

### NOTES

- 1 347V not available with E4WH.
- 2 FAO not available with DMG.



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • [www.lithonia.com](http://www.lithonia.com)  
© 2020-2024 Acuity Brands Lighting, Inc. All rights reserved.

ARC1 LED  
Rev. 08/27/24

## Performance Data

### Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance Package	System Watts	30K (3000K, 80 CRI)					40K (4000K, 80 CRI)					50K (5000K, 80 CRI)				
		Lumens	LPW	B	U	G	Lumens	LPW	B	U	G	Lumens	LPW	B	U	G
P1	11W	1,376	127	0	0	0	1,454	134	0	0	0	1,464	135	0	0	0
P2	17W	2,035	121	1	0	1	2,151	128	1	0	1	2,165	129	1	0	1
P3	25W	2,859	117	1	0	1	3,021	123	1	0	1	3,041	124	1	0	1

### Electrical Load

Performance Package	System Watts	Current (A)				
		120V	208V	240V	277V	347V
P1	11W	0.111	0.061	0.053	0.047	0.045
P2	17W	0.139	0.081	0.071	0.063	0.060
P3	25W	0.208	0.122	0.108	0.097	0.081

### Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Lumens
E4WH	620

### Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.97

### Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11). To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.


Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	0.97	>0.96	>0.95	>0.91

## Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting ARC LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

#### LEGEND

- 0.25 fc
- 0.5 fc
- 1.0 fc
- 3.0 fc

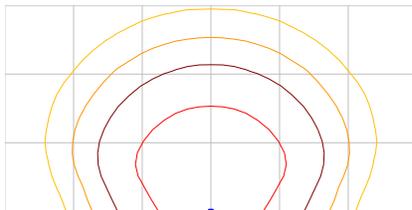

MH = 10ft  
Grid = 10ft x 10ft

ARC1 LED P3 40K

# ILLUSION

## Outdoor LED Sconce




9777 Reavis Park Drive  
St. Louis, MO 63123  
800.331.2425 or 314.631.6000

sales@glighting.com www.glighting.com

### GENERAL SPECIFICATION

- LED:** High efficiency mid-power LEDs are field serviceable.
- LED Dimming:** 1% 0-10V dimming standard. Integral driver.
- Body:** Formed aluminum.
- Finish:** Highly durable oven cured no VOC premium powder coat.  
Face plate painted textured white.
- Surge Protection:** External surge protector provided as standard.
- Listing:** Fixture ETL listed for wet locations.

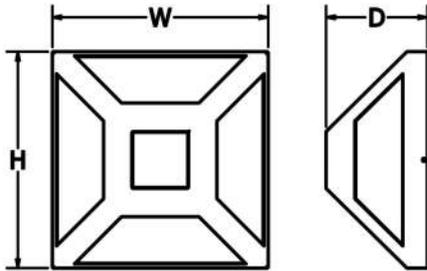

SAMPLE CATALOG NUMBER: GL-6550-		E5-	NSN
MODEL NO.		LAMPING	FINISH
<b>GL-6550</b>	W in 12" mm 305	<b>E0.</b> 13LED30 <b>E5.</b> 13LED35 <b>E4.</b> 13LED40 <b>G0.</b> 20LED30 <b>G5.</b> 20LED35 <b>G4.</b> 20LED40	Standard: Textured Powder <b>TLV</b> -Light Verdigris <b>TWH</b> -Textured White <b>TBL</b> -Textured Black <b>TS</b> -Textured Silver <b>TBZ</b> -Textured Bronze <b>TST</b> -Stone
	H in 12" mm 305		
	D in 5 1/2" mm 140		
<b>GL-6555</b>	W in 16" mm 405		
	H in 16" mm 405		
	D in 7" mm 180		
12lbs			
5.5kg			
15lbs			
7kg			

All dimensions are nominal.

### Light Source Definition

Code	LED	CRI	Rated Life Hrs	Delivered Kelvin	Delivered Lumens
13LED30	13W LED	+80	50000	3000	1500
13LED35	13W LED	+80	50000	3500	1500
13LED40	13W LED	+80	50000	4000	1500
20LED30	20W LED	+80	50000	3000	2000
20LED35	20W LED	+80	50000	3500	2000
20LED40	20W LED	+80	50000	4000	2000

Universal Voltage unless otherwise specified.




## Emergency Egress Options

### Emergency Battery Backup


The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90 minutes.

Applicable codes: NFPA 70/NEC – section 700.16, NFPA 101 Life Safety Code Section 7.9

The example below shows illuminance of 1 fc average and 0.1 fc minimum in emergency mode.

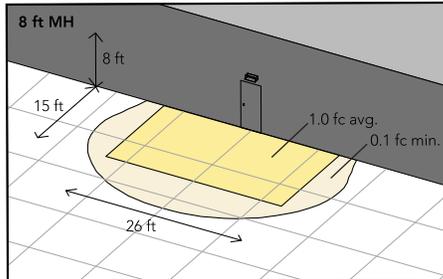

ARC1 LED 40K MVOLT E4WH

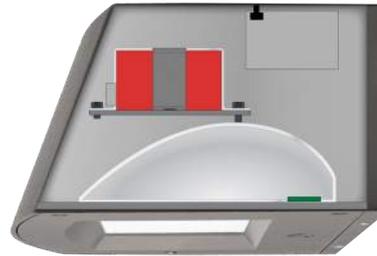

Self-contained solution for clean aesthetic

## Mounting, Options & Accessories



### E4WH – 4W Emergency Battery Backup

D = 6.5"  
H = 5"  
W = 11"



### BBW – Standard Back Box

D = 1.5"  
H = 4"  
W = 5.5"

For surface conduit applications.  
3/4" conduit entry holes.

## FEATURES & SPECIFICATIONS

### INTENDED USE

The clean architectural shape of the ARC LED was designed for applications such as hospitals, schools, malls, restaurants, and commercial buildings. The long-life LEDs and driver make this luminaire nearly maintenance-free.

### CONSTRUCTION

The die-cast aluminum housing and door act as heat sinks to optimize thermal transfer from the light engine and driver to promote long-life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

### OPTICS

Recessed lens to cut off high angle light and reduce glare. Combination of diffused lens and reflector design has low surface brightness creating a visually comfortable environment with great distribution. LEDs are fully hidden from view to eliminate pixelization and harsh glare. The ARC LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

### ELECTRICAL

Light engine consists of high-efficiency LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long-life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire is 0-10V dimmable.

### INSTALLATION

The universal wall plate, supplied with the luminaire, fits multiple size junction boxes and supports the luminaire during wiring for easy installation. Built-in wet location wiring compartment on the luminaire to accommodate wiring connections for where there is no junction box. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified. International DarkSky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only. Rated for -40°C minimum ambient.

### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

