



McKee Rd (CTH PD) Reconstruction

Project Engineer Chris Petykowski 267-8678

Project Limits McKee Rd (CTH PD) from Meriter Way to Maple Grove Rd
Alder: King

Street	Existing	Proposed
Project Type		Complete Reconstruction
Last Surfaced		
Pavement Rating	5-Apr	
Curb Rating	0	
Width	22	60
Surface Type	Asphalt	Asphalt
Traffic (Average Vehicles per Day)	12,000	22,000

Sidewalk	Existing	Proposed
Work Required	None	Install new 5' & 10'

Storm Sewer	Existing	Proposed
Work Required		Install New system
Size		Varies
Material		RCP
Year		

Sanitary Sewer	Existing	Proposed
Work Required		Install new system
Size	Varies	Varies
Material		PVC
Year		

Water Main	Existing	Proposed
Work Required		Install new system
Size	Varies	Varies
Material		Ductile Iron
Year		

Parking	Existing	Proposed
Parking Conditions	None	None

Street Lighting	Existing	Proposed
Street Lighting	Wood Poles	Steel Poles


Cost	
Total Cost	\$14,250,000
Federal Cost Share	\$6,080,000
County Share	\$3,700,000
City Share	\$4,470,000

Assessment Policy
None

Schedule	
Start Date	1-Apr-17
Length of Project	1-Nov-17

Correspondence None

Location Map

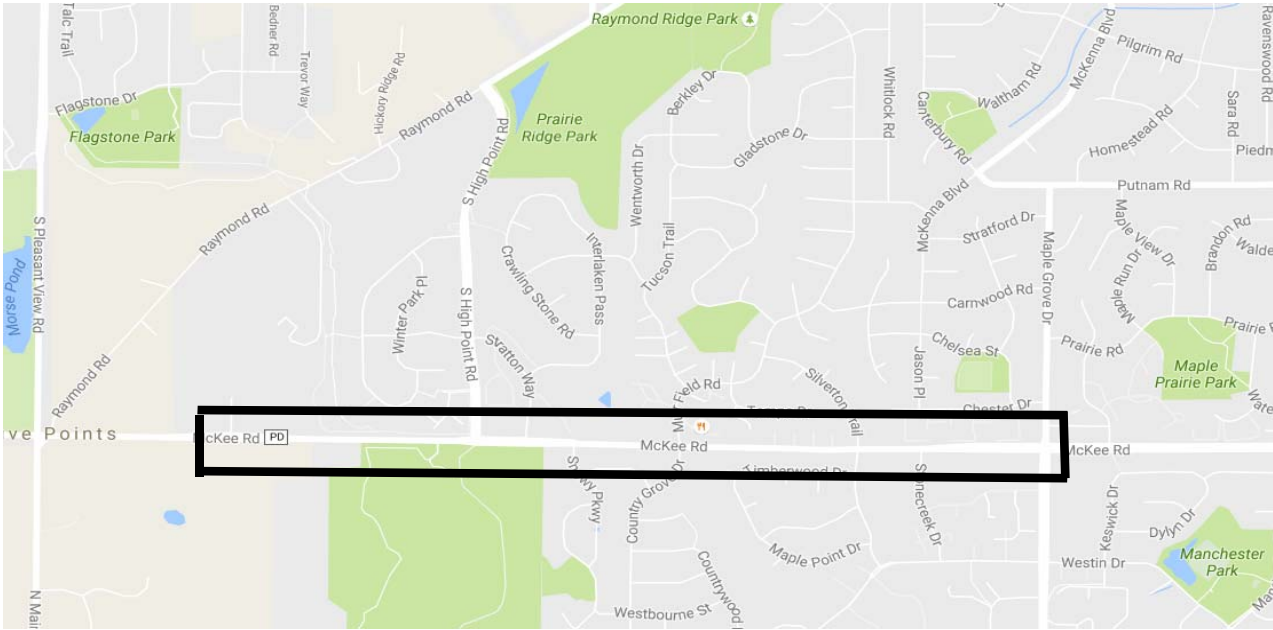

Source: Google Maps