
# 519-547 W Washington Ave MADISON, WI









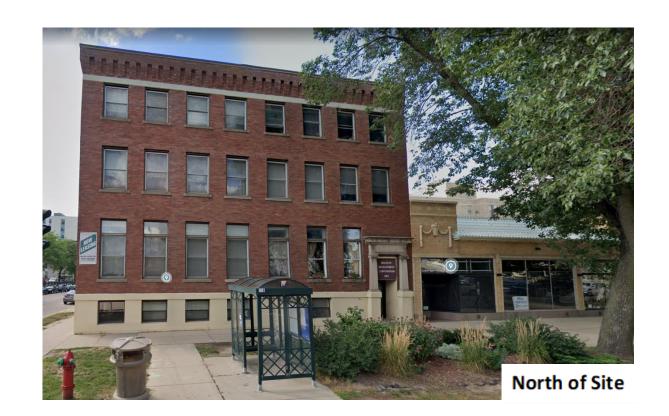



# 519-547 W Washington Ave MADISON, WI















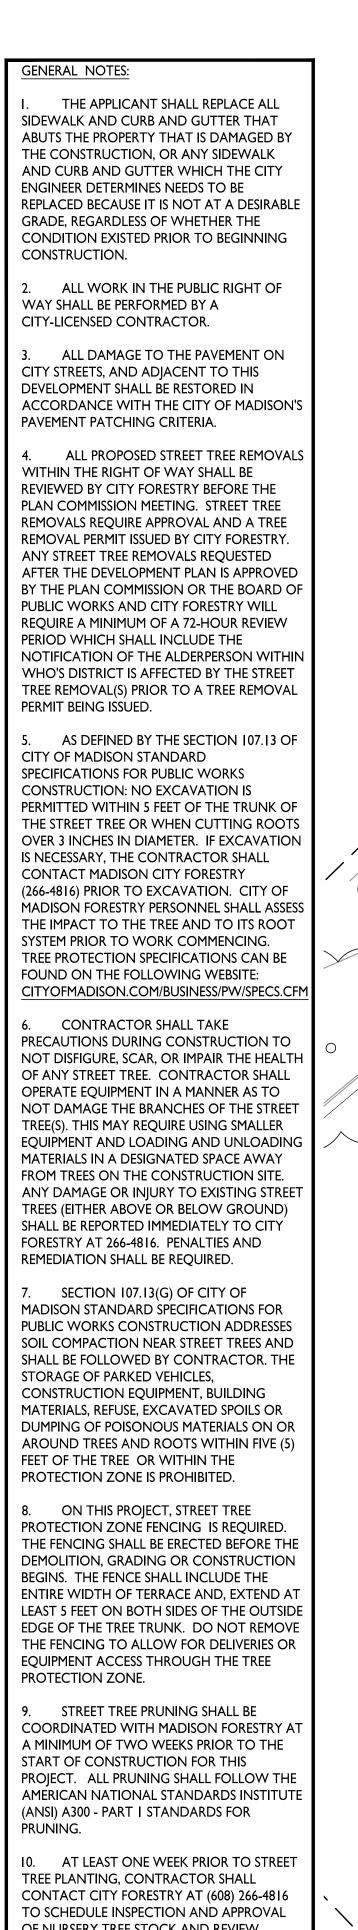

OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS WITH THE LANDSCAPER. II. APPROVAL OF PLANS FOR THIS PROJECT DOES NOT INCLUDE ANY APPROVAL TO

PRUNE, REMOVE, OR PLANT TREES IN THE PUBLIC RIGHT-OF-WAY. PERMISSION FOR SUCH ACTIVITIES MUST BE OBTAINED FROM THE CITY FORESTER (266-4816).

12. THE PUBLIC RIGHT-OF-WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME. NO ITEMS SHOWN ON THIS SITE PLAN IN THE RIGHT-OF-WAY ARE PERMANENT AND MAY NEED TO BE REMOVED AT THE APPLICANTS EXPENSE UPON NOTIFICATION BY THE CITY.

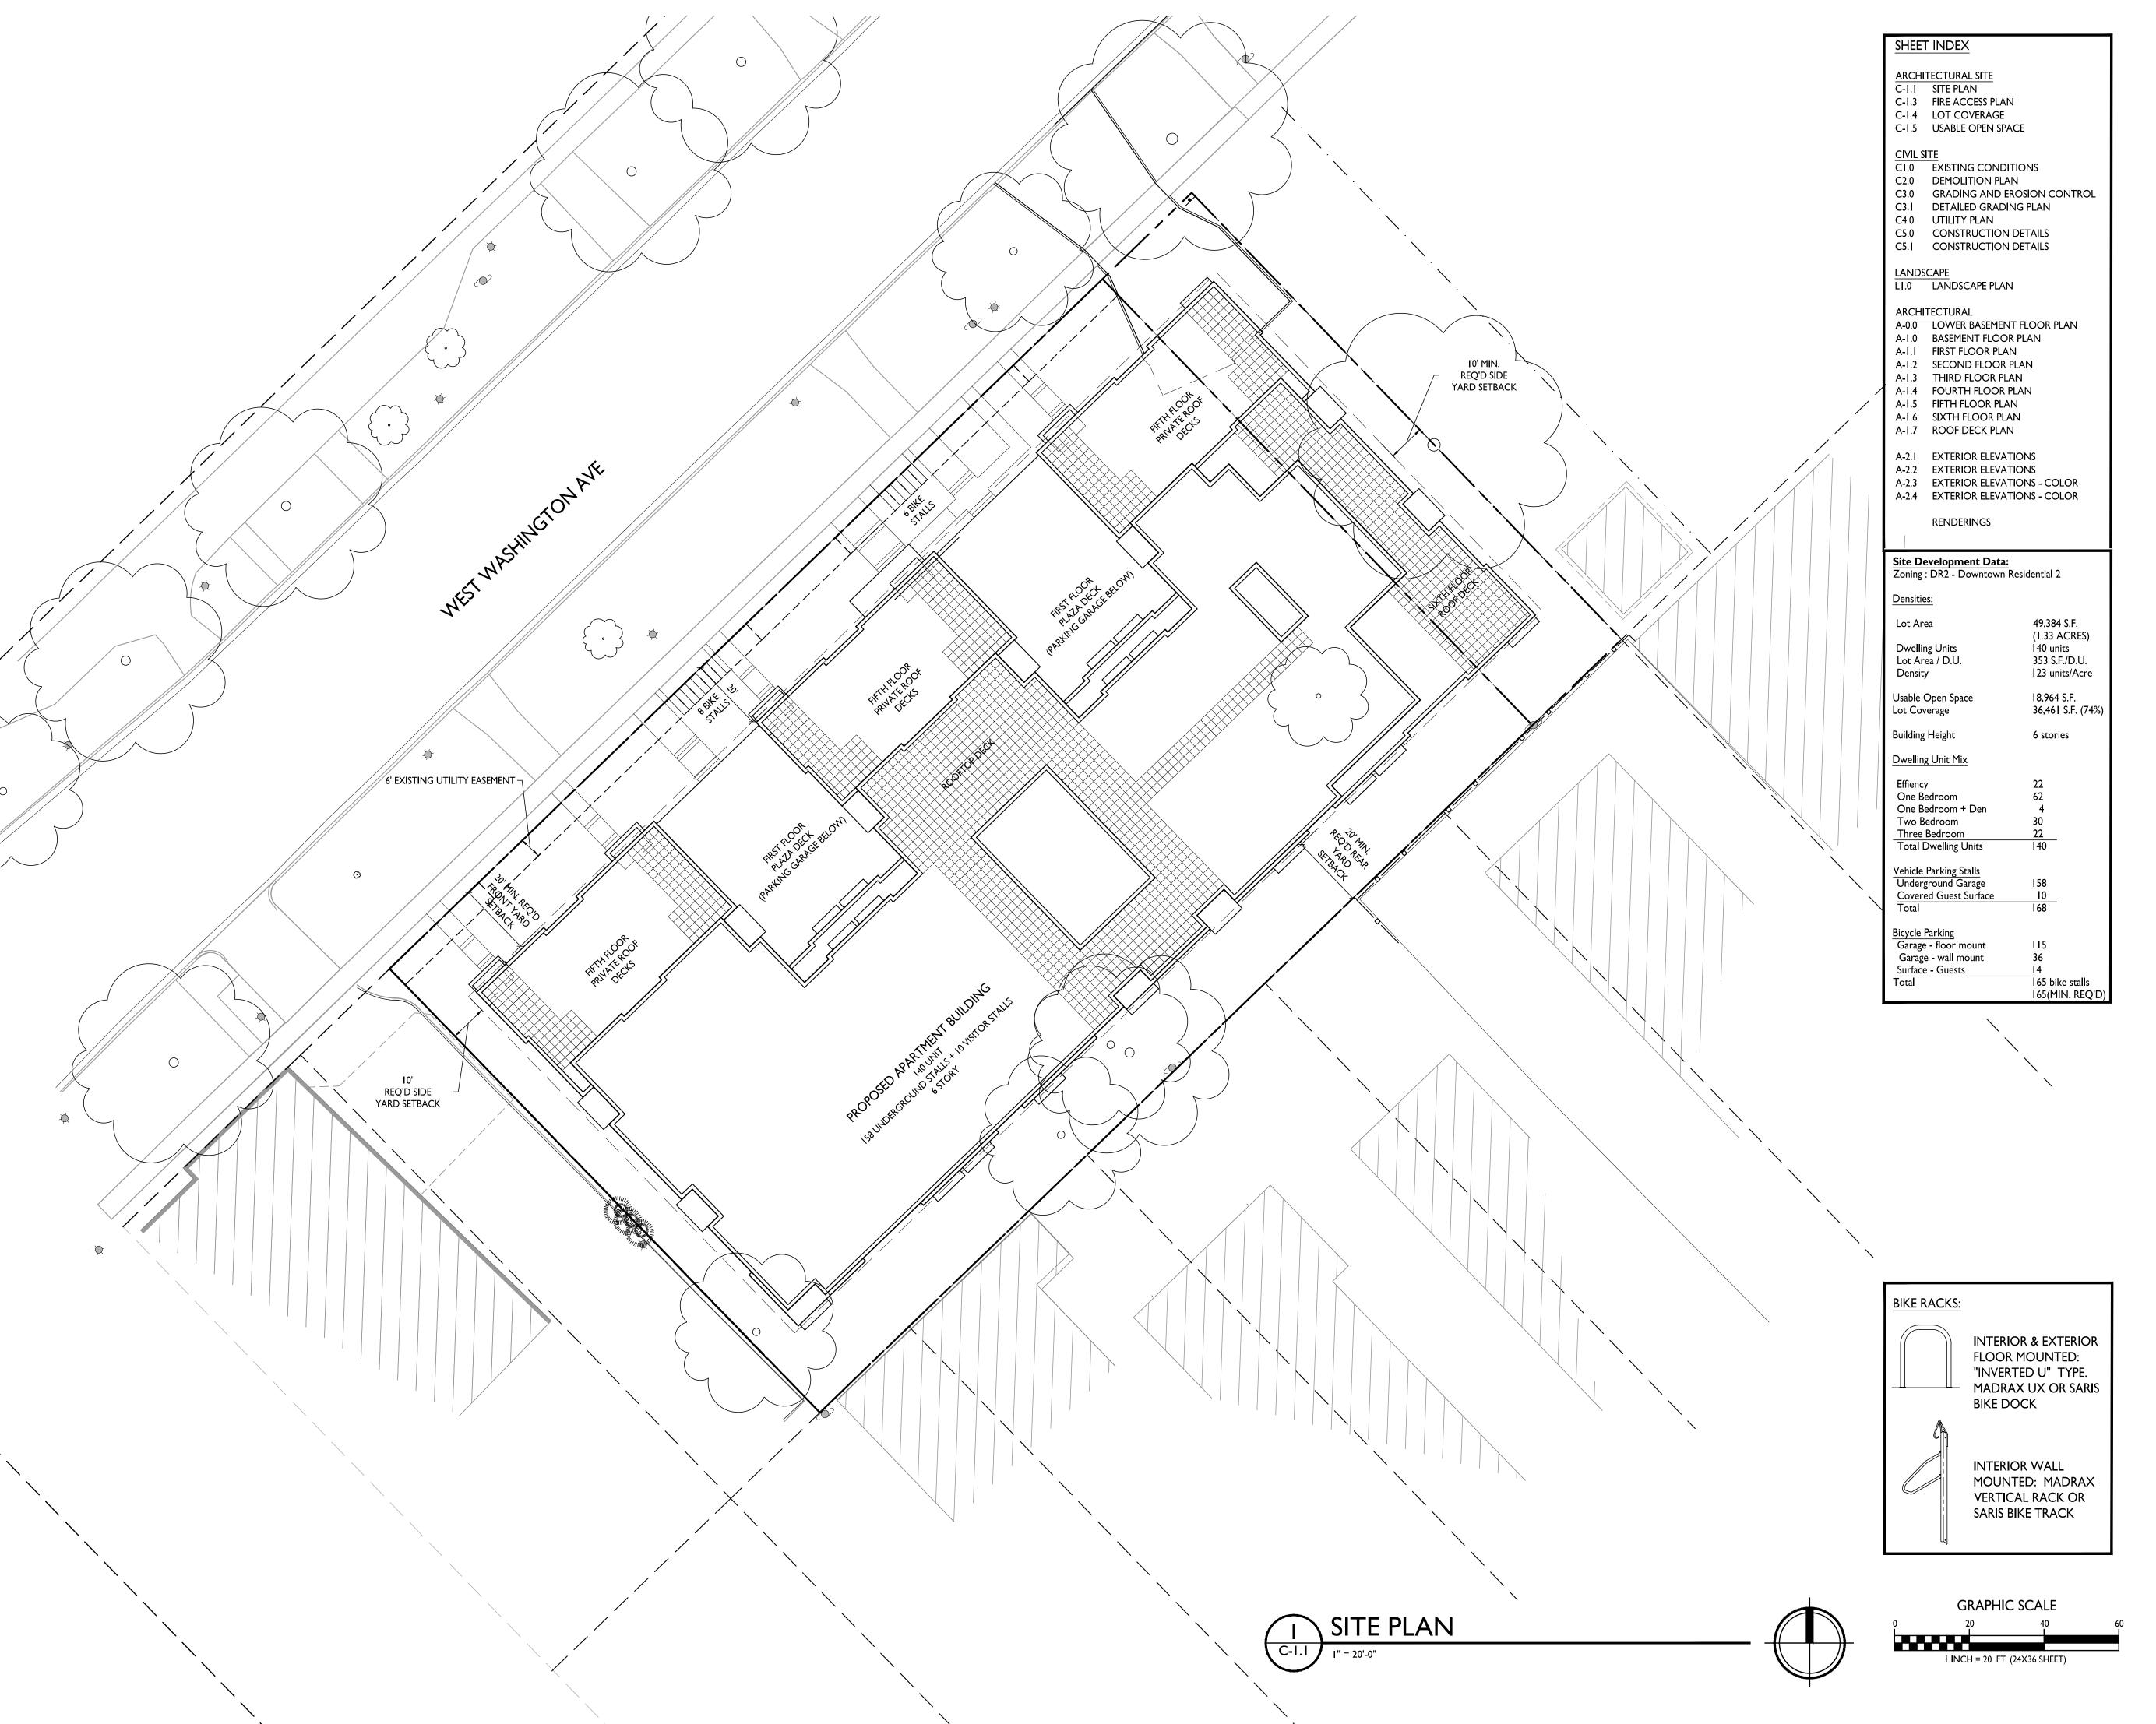



ISSUED

Issued for Review - January 10, 2022 Issued for LUA & UDC Submittal - Feb. 28, 2022

PROJECT TITLE West Washington Development


519-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE Site Plan

SHEET NUMBER

PROJECT NO.

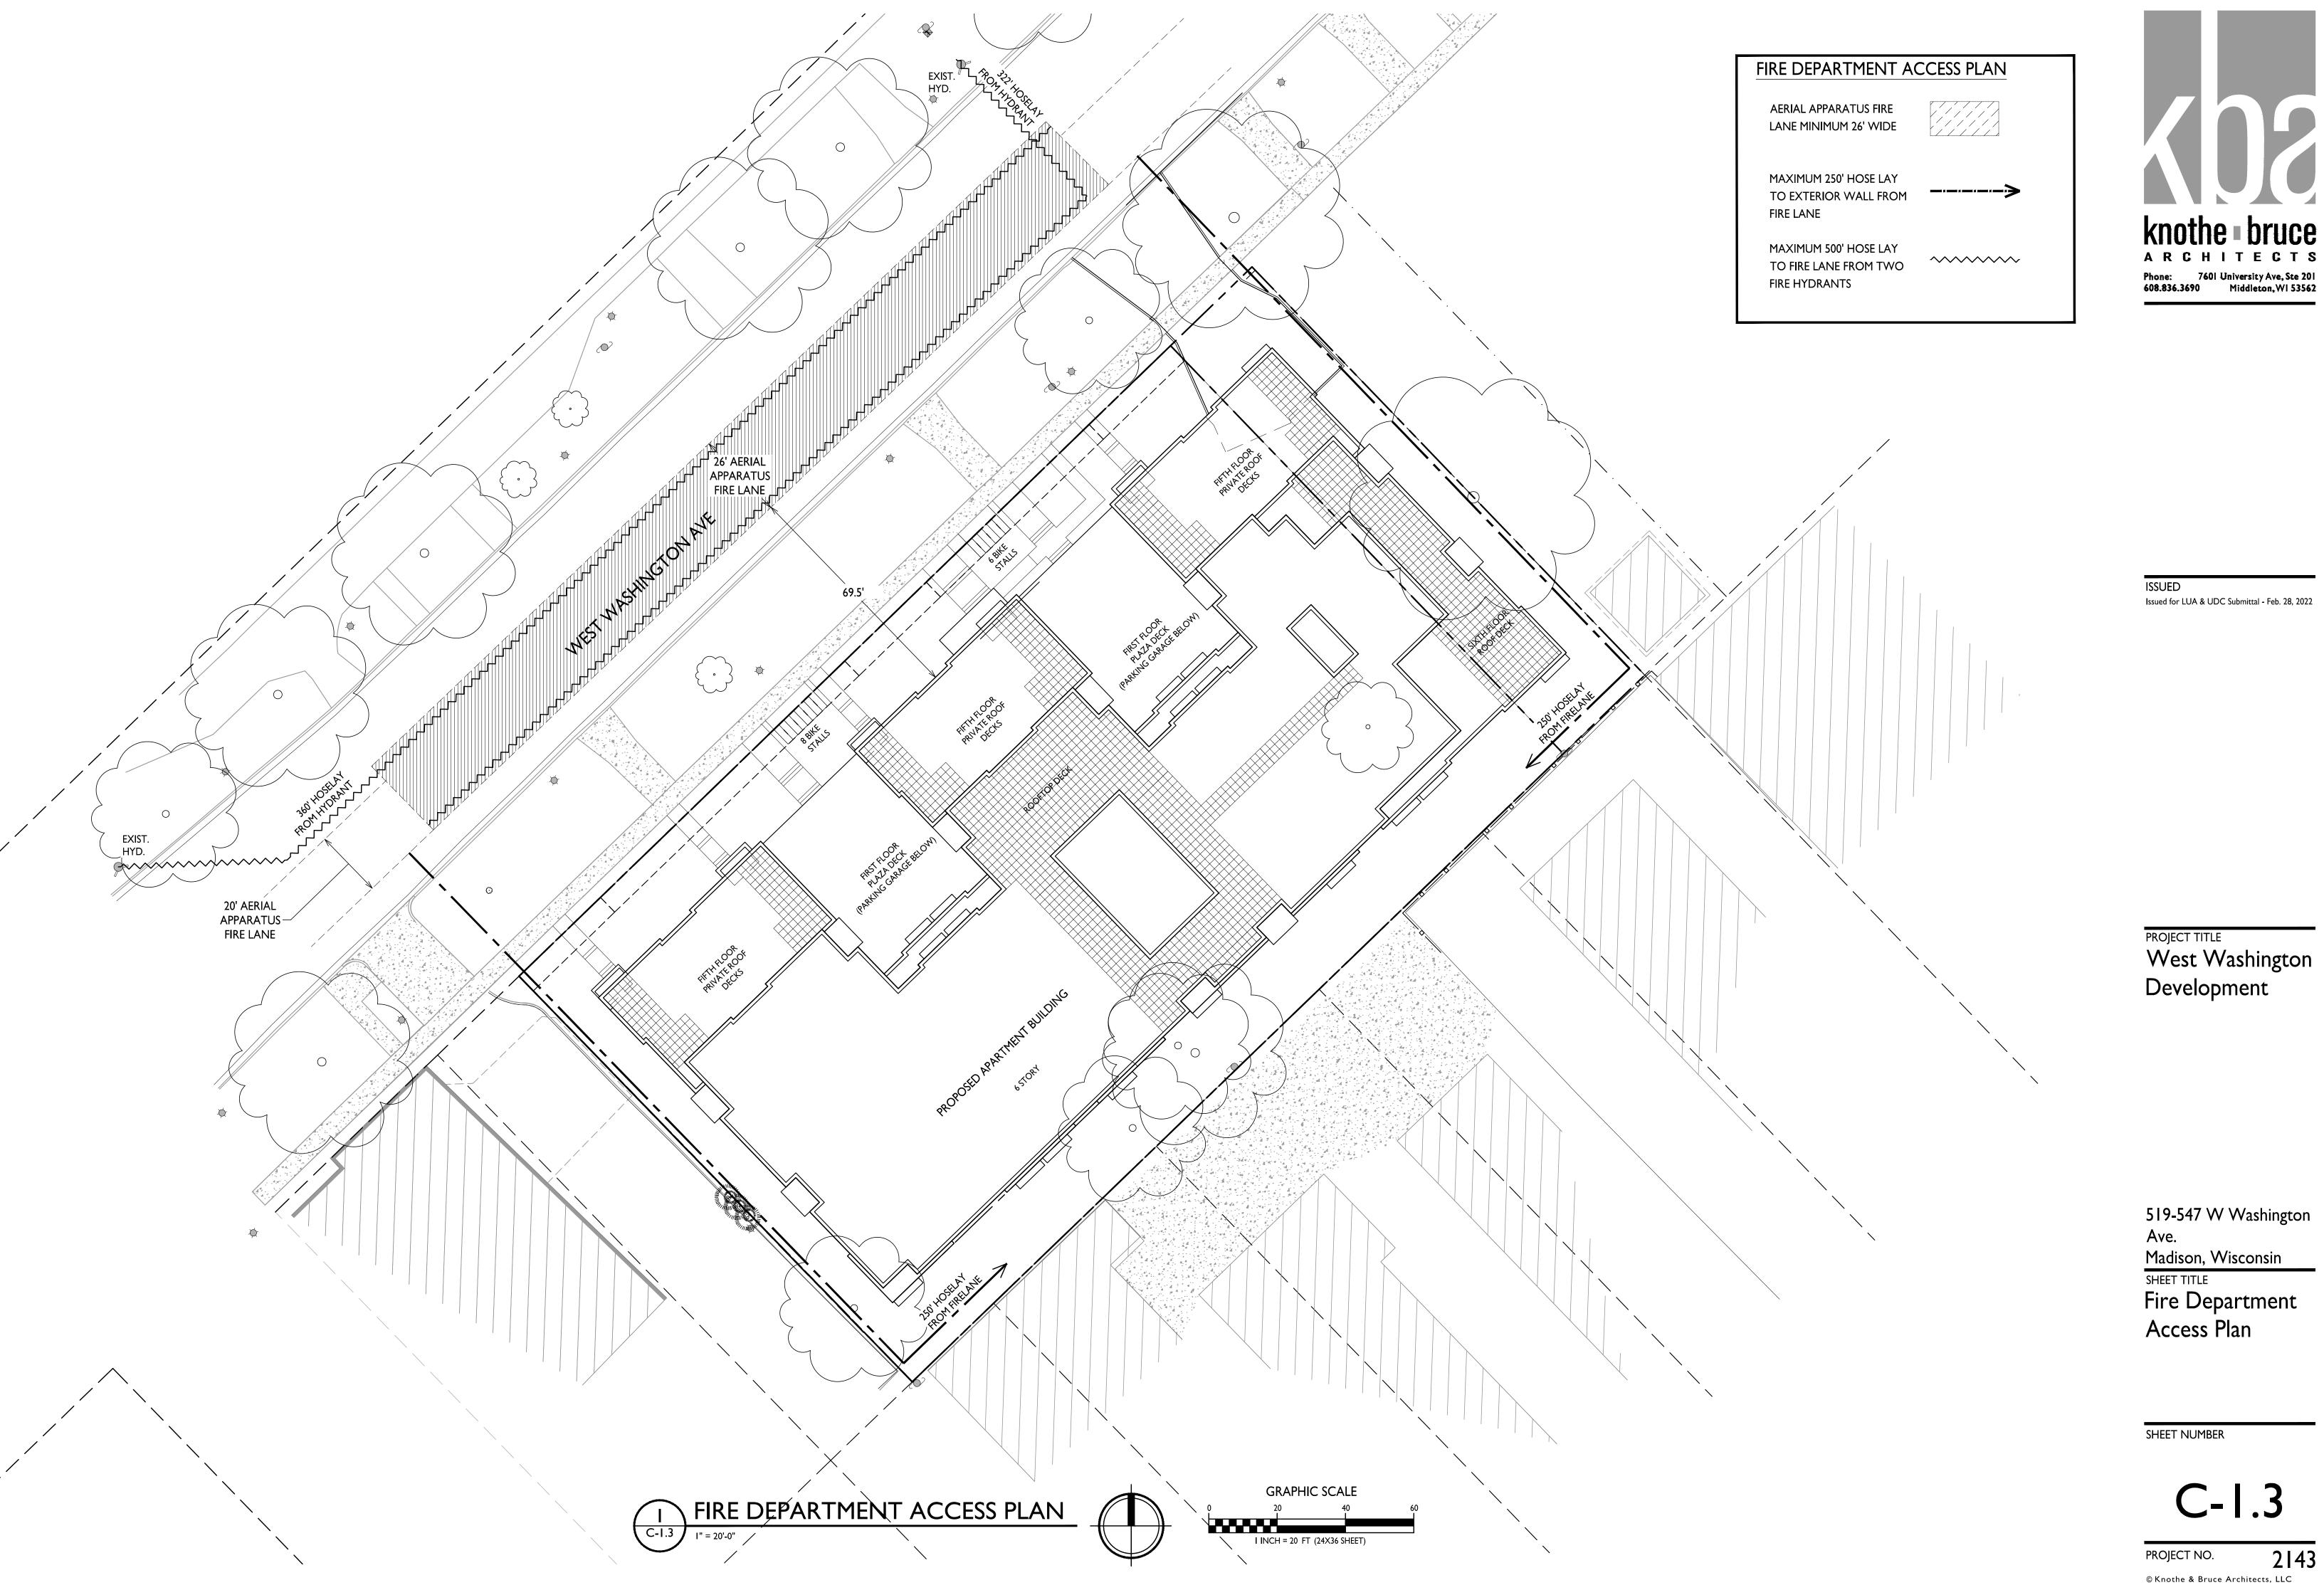



Phone: 7601 University Ave, Ste 201 608.836.3690 Middleton, WI 53562

519-547 W Washington

C-1.3

2143

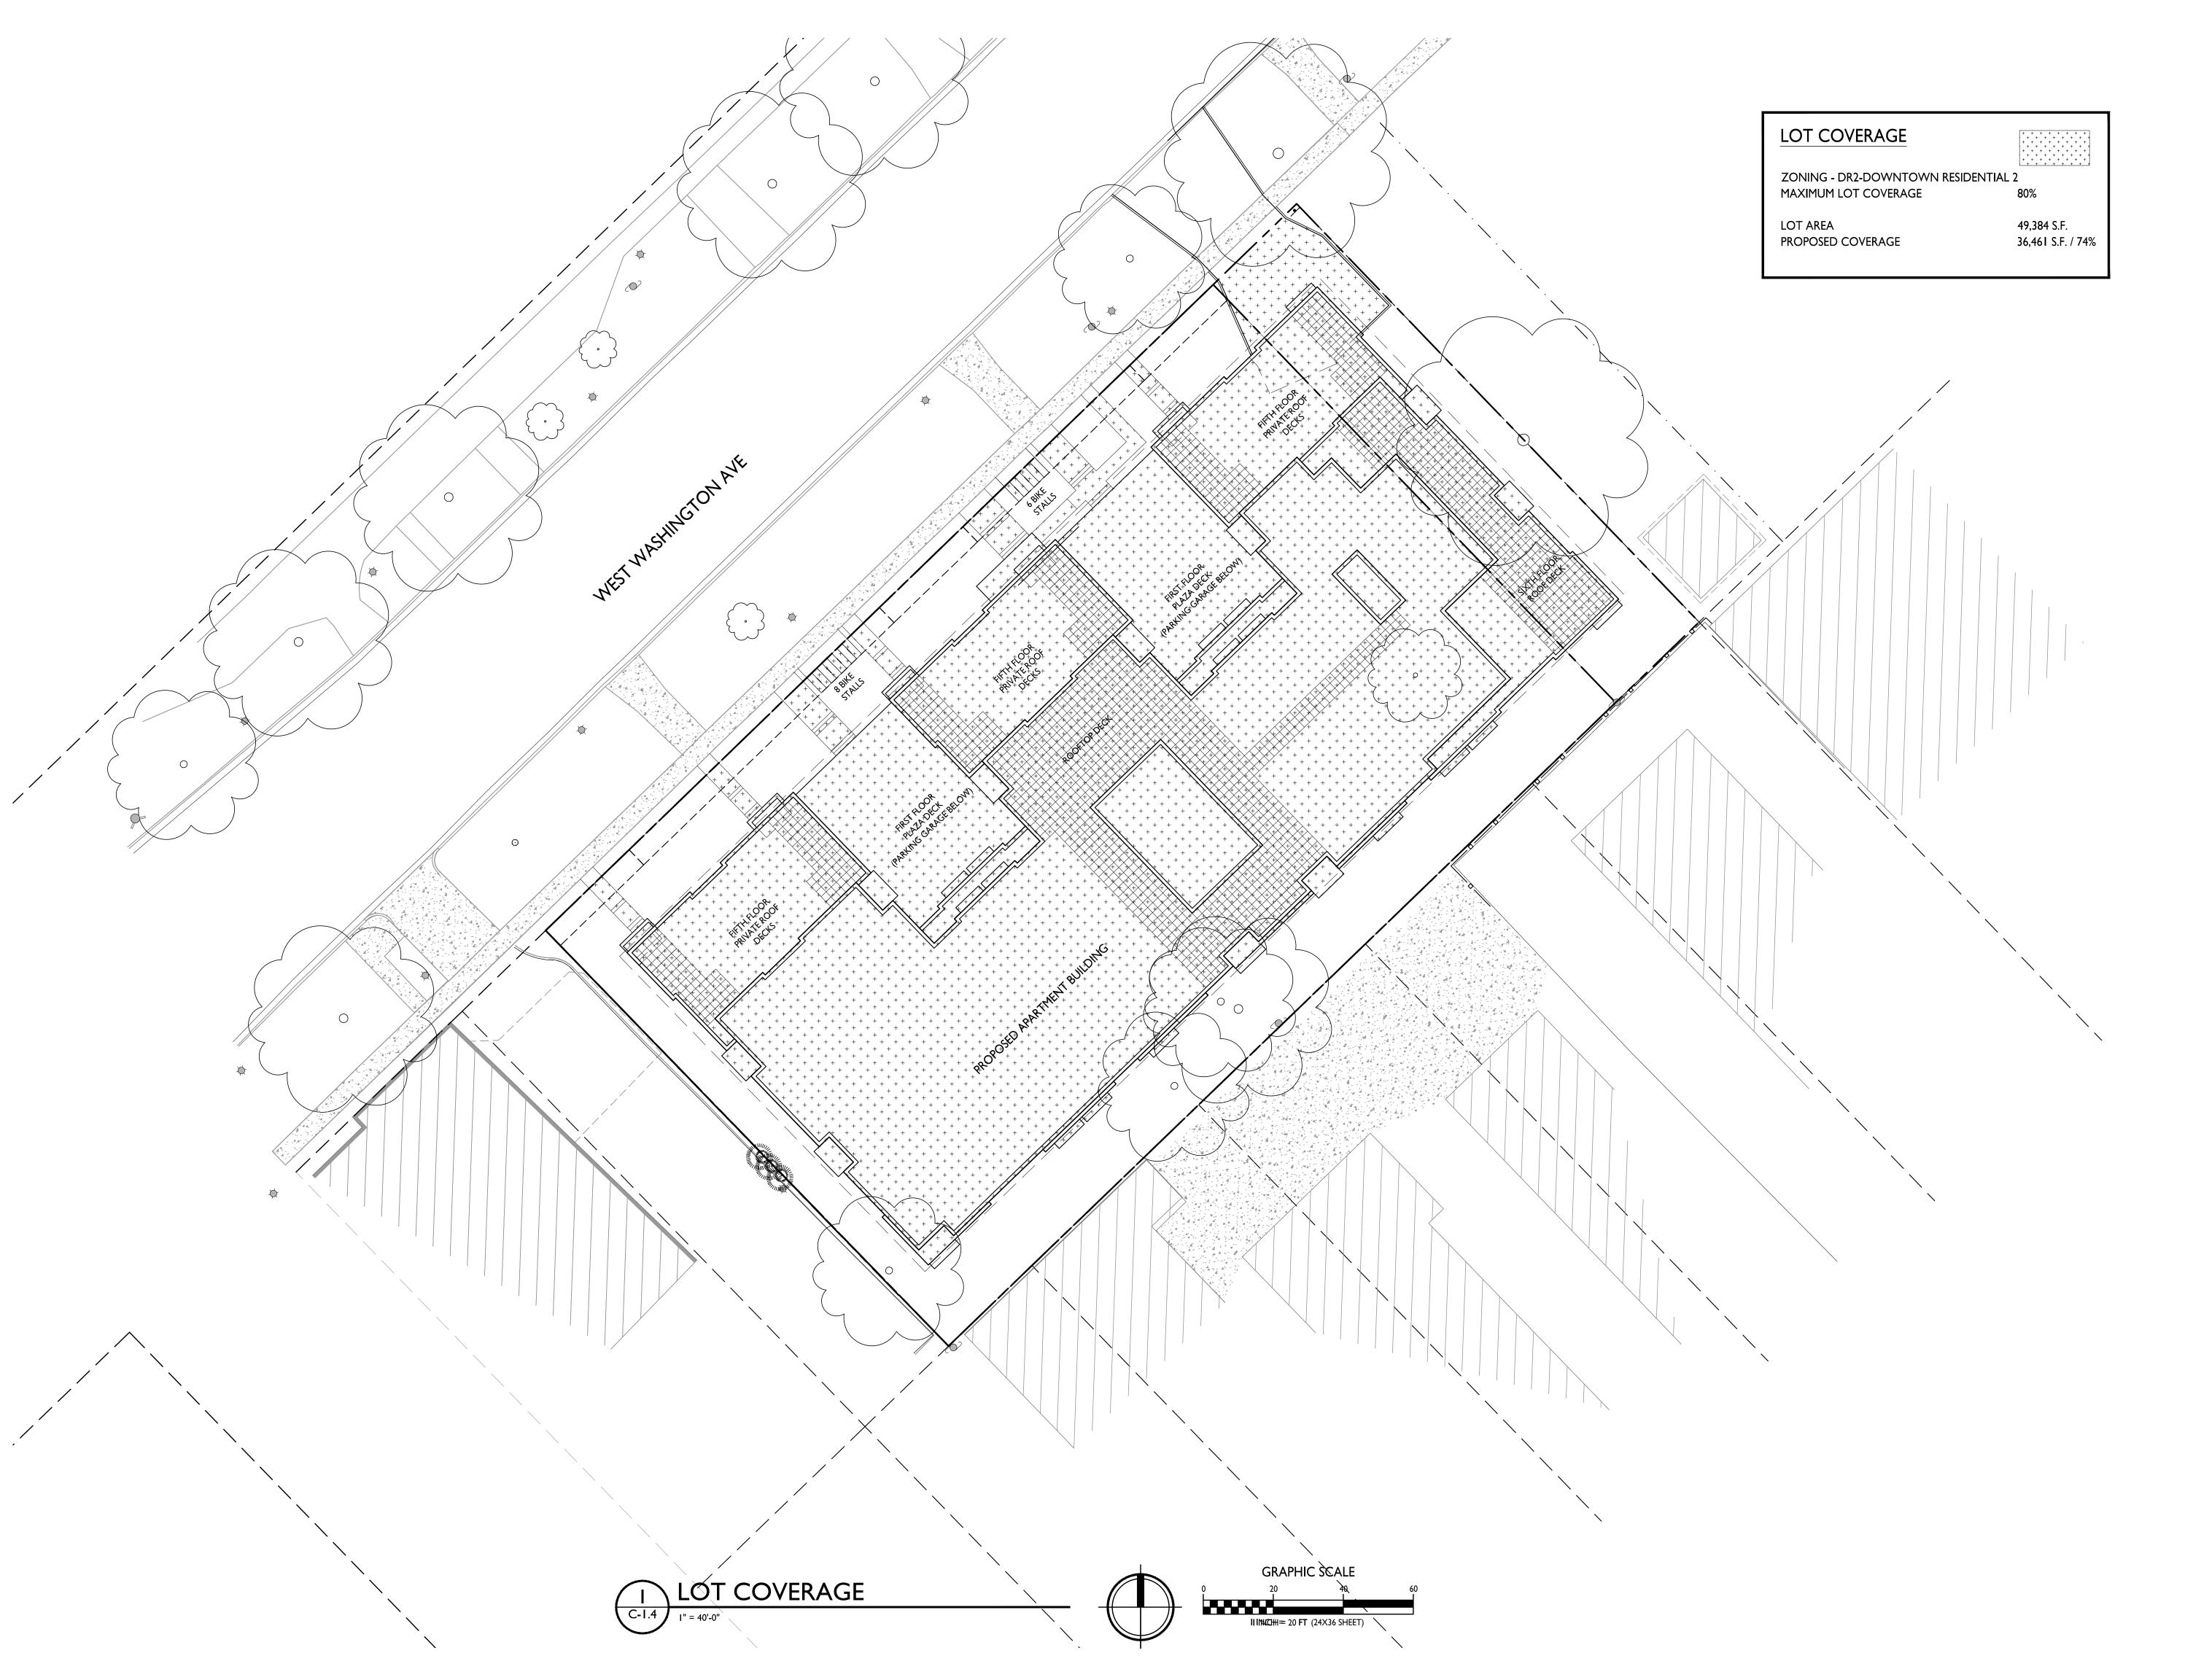

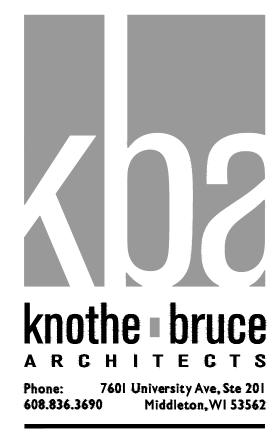

ISSUED
Issued for LUA & UDC Submittal - Feb. 28, 2022

PROJECT TITLE
West Washington
Development

519-547 W Washington Ave.

Madison, Wisconsin


SHEET TITLE

Lot Coverage

SHEET NUMBER

C-1.4

PROJECT NO. 2143

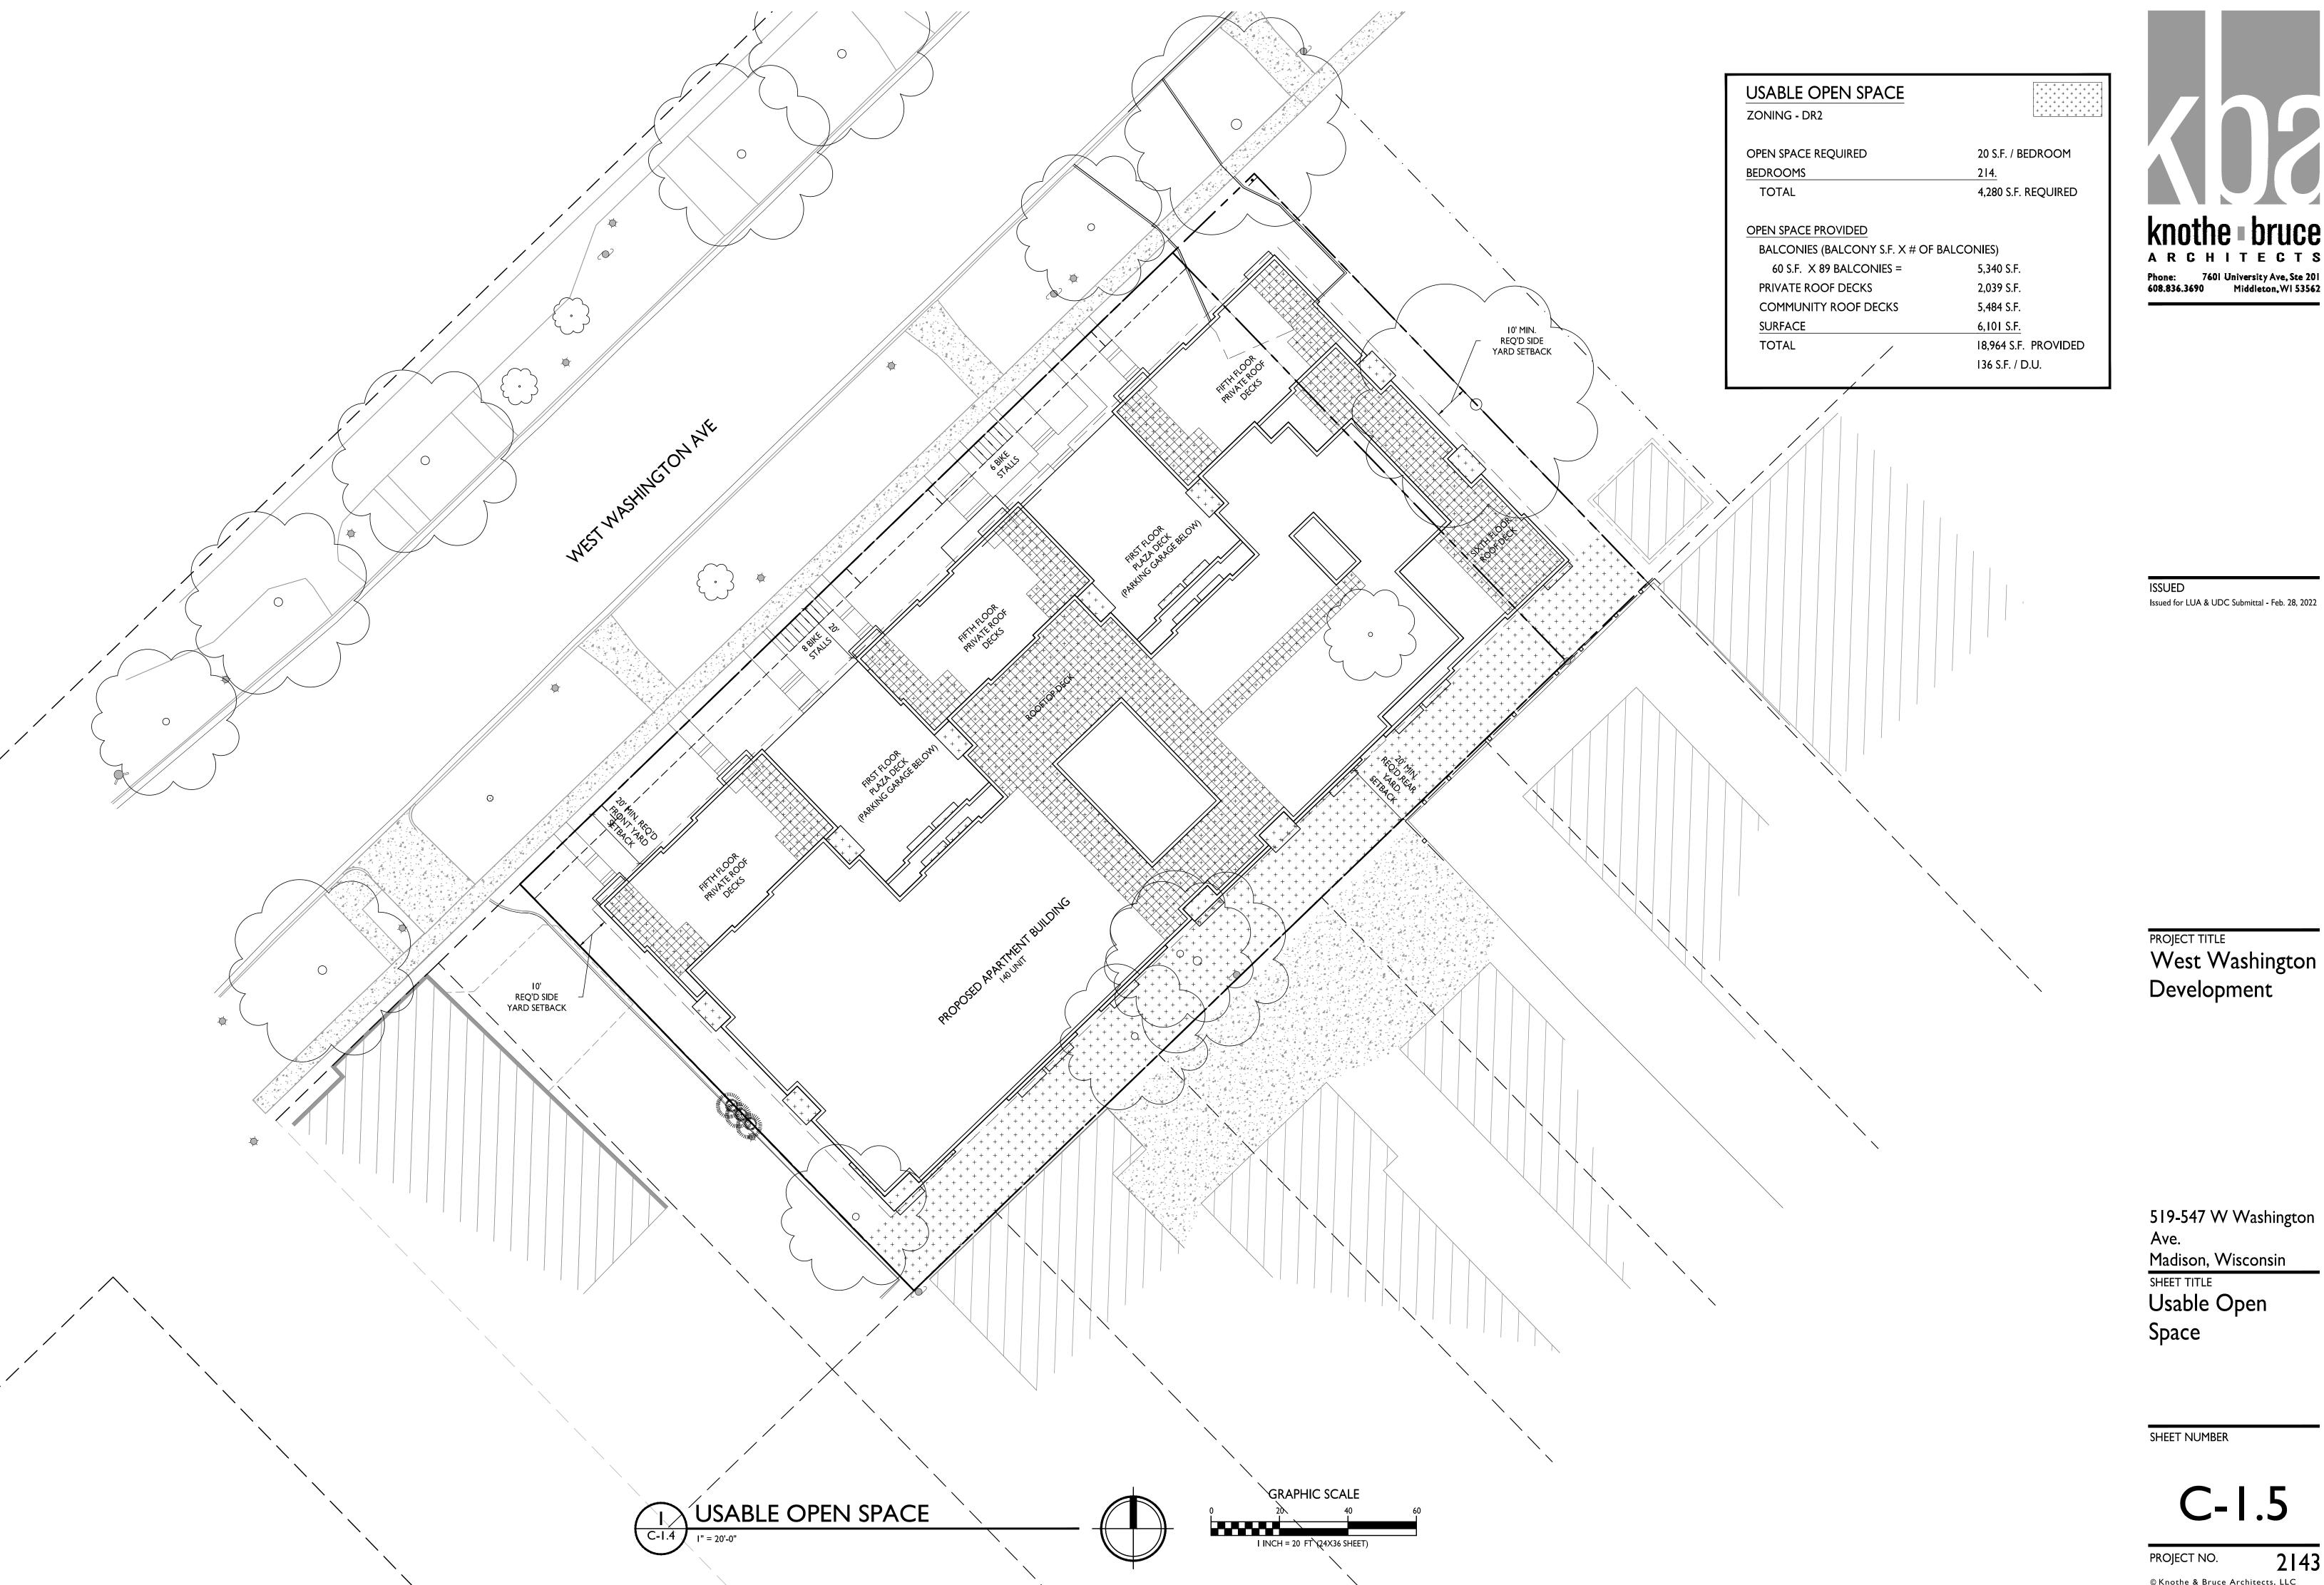

Phone: 7601 University Ave, Ste 201 608.836.3690 Middleton, WI 53562


PROJECT TITLE
West Washington

Ave.

Madison, Wisconsin

C-1.5

2143

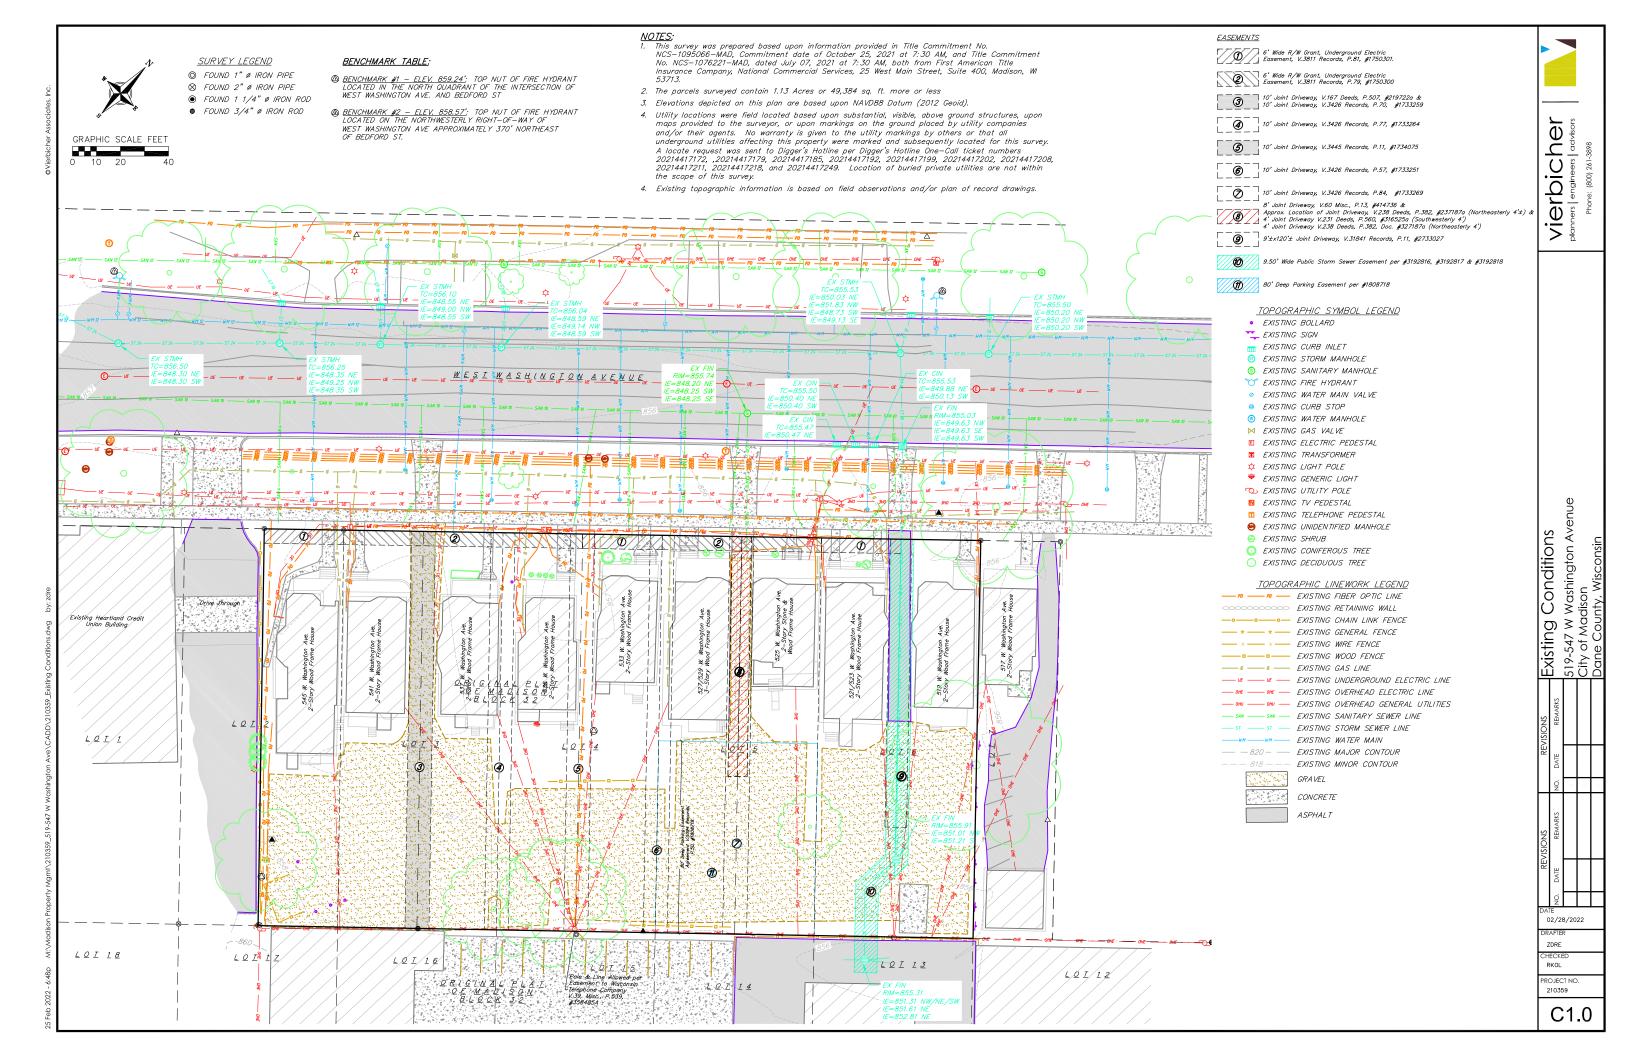



Vierbicher planners | engineers | advisors Phone: (800) 261-3898

Avenue


EVISIONS REVISIONS Demolition Plan
REMARKS NO. DATE REMARKS
519-547 W Washington A
City of Madison
Dane County, Wisconsin


DATE
02/28/2022


DRAFTER
ZDRE

CHECKED RKOL

210359

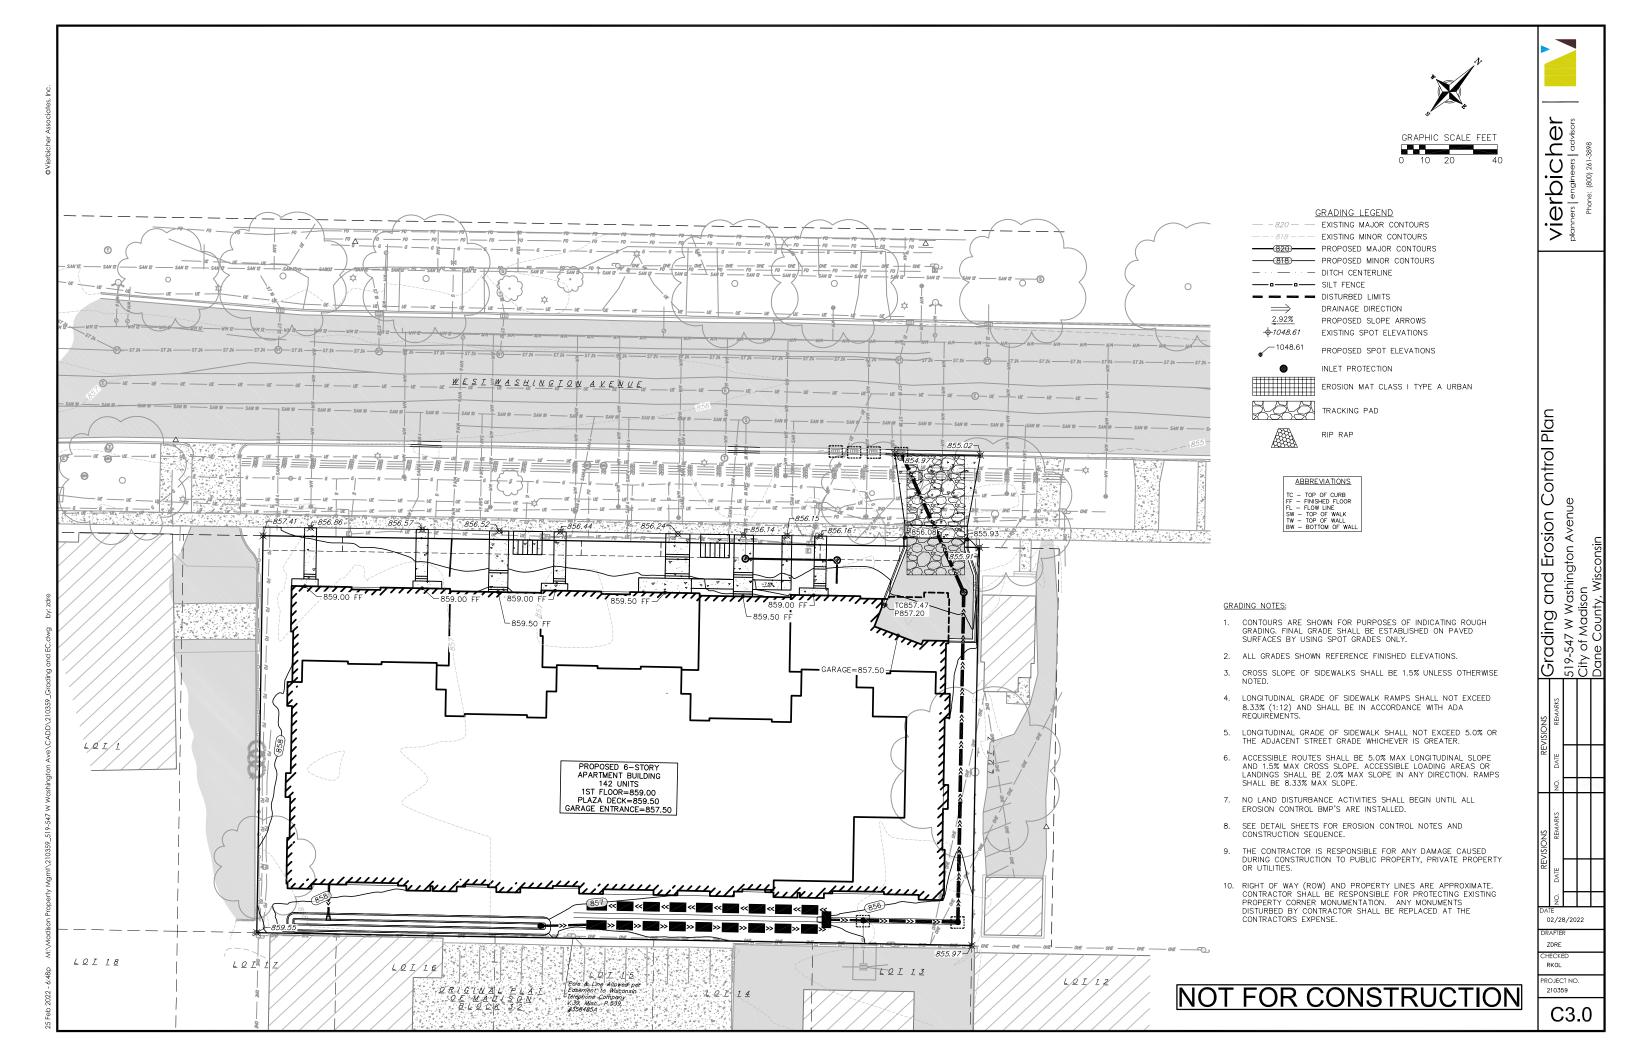

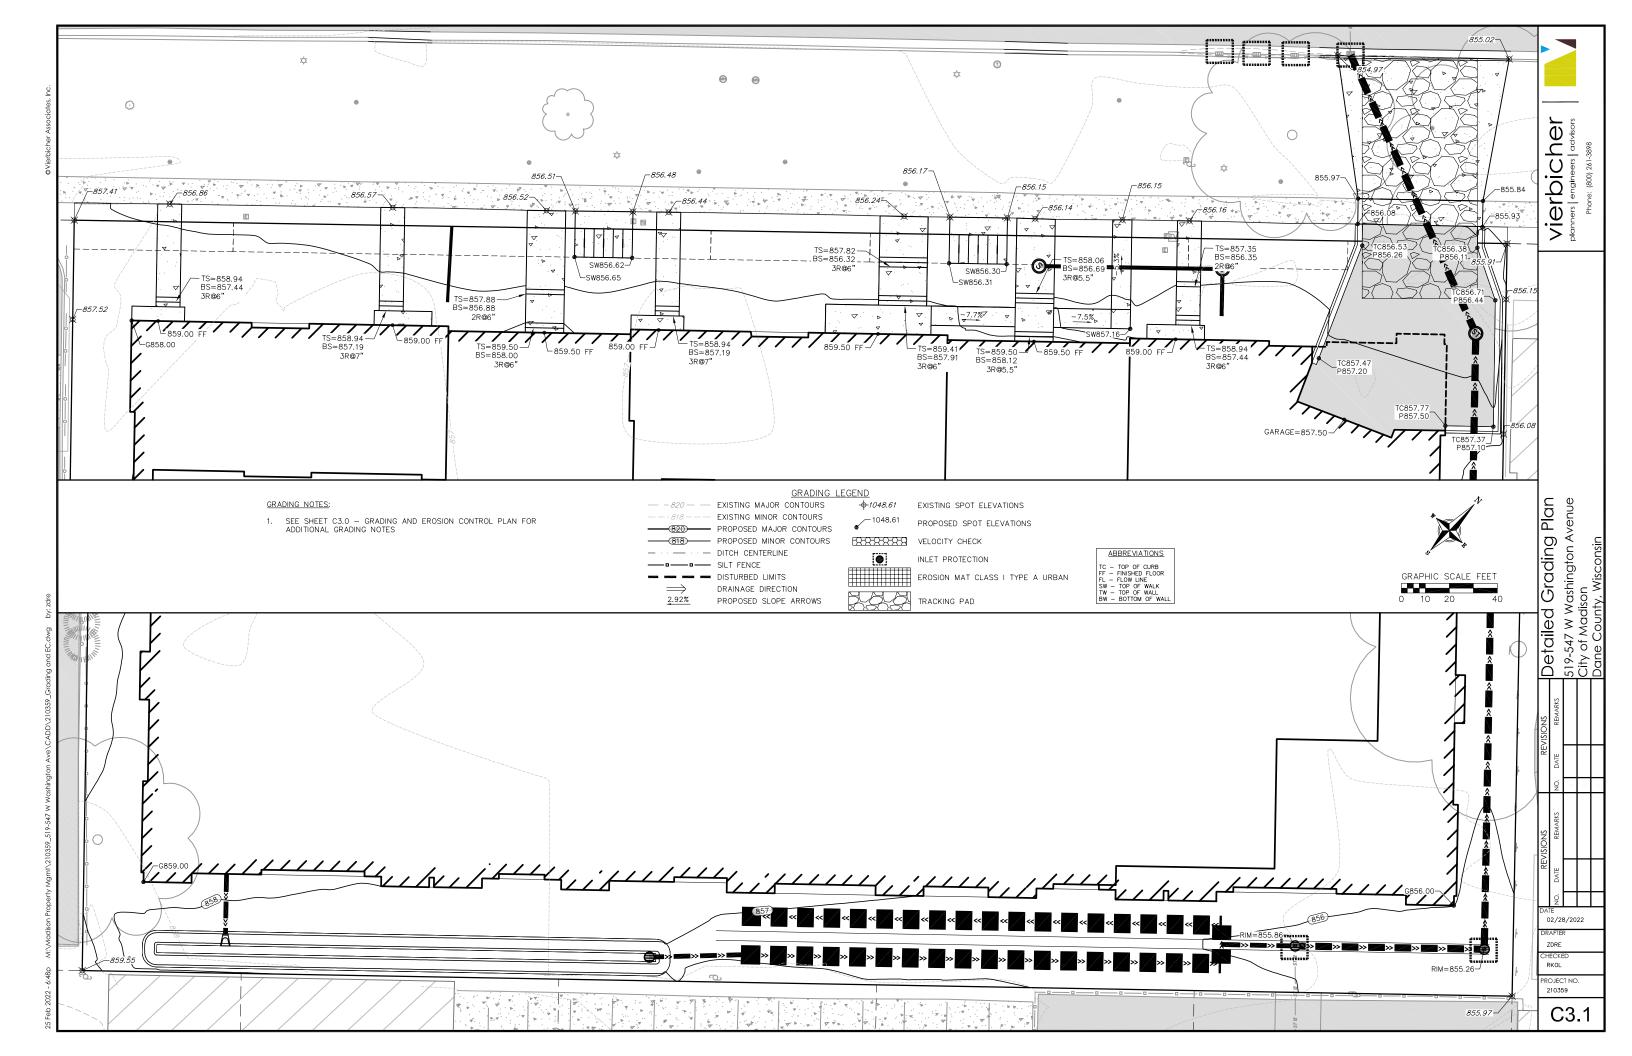

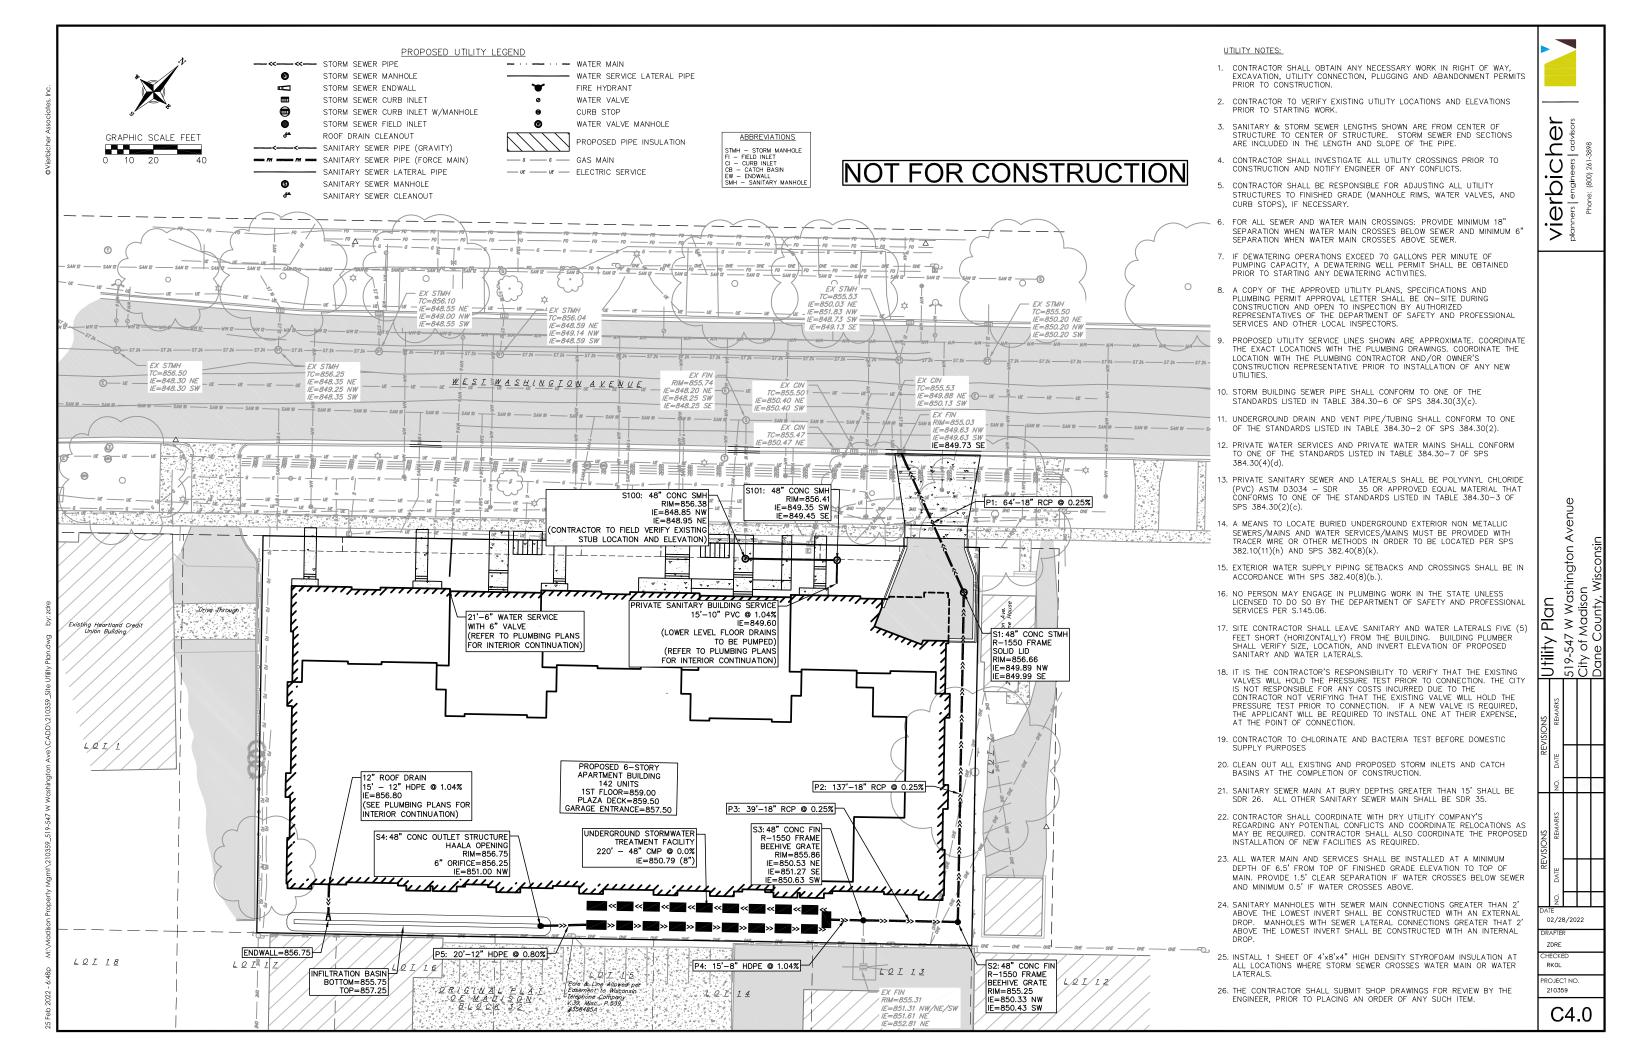

### EROSION CONTROL MEASURES

- EROSION CONTROL SHALL BE IN ACCORDANCE WITH THE CITY OF MADISON EROSION CONTROL ORDINANCE AND CHAPTER NR 216 OF THE WISCONSIN ADMINISTRATIVE CODE.
- CONSTRUCT AND MAINTAIN ALL EROSION AND SEDIMENT CONTROL MEASURES IN ACCORDANCE WITH WISCONSIN DNR TECHNICAL STANDARDS (http://dnr.wi.gov/runoff/stormwater/techstds.htm) AND WISCONSIN CONSTRUCTION SITE BEST MANAGEMENT PRACTICE HANDBOOK.
- 3. INSTALL SEDIMENT CONTROL PRACTICES (TRACKING PAD, PERIMETER SILT FENCE, ETC.) PRIOR TO INITIATING OTHER LAND DISTURBING CONSTRUCTION ACTIVITIES.
- 4. THE CONTRACTOR IS REQUIRED TO MAKE EROSION CONTROL INSPECTIONS AT THE END OF EACH WEEK AND WHEN 0.5 INCHES OF RAIN FALLS WITHIN 24 HOURS. INSPECTION REPORTS SHALL BE PREPARED AND FILED AS REQUIRED BY THE DNR AND/OR CITY. ALL MAINTENANCE WILL FOLLOW AN INSPECTION WITHIN 24 HOLIPS.
- 5. EROSION CONTROL IS THE RESPONSIBILITY OF THE CONTRACTOR UNTIL ACCEPTANCE OF THIS PROJECT. EROSION CONTROL MEASURES AS SHOWN SHALL BE THE MINIMUM PRECAUTIONS THAT WILL BE ALLOWED. ADDITIONAL EROSION CONTROL MEASURES, AS REQUESTED IN WRITING BY THE STATE OR LOCAL INSPECTORS, OR THE DEVELOPER'S ENGINEER, SHALL BE INSTALLED WITHIN 24 HOURS.
- 6. A 3" CLEAR STONE TRACKING PAD SHALL BE INSTALLED AT THE END OF ROAD CONSTRUCTION LIMITS TO PREVENT SEDIMENT FROM BEING TRACKED ONTO THE ADJACENT PAVED PUBLIC ROADWAY. SEDIMENT TRACKING PAD SHALL CONFORM TO WISDNR TECHNICAL STANDARD 1057. SEDIMENT REACHING THE PUBLIC ROAD SHALL BE REMOVED BY STREET CLEANING (NOT HYDRAULIC FLUSHING) BEFORE THE END OF EACH WORK DAY
- 7. CHANNELIZED RUNOFF: FROM ADJACENT AREAS PASSING THROUGH THE SITE SHALL BE DIVERTED AROUND DISTURBED AREAS
- 8. STABILIZED DISTURBED GROUND: ANY SOIL OR DIRT PILES WHICH WILL REMAIN IN EXISTENCE FOR MORE THAN 7-CONSECUTIVE DAYS, WHETHER TO BE WORKED DURING THAT PERIOD OR NOT, SHALL NOT BE LOCATED WITHIN 25-FEET OF ANY ROADWAY, PARKING LOT, PAVED AREA, OR DRAINAGE STRUCTURE OR CHANNEL (UNLESS INTENDED TO BE USED AS PART OF THE EROSION CONTROL MEASURES). TEMPORARY STABILIZATION AND CONTROL MEASURES (SEEDING, MULCHING, TARPING, EROSION MATTING, BARRIER FENCING, ETC.) ARE REQUIRED FOR THE PROTECTION OF DISTURBED AREAS AND SOIL PILES, WHICH WILL REMAIN UN-WORKED FOR A PERIOD OF MORE THAN 7-CONSECUTIVE CALENDAR DAYS. THESE MEASURES SHALL REMAIN IN PLACE UNTIL SITE HAS STABILIZED.
- 9. <u>SITE DE-WATERING:</u> WATER PUMPED FROM THE SITE SHALL BE TREATED BY TEMPORARY SEDIMENTATION BASINS OR OTHER APPROPRIATE CONTROL MEASURES. SEDIMENTATION BASINS SHALL HAVE A DEPTH OF AT LEAST 3 FEET, BE SURROUNDED BY SNOWFENCE OR EQUIVALENT BARRIER AND HAVE SUFFICIENT SURFACE AREA TO PROVIDE A SURFACE SETTLING RATE OF NO MORE THAN 750 GALLONS PER SQUARE FOOT PER DAY AT THE HIGHEST DEWATERING PUMPING RATE. WATER MAY NOT BE DISCHARGED IN A MANNER THAT CAUSES EROSION OF THE SITE, A NEICHBORING SITE, OR THE BED OR BANKS OF THE RECEIVING WATER. POLYMERS MAY BE USED AS DIRECTED BY DNR TECHNICAL STANDARD 1061 (DF-WATFRING).
- 10. RESTORATION (SEED, FERTILIZE AND MULCH) SHALL BE PER SPECIFICATIONS ON THIS SHEET UNLESS SPECIAL RESTORATION IS CALLED FOR ON THE LANDSCAPE PLAN OR THE DETENTION BASIN DETAIL SHEET.
- 11. TERRACES SHALL BE RESTORED WITH 6" TOPSOIL, PERMANENT SEED, FERTILIZER AND MULCH. LOTS SHALL BE RESTORED WITH 6" TOPSOIL, TEMPORARY SEED, FERTILIZER AND MULCH.
- 12. SEED, FERTILIZER AND MULCH SHALL BE APPLIED WITHIN 7 DAYS AFTER FINAL GRADE HAS BEEN ESTABLISHED. IF DISTURBED AREAS WILL NOT BE RESTORED IMMEDIATELY AFTER ROUGH GRADING, TEMPORARY SEED SHALL BE PLACED.
- 13. FOR THE FIRST SIX WEEKS AFTER RESTORATION (E.G. SEED & MULCH, EROSION MAT, SOD) OF A DISTURBED AREA, INCLUDE SUMMER WATERING PROVISIONS OF ALL NEWLY SEEDED AND MULCHED AREAS WHENEVER 7 DAYS ELAPSE WITHOUT A RAIN EVENT.
- 14. SOIL STABILIZERS SHALL BE APPLIED TO DISTURBED AREAS WITH SLOPES BETWEEN 10% AND 3:1 (DO NOT USE IN CHANNELS). SOIL STABILIZERS SHALL BE TYPE B, PER WISCONSIN D.O.T. P.A.L. (PRODUCT ACCEPTABILITY LIST), OR EQUAL. APPLY AT RATES AND METHODS SPECIFIED PER MANUFACTURER/THIS SHEET. SOIL STABILIZERS SHALL BE RE-APPLIED WHENEVER VEHICLES OR OTHER EQUIPMENT TRACK ON THE AREA.
- 15. SILT FENCE OR EROSION MAT SHALL BE INSTALLED ALONG THE CONTOURS AT 100 FOOT INTERVALS DOWN THE SLOPE ON THE DISTURBED SLOPES STEEPER THAN 5% AND MORE THAN 100 FEET LONG THAT SHEET FLOW TO THE ROADWAY UNLESS SOIL STABILIZERS ARE USED.
- 16. SILT FENCE TO BE USED ACROSS AREAS OF THE LOT THAT SLOPE TOWARDS A PUBLIC STREET OR WATERWAY. SEE DETAILS.
- 17. SEDIMENT SHALL BE CLEANED FROM CURB AND GUTTER AFTER EACH RAINFALL AND PRIOR TO PROJECT ACCEPTANCE.
- 18. ALL CONSTRUCTION ENTRANCES SHALL HAVE TEMPORARY ROAD CLOSED SIGNS THAT WILL BE IN PLACE WHEN THE ENTRANCE IS NOT IN USE AND AT THE END OF EACH DAY.
- 19. ANY PROPOSED CHANGES TO THE EROSION CONTROL PLAN MUST BE SUBMITTED AND APPROVED BY ENGINEER OR PERMITTING MUNICIPALITY.
- 20. THE CITY, OWNER AND/OR ENGINEER MAY REQUIRE ADDITIONAL EROSION CONTROL MEASURES AT ANY TIME DURING CONSTRUCTION.

### CONSTRUCTION SEQUENCE:

- INSTALL SILT FENCE, TRACKING PAD, INLET PROTECTION
- 2. DEMOLISH EXISTING BUILDINGS
- 3. ROUGH GRADE SITE
- 4. EXCAVATE AND CONSTRUCT BUILDING FOUNDATION
- 5. CONSTRUCT UNDERGROUND UTILITIES
- 6. INSTALL INLET PROTECTION ON NEW
- 7. CONSTRUCT BUILDING
- 8. CONSTRUCT PAVEMENT (STONE BASE, CURB & GUTTER, AND SIDEWALK)
- 9. RESTORE TERRACES
- 10. REMOVE TRACKING PAD AND SILT FENCE AFTER DISTURBED AREAS ARE RESTORED

### SEEDING RATES:

### TEMPORARY

- 1. USE ANNUAL OATS AT 3.0 LB./1,000 S.F. FOR SPRING AND SUMMER PLANTINGS.
- 2. USE WINTER WHEAT OR RYE AT 3.0 LB./1,000 SF FOR FALL PLANTINGS STARTED

AFTER SEPTEMBER 15

### PERMANENT:

1. USE WISCONSIN D.O.T. SEED MIX #40 AT 2 LB./1,000 S.F.

### FERTILIZING RATES:


### TEMPORARY AND PERMANENT:

USE WISCONSIN D.O.T. TYPE A OR B AT 7 LB./1,000 S.F.

### MULCHING RATES:

### TEMPORARY AND PERMANENT:

USE ½" TO 1-½" STRAW OR HAY MULCH, CRIMPED PER SECTION 607.3.2.3, OR OTHER RATE AND METHOD PER SECTION 627, WISCONSIN D.O.T. STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION

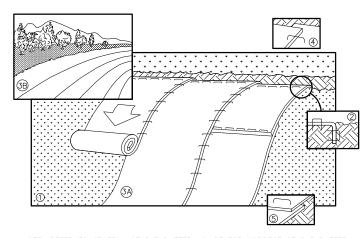



NOTE: REFER TO GENERAL STAPLE PATTERN GUIDE FOR CORRECT STAPLE PATTERN RECOMMENDATIONS FOR SLOPE INSTALLATIONS.

- PREPARE SOIL BEFORE INSTALLING BLANKETS, INCLUDING APPLICATION OF FERTILIZER AND SEED. NOTE: WHEN USING CELL-O-SEED, DO NOT SEED PREPARED AREA.
- CELL-O-SEED MUST BE INSTALLED WITH PAPER SIDE DOWN.
  2. BEGIN AT THE TOP OF THE SLOPE BY ANCHORING THE BLANKET IN 6" DEEP
- BY 6" WIDE TRENCH, BACKFILL AND COMPACT THE TRENCH AFTER STAPLING.
  3. ROLL THE BLANKETS <A.> DOWN, OR <B.> HORIZONTALLY ACROSS THE SLOPE.
- THE EDGES OF PARALLEL BLANKETS MUST BE STAPLED WITH APPROXIMATELY 2" OVERLAP.
   WHEN BLANKETS MUST BE SPLICED DOWN THE SLOPE, PLACE BLANKETS END OVER END (SHINGLE STYLE) WITH APPROXIMATELY 4" OVERLAP. STAPLE
- THROUGH OVERLAPPED AREA, APPROXIMATELY 12" APART.

  6. ALL BLANKETS MUST BE SECURELY FASTENED TO THE SLOPE BY PLACING STAPLES/STAKES IN APPROPRIATE LOCATIONS AS RECOMMENDED BY THE MANUFACTURER
- 1 EROSION MAT

/ NOT TO SCALE

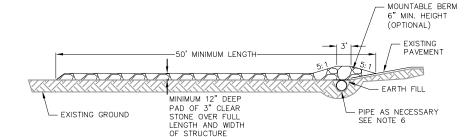

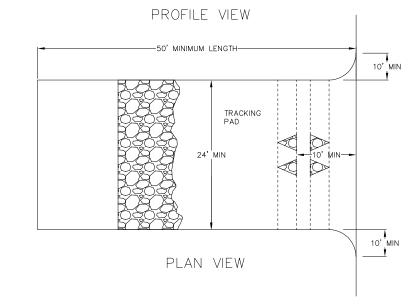


- 1. FOLLOW WISCONSIN DNR TECHNICAL STANDARD 1057 FOR FURTHER DETAILS AND INSTALLATION.
- 2. LENGTH MINIMUM OF 50'
- 3. WIDTH 24' MINIMUM, SHOULD BE FLARED AT THE EXISTING ROAD TO PROVIDE A TURNING RADIUS.

TRACKING PAD

NOT TO SCALE

C5.0

- 4. ON SITES WITH A HIGH GROUND WATER TABLE OR WHERE SATURATED CONDITIONS EXIST, GEOTEXTILE FABRIC SHALL BE PLACED OVER EXISTING GROUND PRIOR TO PLACING STONE. FABRIC SHALL BE WISDOT TYPE—HR GEOTEXTILE FABRIC.
- 5. STONE CRUSHED 3" CLEAR STONE SHALL BE PLACED AT LEAST 12" DEEP OVER THE ENTIRE LENGTH AND WIDTH OF ENTRANCE.
- 6. SURFACE WATER ALL SURFACE WATER FLOWING TO OR DIVERTED TOWARDS CONSTRUCTION ENTRANCES SHALL BE PIPED THROUGH THE ENTRANCE. MAINTAINING POSITIVE DRAINAGE. PIPE INSTALLED THROUGH THE STABILIZED CONSTRUCTION ENTRANCE SHALL BE PROTECTED WITH A MOUNTABLE BERM WITH 5:1 SLOPES AND MINIMIUM OF 6" STONE OVER THE PIPE. PIPE SHALL BE SIZED ACCORDING TO THE DRAINAGE REQUIREMENTS. WHEN THE ENTRANCE IS LOCATED AT A HIGH SPOT AND HAS NO DRAINAGE TO CONVEY A PIPE SHALL NOT BE NECESSARY. THE MINIMUM PIPE DIAMETER SHALL BE 6". CONTRACTOR SHALL BE RESPONSIBLE FOR THE MAINTENANCE OF SAID PIPE.
- 7. LOCATION A STABILIZED CONSTRUCTION ENTRANCE SHALL BE LOCATED WHERE CONSTRUCTION TRAFFIC ENTERS AND/OR LEAVES THE CONSTRUCTION SITE. VEHICLES LEAVING THE SITE MUST TRAVEL OVER THE ENTIRE LENGTH OF THE TRACKING PAD.

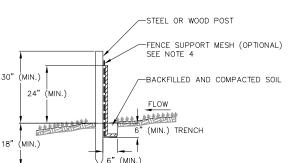

### NOTES

- INSTALL SILT FENCE TO FOLLOW THE GROUND CONTOURS AS CLOSELY AS POSSIBLE.
- CURVE THE SILT FENCE UP THE SLOPE TO PREVENT WATER FROM RUNNING AROUND THE ENDS.
- POST SPACING WITH FENCE SUPPORT MESH = 10 FT. (MAX.)

POST SPACING WITHOUT FENCE SUPPORT MESH = 6 FT. (MAX.)

4. SILT FENCE SUPPORT MESH CONSISTS OF 14-GAUGE STEEL WIRE WITH A MESH SPACING OF 6 IN. X 6 IN. OR PREFABRICATED POLYMERIC MESH OF EQUIVALENT STRENGTH





Vierbich planners | engineers | ad

EMARKS NO. DATE REMARKS

EMARKS NO. DATE REMARKS

519-547 W Washington Avenue City of Madison

City of Madison


Dane County, Wisconsin

DATE
02/28/2022
DRAFTER
ZDRE

RKOL PROJECT NO. 210359


C5.0

INLET PROTECTION DEVICES SHALL BE MAINTAINED OR REPLACED AT THE DIRECTION OF THE ENGINEER.

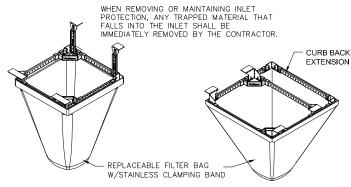

FLEXSTORM CATCH-IT INLET FITLERS FOR ROLLED CURB

FLEXSTORM CATCH-IT INLET FITLERS FOR CURB BOX OPENINGS (MAGNETIC CURB FLAP)

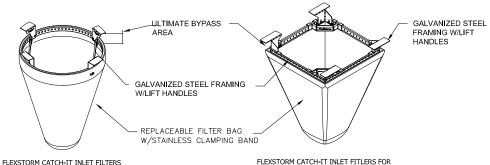


SQUARE/RECTANGULAR OPENINGS

NEENAH CASTING	INLET TYPE	GRATE SIZE	OPENING SIZE	ADS P/N
1040/1642/1733	ROUND	26	24	62MRDFX
3067 W/FLAP	CURB BOX	35.25 X 17.75	33.0 X 15.0	62LCBEXTFX
3067 EXTENDED BACK	CURB BOX	35.25 X 17.75	33.0 X 15.0	62LCBEXTFX
3246A	CURB BOX	35.75 X 23.875	33.5 X 21.0	62LCBFX
3030	SQUARE/RECT	23 X 16	20.5 X 13.5	62MCBFX
3067-C	SQUARE/RECT	35.25 X 17.75	33 X 15	62LSQFX


FRAMED INLET PROTECTION

NOT TO SCALE

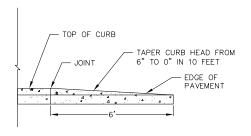


PROFILE VIEW


CURB & GUTTER TERMINATION NOT TO SCALE

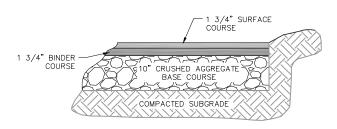


BITUMINOUS PAVEMENT

SITE PAVEMENT NOT TO SCALE

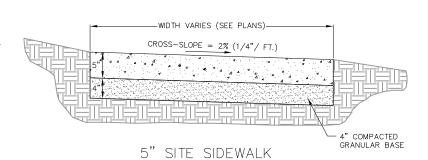

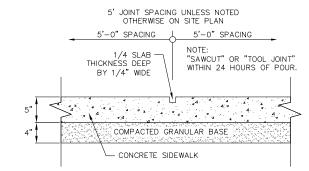


SIDEWALK CONTROL JOINT

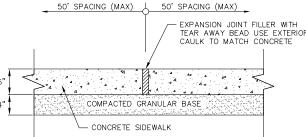


SIDEWALK EXPANSION JOINT


SIDEWALK NOT TO SCALE




CURB AND GUTTER CROSS SECTION



DRIVEWAY GUTTER CROSS SECTION

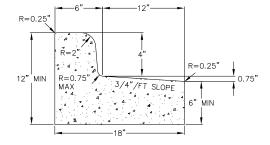


CURB AND GUTTER REJECT SECTION



HANDICAP RAMP GUTTER CROSS SECTION






C5.1

Vierbicher planners | engineers | advisors



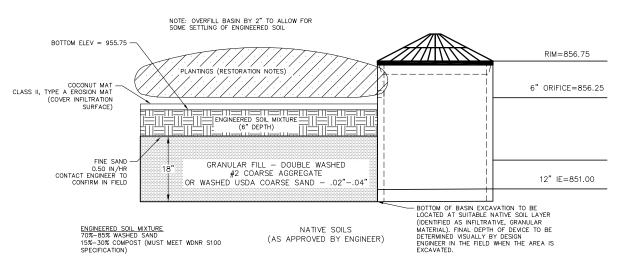

- RESTORATION OF THE INFILTRATION AREA (NOT INCLUDING SIDE SLOPES):

  1. OVER-EXCAVATE THE AREA TO INFILTRATIVE LAYER TO BE DETERMINED IN THE FIELD, DURING EXCAVATION, BY DESIGN ENGINEER.

  2. CONTRACTOR SHALL CHISEL PLOW OR ROTO—TILL THE BOTTOM OF THE INFILTRATION FACILITY TO BREAK UP ANY HARDPAN IN THE NATIVE SOIL LAYER AFTER REMOVAL OF CONSTRUCTION SEDIMENT AND OVER EXCAVATION OF BASIN AREA.

- OF BASIN AREA.

  1. PLACE WASHED SAND (FREE OF P200 PARTICLES) TO DEPTH OF SUITABLE NATIVE SOIL LAYER (IF REQUIRED).


  4. PLACE 6 INCHES OF ENGINEERED SOIL, COMPRISED OF:

  70-85% WASHED SAND

  15-30% COMPOST (MUST MEET WDNR S100 SPECIFICATION

  5. INFILITATION FACILITY INTERIOR SIDE SLOPES AND TOP OF ACCESS BERM SHALL BE SEEDED WITH SHORT GRASS PRAIRE SEED MIX BY AGRECOL (OR APPROVED EQUAL). APPLICATION RATES PER MANUFACTURER'S RECOMMENDATIONS.
- 6. BOTTOM OF INFILTRATION FACILITY TO BE RESTORED WITH INFILTRATION SWALE SEED MIX BY AGRECOL (OR APPROVED EQUAL). APPLICATION RATES PER MANUFACTURER'S RECOMMENDATIONS.




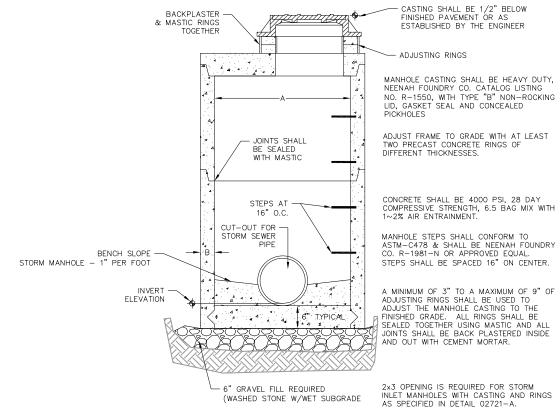

### STORM MANHOLE DIMENSIONS

MANHOLE	DIME	NSION
SIZE	Α	B (MIN.)
48"	48"	5"
60"	60"	6"
72"	72"	7"
84"	84"	7"
96"	96"	9"

STORM SEWER MANHOLE NOT TO SCALE

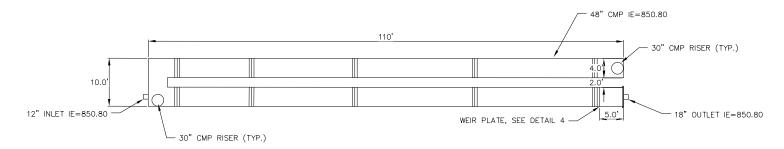

PLAN VIEW

REFER TO PLANS FROM CONTECH FOR FINAL LAYOUT AND CONSTRUCTION & INSTALLATION DETAILS





C5.2

' DIAMETER WEIR PLATE

- TOP OF PLATE=854.80 -12" WIDE RECTANGULAR WEIR IE=853.50 PLATE IE=850.80 8" ORIFICE IE=850.80

48" NOT TO SCALE Construction Details
519-547 w washington Avenue
City of Madison
Dane County, Wisconsin 02/28/2022 ZDRE

Vierbicher planners | engineers | advisors

PROJECT NO. 210359 C5.2

CHECKE RKOL

### PLANT SCHEDULE

UNDERSTORY TREES Al Cb	BOTANICAL / COMMON NAME Amelanchier laevis / Allegheny Serviceberry Carpinus caroliniana 'J.N. Globe' TM / Ball O' Fire American Hornbeam	ROOT COND. B & B B & B	<u>SIZE</u> 7'ht. 2"Cal	NOTES Multi-Stem	<u>QTY</u> 3 2
DECIDUOUS SHRUBS Hpj Hpq Po Rg Sm	BOTANICAL / COMMON NAME Hydrangea paniculata 'Jane' TM / Little Lime Hydrangea Hydrangea paniculata 'Little Quick Fire' / Little Quick Fire Hydrangea Physocarpus opulifolius 'Donna May' TM / Little Devil Ninebark Ribes alpinum 'Green Mound' / Green Mound Alpine Currant Syringa meyeri 'Palibin' / Dwarf Korean Lilac	ROOT COND. Cont. Cont. Cont. Cont. Cont.	<u>SIZE</u> 5 Gal. 5 Gal. 5 Gal. 3 Gal. 7 Gal.	<u>NOTES</u>	QTY 8 12 21 24 3
EVERGREEN SHRUBS Jfs Tm Tom Toh	BOTANICAL / COMMON NAME Juniperus chinensis 'Sea Green' / Sea Green Juniper Taxus x media 'Everlow' / Everlow Yew Thuja occidentalis 'Hetz Midget' / Hetz Midget Arborvitae Thuja occidentalis 'Holmstrup' / Holmstrup Cedar	ROOT COND. Cont. Cont. Cont. B & B	<u>SIZE</u> 5 Gal. 5 Gal. 5 Gal. 5' ht.	NOTES	QTY 6 19 12 2
PERENNIALS ad cl pvh pvs sn	BOTANICAL / COMMON NAME Astilbe x 'Delft Lace' / Delft Lace Astilbe Chasmanthium latifolium / Northern Sea Oats Panicum virgatum 'Heavy Metal' / Heavy Metal Switch Grass Panicum virgatum 'Shenandoah' / Shenandoah Red Switch Grass Salvia nemorosa 'Blue Hill' / Woodland Sage	ROOT COND. Cont. Cont. Cont. Cont. Cont. Cont. Cont.	<u>SIZE</u> 1 Gal. 1 Gal. 1 Gal. 1 Gal. 1 Gal.	NOTES	QTY 10 56 34 20 5

BASIN SEED SCHEDULE

STORMWATER BASIN SEED MIX 835 sf



GRAPHIC SCALE FEET

### PLANT MATERIAL NOTES:

- 1. ALL PLANTINGS SHALL CONFORM TO QUALITY REQUIREMENTS AS PER ANSI 760.1.
- 2. ALL PLANT MATERIAL SHALL BE TRUE TO SPECIES, VARIETY AND SIZE SPECIFIED, NURSERY GROWN IN ACCORDANCE WITH GOOD HORTICULTURAL PRACTICES, AND UNDER CLIMATIC CONDITIONS SIMILAR TO THOSE OF THE PROJECT SITE.
- 3. CONTACT LANDSCAPE ARCHITECT, IN WRITING, TO REQUEST ANY PLANT MATERIAL SUBSTITUTIONS DUE TO AVAILABILITY ISSUES.
- ALL PLANTS SHALL BE GUARANTEED TO BE IN HEALTHY AND FLOURISHING CONDITION DURING THE GROWING SEASON FOLLOWING INSTALLATION. ALL PLANT MATERIAL SHALL BE GUARANTEED FOR ONE YEAR FROM THE TIME OF INSTALLATION.

### LANDSCAPE MATERIAL NOTES:

- 1. CONTRACTOR SHALL PROVIDE A SUITABLE AMENDED TOPSOIL BLEND FOR ALL PLANTING AREAS WHERE SOIL CONDITIONS ARE UNSUITABLE FOR PLANT GROWTH. TOPSOIL SHALL CONFORM TO QUALITY REQUIREMENTS AS PER SECTION 625.2(1) OF THE "STANDARD SPECIFICATIONS FOR HIGHWAY CONSTRUCTION." PROVIDE A MINIMUM OF 18" OF TOPSOIL IN ALL PLANTING AREAS AND 6" OF TOPSOIL IN AREAS TO BE SEEDED/SODDED.
- 2. LANDSCAPE BEDS TO BE MULCHED WITH UNDYED SHREDDED HARDWOOD BARK MULCH TO 3" DEPTH MIN. AND EDGED WITH COMMERCIAL GRADE ALUMINUM LANDSCAPE EDGING, PERMALOC CLEANLINE  $\frac{3}{16}$ "X4" OR EQUAL, COLOR BLACK ANODIZED.
- 3. ALL TREES AND/OR SHRUBS PLANTED IN LAWN AREAS TO BE INSTALLED WITH A 5' DIAMETER MULCH RING AND SHOVEL CUT EDGE. A PRE-EMERGENT GRANULAR HERBICIDE WEED-PREVENTER SHOULD BE MIXED WITH MULCH AS WELL AS TOPICALLY APPLIED TO TREE RING.

### SEEDING NOTES:

- 1. ALL DISTURBED AREAS, UNLESS OTHERWISE NOTED, TO BE SEEDED WITH 'MADISON PARKS' MIX BY 'LACROSSE SEED COMPANY' OR EQUIVALENT, PER MANUFACTURER'S SPECIFIED APPLICATION RATES. ALL SEEDED AREAS ARE TO BE WATERED DAILY TO MAINTAIN ADEQUATE SOIL MOISTURE FOR PROPER GERMINATION. AFTER VIGOROUS GROWTH IS ESTABLISHED, APPLY  $\frac{1}{2}$ " WATER TWICE WEEKLY UNTIL FINAL ACCEPTANCE.
- 2. ALL AREAS NOTED ON PLAN AS STORMWATER BASIN SEEDING, INSTALL 'DETENTION BASIN BIOSWALE' SEED MIX BY 'PRAIRIE NURSERY'. INSTALL PER MANUFACTURER'S SPECIFIED APPLICATION RATES. ALL SEEDED AREAS ARE TO BE WATERED DAILY TO MAINTAIN ADEQUATE SOIL MOISTURE FOR PROPER GERMINATION. AFTER VIGOROUS GROWTH IS ESTABLISHED, APPLY 1 WATER TWICE WEEKLY UNTIL FINAL ACCEPTANCE.

										+
Address:	525-547 W Washi	ngton	Date:	02.28.2022						
Total Square Footage o Area:	of Developed	(Site Area)	49,384	-		ootprint at ade)	33,919	=	15465	sf
Total Landscape Point	s Required (<5 ac):	15,465	/ 300 =	52	x 5 =	258				
Lansdcape Poir	nts Requried >5 ac:	0	/ 100 =	0	x 1 =	-	1 1	258		
				s/ Existing Iscaping		roposed caping				T
Plant Type/ Element	Min. Size at Installation	Points	Quantity	Points Achieved	Quantity	Points Achieved				
Overstory deciduous tree	2.5" cal	35		0		0				
Tall Evergreen Tree	5-6 feet tall	35		0		0				
Ornamental tree	1.5" cal	15		0	5	75				
Upright evergreen shrub	3-4 feet tall	10		0	2	20				
Shrub, deciduous	#3 gallon container size, Min. 12-24"	3		0	68	204				
Shrub, evergreen	#3 gallon container size, Min. 12-24"	4		0	37	148				
Ornamental grasses/perennials	#1 gallon container size, Min. 8-18"	2		0	125	250				
Ornamental/decorative fencing or wall	n/a	4 per 10 LF		0		0				
Existing significant specimen tree	Min. Size 2.5" cal. Trees must be within developed area and cannot comprise more than 30% of total required points.	14 per caliper inch. Max. points per tree: 200		0		0				
Landscape Furniture for public seating and/or transit connections	Furniture must be within developed area, publicly accessible, and cannot comprise more than 5% of total required points	5 points per "seat"		0		0				
Sub Totals				0		697				
			Takal Dai	nts Provided:	697					

NOT FOR CONSTRUCTION


vierbiche

Avenue 519-547 W Washington A City of Madison andscape Plan

02/28/2022 AKAN RKOL

PROJECT NO. 210359

L1.0

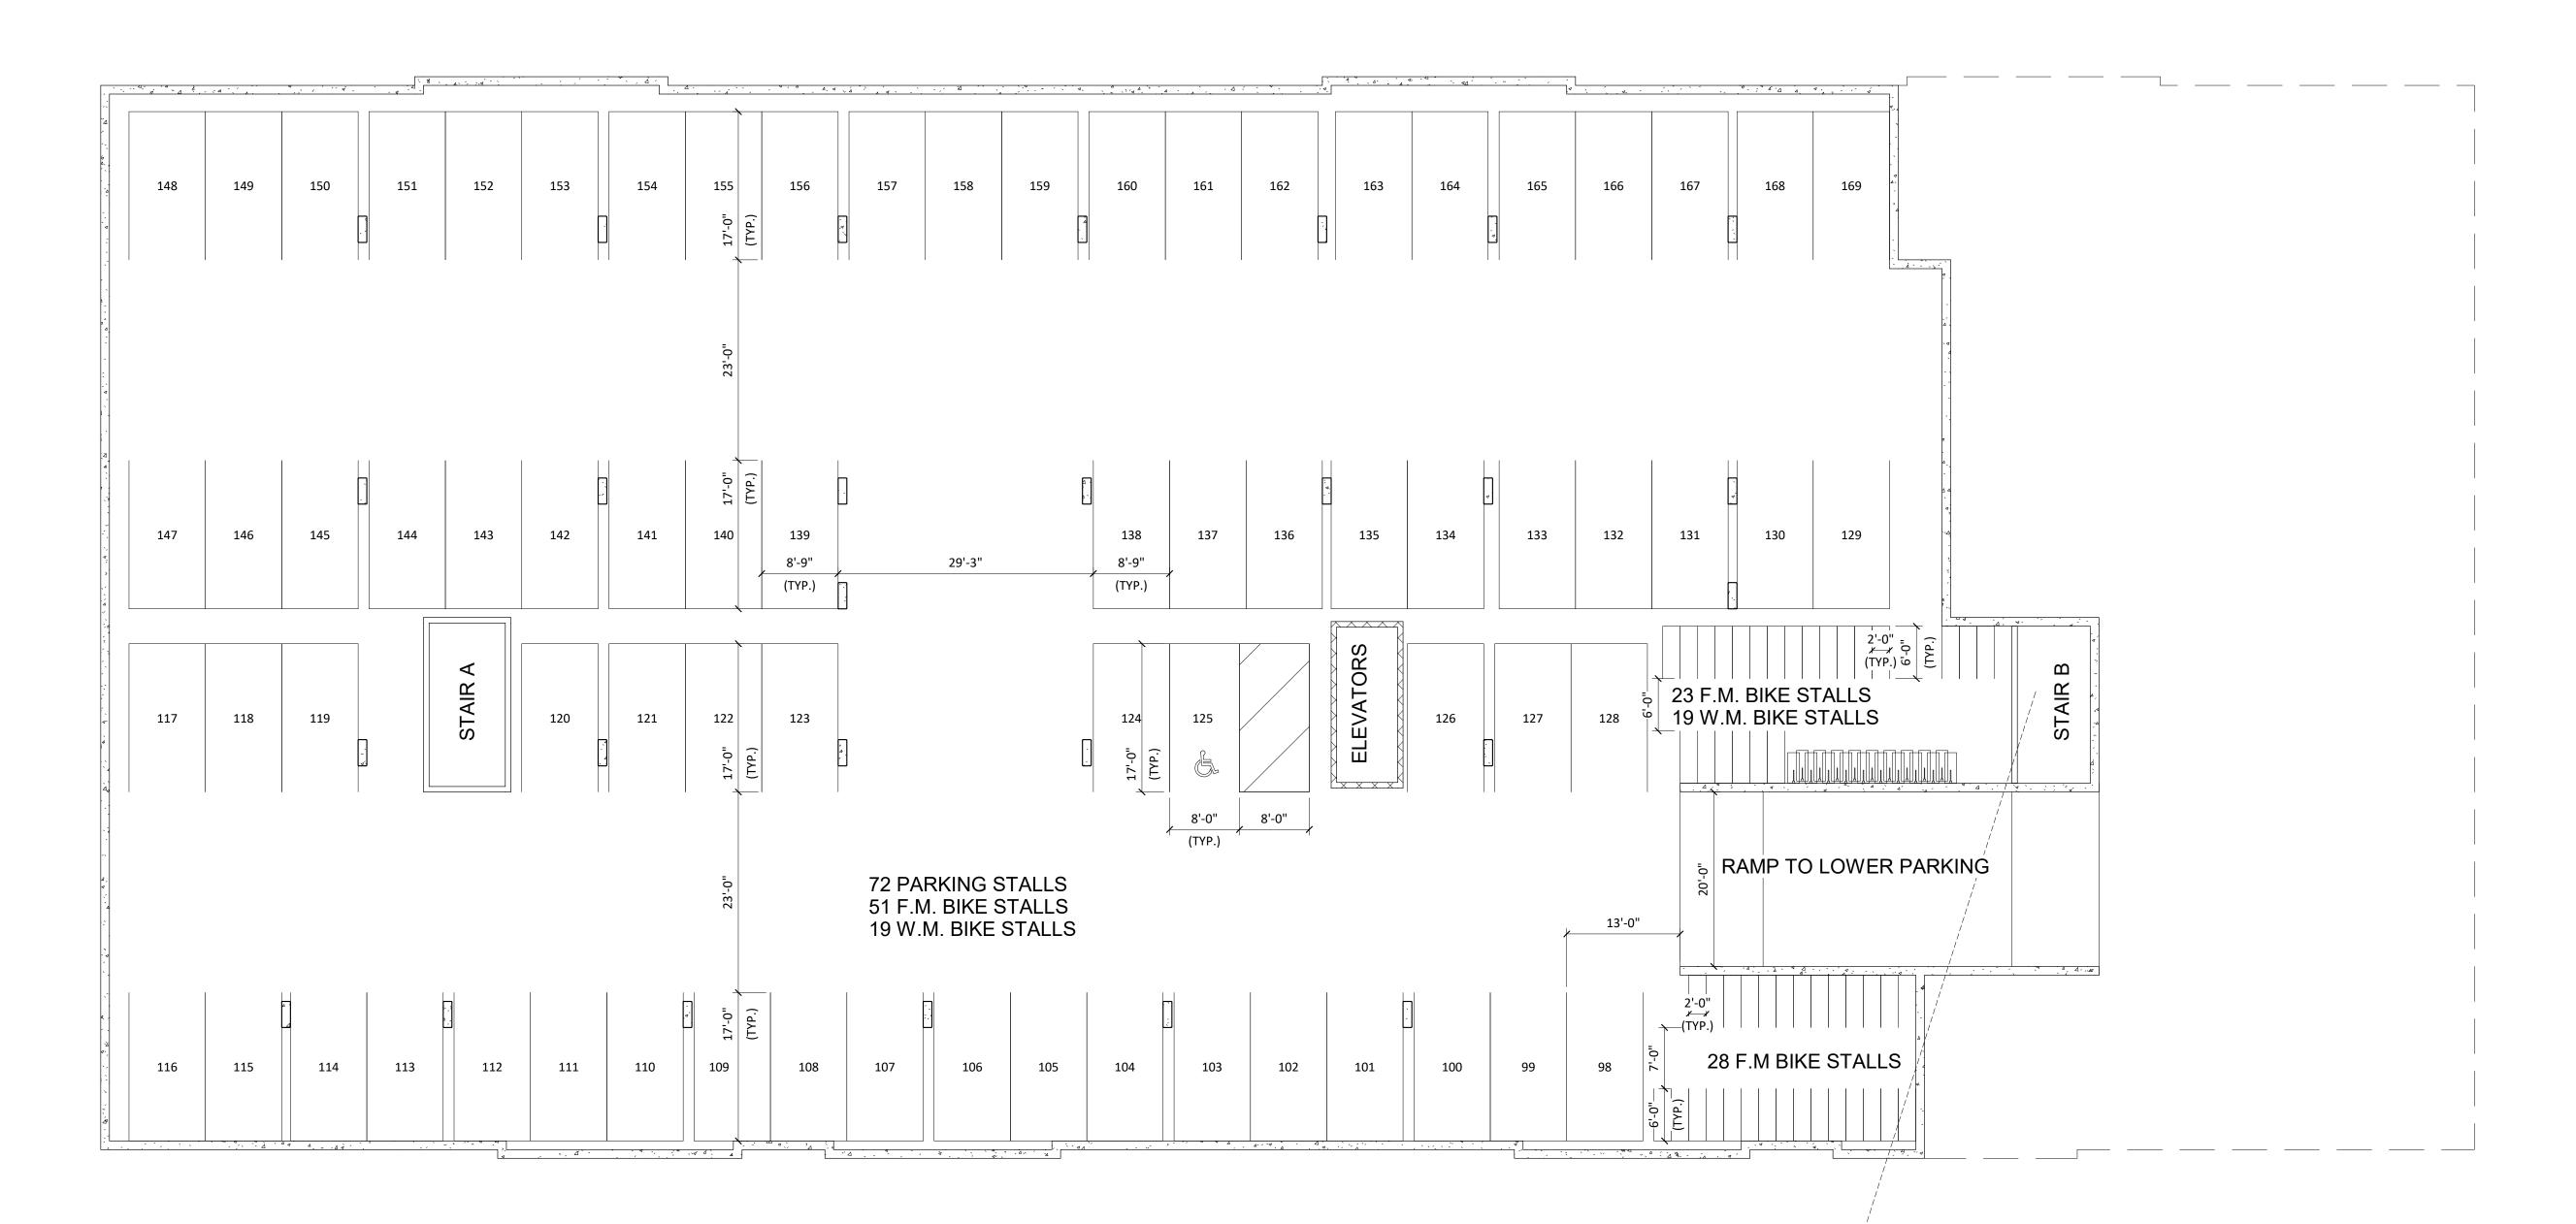

1 -00 - LOWER BASEMENT A-0.0 3/32" = 1'-0"

PROJECT TITLE

West Washington Development

608.836.3690 Middleton, WI 53562

TRUE NORTH

**KEY PLAN** 

525-547 W Washington Ave.

Madison, Wisconsin


SHEET TITLE

LOWER

**BASEMENT** FLOOR PLAN

SHEET NUMBER

A-0.0 PROJECT NUMBER 2143

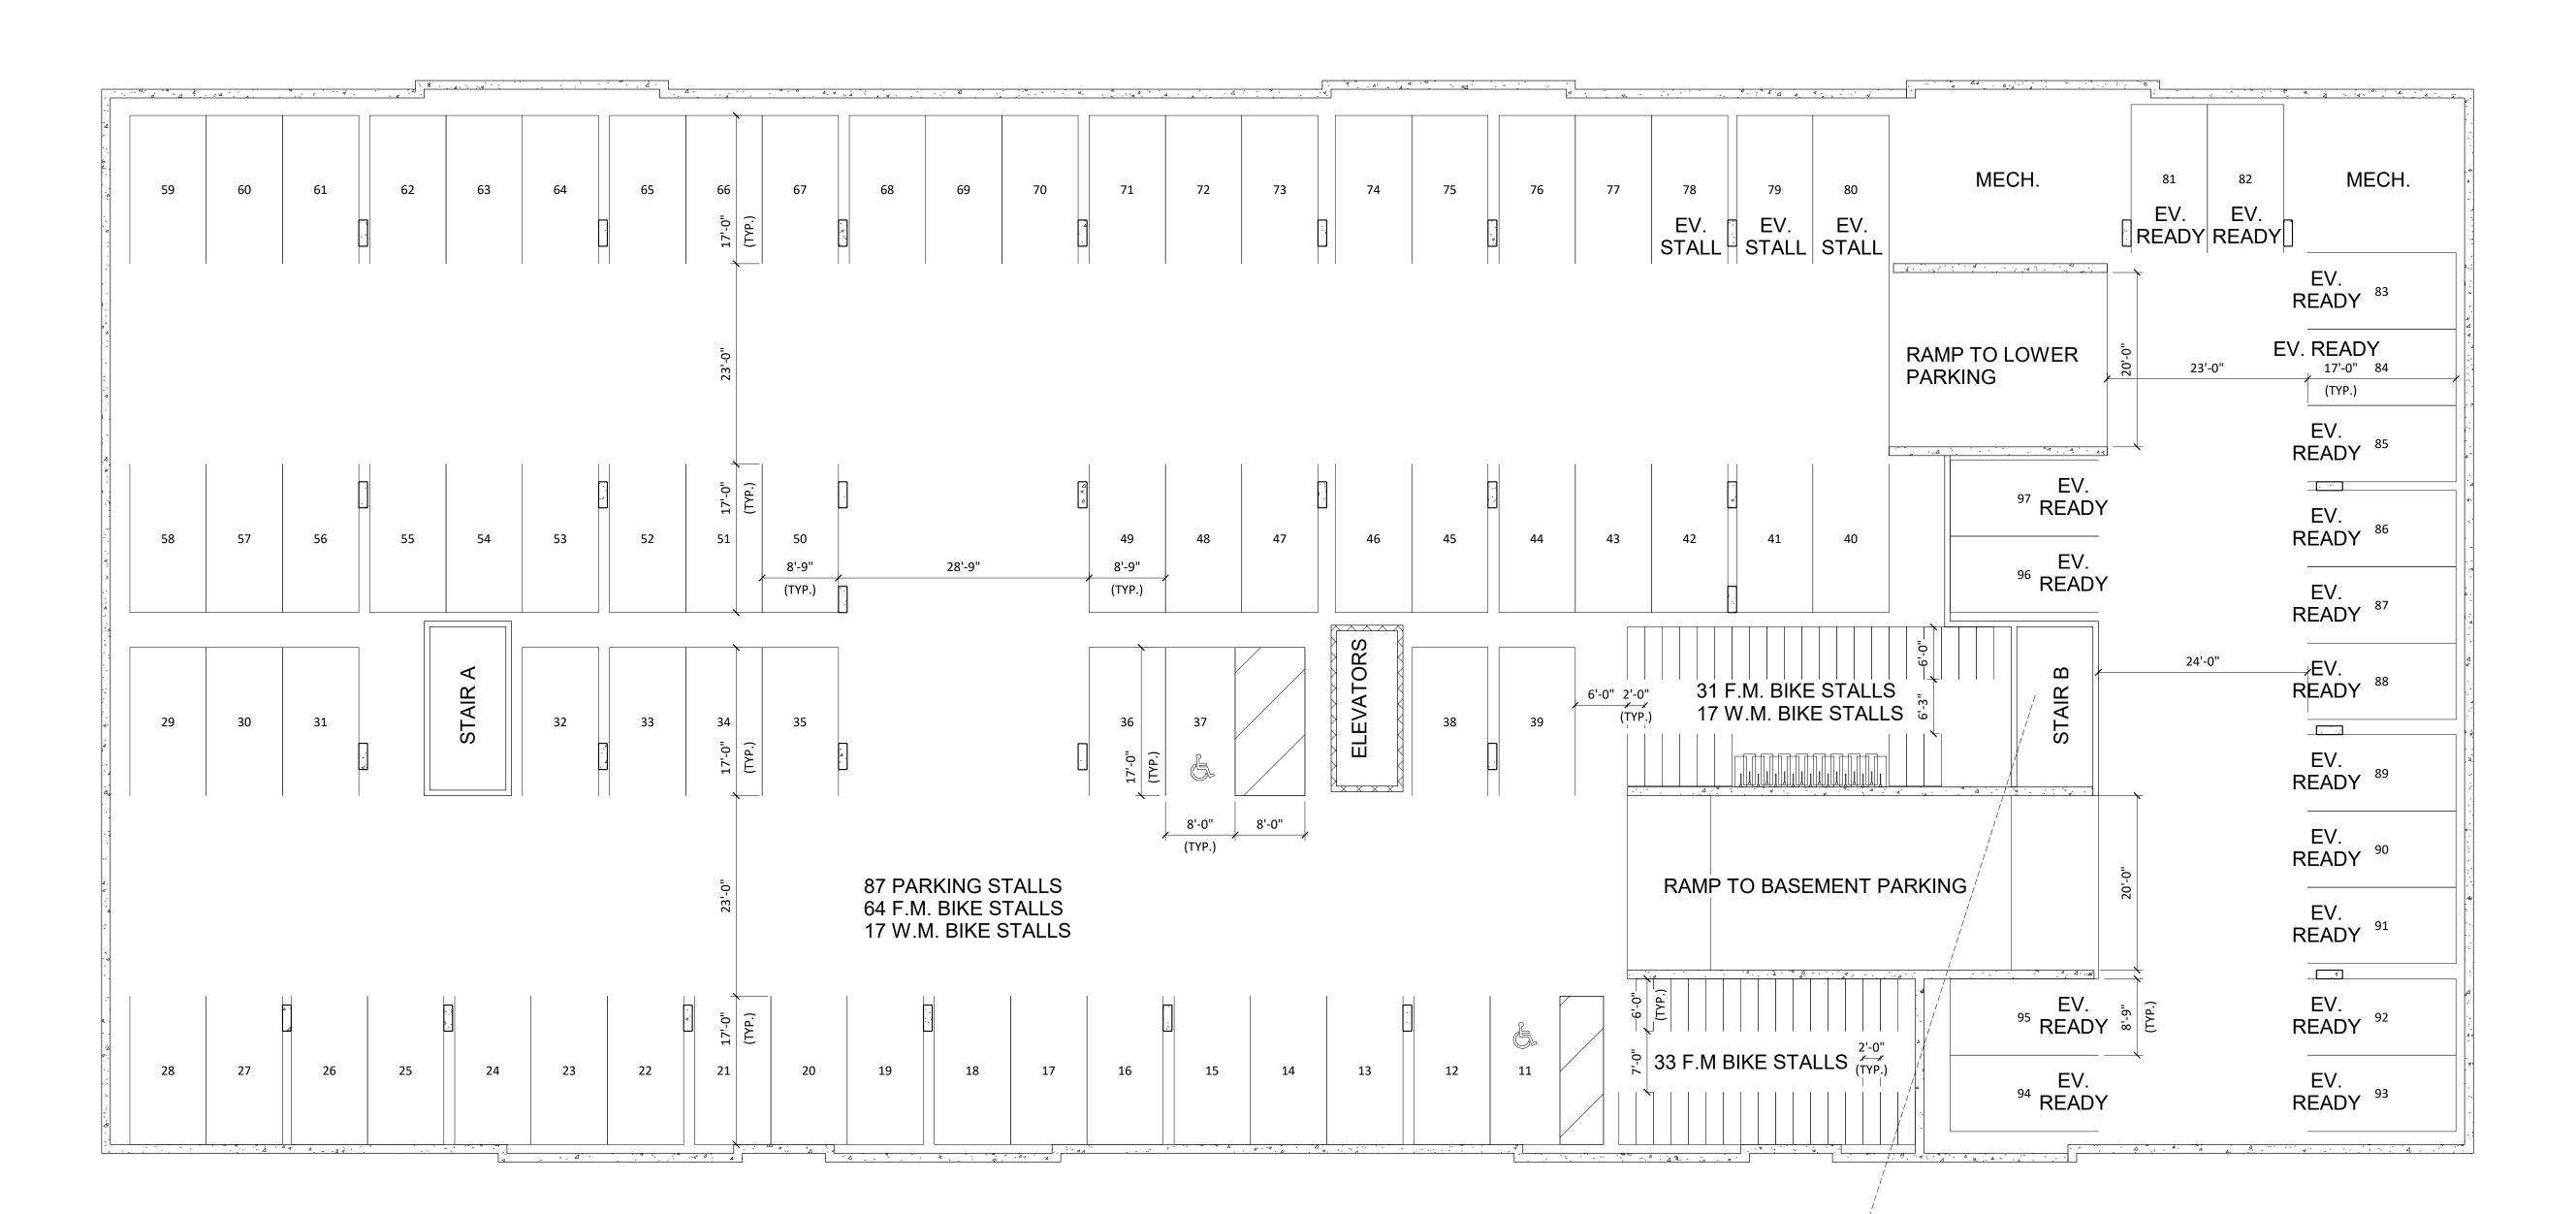

1 00 - BASEMENT A-1.0 3/32" = 1'-0"

# knothe bru A R C H I T E C Phone: 608.836.3690 TRUE NORTH KEY PLAN

ISSUED

PROJECT TITLE

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin


SHEET TITLE

BASEMENT FLOOR PLAN

SHEET NUMBER

A-1.0

PROJECT NUMBER 2143

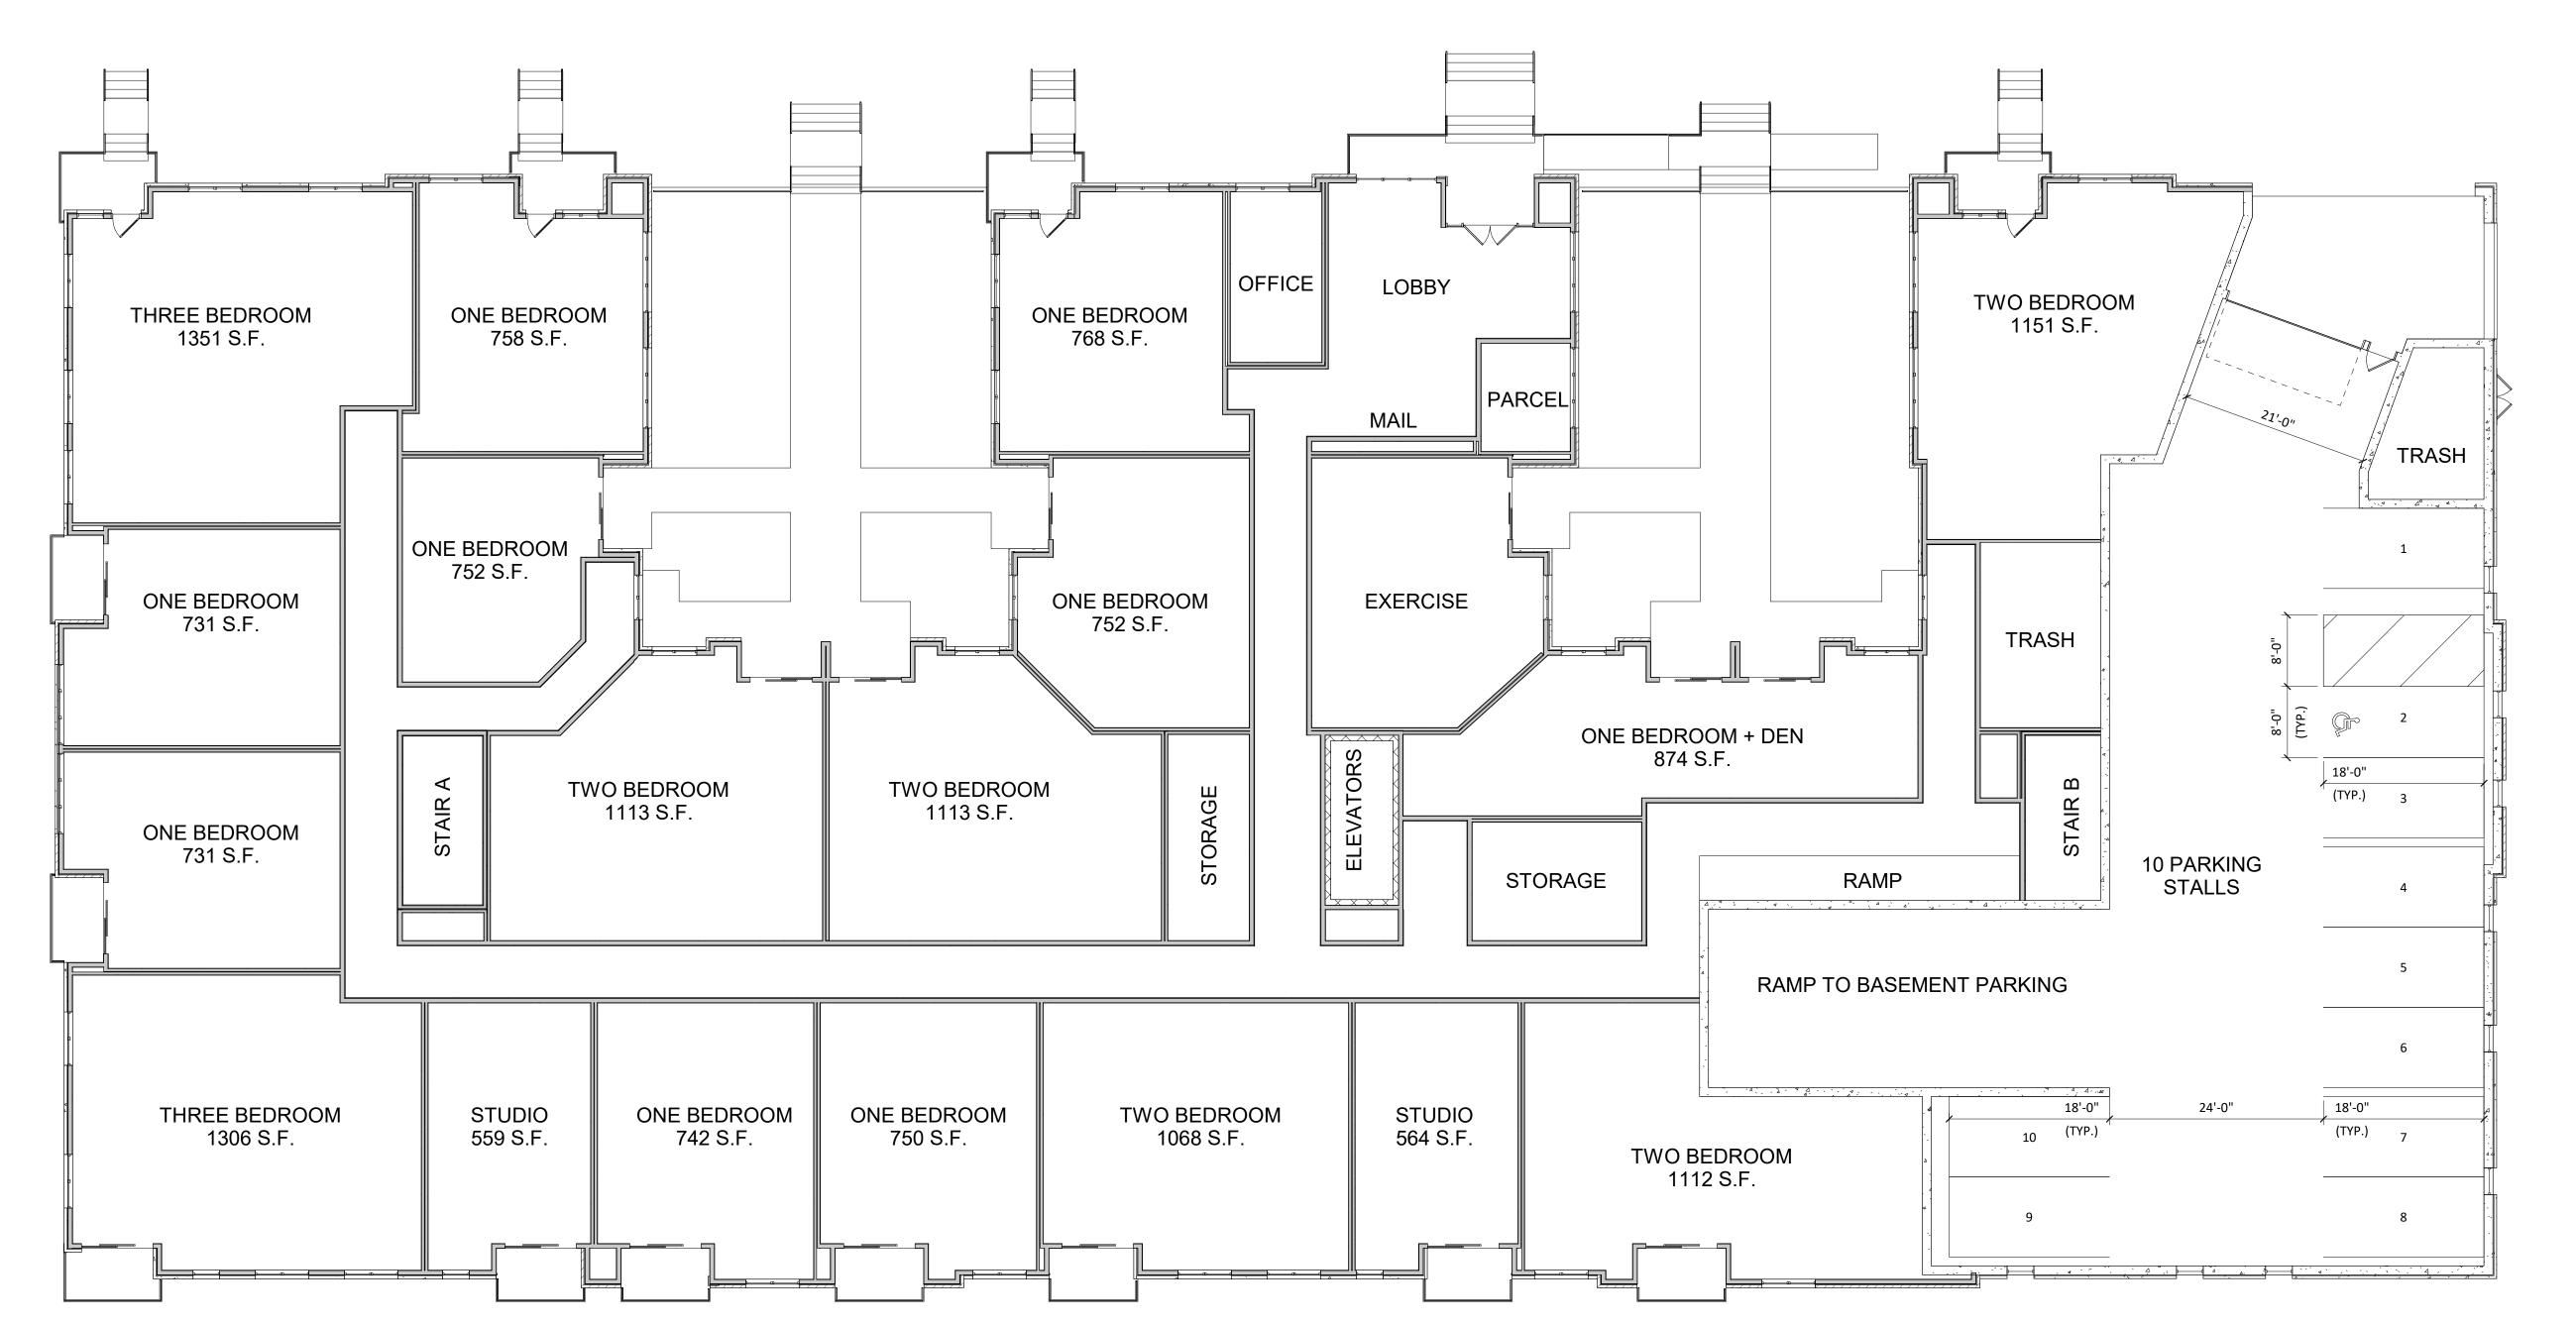

1 01 - FIRST FLOOR A-1.1 3/32" = 1'-0"

608.836.3690

**KEY PLAN** 

**ISSUED** 

TRUE NORTH

Middleton, WI 53562

PROJECT TITLE

West Washington
Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

FIRST FLOOR PLAN

SHEET NUMBER

A-1.1

PROJECT NUMBER 2143



KEY PLAN ISSUED

PROJECT TITLE

608.836.3690

TRUE NORTH

Middleton, WI 53562

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

SECOND FLOOR PLAN

SHEET NUMBER

A-1.2

PROJECT NUMBER 2143



1 03 - THIRD FLOOR A-1.3 3/32" = 1'-0"

PROJECT TITLE

608.836.3690

**KEY PLAN** 

ISSUED

TRUE NORTH

Middleton, WI 53562

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

THIRD FLOOR PLAN

SHEET NUMBER

A-1.3

PROJECT NUMBER 2143
© Knothe & Bruce Architects, LLC



1 04 - FOURTH FLOOR A-1.4 3/32" = 1'-0"

PROJECT TITLE

608.836.3690

**KEY PLAN** 

ISSUED

TRUE NORTH

Middleton, WI 53562

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin


SHEET TITLE

FOURTH FLOOR PLAN

SHEET NUMBER

A-1.4

PROJECT NUMBER 2143

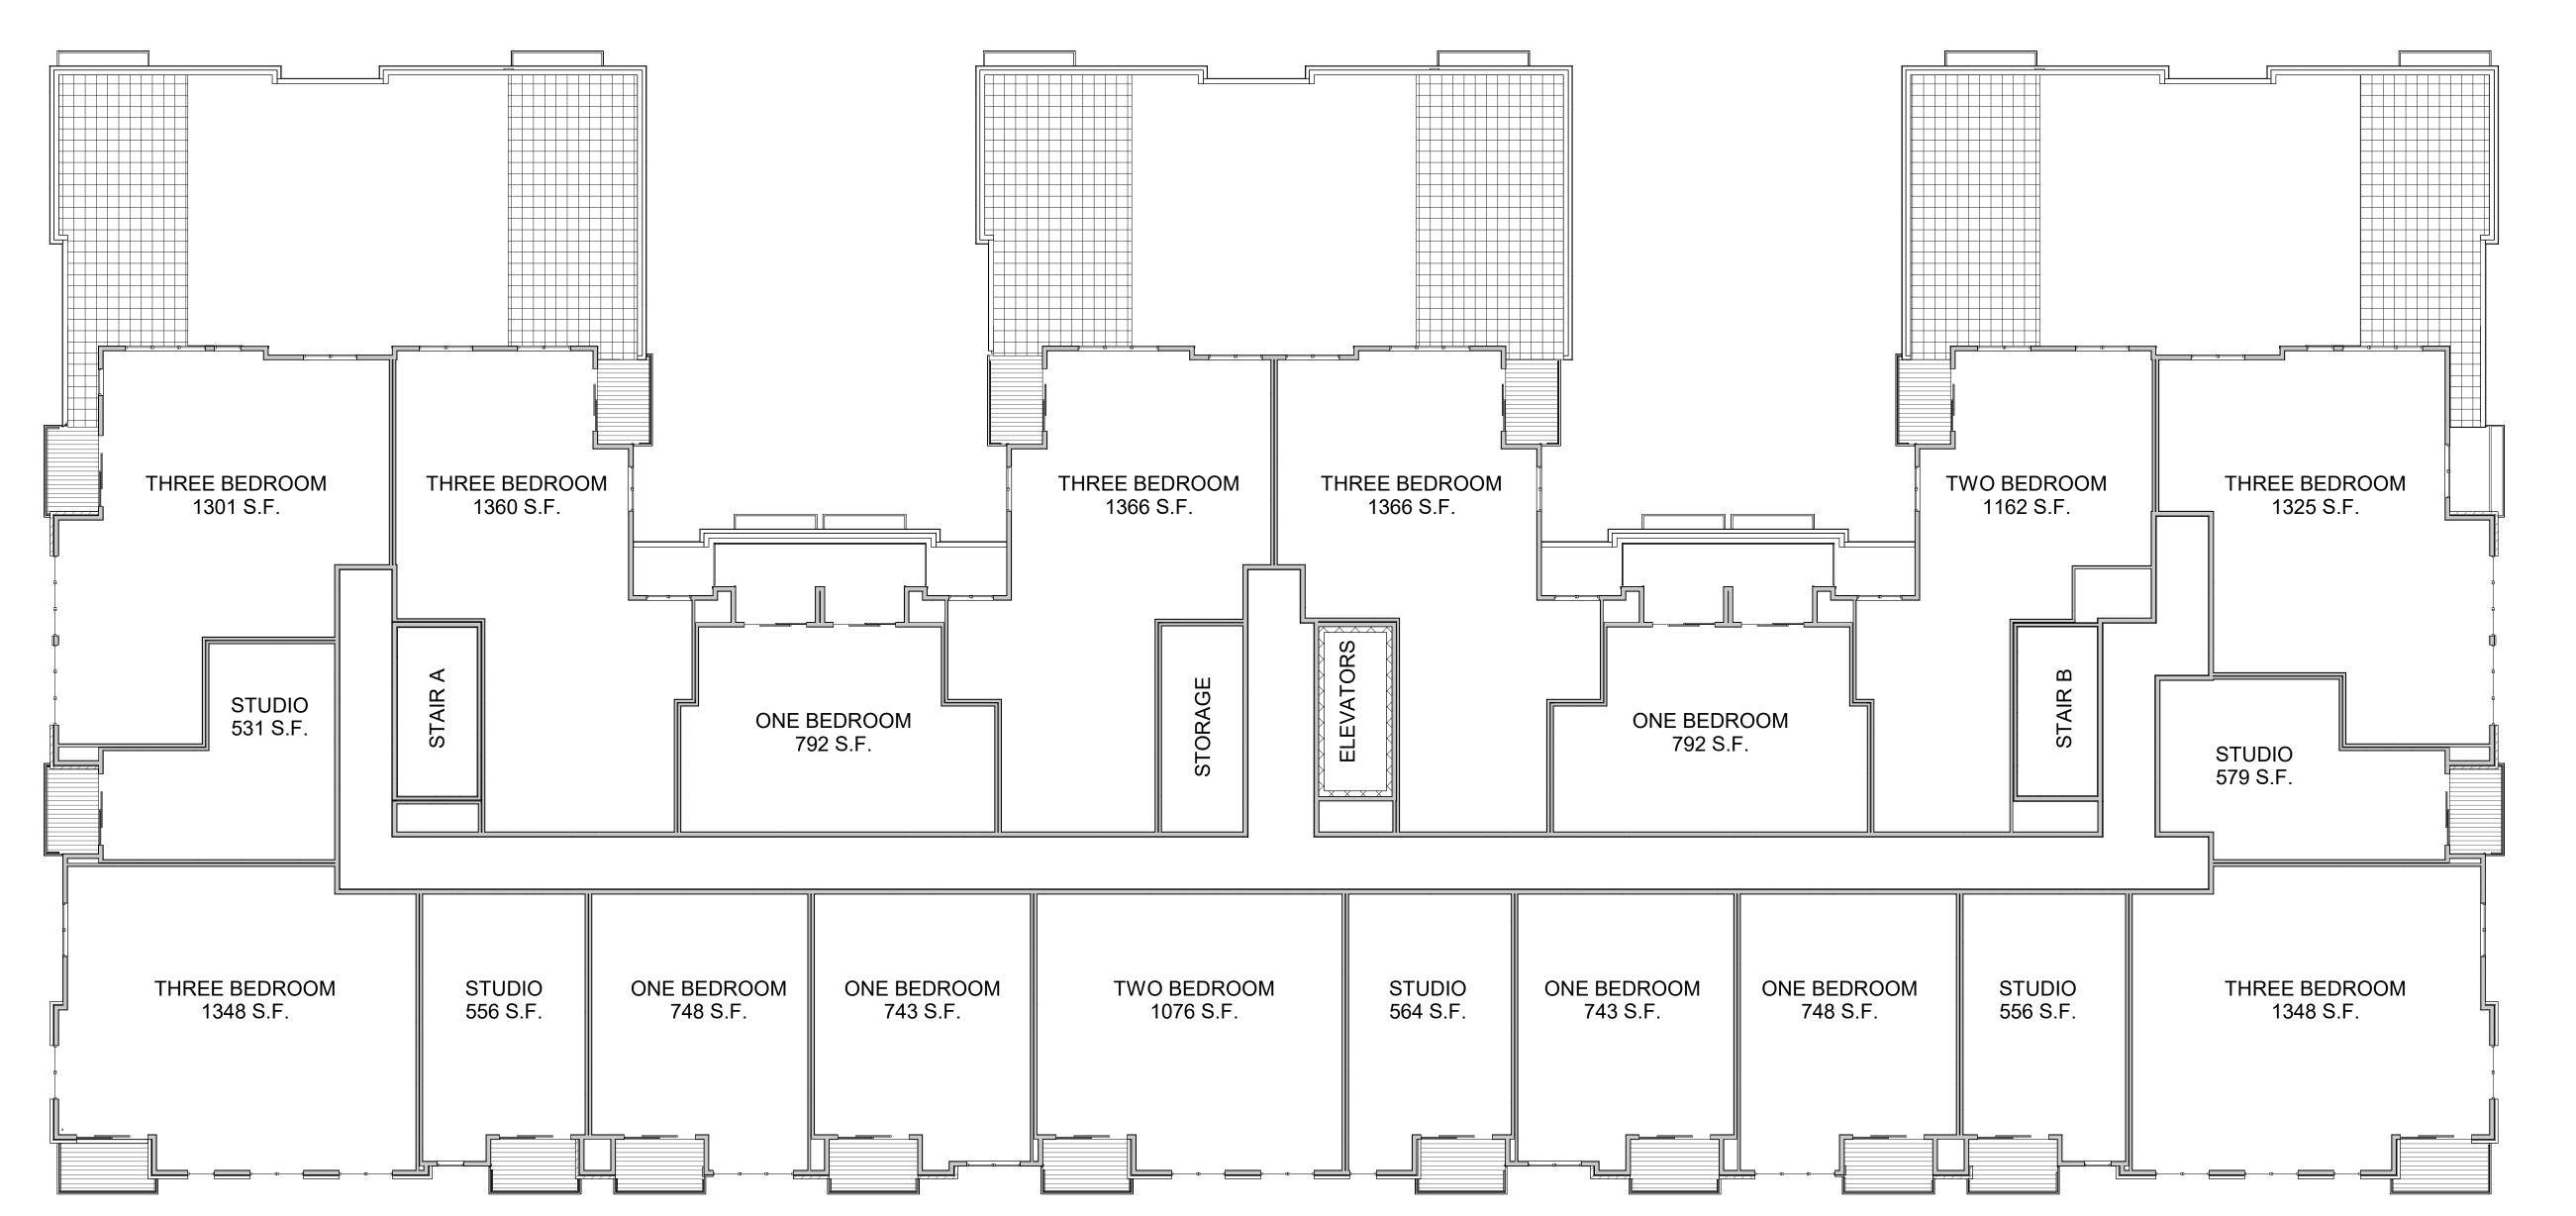

1 05 - FIFTH FLOOR A-1.5 3/32" = 1'-0"

PROJECT TITLE

608.836.3690

**KEY PLAN** 

**ISSUED** 

TRUE NORTH

Middleton, WI 53562

West Washington Development

525-547 W Washington Ave.


Madison, Wisconsin

SHEET TITLE

FIFTH FLOOR PLAN

SHEET NUMBER

A-1.5 PROJECT NUMBER 2143

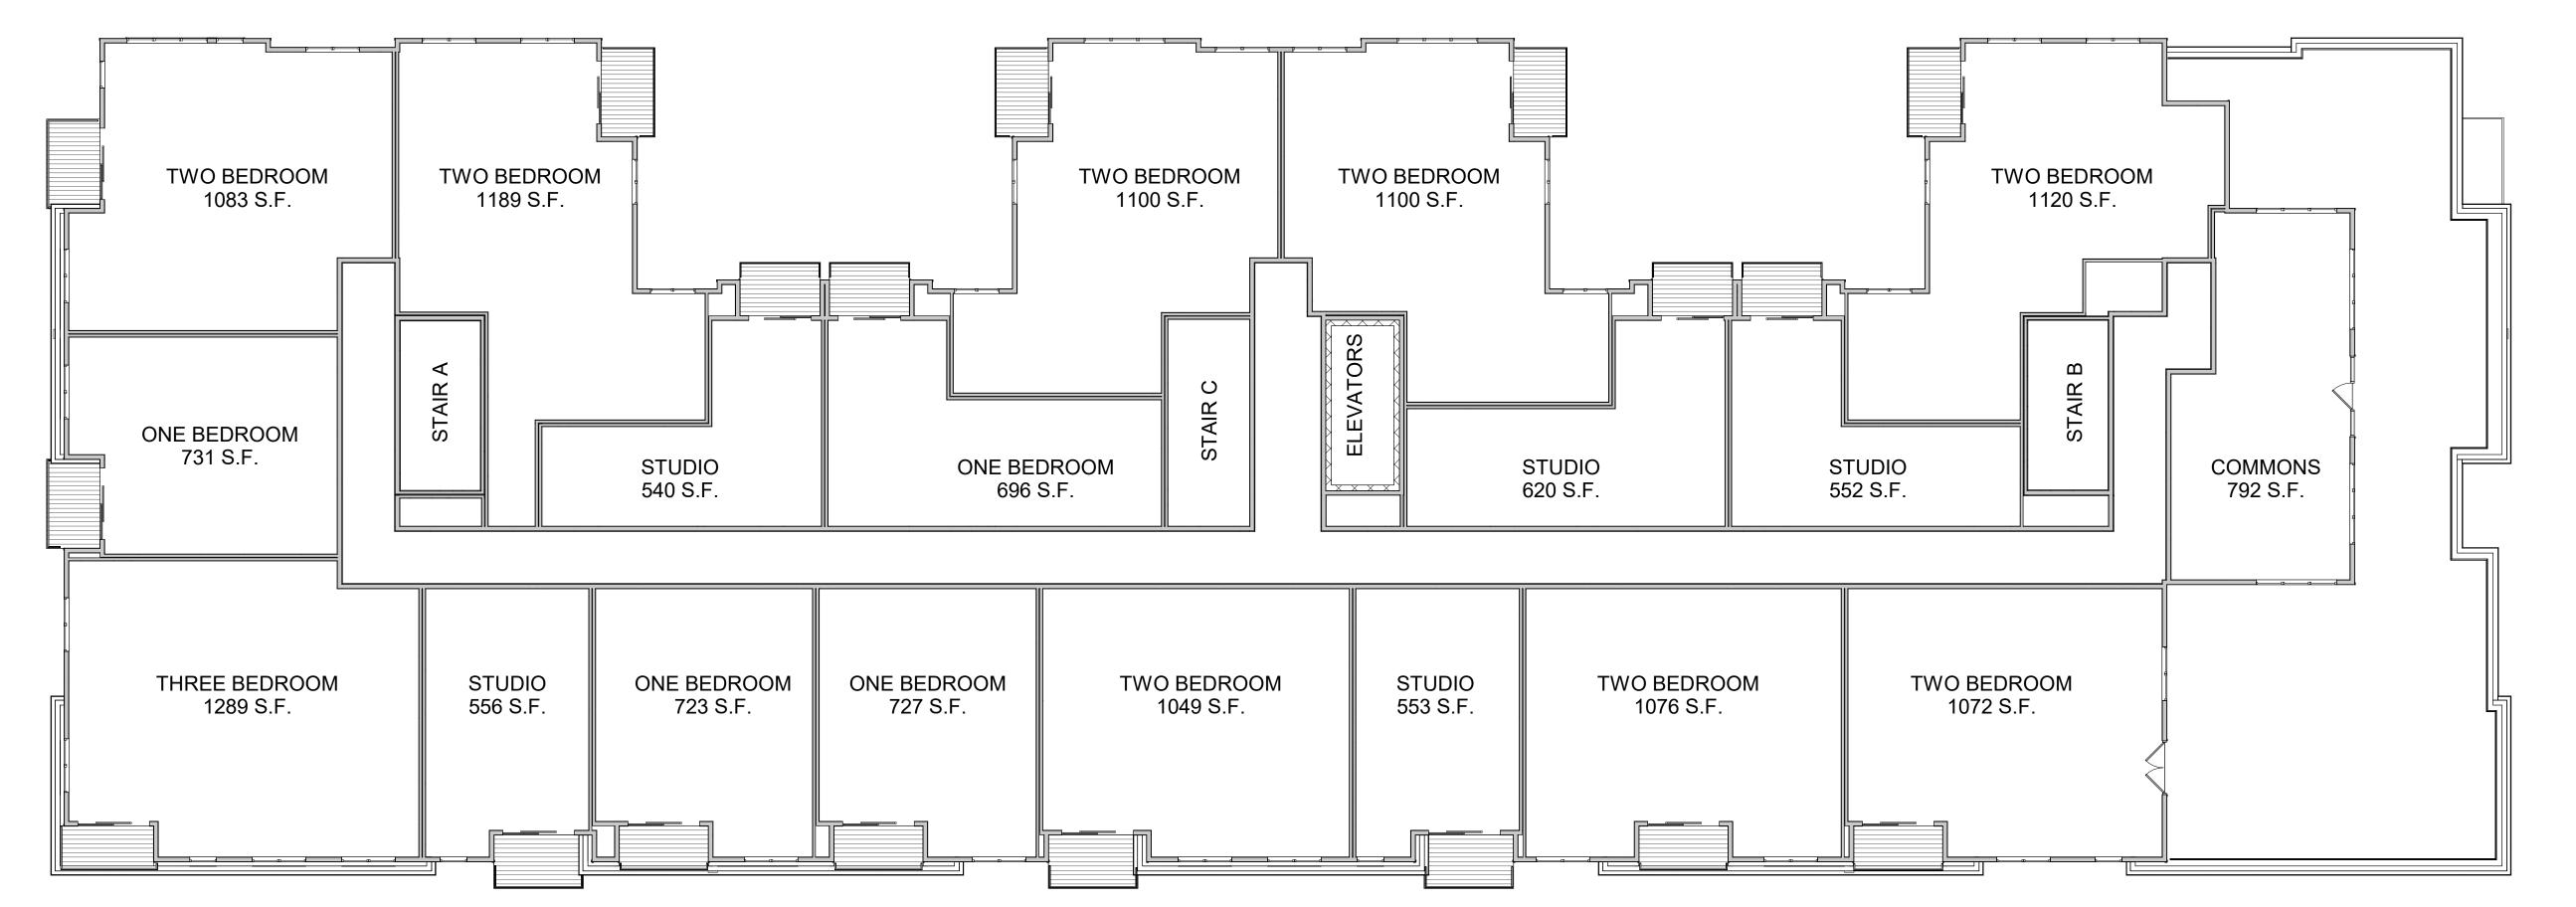

1 06 - SIXTH FLOOR A-1.6 3/32" = 1'-0"

PROJECT TITLE

608.836.3690

TRUE NORTH

KEY PLAN

ISSUED

Middleton, WI 53562

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin


SHEET TITLE

SIXTH FLOOR PLAN

SHEET NUMBER

A-1.6

PROJECT NUMBER 2143

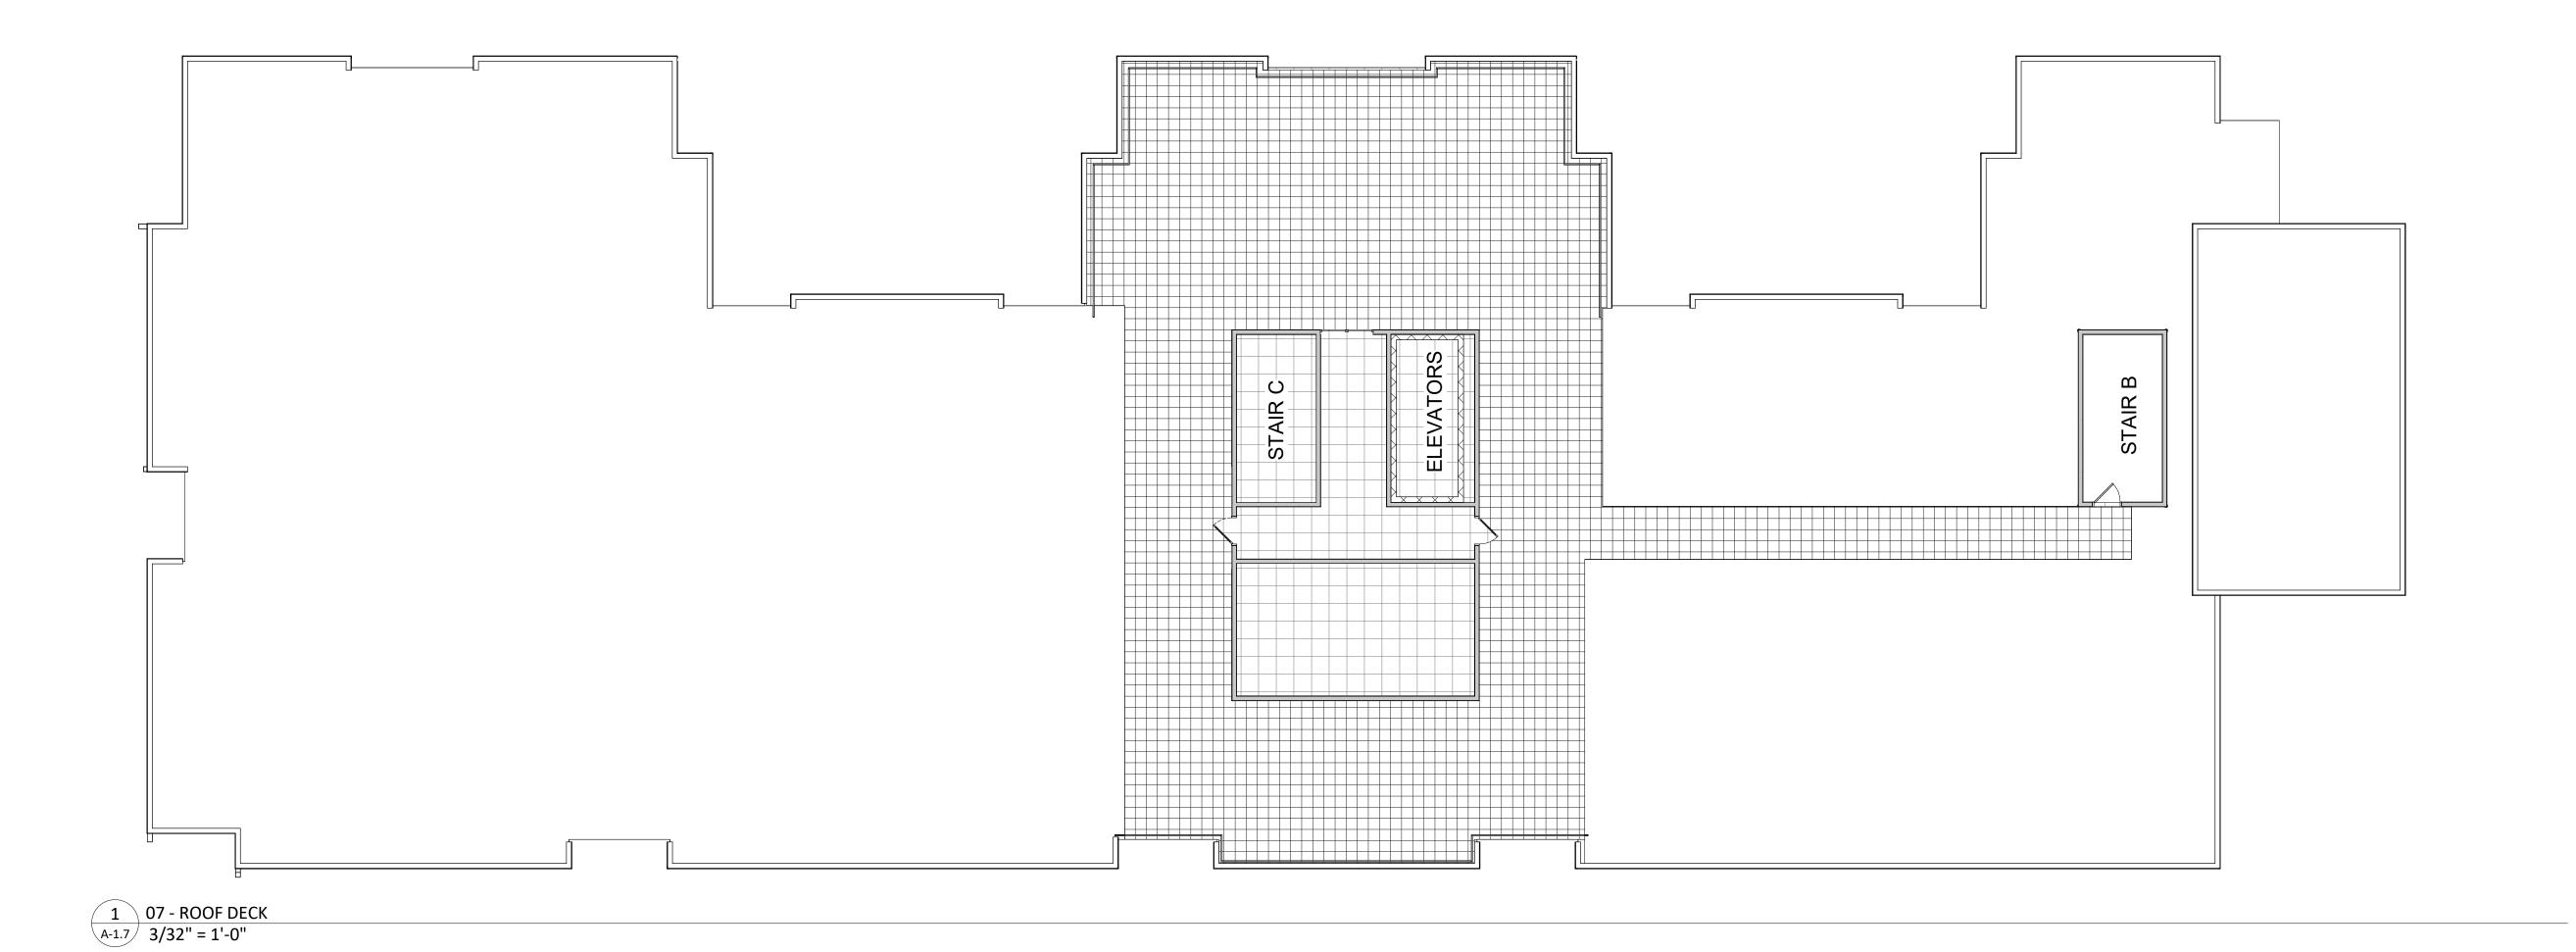

**KEY PLAN** ISSUED

PROJECT TITLE

West Washington Development

608.836.3690 Middleton, WI 53562

TRUE NORTH

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

**ROOF DECK PLAN** 

SHEET NUMBER

A-1.7 PROJECT NUMBER 2143



COMPOSITE TRIM PARAPET V 166'-8 5/8" ROOF TRUSS BEAKING 163'-9 3/4" METAL SIDING SOILDIER COURSING BRICK VENEER (#2) SIXTH FLOOR 154'-0" **ALUMINIUM RAILINGS** COMPOSITE PANEL FIFTH FLOOR 142'-8" COMPOSITE WINDOWS BRICK VENEER (#1) FOURTH FLOOR 131'-4" THIRD FLOOR 121'-0" CAST STONE SILLS/BANDS/HEADERS SECOND FLOOR 110'-8" CAST STONE FIRST FLOOR 100'-0" BASEMENT \

2 ELEVATION - SOUTH A-2.1 3/32" = 1'-0"

A-2.1 3/32" = 1'-0"

		EXTERIO	MAT	ERIAL SCHEDULE		
BUILDING ELEMENT	MANUFACTURER	COLOR		BUILDING ELEMENT	MANUFACTURER	COLOR
METAL SIDING	MCELROY	ALMOND		CAST STONE BANDS & SILLS	EDWARDS CAST STONE	TBD
COMPOSITE PANEL	JAMES HARDIE	IRON GRAY		COMPOSITE WINDOWS	ANDERSEN 100	BLACK
COMPOSITE TRIM	JAMES HARDIE	MATCH ADJ. SIDING COLOR		ALUM. STOREFRONT	N/A	BLACK
BRICK VENEER (#1)	INTERSTATE BRICK	MOUNTAIN RED		INSULATED METAL DOORS/FRAMES	N/A	TBD
BRICK VENEER (#2)	INTERSTATE BRICK	SMOKEY MOUNTAIN		CANOPY & BAY SOFFITS	JAMES HARDIE	COLOR TO MATCH ADJ. TRIM/SIDING
MASONRY BASE VENEER	ARRISCRAFT	SUNSET		RAILINGS & HANDRAILS	SUPERIOR	BLACK
				TREATED-EXPOSED DECK BEAMS	N/A	BROWN TREATED



KEY PLAN

ISSUED

PROJECT TITLE

West Washington

Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

EXTERIOR

ELEVATIONS

SHEET NUMBER

90'-8"

OWER BASEMENT 81'-4"

A-2.1

PROJECT NUMBER 2143



1 ELEVATION - EAST 3/32" = 1'-0"



EXTERIOR MATERIA COLOR BUILDING ELEMENT MANUFACTURER METAL SIDING MCELROY ALMOND **IRON GRAY COMPOSITE PANEL** JAMES HARDIE MATCH ADJ. SIDING COLOR JAMES HARDIE COMPOSITE TRIM MOUNTAIN RED BRICK VENEER (#1) INTERSTATE BRICK BRICK VENEER (#2) INTERSTATE BRICK SMOKEY MOUNTAIN SUNSET MASONRY BASE VENEER ARRISCRAFT

IAL SCHEDULE		
BUILDING ELEMENT	MANUFACTURER	COLOR
CAST STONE BANDS & SILLS	EDWARDS CAST STONE	TBD
COMPOSITE WINDOWS	ANDERSEN 100	BLACK
ALUM. STOREFRONT	N/A	BLACK
INSULATED METAL DOORS/FRAMES	N/A	TBD
CANOPY & BAY SOFFITS	JAMES HARDIE	COLOR TO MATCH ADJ. TRIM/SIDING
RAILINGS & HANDRAILS	SUPERIOR	BLACK
TREATED-EXPOSED DECK BEAMS	N/A	BROWN TREATED

knothe bruce
ARCHITECTS
Phone:
608.836.3690

7601 University Ave. #201
Middleton, WI 53562

KEY PLAN

ISSUED

PROJECT TITLE

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE

EXTERIOR

ELEVATIONS

SHEET NUMBER

A-2.2

PROJECT NUMBER 2143



608.836.3690 Middleton, WI 53562 KEY PLAN

ISSUED

PROJECT TITLE West Washington

Development

525-547 W Washington

Madison, Wisconsin

SHEET TITLE COLORED

**EXTERIOR ELEVATIONS** 


SHEET NUMBER

A-2.3

PROJECT NUMBER 2143


© Knothe & Bruce Architects, LLC

1 COLORED - ELEVATION - NORTH A-2.3 3/32" = 1'-0"

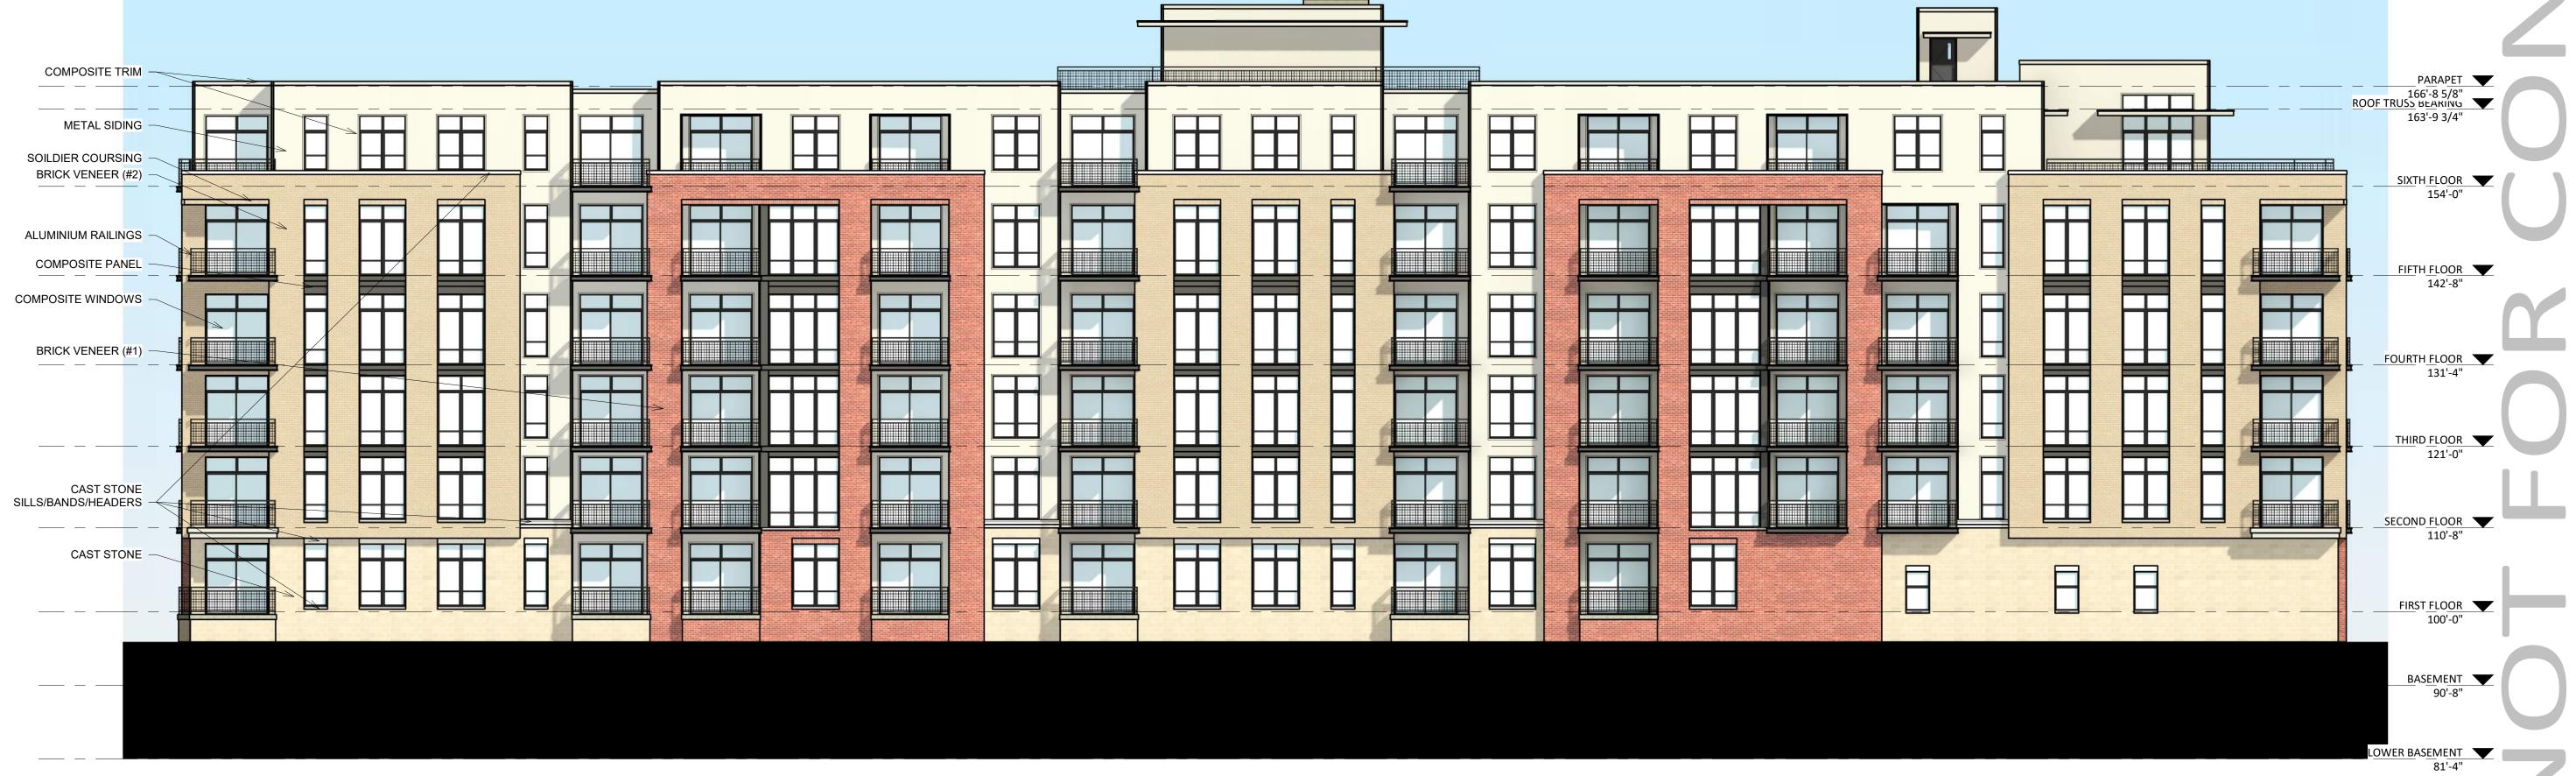


2 COLORED - ELEVATION - SOUTH A-2.3 3/32" = 1'-0"

		EXTERIO	R MATERIAL SCHEDULE		
UILDING ELEMENT	MANUFACTURER	COLOR	BUILDING ELEMENT	MANUFACTURER	COLOR
1ETAL SIDING	MCELROY	ALMOND	CAST STONE BANDS & SILLS	EDWARDS CAST STONE	TBD
OMPOSITE PANEL	JAMES HARDIE	IRON GRAY	COMPOSITE WINDOWS	ANDERSEN 100	BLACK
OMPOSITE TRIM	JAMES HARDIE	MATCH ADJ. SIDING COLOR	ALUM. STOREFRONT	N/A	BLACK
RICK VENEER (#1)	INTERSTATE BRICK	MOUNTAIN RED	INSULATED METAL DOORS/FRAMES	N/A	TBD
RICK VENEER (#2)	INTERSTATE BRICK	SMOKEY MOUNTAIN	CANOPY & BAY SOFFITS	JAMES HARDIE	COLOR TO MATCH ADJ. TRIM/SIDING
1ASONRY BASE VENEER	ARRISCRAFT	SUNSET	RAILINGS & HANDRAILS	SUPERIOR	BLACK
			TREATED-EXPOSED DECK BEAMS	N/A	BROWN TREATED

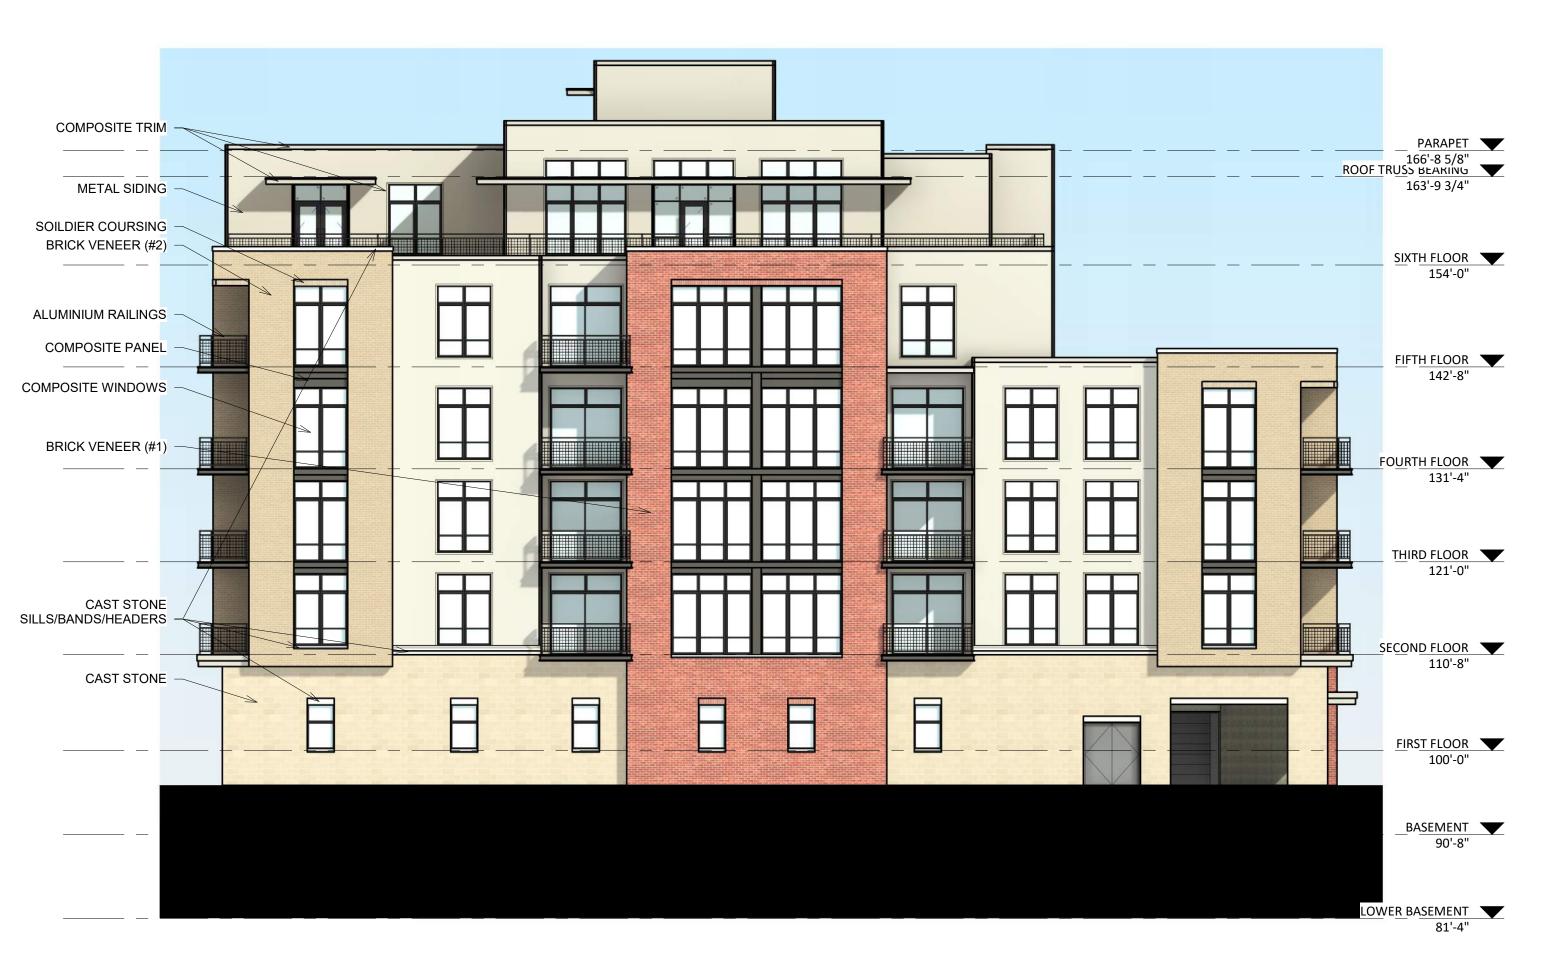

1 COLORED - ELEVATION - EAST 3/32" = 1'-0"

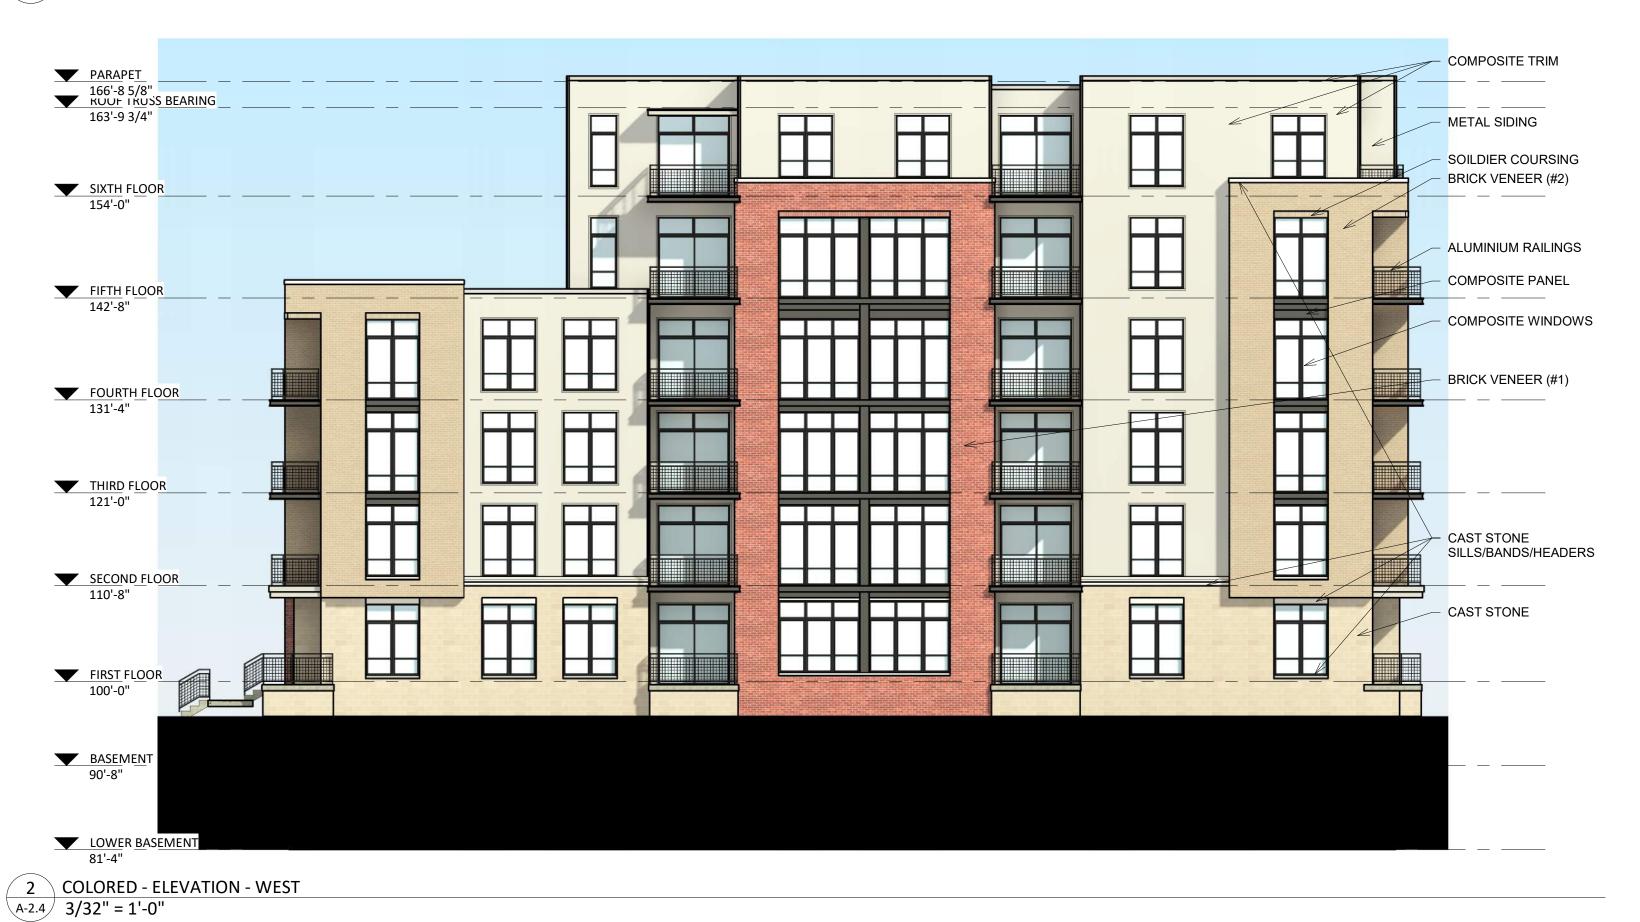

**EXTERIOR MATERIAL SCHEDULE** MANUFACTURER COLOR BUILDING ELEMENT MANUFACTURER COLOR **BUILDING ELEMENT** ALMOND TBD METAL SIDING MCELROY CAST STONE BANDS & SILLS EDWARDS CAST STONE **COMPOSITE PANEL IRON GRAY** JAMES HARDIE COMPOSITE WINDOWS ANDERSEN 100 BLACK MATCH ADJ. SIDING COLOR JAMES HARDIE BLACK COMPOSITE TRIM ALUM. STOREFRONT BRICK VENEER (#1) INTERSTATE BRICK MOUNTAIN RED INSULATED METAL DOORS/FRAMES COLOR TO MATCH ADJ. TRIM/SIDING BRICK VENEER (#2) INTERSTATE BRICK SMOKEY MOUNTAIN CANOPY & BAY SOFFITS JAMES HARDIE BLACK MASONRY BASE VENEER SUNSET RAILINGS & HANDRAILS SUPERIOR ARRISCRAFT **BROWN TREATED** TREATED-EXPOSED DECK BEAMS

knothe bruce
ARCHITECTS
Phone:
608.836.3690

KEY PLAN

ISSUED

PROJECT TITLE

West Washington Development

525-547 W Washington Ave.

Madison, Wisconsin

SHEET TITLE
COLORED

EXTERIOR ELEVATIONS

SHEET NUMBER

A-2.4

PROJECT NUMBER 211
























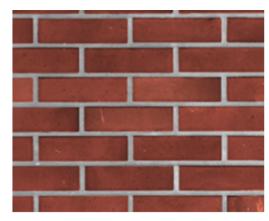

Brick Veneer #1 Interstate Brick Mountain Red



Brick Veneer #2 Interstate Brick Smokey Mountain




Composite Panel James Hardie Iron Gray



Masonry Base Veneer Arriscraft Sunset



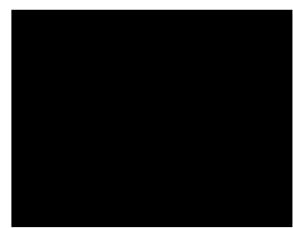

Windows & Railings Black



THE SECOND SECON		EXTERIOR	R MATERIAL
BUILDING ELEMENT	MANUFACTURER	COLOR	BU
METAL SIDING	MCELROY	ALMOND	CAS
COMPOSITE PANEL	JAMES HARDIE	IRON GRAY	со
COMPOSITE TRIM	JAMES HARDIE	MATCH ADJ. SIDING COLOR	ALU
BRICK VENEER (#1)	INTERSTATE BRICK	MOUNTAIN RED	INS
BRICK VENEER (#2)	INTERSTATE BRICK	SMOKEY MOUNTAIN	CAI
MASONRY BASE VENEER	ARRISCRAFT	SUNSET	RAI
			TRE

TERIAL SCHEDULE		
BUILDING ELEMENT	MANUFACTURER	COLOR
CAST STONE BANDS & SILLS	EDWARDS CAST STONE	TBD
COMPOSITE WINDOWS	ANDERSEN 100	BLACK
ALUM. STOREFRONT	N/A	BLACK
INSULATED METAL DOORS/FRAMES	N/A	TBD
CANOPY & BAY SOFFITS	JAMES HARDIE	COLOR TO MATCH ADJ. TRIM/SIDING
RAILINGS & HANDRAILS	SUPERIOR	BLACK
TREATED-EXPOSED DECK BEAMS	N/A	BROWN TREATED

## 519-547 W WASHINGTON

MADISON, WI 2/28/2022 KBA #2143



# **City of Madison Fire Department**

314 W Dayton Street, Madison, WI 53703-2506

Phone: 608-266-4420 • Fax: 608-267-1100 • E-mail: fire@cityofmadison.com

Project Address: 519-547 West Washington Avenue	
Contact Name & Phone #: Kevin Burow (608) 836-3690	

### FIRE APPARATUS ACCESS AND FIRE HYDRANT WORKSHEET

1. Is the building completely protected by an NFPA 13 or 13R automatic fire sprinkler system?  If non-sprinklered, fire lanes extend to within 150-feet of all portions of the exterior wall?  If sprinklered, fire lanes are within 250-feet of all portions of the exterior wall?	X Yes Yes Yes	☐ No ☐ No ☒ No	N/A N/A N/A
2. Is the fire lane constructed of concrete or asphalt, designed to support a minimum load of 85,000 lbs?  a) Is the fire lane a minimum unobstructed width of at least 20-feet?  b) Is the fire lane unobstructed with a vertical clearance of at least 13½-feet?  c) Is the minimum inside turning radius of the fire lane at least 28-feet?  d) Is the grade of the fire lane not more than a slope of 8%?  e) Is the fire lane posted as fire lane? (Provide detail of signage.)  f) Is a roll-able curb used as part of the fire lane? (Provide detail of curb.)  g) Is part of a sidewalk used as part of the required fire lane? (Must support +85,000 lbs.)		☐ No	<ul> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> </ul>
3. Is the fire lane obstructed by security gates or barricades? If yes:  a) Is the gate a minimum of 20-feet clear opening?  b) Is an approved means of emergency operations installed, key vault, padlock or key switch?	☐ Yes ☐ Yes ☐ Yes	X No  No  No	N/A N/A N/A N/A
4. Is the Fire lane dead-ended with a length greater than 150-feet?  If yes, does the area for turning around fire apparatus comply with IFC D103?	Yes Yes	X No No	N/A N/A
5. Is any portion of the building to be used for high-piled storage in accordance with IFC Chapter 3206.6 If yes, see IFC 3206.6 for further requirements.	Yes	X No	□ N/A
6. Is any part of the building greater than 30-feet above the grade plane?	X Yes	☐ No	N/A
<ul> <li>6. Is any part of the building greater than 30-feet above the grade plane? If yes, answer the following questions: <ul> <li>a) Is the aerial apparatus fire lane parallel to one entire side of the building and covering at least 25% of the perimeter?</li> <li>b) Is the near edge of the aerial apparatus fire lane between 15' and 30' from the building?</li> <li>c) Are there any overhead power or utility lines located across the aerial apparatus fire lane?</li> <li>d) Are there any tree canopies expected to grow across the aerial fire lane? (Based on mature canopy width of tree species)</li> </ul> </li> </ul>	<ul> <li>X Yes</li> <li> Yes</li> <li> Yes</li> <li> Yes</li> <li> Yes</li> </ul>	No No No No No No	<ul> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> </ul>
If yes, answer the following questions:  a) Is the aerial apparatus fire lane parallel to one entire side of the building and covering at least 25% of the perimeter?  b) Is the near edge of the aerial apparatus fire lane between 15' and 30' from the building?  c) Are there any overhead power or utility lines located across the aerial apparatus fire lane?  d) Are there any tree canopies expected to grow across the aerial fire lane? (Based on mature canopy width of tree species)  e) Does the aerial apparatus fire lane have a minimum unobstructed width of 26-feet?	X Yes Yes Yes	□ No ☑ No ☑ No ☑ No ☑ No ☑ No	□ N/A □ N/A □ N/A
If yes, answer the following questions:  a) Is the aerial apparatus fire lane parallel to one entire side of the building and covering at least 25% of the perimeter?  b) Is the near edge of the aerial apparatus fire lane between 15' and 30' from the building?  c) Are there any overhead power or utility lines located across the aerial apparatus fire lane?  d) Are there any tree canopies expected to grow across the aerial fire lane? (Based on mature canopy width of tree species)  e) Does the aerial apparatus fire lane have a minimum unobstructed width of 26-feet?  f) Is the space between the aerial lane and the building free of trees exceeding 20' in heights?	<ul> <li>X Yes</li> <li>Yes</li> <li>Yes</li> <li>Yes</li> <li>X Yes</li> <li>Yes</li> </ul>	No No No No No No No No No	<ul> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> </ul>
If yes, answer the following questions:  a) Is the aerial apparatus fire lane parallel to one entire side of the building and covering at least 25% of the perimeter?  b) Is the near edge of the aerial apparatus fire lane between 15' and 30' from the building?  c) Are there any overhead power or utility lines located across the aerial apparatus fire lane?  d) Are there any tree canopies expected to grow across the aerial fire lane? (Based on mature canopy width of tree species)  e) Does the aerial apparatus fire lane have a minimum unobstructed width of 26-feet?	<ul><li>X Yes</li><li>Yes</li><li>Yes</li><li>Yes</li><li>X Yes</li></ul>	□ No ☑ No ☑ No ☑ No ☑ No ☑ No	<ul> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> <li>N/A</li> </ul>

Attach an additional sheet if further explanation is required for any answers.

This worksheet is based on MGO 34.503 and IFC 2015 Edition Chapter 5 and Appendix D; please see the codes for further information.