



D-Series Pole Mount LED Area Luminaire





Buy American

d#series

Specifications Luminaire

- EPA:** 0.8 ft² (.07 m²)
- Width:** 13-3/4" (34.9 cm)
- Length:** 11.5" (29.2 cm)
- Height:** 8" (20.3 cm)
- Weight:** 16.03 lbs (7.3 kg)



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Introduction

The D-Series Pole Mount luminaire is a stylish, fully integrated LED solution for area and site applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Pole Mount is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXWPM LED 20C 1000 40K T5M MVOLT SPUMBA DDBXD

DSXWPM LED	Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting ³
DSXWPM LED	10C	10 LEDs (one engine)	350 350 mA 530 530 mA	30K 3000K 40K 4000K	T2S Type II short T2M Type II medium	MVOLT ¹ 120 ¹ 208 ¹ 240 ¹ 277 ¹ 347 ² 480 ²	Shipped included SPUMBA Square pole universal mounting adapter RPUMBA Round pole universal mounting adapter PUMBA Square and round universal mounting adapters
	20C	20 LEDs (two engines)	700 700 mA 1000 1000 mA (1 A)	50K 5000K AMBPC Amber phosphor converted	T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5M Type V medium T5S Type V short T5A Type V area T5W Type V wide SYMDF Symmetric diffuse		

Control Options	Other Options	Finish (required)
Shipped installed PE Photoelectric cell, button type ⁴ DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) PIR Motion/ambient light sensor, <15' mtg ht ^{5,6} PIRH Motion/ambient light sensor, 15-30' mtg ht ^{5,6} PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ⁷ PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ⁷	Shipped installed SF Single fuse (120, 277, 347V) ⁸ DF Double fuse (208, 240, 480V) ⁸ HS House-side shield ⁹	Shipped separately ⁹ BSW Bird-deterrent spikes WG Wire guard VG Vandal guard DDL Diffused drop lens DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz). Specify 120, 208, 240 or 277 options only when ordering with fusing (SF, DF options), or photocontrol (PE option).
- Only available with 20C, 700mA or 1000mA. Not available with PIR, PIRH.
- Not available with 90 degree mounting. Not recommended for 3" poles.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- PIR specifies the SensorSwitch SBGR-10-ODP control; PIRH specifies the SensorSwitch SBGR-6-ODP control; see Motion Sensor Guide for details. Dimming driver standard. Includes ambient light sensor. Not available with "PE" option (button type photocell).
- Not available with 20 LED/1000 mA configuration (DSXWPM LED 20C 1000).
- PIR1FC3V specify the SensorSwitch SBGR-10-ODP control; PIRH1FC3V specify the SensorSwitch SBGR-6-ODP control; see Motion Sensor Guide for details. Dimming driver standard. Not available with PER5 or PER7. Separate on/off required.
- Single fuse (SF) requires 120, 277, or 347 voltage option. Double fuse (DF) requires 208, 240, or 480 voltage option.
- Also available as a separate accessory; see Accessories information.

Accessories

Ordered and shipped separately.


DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXW1WG U	Wire guard accessory
DSXW1VG U	Vandal guard accessory
DSXWDDL U	Diffused drop lens



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com
 © 2013-2021 Acuity Brands Lighting, Inc. All rights reserved.

DSXWPM-LED
 Rev. 04/19/21
 Page 1 of 5

Drilling



Visit Lithonia Lighting's **POLES CENTRAL** to see our wide selection of poles, accessories and educational tools.

If ordering new poles, specify the AERIS™ drilling pattern, per the table below.

DM19AS Single unit **DM28AS** 2 at 180°

Example: SSA 20 4C **DM19AS** DDBXD

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
10C (10 LEDs)	350mA	14W	T2S	1,415	0	0	1	101	1,520	0	0	1	109	1,529	0	0	1	109	894	0	0	1	64
			T2M	1,349	0	0	1	96	1,449	0	0	1	103	1,458	0	0	1	104	852	0	0	1	61
			T3S	1,400	0	0	1	100	1,503	0	0	1	107	1,512	0	0	1	108	884	0	0	1	63
			T3M	1,386	0	0	1	99	1,488	0	0	1	106	1,497	0	0	1	107	876	0	0	1	63
			T4M	1,358	0	0	1	97	1,458	0	0	1	104	1,467	0	0	1	105	858	0	0	1	61
			TFTM	1,411	0	0	1	101	1,515	0	0	1	108	1,525	0	0	1	109	892	0	0	1	64
			T5M	1,486	1	0	0	106	1,595	1	0	0	114	1,605	1	0	0	115	939	1	0	0	67
			T5S	1,516	1	0	0	108	1,627	1	0	0	116	1,638	1	0	0	117	958	1	0	0	68
			T5A	1,425	1	0	1	102	1,531	1	0	1	109	1,540	1	0	1	110	901	1	0	1	64
			T5W	1,423	1	0	1	102	1,528	1	0	1	109	1,538	1	0	1	110	899	1	0	1	64
			ASYDF	1,262	0	0	1	90	1,355	1	0	1	97	1,363	1	0	1	97	797	0	0	1	57
			SYMDF	1,299	1	0	1	93	1,394	1	0	1	100	1,403	1	0	1	100	821	1	0	1	59
			T2S	2,054	1	0	1	103	2,205	1	0	1	110	2,219	0	0	1	111	1,264	0	0	1	63
			T2M	1,957	1	0	1	98	2,102	1	0	1	105	2,115	0	0	1	106	1,205	0	0	1	60
			T3S	2,031	0	0	1	102	2,181	0	0	1	109	2,195	0	0	1	110	1,250	0	0	1	63
	T3M	2,010	1	0	1	101	2,159	1	0	1	108	2,172	0	0	1	109	1,237	0	0	1	62		
	T4M	1,970	1	0	1	98	2,115	1	0	1	106	2,128	0	0	1	106	1,212	0	0	1	61		
	TFTM	2,047	0	0	1	102	2,198	0	0	1	110	2,212	0	0	1	111	1,260	0	0	1	63		
	T5M	2,156	1	0	0	108	2,315	2	0	0	116	2,329	1	0	0	116	1,326	1	0	0	66		
	T5S	2,199	1	0	0	110	2,361	1	0	0	118	2,376	1	0	0	119	1,353	1	0	0	68		
	T5A	2,068	2	0	1	103	2,221	2	0	1	111	2,235	1	0	1	112	1,272	1	0	1	64		
	T5W	2,065	2	0	1	103	2,217	2	0	1	111	2,231	1	0	1	112	1,271	1	0	1	64		
	ASYDF	1,830	1	0	1	92	1,966	1	0	1	98	1,978	0	0	1	99	1,127	0	0	1	56		
	SYMDF	1,884	1	0	1	94	2,023	1	0	1	101	2,036	1	0	1	102	1,160	1	0	1	58		
	T2S	2,623	1	0	1	97	2,816	1	0	1	104	2,834	0	0	1	105	1,544	0	0	1	57		
	T2M	2,499	1	0	1	93	2,684	1	0	1	99	2,701	0	0	1	100	1,472	0	0	1	55		
	T3S	2,593	1	0	1	96	2,785	1	0	1	103	2,802	0	0	1	104	1,527	0	0	1	57		
	T3M	2,567	1	0	1	95	2,757	1	0	1	102	2,774	0	0	1	103	1,512	0	0	1	56		
	T4M	2,515	1	0	1	93	2,701	1	0	1	100	2,718	0	0	1	101	1,481	0	0	1	55		
	TFTM	2,614	1	0	1	97	2,807	1	0	1	104	2,825	0	0	1	105	1,539	0	0	1	57		
	T5M	2,753	2	0	0	102	2,956	2	0	0	109	2,974	1	0	0	110	1,621	1	0	0	60		
	T5S	2,808	1	0	0	104	3,015	1	0	0	112	3,034	1	0	0	112	1,654	1	0	0	61		
	T5A	2,641	2	0	1	98	2,836	2	0	1	105	2,854	1	0	1	106	1,555	1	0	1	58		
	T5W	2,637	2	0	1	98	2,831	2	0	1	105	2,849	1	0	1	106	1,553	1	0	1	58		
	ASYDF	2,337	1	0	1	87	2,510	1	0	1	93	2,526	1	0	1	94	1,376	1	0	1	51		
	SYMDF	2,406	1	0	1	89	2,584	1	0	1	96	2,600	1	0	1	96	1,417	1	0	1	52		
	T2S	3,685	1	0	1	92	3,957	1	0	1	99	3,982	1	0	1	100	2,235	1	0	1	58		
	T2M	3,512	1	0	1	88	3,771	1	0	1	94	3,795	1	0	1	95	2,130	1	0	2	55		
	T3S	3,644	1	0	1	91	3,913	1	0	1	98	3,938	1	0	1	98	2,210	1	0	2	57		
	T3M	3,607	1	0	1	90	3,874	1	0	1	97	3,898	1	0	1	97	2,187	1	0	2	56		
	T4M	3,534	1	0	1	88	3,795	1	0	1	95	3,819	1	0	1	95	2,143	1	0	2	55		
	TFTM	3,674	1	0	1	92	3,945	1	0	1	99	3,969	1	0	1	99	2,228	1	0	2	57		
	T5M	3,868	2	0	1	97	4,153	2	0	1	104	4,179	3	0	1	104	2,345	3	0	1	60		
	T5S	3,946	1	0	0	99	4,237	2	0	0	106	4,264	2	0	0	107	2,393	2	0	1	62		
	T5A	3,711	2	0	1	93	3,985	2	0	1	100	4,010	3	0	1	100	2,250	3	0	2	58		
T5W	3,705	2	0	1	93	3,978	2	0	1	99	4,003	3	0	1	100	2,247	3	0	2	58			
ASYDF	3,284	1	0	1	82	3,527	1	0	1	88	3,549	1	0	1	89	1,991	1	0	2	51			
SYMDF	3,381	1	0	1	85	3,630	1	0	1	91	3,653	2	0	1	91	2,050	2	0	2	53			

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Actual performance may differ as a result of end-user environment and application. Actual wattage may differ by +/- 8% when operating between 120-480V +/- 10%. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
20C (20 LEDs)	350mA	24W	T2S	2,820	1	0	1	118	3,028	1	0	1	126	3,047	1	0	1	127	1,777	1	0	1	74
			T2M	2,688	1	0	1	112	2,886	1	0	1	120	2,904	1	0	1	121	1,693	1	0	1	71
			T3S	2,789	1	0	1	116	2,995	1	0	1	125	3,013	1	0	1	126	1,757	0	0	1	73
			T3M	2,761	1	0	1	115	2,964	1	0	1	124	2,983	1	0	1	124	1,739	1	0	1	72
			T4M	2,705	1	0	1	113	2,904	1	0	1	121	2,922	1	0	1	122	1,704	1	0	1	71
			TFTM	2,811	1	0	1	117	3,019	1	0	1	126	3,038	1	0	1	127	1,771	0	0	1	74
			TSM	2,960	2	0	1	123	3,178	2	0	1	132	3,198	2	0	1	133	1,865	1	0	0	78
			T5S	3,020	1	0	0	126	3,242	1	0	0	135	3,263	1	0	0	136	1,903	1	0	0	79
			T5A	2,840	2	0	1	118	3,049	2	0	1	127	3,068	2	0	1	128	1,789	2	0	1	75
			T5W	2,835	2	0	1	118	3,044	2	0	1	127	3,063	2	0	1	128	1,786	2	0	1	74
			ASYDF	2,513	1	0	1	105	2,699	1	0	1	112	2,716	1	0	1	113	1,584	1	0	1	66
			SYMDF	2,587	1	0	1	108	2,778	1	0	1	116	2,796	1	0	1	116	1,630	1	0	1	68
			T2S	4,079	1	0	1	113	4,380	1	0	1	122	4,408	1	0	1	122	2,504	1	0	1	70
			T2M	3,887	1	0	1	108	4,174	1	0	1	116	4,200	1	0	1	117	2,387	1	0	1	66
			T3S	4,034	1	0	1	112	4,332	1	0	1	120	4,359	1	0	1	121	2,477	1	0	1	69
	T3M	3,993	1	0	1	111	4,288	1	0	1	119	4,315	1	0	1	120	2,451	1	0	1	68		
	T4M	3,912	1	0	2	109	4,201	1	0	2	117	4,227	1	0	1	117	2,402	1	0	1	67		
	TFTM	4,066	1	0	1	113	4,367	1	0	1	121	4,394	1	0	1	122	2,496	1	0	1	69		
	TSM	4,281	3	0	1	119	4,597	3	0	1	128	4,626	3	0	1	129	2,629	3	0	1	73		
	T5S	4,368	2	0	1	121	4,690	2	0	1	130	4,719	2	0	1	131	2,682	2	0	1	75		
	T5A	4,108	3	0	2	114	4,411	3	0	2	123	4,438	3	0	2	123	2,522	3	0	2	70		
	T5W	4,101	3	0	2	114	4,403	3	0	2	122	4,431	3	0	2	123	2,518	3	0	2	70		
	ASYDF	3,635	1	0	2	101	3,904	1	0	2	108	3,928	1	0	2	109	2,232	1	0	1	62		
	SYMDF	3,742	2	0	2	104	4,018	2	0	2	112	4,044	2	0	2	112	2,297	2	0	2	64		
	T2S	5,188	1	0	1	110	5,571	1	0	1	119	5,606	1	0	1	119	3,065	1	0	1	65		
	T2M	4,945	1	0	1	105	5,310	1	0	1	113	5,343	1	0	1	114	2,921	1	0	1	62		
	T3S	5,131	1	0	1	109	5,510	1	0	2	117	5,544	1	0	2	118	3,031	1	0	1	64		
	T3M	5,079	1	0	2	108	5,454	1	0	2	116	5,488	1	0	2	117	3,000	1	0	1	64		
	T4M	4,976	1	0	2	106	5,343	1	0	2	114	5,377	1	0	2	114	2,939	1	0	1	63		
	TFTM	5,172	1	0	2	110	5,554	1	0	2	118	5,589	1	0	2	119	3,055	1	0	1	65		
	TSM	5,446	3	0	1	116	5,848	3	0	1	124	5,884	3	0	1	125	3,217	3	0	1	68		
	T5S	5,555	2	0	1	118	5,966	2	0	1	127	6,003	2	0	1	128	3,282	2	0	1	70		
	T5A	5,225	3	0	2	111	5,610	3	0	2	119	5,645	3	0	2	120	3,086	3	0	2	66		
	T5W	5,216	3	0	2	111	5,601	3	0	2	119	5,636	3	0	2	120	3,081	3	0	2	66		
	ASYDF	4,624	1	0	2	98	4,966	1	0	2	106	4,997	1	0	2	106	2,732	1	0	1	58		
	SYMDF	4,760	2	0	2	101	5,111	2	0	2	109	5,143	2	0	2	109	2,812	2	0	2	60		
	T2S	7,205	1	0	1	97	7,736	1	0	1	105	7,785	1	0	1	105	4,429	1	0	1	61		
	T2M	6,866	1	0	2	93	7,373	1	0	2	100	7,419	1	0	2	100	4,221	1	0	2	58		
	T3S	7,124	1	0	2	96	7,650	1	0	2	103	7,698	1	0	2	104	4,380	1	0	2	60		
	T3M	7,052	1	0	2	95	7,573	1	0	2	102	7,620	1	0	2	103	4,335	1	0	2	59		
	T4M	6,909	1	0	2	93	7,420	1	0	2	100	7,466	1	0	2	101	4,248	1	0	2	58		
	TFTM	7,182	1	0	2	97	7,712	1	0	2	104	7,760	1	0	2	105	4,415	1	0	2	60		
	TSM	7,562	3	0	1	102	8,120	3	0	1	110	8,171	3	0	1	110	4,648	3	0	1	63		
	T5S	7,714	2	0	1	104	8,284	2	0	1	112	8,335	2	0	1	113	4,742	2	0	1	64		
	T5A	7,255	3	0	2	98	7,790	3	0	2	105	7,839	3	0	2	106	4,460	3	0	2	62		
T5W	7,243	3	0	2	98	7,777	3	0	2	105	7,826	3	0	2	106	4,452	3	0	2	61			
ASYDF	6,421	1	0	2	87	6,895	2	0	2	93	6,938	1	0	2	94	3,947	1	0	2	54			
SYMDF	6,609	2	0	2	89	7,097	2	0	2	96	7,142	2	0	2	97	4,063	2	0	2	55			

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the **DSXWPM LED 20C 1000** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88

Electrical Load














LEDs	Drive Current (mA)	System Watts	Current (A)					
			120	208	240	277	347	480
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17

Photometric Diagrams


To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Pole Mount homepage](#).

Isofootcandle plots for the DSXWPM LED 20C 1000 40K. Distances are in units of mounting height (20').

LEGEND

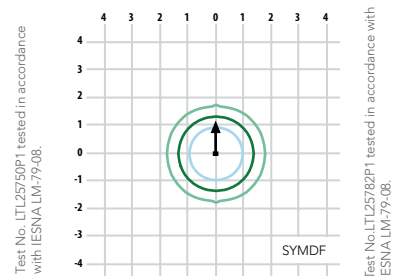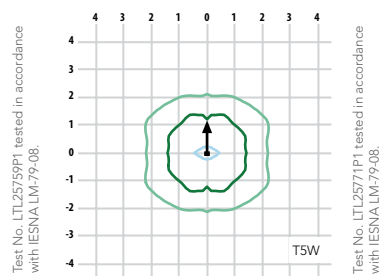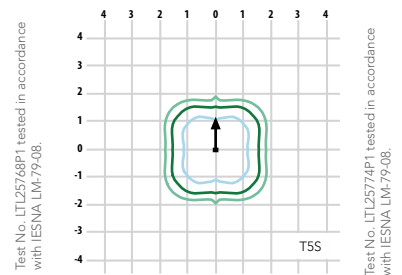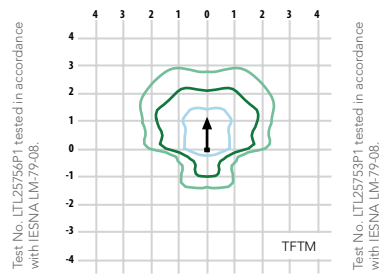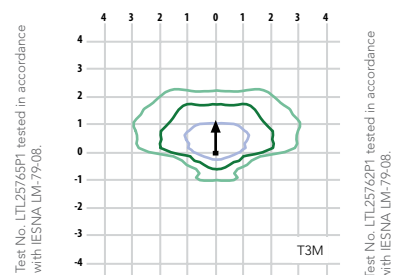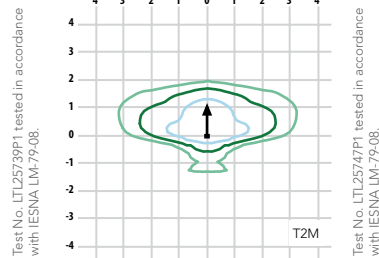

Options and Accessories

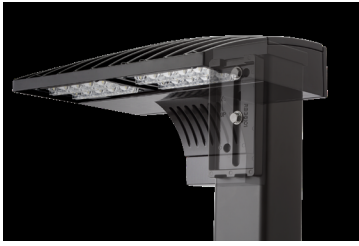


Mounting detail



ASYDF - Asymmetric diffuse (left engine is T3M, right engine is diffused)



HS - House-side shields



BSW - Bird-deterrent spikes



WG - Wire guard



VG - Vandal guard



DDL - Diffused drop lens

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Pole Mount make it the smart choice for area and site illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to area lighting applications. Light engines are available in 3000K, 4000K or 5000K with 70 min. CRI configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 6KV surge rating. The luminaire meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Includes universal mounting plate, which utilizes existing drill patterns and allows for quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org to confirm which versions are qualified.

BUY AMERICAN

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

Five-year limited warranty. Complete warranty terms located at:

www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.