

HARTMEYER REDEVELOPMENT: FAMILY HOUSING

2007 ROTH STREET: LOT 2



DRAWING INDEX FAMILY HOUSING	
DRAWING#	DRAWING TITLE
G000	COVER SHEET
G010	SITE LOCATOR MAP
G011	CONTEXTUAL SITE INFO
G012	CONTEXTUAL SITE INFO
G013	CONTEXTUAL SITE INFO
C0.1	EXISTING CONDITIONS MAP
C1.0	GENERAL NOTES & LEGEND
C2.0	DEMO PLAN
C3.0	SITE PLAN
C4.0	GRADING & EROSION CONTROL PLAN
C4.1	DETAILED GRADING PLAN
C4.2	DETAILED GRADING PLAN
C5.0	UTILITY PLAN
C6.0	DETAILS
C7.0	FIRE ACCESS PLAN
L1.0	LANDSCAPE PLAN OVERALL
L1.1	LANDSCAPE PLAN – NORTHWEST
L1.2	LANDSCAPE PLAN – NORTHEAST
L1.3	LANDSCAPE PLAN – SOUTHWEST
L1.4	LANDSCAPE PLAN – SOUTHEAST
L2.0	LANDSCAPE DETAILS & NOTES
ASP-100	USABLE OPEN SPACE
ASP-200	SITE LIGHTING PLAN
A101	1ST FLOOR PLAN
A102	2ND FLOOR PLAN
A103	3RD FLOOR PLAN
A104	4TH - 6TH FLOOR PLANS
A105	ROOF PLAN
A200	EXTERIOR ELEVATIONS: NORTH & WEST
A201	EXTERIOR ELEVATIONS: SOUTH & EAST
A204	EXTERIOR PERSPECTIVE: BIRD'S EYE VIEW FROM SOUTHWEST
A205	EXTERIOR PERSPECTIVE: BIRD'S EYE VIEW FROM WEST
A206	EXTERIOR PERSPECTIVE: BIRD'S EYE VIEW FROM NORTHWEST
A207	EXTERIOR PERSPECTIVE: BIRD'S EYE VIEW FROM EAST
A208	EXTERIOR PERSPECTIVE: VIEW TO ENTRANCE
A209	EXTERIOR PERSPECTIVE: VIEW TO ENTRANCE
A210	EXTERIOR PERSPECTIVE: VIEW TO COURTYARD 1
A211	EXTERIOR PERSPECTIVE: VIEW TO COURTYARD 2
A215	MATERIALS BOARDS
A220	BIRD GLASS MATRIX
A221	EXTERIOR ELEVATIONS - BIRD GLASS

LAND USE APPLICATION

NOVEMBER 07, 2022





JLA

ARCHITECTS

JLA PROJECT NUMBER: W22-0128-01



○ SITE LOCATOR
1"= 100' - 0"

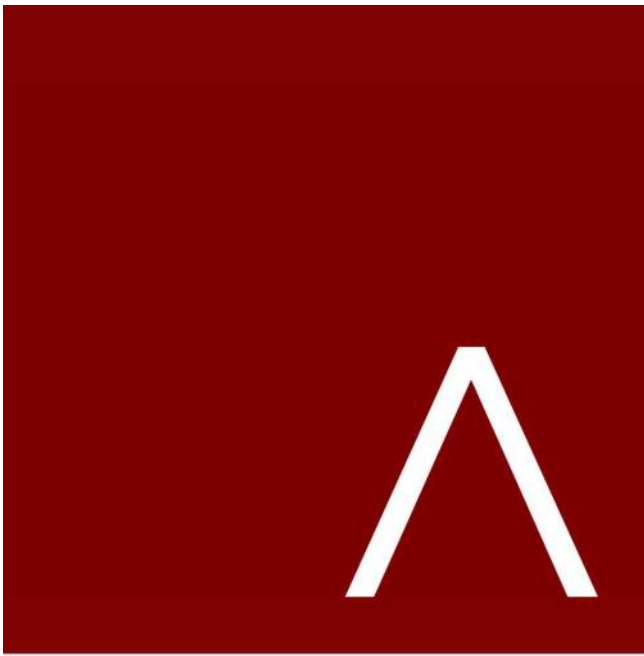

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN
PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

SITE LOCATOR

SHEET NUMBER


G010



AERIAL VIEW FROM SOUTHWEST



AERIAL VIEW FROM NORTHEAST

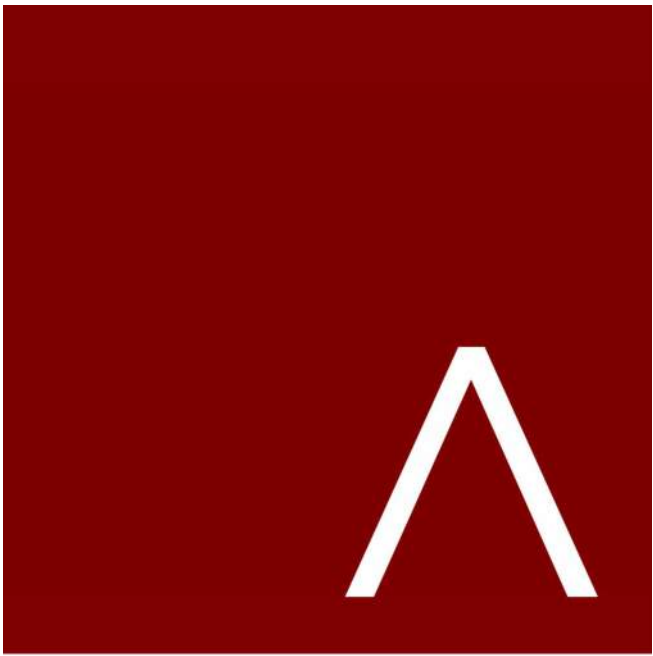

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN
PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE
**CONTEXTUAL SITE
INFORMATION**

SHEET NUMBER
G011



ROTH ST AT RAILROAD LOOKING SOUTH




HUXLEY ST LOOKING SOUTH



O'NEIL AVE LOOKING SOUTHEAST



ROTH STREET LOOKING EAST

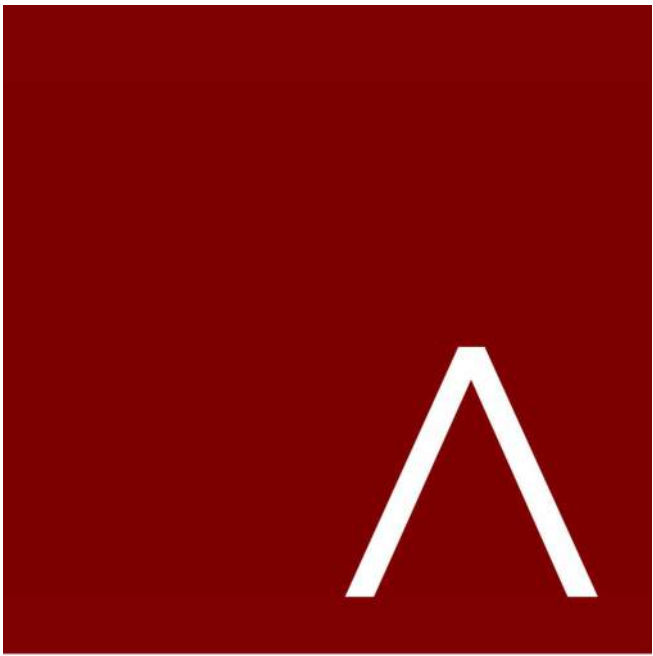

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

**CONTEXTUAL SITE
INFORMATION**

SHEET NUMBER

G012




RUSKIN ST ATCOMMERCIAL AVE LOOKING NORTH



COMMERCIAL AVE AT RAILROAD LOOKING NORTH



COMMERCIAL AVE LOOKING NORTH

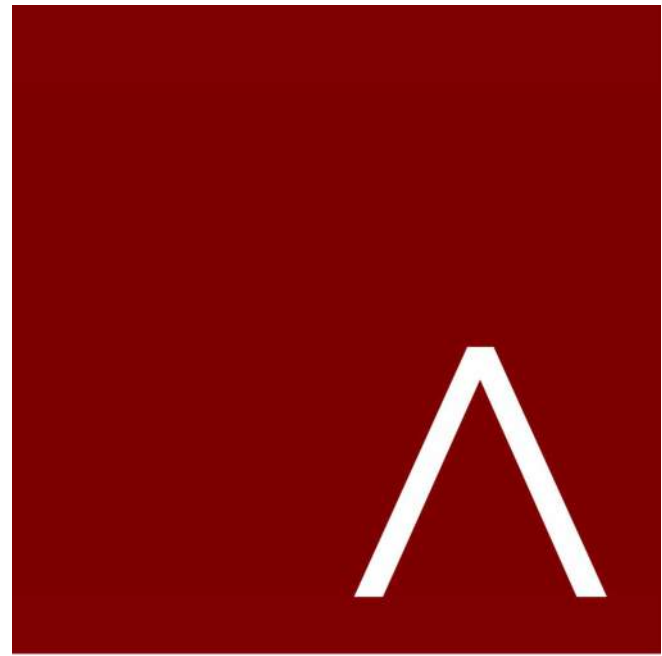

JLA
ARCHITECTS

MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE: NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date


SHEET TITLE

CONTEXTUAL SITE
INFORMATION

SHEET NUMBER


G013

File: L202202211581DWGSurvey Sheet0211581 E:Con 2.dwg Layout Editor User:mlhase Printed: Sep 22, 2022 - 3:40pm Wark

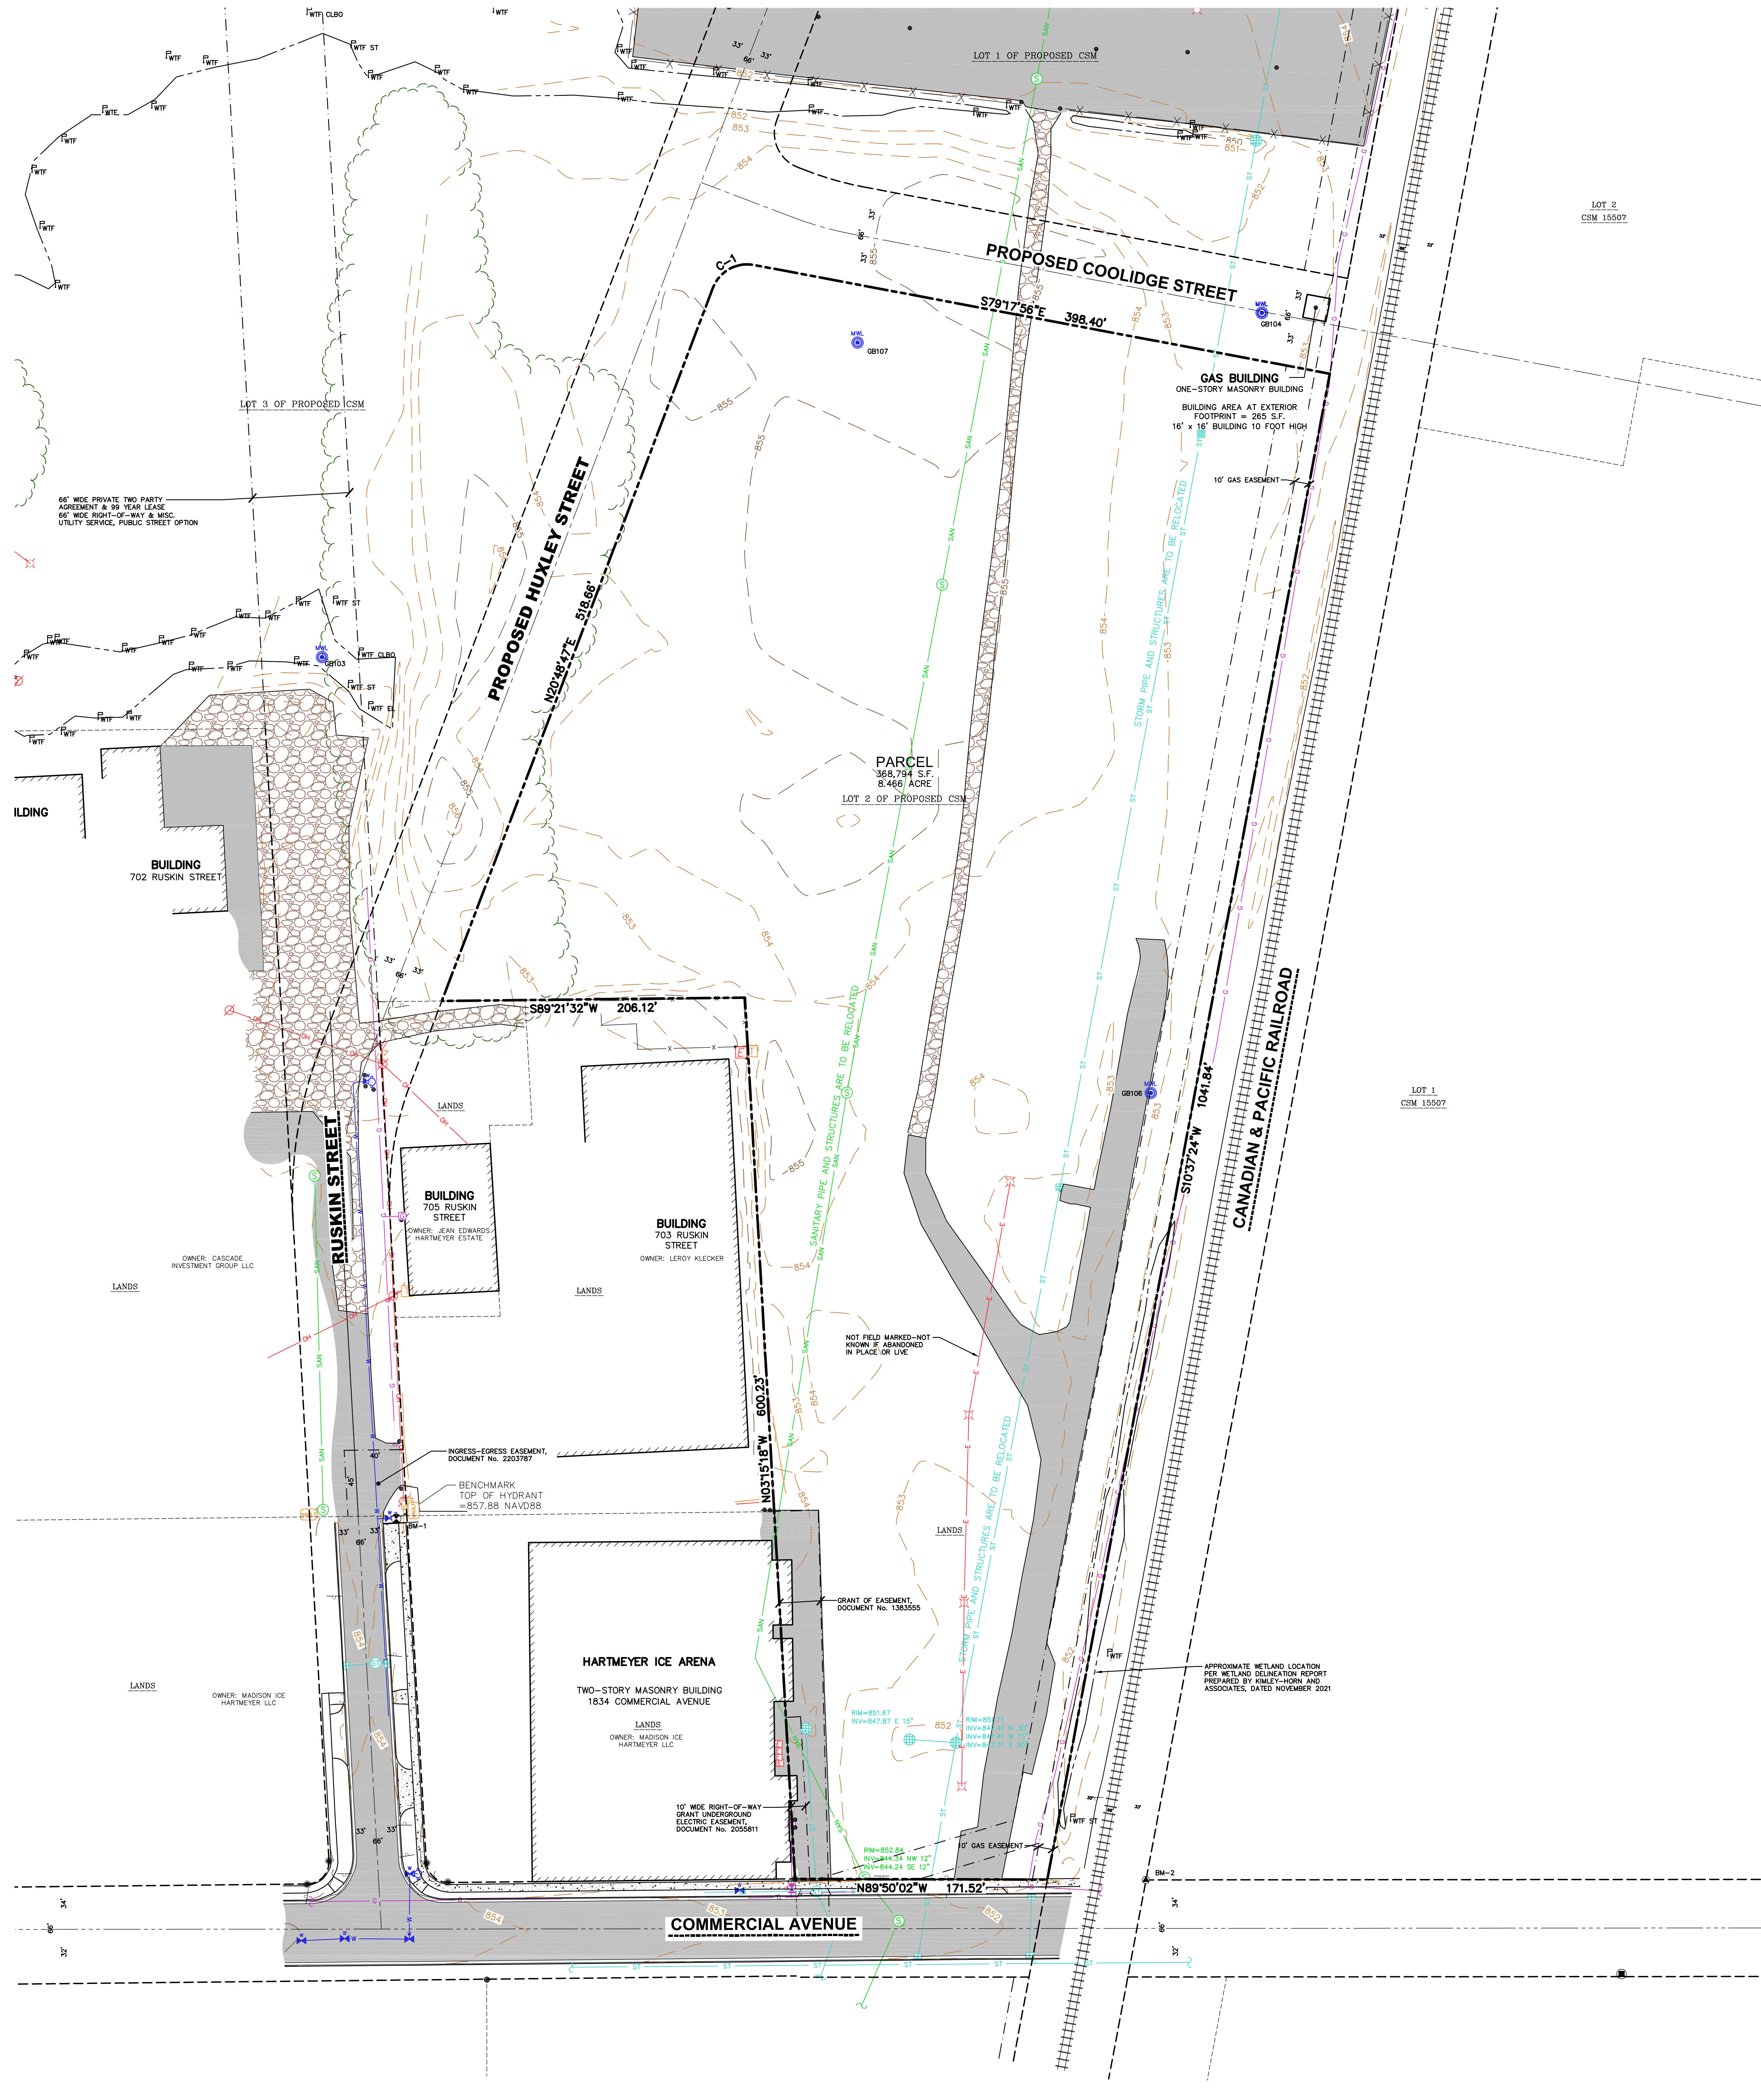

EXISTING CONDITIONS MAP

PART OF THE NORTHEAST QUARTER OF THE SOUTHWEST QUARTER, THE SOUTHEAST QUARTER OF THE SOUTHWEST QUARTER, THE SOUTHWEST QUARTER OF THE SOUTHWEST QUARTER, AND THE NORTHWEST QUARTER OF THE SOUTHWEST QUARTER OF SECTION 31, TOWNSHIP 08 NORTH, RANGE 10 EAST, CITY OF MADISON, DANE COUNTY, WISCONSIN

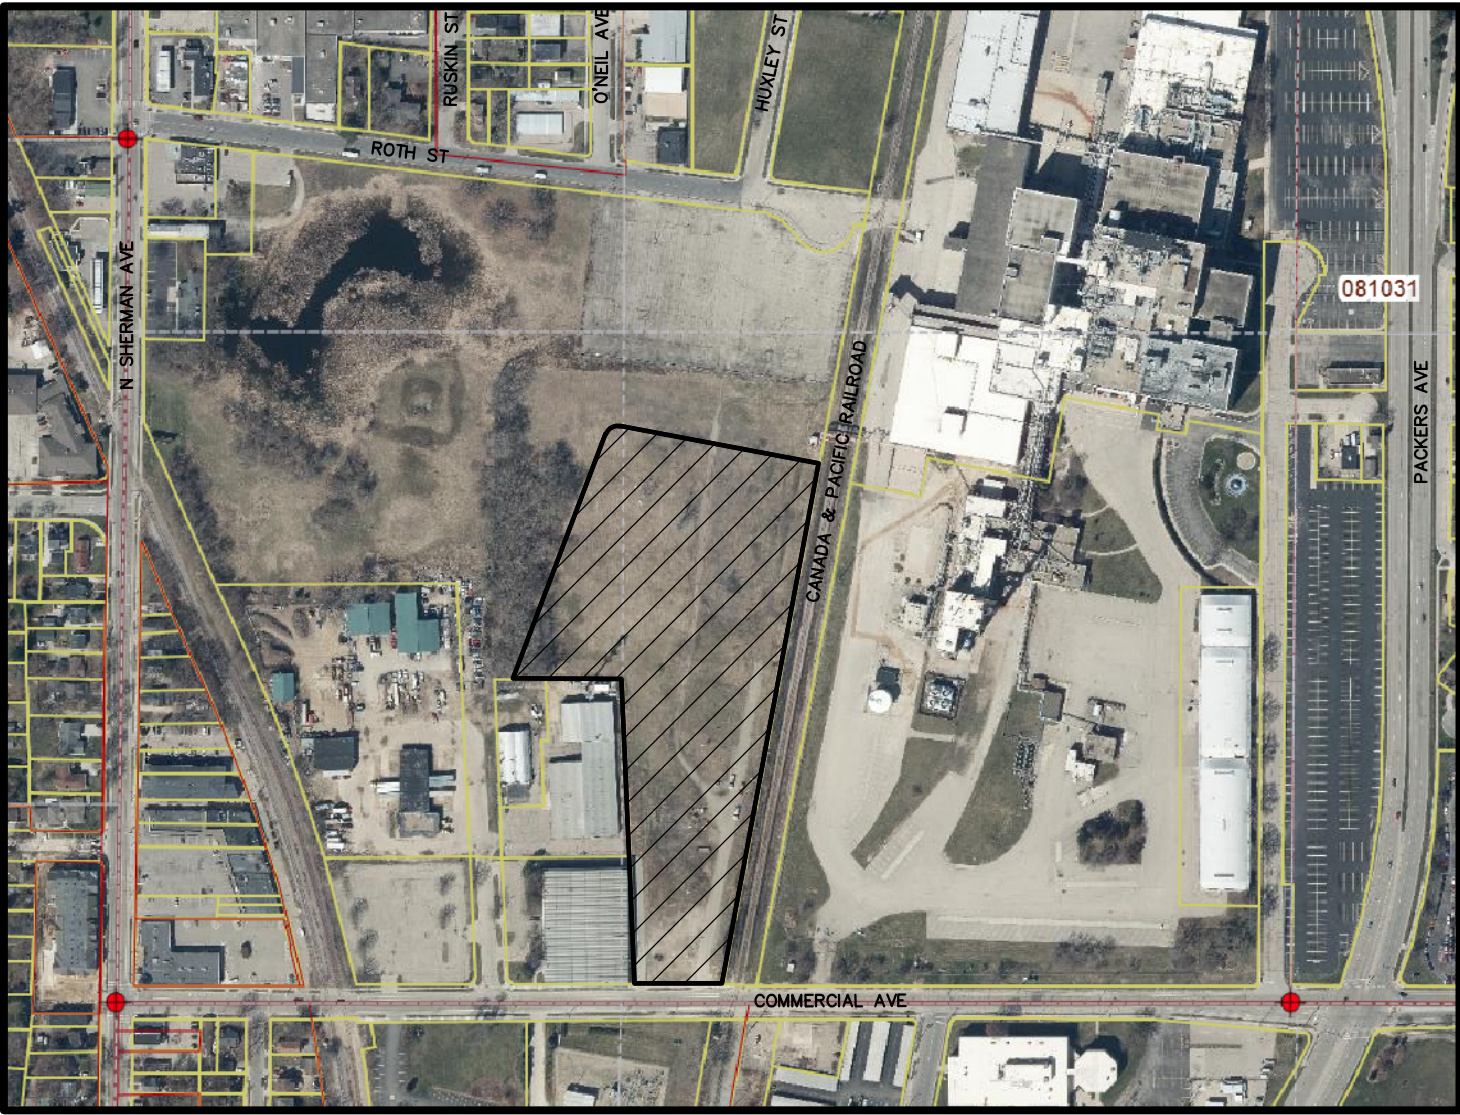

VICINITY MAP
NOT TO SCALE

LEGEND

- 1" IRON PIPE FOUND
- BENCHMARK
- BOLLARD
- SIGN
- SANITARY MANHOLE
- WATERMAIN OR GASMAIN VALVE
- HYDRANT
- ROUND CASTED INLET
- SQUARE CASTED INLET
- CURB INLET
- STORM SEWER ACCESS
- POWER POLE W/GUY
- TRAFFIC SIGNAL
- MONITORING WELL
- WETLAND FLAG
- PARCEL BOUNDARY
- CHORD LINE
- CENTERLINE
- RIGHT-OF-WAY LINE
- SETBACK LINE
- SECTION LINE
- PLATTED LOT LINE
- EASEMENT LINE
- FENCE LINE
- GUARD OR SAFETY RAIL
- EDGE OF PAVEMENT
- CONCRETE CURB & GUTTER
- EDGE OF GRAVEL
- SANITARY SEWER
- WATER LINE
- STORM SEWER
- NATURAL GAS
- OVERHEAD LINE
- BUILDING
- INDEX CONTOUR
- INTERMEDIATE CONTOUR
- DELINEATED WETLANDS
- BITUMINOUS PAVEMENT
- CONCRETE PAVEMENT
- GRAVEL
- EDGE OF BITUMINOUS
- END OF FLAGGED UTILITIES
- DENOTES RECORD DATA DEPICTING THE SAME LINE ON THE GROUND AS RETRACED BY THIS SURVEY


NOTES

- FIELD WORK PERFORMED ON AUGUST 22, 2022.
- BEARINGS FOR THIS SURVEY AND MAP ARE REFERENCED TO THE WISCONSIN COUNTY COORDINATE SYSTEM, DANE COUNTY ZONE; THE SOUTH LINE OF SECTION 31, T08N, R10E, BEARS N89°57'05"E.
- ELEVATIONS ARE BASED ON THE NORTH AMERICAN VERTICAL DATUM OF 1988 (NAV88). BENCHMARK IS THE TOP NUT OF A HYDRANT AS NOTED ON ALTA COMPLETED BY D'ONOFRIO KOTTKE AND ASSOCIATES, INC., FEBRUARY 25, 2022, ELEVATION = 857.88'
- CONTOUR INTERVAL IS ONE FOOT.
- SUBSURFACE UTILITIES AND FEATURES SHOWN ON THIS MAP HAVE BEEN APPROXIMATED BY LOCATING SURFICIAL FEATURES AND APPURTENANCES, LOCATING DIGGERS HOTLINE FIELD MARKINGS AND BY REFERENCE TO UTILITY RECORDS AND MAPS. DIGGER'S HOTLINE LOCATE TICKET NO. 20223425446, 20223425501, 20223425514, WITH A CLEAR DATE OF AUGUST 24, 2022, AND DIGGER'S HOTLINE MAPPING TICKET NO. 20223425467, 20223425471, 20223425546, WITH A CLEAR DATE OF AUGUST 29, 2022.
- UTILITY COMPANIES CONTACTED THRU DIGGERS HOTLINE:
 - AMERICAN TRANSMISSION MADISON GAS & ELECTRIC
 - ROGERS COMMUNICATIONS CANADA AT&T DISTRIBUTION
 - TDS TELECOM - MIDDLETON TDS METROCOM
 - CITY OF MADISON ENGINEERING MCI
- BEFORE EXCAVATION, APPROPRIATE UTILITY COMPANIES SHOULD BE CONTACTED. FOR EXACT LOCATION OF UNDERGROUND UTILITIES, CONTACT DIGGERS HOTLINE, AT 1.800.242.8511.
- JSD PROFESSIONAL SERVICES, INC. DOES NOT GUARANTEE THAT THE BENCHMARKS LISTED ON THIS MAP HAVE NOT BEEN DISTURBED SINCE THE DATE OF SURVEY AND SHOULD BE VERIFIED PRIOR TO USE.
- THIS PARCEL IS SUBJECT TO ALL EASEMENTS AND AGREEMENTS, BOTH RECORDED AND UNRECORDED.
- THE PARCEL BOUNDARY HEREON IS SHOWN AS PROPOSED ON THE LAND DIVISION BY CERTIFIED SURVEY MAP THAT IS UNDER LOCAL REVIEW. PARCEL MONUMENTS HAVE NOT BEEN SET IN THE FIELD.

CURVE TABLE					
CURVE	LENGTH	RADIUS	DELTA	CHORD	CHORD BEARING
C-1	34.86'	25.00'	79°53'17"	32.10'	N60°45'25"E

BENCHMARKS		
BENCH MARK	ELEVATION	DESCRIPTION
BM-1	857.88	TOP NUT ON HYDRANT EAST SIDE OF RUSKIN STREET, NW CORNER OF HARTMEYER ICE ARENA PARCEL
BM-2	851.64	M.A.G. RAIL FOUND, SE CORNER OF SITE, EAST SIDE OF RAILROAD, NORTH SIDE OF COMMERCIAL AVENUE.

*JSD DOES NOT GUARANTEE THAT THE BENCHMARK ELEVATIONS LISTED ON THIS MAP HAVE NOT BEEN DISTURBED SINCE THE DATE OF THE SURVEY AND SHOULD BE VERIFIED PRIOR TO CONSTRUCTION ACTIVITIES.

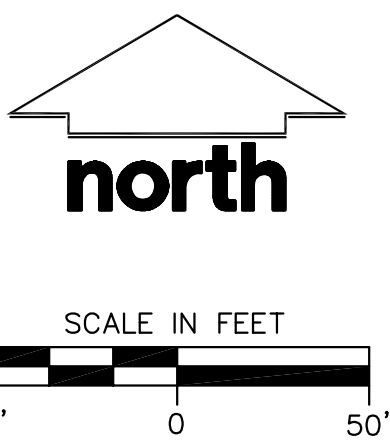

CREATE THE VISION TELL THE STORY

jsdinc.com

MADISON REGIONAL OFFICE
181 HORIZON DRIVE, SUITE 101
VERONA, WISCONSIN 53593
P. 608.848.5060

CLIENT:

LINCOLN
AVENUE
CAPITAL

CLIENT ADDRESS:

401 WILSHIRE BLVD, STE 1070
SANTA MONICA, CA 90401

PROJECT:

RUSKIN & ROTH
APARTMENTS 2

PROJECT LOCATION:

CITY OF MADISON
DANE COUNTY, WI

MODIFICATIONS:

#	Date	Description
1	09/23/22	LAND USE SUBMITTAL
2		
3		
4		
5		
6		
7		
8		
9		
10		
11		
12		
13		
14		
15		

Prepared By: CJO 08/01/22
Reviewed By: JK 08/02/22
Approved By: INIT 08/02/22

SHEET TITLE:
EXISTING
CONDITIONS
MAP

SHEET NUMBER:

C0.1

PROJECT NO: 22-11581

THESE PLANS AND DESIGNS ARE COPYRIGHT PROTECTED AND MAY NOT BE USED IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF JSD PROFESSIONAL SERVICES, INC.

GENERAL NOTES

1. REFER TO THE EXISTING CONDITIONS SURVEY FOR EXISTING CONDITIONS NOTES AND LEGENDS.
2. ALL WORK IN THE ROW AND/OR PUBLIC EASEMENTS SHALL BE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR SEWER & WATER CONSTRUCTION IN WISCONSIN AND MUNICIPAL REQUIREMENTS.
3. EXISTING GRADE SPOT ELEVATIONS SHOWN FOR INFORMATIONAL PURPOSES. DURING CONSTRUCTION MATCH EXISTING GRADES AT CONSTRUCTION LIMITS.
4. NO SITE GRADING OUTSIDE OR DOWNSLOPE OF PROPOSED SILT FENCE LOCATION. NO LAND DISTURBANCE BEYOND PROPERTY LINES.
5. JSD SHALL BE HELD HARMLESS AND DOES NOT WARRANT ANY DEVIATIONS BY THE OWNER/CONTRACTOR FROM THE APPROVED CONSTRUCTION PLANS THAT MAY RESULT IN DISCIPLINARY ACTIONS BY ANY OR ALL REGULATORY AGENCIES.

DEMOLITION NOTES

1. THIS PLAN INDICATES ITEMS ON THE PROPERTY INTENDED FOR DEMOLITION BASED ON THE CURRENT SITE DESIGN THAT HAVE BEEN IDENTIFIED BY A REASONABLE OBSERVATION OF THE EXISTING CONDITIONS THROUGH FIELD SURVEY, RECONNAISSANCE, "DIGGER'S HOTLINE" LOCATION, AND GENERAL STANDARD OF CARE. THERE MAY BE ADDITIONAL ITEMS THAT CAN NOT BE IDENTIFIED BY A REASONABLE ABOVE GROUND OBSERVATION, OF WHICH THE ENGINEER WOULD HAVE NO KNOWLEDGE OR MAY BE A PART OF ANOTHER DESIGN DISCIPLINE. IT IS THE CONTRACTOR'S/BIDDER'S RESPONSIBILITY TO REVIEW THE PLANS, INSPECT THE SITE AND PROVIDE THEIR OWN DUE DILIGENCE TO INCLUDE IN THEIR BID WHAT ADDITIONAL ITEMS, IN THEIR OPINION, MAY BE NECESSARY FOR DEMOLITION. ANY ADDITIONAL ITEMS IDENTIFIED BY THE CONTRACTOR/BIDDER SHALL BE IDENTIFIED IN THE BID AND REPORTED TO THE ENGINEER OF RECORD. JSD TAKES NO RESPONSIBILITY FOR ITEMS ON THE PROPERTY THAT COULD NOT BE LOCATED BY A REASONABLE OBSERVATION OF THE PROPERTY OR OF WHICH THEY WOULD HAVE NO KNOWLEDGE.
2. CONTRACTOR SHALL KEEP ALL STREETS AND PRIVATE DRIVES FREE AND CLEAR OF ALL CONSTRUCTION RELATED DIRT, DUST AND DEBRIS.
3. ALL TREES WITHIN THE CONSTRUCTION LIMITS SHALL BE REMOVED UNLESS SPECIFICALLY CALLED OUT FOR PROTECTION. TREES TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY AND STUMPS SHALL BE GROUND TO PROPOSED SUBGRADE.
4. ALL LIGHT POLES TO BE REMOVED SHALL BE REMOVED IN THEIR ENTIRETY, INCLUDING BASE AND ALL APPURTENANCES. SALVAGE FOR RELOCATION. COORDINATE RELOCATION AND/OR ABANDONMENT OF ALL ELECTRIC LINES WITH ELECTRICAL ENGINEER AND OWNER PRIOR TO DEMOLITION.
5. ABANDONED/REMOVED ITEMS SHALL BE DISPOSED OF OFF SITE UNLESS OTHERWISE NOTED.
6. CONTRACTOR TO REPLACE ALL SIDEWALK AND CURB AND GUTTER ADJUTING THE PROPERTIES WHICH IS DAMAGED BY THE CONSTRUCTION, OR ANY SIDEWALK AND CURB AND GUTTER THAT THE CITY ENGINEER DETERMINES NEEDS TO BE REPLACED BECAUSE IT IS NOT AT A DESIRABLE GRADE REGARDLESS OF WHETHER THE CONDITION EXISTED PRIOR TO BEGINNING CONSTRUCTION.
7. PRIOR TO CONSTRUCTION, THE CONTRACTOR IS RESPONSIBLE FOR:
 - 7.1. EXAMINE ALL SITE CONDITIONS RELATIVE TO THE CONDITIONS INDICATED ON THE ENGINEERING DRAWINGS, ANY DISCREPANCIES ARE TO BE REPORTED IMMEDIATELY TO THE ENGINEER AND RESOLVED PRIOR TO THE START OF CONSTRUCTION.
 - 7.2. VERIFYING UTILITY ELEVATIONS AND NOTIFYING ENGINEER OF ANY DISCREPANCIES. NO WORK SHALL BE PERFORMED UNTIL THE DISCREPANCIES ARE RESOLVED.
 - 7.3. NOTIFYING ALL UTILITIES PRIOR TO THE REMOVAL OF ANY UNDERGROUND UTILITIES.
 - 7.4. NOTIFYING THE DESIGN ENGINEER AND LOCAL CONTROLLING MUNICIPALITY 48 HOURS PRIOR TO THE START OF CONSTRUCTION TO ARRANGE FOR APPROPRIATE CONSTRUCTION INSPECTION.
8. ANY SANITARY SEWER, SANITARY SEWER SERVICES, WATER MAIN, WATER SERVICES, STORM SEWER, OR OTHER UTILITIES, WHICH ARE DAMAGED BY THE CONTRACTORS, SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTORS EXPENSE.
9. CONTRACTOR IS RESPONSIBLE FOR SITE SAFETY DURING THE CONSTRUCTION OF THESE IMPROVEMENTS.
10. CONTRACTOR TO COORDINATE PRIVATE UTILITY REMOVAL / ABANDONMENT AND NECESSARY RELOCATION WITH RESPECTIVE UTILITY COMPANY. COORDINATION REQUIRED PRIOR TO CONSTRUCTION.
11. ALL DEMOLITION SHALL BE IN ACCORDANCE WITH THE APPROVED MUNICIPALITY RECYCLING PLAN.
12. ANY CONTAMINATED SOLS SHALL BE REMOVED IN ACCORDANCE WITH FEDERAL AND STATE REGULATIONS TO AN APPROVED LANDFILL. CONTRACTOR SHALL REFER TO THE PROJECT MATERIAL HANDLING AND ENVIRONMENTAL REPOTS FOR DETAILS ON SOIL CONTAMINATION.
13. ALL EXISTING UTILITIES SHALL BE FIELD LOCATED AND FLAGGED BY CONTRACTOR.
14. SEWER ABANDONMENT SHALL BE IN ACCORDANCE WITH SECTION 3.2.24, OF THE STANDARD SPECIFICATIONS FOR WATER AND SEWER CONSTRUCTION IN WISCONSIN, LATEST ADDITION, AND CITY OF MADISON SPECIFICATIONS.
15. WATER ABANDONMENT SHALL BE IN ACCORDANCE WITH SECTION 4.14.0 OF THE STANDARD SPECIFICATIONS FOR WATER AND SEWER CONSTRUCTION IN WISCONSIN, LATEST ADDITION, AND CITY OF MADISON SPECIFICATIONS.
16. ALL PERIMETER EROSION CONTROL DEVICES SHALL BE INSTALLED PRIOR TO THE START OF DEMOLITION ACTIVITIES. CONTRACTOR SHALL KEEP ALL STREETS AND PAVEMENT FREE AND CLEAR OF ALL CONSTRUCTION RELATED DIRT, DUST AND DEBRIS.
17. BUILDING REMOVALS SHALL BE BY A QUALIFIED CONTRACTOR. CONTRACTOR TO FOLLOW ALL DEMOLITION REGULATIONS, DISCONNECT ALL UTILITIES, OBTAIN ALL APPLICABLE PERMITS AND DISPOSE OF ALL BUILDING MATERIALS IN APPROPRIATE LANDFILLS. DEMOLISHED MATERIALS SHALL NOT BE BURIED ON SITE IF ENCOUNTERED, ANY CONTAMINATED SOLS SHALL BE REMOVED TO A LANDFILL IN ACCORDANCE WITH APPROPRIATE STATE AND FEDERAL REGULATIONS.
18. CONTRACTOR TO REMOVE EXISTING UTILITY PIPE OR PROVIDE PIPE BACK-FILLING AFTER REMOVAL OF EXISTING UTILITIES WITHIN BUILDING FOOTPRINT USING "LOW DENSITY CONCRETE/FLOWABLE FILL".
19. RESTORATION OF THE EXISTING ROADWAY RIGHT-OF-WAYS ARE CONSIDERED INCIDENTAL AND SHOULD BE PART OF THE COST OF THE UNDERGROUND IMPROVEMENTS. DEMOLITION AND REMOVAL THIS INCLUDES CURB & GUTTER, SIDEWALK, TOPSOIL, SEEDING AND MULCHING.

PAVING NOTES

1. GENERAL
 - 1.1. ALL PAVING SHALL CONFORM TO "STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY & STRUCTURE CONSTRUCTION, LATEST EDITION, APPLICABLE CITY OF MADISON ORDINANCES AND THE GEOTECHNICAL REPORT PREPARED BY CGC, INC. DATED SEPTEMBER 13, 2022.
 - 1.2. ALL PAVING DIMENSIONS ARE TO FACE OF CURB UNLESS SPECIFIED OTHERWISE.
 - 1.3. SURFACE PREPARATION – NOTIFY ENGINEER/OWNER OF UNSATISFACTORY CONDITIONS. DO NOT BEGIN PAVING WORK UNTIL DEFICIENT SUBBASE AREAS HAVE BEEN CORRECTED AND ARE READY TO RECEIVE PAVING.
 - 1.4. ANY REQUIRED REPLACEMENT OF PUBLIC CURB AND GUTTER SHALL MATCH EXISTING AND MEET MUNICIPALITY REQUIREMENTS.
2. ASPHALTIC CONCRETE PAVING SPECIFICATIONS
 - 2.1. CODES AND STANDARDS – THE PLACING, CONSTRUCTION AND COMPOSITION OF THE ASPHALTIC BASE COURSE AND ASPHALTIC CONCRETE SURFACE COURSE SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTIONS 450, 455, 460 AND 465 OF THE STATE OF WISCONSIN STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, CURRENT EDITION. HEREAFTER, THIS PUBLICATION WILL BE REFERRED TO AS STATE HIGHWAY SPECIFICATIONS.
 - 2.2. WEATHER LIMITATIONS – APPLY TACK COATS WHEN AMBIENT TEMPERATURE IS ABOVE 50° F (10° C) AND WHEN TEMPERATURE HAS NOT BEEN BELOW 35° F (1° C) FOR 12 HOURS IMMEDIATELY PRIOR TO APPLICATION. DO NOT APPLY WHEN BASE IS WET OR CONTAINS EXCESS OF MOISTURE. CONSTRUCT ASPHALTIC CONCRETE SURFACE COURSE WHEN ATMOSPHERIC TEMPERATURE IS ABOVE 40° F (4° C) AND WHEN BASE IS DRY AND WHEN WEATHER IS NOT RAINY. BASE COURSE MAY BE PLACED WHEN AIR TEMPERATURE IS ABOVE 30° F (-1° C).
 - 2.3. GRADE CONTROL – ESTABLISH AND MAINTAIN REQUIRED LINES AND ELEVATIONS FOR EACH COURSE DURING CONSTRUCTION.
 - 2.4. CRUSHED AGGREGATE BASE COURSE – THE TOP LAYER OF BASE COURSE SHALL CONFORM TO SECTIONS 301 AND 305, STATE HIGHWAY SPECIFICATIONS.
 - 2.5. BINDER COURSE AGGREGATE – THE AGGREGATE FOR THE BINDER COURSE SHALL CONFORM TO SECTIONS 460 AND 315, STATE HIGHWAY SPECIFICATIONS.
 - 2.6. SURFACE COURSE AGGREGATE – THE AGGREGATE FOR THE SURFACE COURSE SHALL CONFORM TO SECTIONS 460 AND 465, STATE HIGHWAY SPECIFICATIONS.
 - 2.7. ASPHALTIC MATERIALS – THE ASPHALTIC MATERIALS SHALL CONFORM TO SECTION 455 AND 460, STATE HIGHWAY SPECIFICATIONS.
3. CONCRETE PAVING SPECIFICATIONS
 - 3.1. CONCRETE PAVING SHALL BE IN ACCORDANCE WITH THE REQUIREMENTS OF SECTIONS 415 AND 416 OF THE STATE HIGHWAY SPECIFICATIONS.
 - 3.2. CONCRETE PAVEMENT SHALL BE REINFORCED WITH NOVOMESH 950 (OR EQUAL) FIBER REINFORCEMENT AT A RATE OF 5 LBS/CUBIC YARD.
 - 3.3. CURING COMPOUNDS SHALL CONFORM TO SECTION 415 OF THE STATE HIGHWAY SPECIFICATIONS.
 - 3.4. CONTRACTOR SHALL PROVIDE CONTROL JOINTS AND CONSTRUCTION JOINTS OF ONE-QUARTER CONCRETE THICKNESS AT AN EQUAL RATIO OF LENGTH TO WIDTH WHEREVER POSSIBLE WITH A MAXIMUM LENGTH BETWEEN JOINTS OF 8' ON CENTER.
 - 3.5. CONTRACTOR SHALL PROVIDE EXPANSION JOINTS IN SIDEWALKS AT A MAXIMUM 24' ON CENTER.
 - 3.6. EXTERIOR CONCRETE SURFACES SHALL BE BROOM FINISHED.
 - 3.7. ALL CONCRETE SURFACES TO BE SEALED WITH TYPE TK-26UV CONCRETE SEALANT.
4. PAVEMENT MARKING SPECIFICATIONS
 - 4.1. USE 4" WIDE, HIGH VISIBILITY YELLOW LATEX PAINT FOR STALL LINES.
 - 4.2. MARK AND STRIPE ADA PARKING SPACES APPROPRIATELY.
 - 4.3. ALL PAVEMENT MARKINGS INCLUDING: STOP BARS, CROSSWALKS, DIRECTIONAL ARROWS, PARKING STALL LINES, ADA STALL MARKINGS, NO PARKING ZONES, DROP-OFF/PICK-UP ZONES SHALL BE PAINTED WITH LATEX PAINT PER SPECIFICATIONS.
 - 4.4. 2' x 4' TRUNCATED DOME WARNING DETECTION FIELD SHALL BE PLACED AT ALL ADA RAMPS.

GRADING AND SEEDING NOTES

1. ALL PROPOSED GRADES SHOWN ARE FINISHED GRADES. CONTRACTOR SHALL VERIFY ALL GRADES, MAKE SURE ALL AREAS DRAIN PROPERLY AND SHALL REPORT ANY DISCREPANCIES TO THE ENGINEER PRIOR TO CONSTRUCTION.
2. CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR COMPUTATIONS OF ALL GRADING QUANTITIES. WHILE JSD PROFESSIONAL SERVICES, INC. ATTEMPTS TO PROVIDE A COST EFFECTIVE APPROACH TO BALANCE EARTHWORK, GRADING DESIGN IS BASED ON MANY FACTORS, INCLUDING: SAFETY, AESTHETICS, AND COMMON ENGINEERING STANDARDS OF CARE. THEREFORE, NO GUARANTEE CAN BE MADE FOR A BALANCED SITE.
3. PARKING LOT AND DRIVEWAY ELEVATIONS ARE PAVEMENT GRADES, NOT TOP OF CURB GRADES, UNLESS OTHERWISE NOTED.
4. ANY WORK WITHIN RIGHT-OF-WAY SHALL BE PROPERLY PERMITTED AND COORDINATED WITH THE APPROPRIATE OFFICIALS PRIOR TO COMMENCEMENT OF ANY CONSTRUCTION ACTIVITIES. ALL GRADING WITHIN RIGHT-OF-WAY IS SUBJECT TO APPROVAL BY SAID OFFICIALS.
5. CONTRACTOR SHALL PROVIDE NOTICE TO THE MUNICIPALITY IN ADVANCE OF ANY SOIL DISTURBING ACTIVITIES, IN ACCORDANCE WITH MUNICIPAL REQUIREMENTS.
6. ALL DISTURBED AREAS SHALL BE SODDED AND/OR SEEDED AND MULCHED IMMEDIATELY FOLLOWING GRADING ACTIVITIES. SOD/SEED MIX TO BE IN ACCORDANCE WITH LANDSCAPE PLAN.
7. CONTRACTOR SHALL CHISEL-PLow OR DEEP TILL WITH DOUBLE TINES ALL STORMWATER MANAGEMENT FACILITIES JUST PRIOR TO SODDING AND/OR SEEDING AND MULCHING TO PROMOTE INFILTRATION.
8. CONTRACTOR SHALL WATER ALL NEWLY SODDED/SEEDED AREAS DURING THE SUMMER MONTHS WHENEVER THERE IS A 7 DAY LAPSE WITH NO SIGNIFICANT RAINFALL.
9. CONTRACTOR TO DEEP TILL ALL COMPACTED Pervious SURFACES PRIOR TO SODDING AND/OR SEEDING AND MULCHING.
10. ALL SLOPES 20% OR GREATER SHALL BE TEMPORARY SEEDED, MULCHED, OR OTHER MEANS OF COVER PLACED ON THEM WITHIN 2 WEEKS OF DISTURBANCE.
11. ALL EXPOSED SOIL AREAS THAT WILL NOT BE BROUGHT TO FINAL GRADE OR ON WHICH LAND DISTURBING ACTIVITIES WILL NOT BE PERFORMED FOR A PERIOD GREATER THAN 30 DAYS AND REQUIRE VEGETATIVE COVER FOR LESS THAN 1 YEAR, REQUIRE TEMPORARY SEEDING FOR EROSION CONTROL. SEEDING FOR EROSION CONTROL SHALL BE IN ACCORDANCE WITH WDNr TECHNICAL STANDARD 1059 AND CITY OF MADISON ORDINANCE.

UTILITY NOTES

1. ALL EXISTING UTILITIES ARE SHOWN FOR INFORMATIONAL PURPOSES ONLY AND ARE NOT GUARANTEED TO BE ACCURATE OR ALL INCLUSIVE. THE CONTRACTOR IS RESPONSIBLE FOR MAKING HIS OWN DETERMINATION AS TO THE TYPE AND LOCATIONS OF UNDERGROUND UTILITIES AS MAY BE NECESSARY TO AVOID DAMAGE THERETO. CONTRACTOR/OWNER SHALL CALL "DIGGER'S HOTLINE" PRIOR TO ANY CONSTRUCTION.
2. PRIOR TO CONSTRUCTION, THE PRIME CONTRACTOR IS RESPONSIBLE FOR:
 - 2.1. EXAMINING ALL SITE CONDITIONS RELATIVE TO THE CONDITIONS INDICATED ON THE ENGINEERING DRAWINGS, ANY DISCREPANCIES ARE TO BE REPORTED TO THE ENGINEER AND RESOLVED PRIOR TO THE START OF CONSTRUCTION.
 - 2.2. OBTAINING ALL PERMITS INCLUDING PERMIT COSTS, TAP FEES, METER DEPOSITS, BONDS, AND OTHER FEES REQUIRED FOR PROPOSED WORK TO OBTAIN OCCUPANCY.
 - 2.3. VERIFYING ALL ELEVATIONS, LOCATIONS AND SIZES OF SANITARY, WATER AND STORM LATERALS AND CHECK ALL UTILITY CROSSINGS FOR CONFLICTS. NOTIFY ENGINEER OF ANY DISCREPANCY. NO WORK SHALL BE PERFORMED UNTIL THE DISCREPANCY IS RESOLVED.
 - 2.4. NOTIFYING ALL UTILITIES PRIOR TO INSTALLATION OF ANY UNDERGROUND IMPROVEMENTS.
 - 2.5. NOTIFYING THE DESIGN ENGINEER AND MUNICIPALITY 48 HOURS PRIOR TO THE START OF CONSTRUCTION TO ARRANGE FOR APPROPRIATE CONSTRUCTION OBSERVATION.
 - 2.6. COORDINATING ALL CONSTRUCTION WITH OTHER CONTRACTORS INVOLVED WITH CONSTRUCTION OF THE PROPOSED DEVELOPMENT AND FOR REPORTING ANY ERRORS OR DISCREPANCIES BETWEEN THESE PLANS AND PLANS PREPARED BY OTHERS.
3. ALL UTILITY WORK SHALL BE DONE IN ACCORDANCE WITH THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN – AND ALL STATE AND LOCAL CODES AND SPECIFICATIONS. IT IS THE CONTRACTORS RESPONSIBILITY TO DETERMINE WHICH SPECIFICATIONS AND CODES APPLY, AND TO COORDINATE ALL CONSTRUCTION ACTIVITIES WITH THE APPROPRIATE LOCAL AND STATE AUTHORITIES.
4. SPECIFICATIONS SHALL COMPLY WITH THE CITY OF MADISON SPECIAL PROVISIONS.
5. LENGTHS OF ALL UTILITIES ARE TO CENTER OF STRUCTURES OR FITTINGS AND MAY VARY SLIGHTLY FROM PLAN. LENGTHS SHALL BE VERIFIED IN THE FIELD DURING CONSTRUCTION.
6. CONTRACTOR IS RESPONSIBLE FOR SITE SAFETY DURING THE CONSTRUCTION OF IMPROVEMENTS.
7. CONTRACTOR SHALL INSTALL A PEDESTRIAN FENCE AROUND ALL EXCAVATIONS TO BE LEFT OPEN OVER NIGHT AS REQUIRED IN CONSTRUCTION SITES WHERE THE POTENTIAL FOR PEDESTRIAN INJURY EXISTS.
8. CONTRACTOR SHALL ADJUST AND/OR RECONSTRUCT ALL UTILITY COVERS (SUCH AS MANHOLE COVERS, VALVE BOX COVERS, ETC.) TO MATCH THE FINISHED GRADES OF THE AREAS EFFECTED BY THE CONSTRUCTION.
9. THE PRIME CONTRACTOR IS RESPONSIBLE FOR COORDINATING ALL CONSTRUCTION WITH OTHER CONTRACTORS INVOLVED WITH CONSTRUCTION OF THE PROPOSED DEVELOPMENT AND FOR REPORTING ANY ERRORS OR DISCREPANCIES BETWEEN THESE PLANS AND PLANS PREPARED BY OTHERS.
10. ANY SANITARY SEWER, SANITARY SEWER SERVICES, WATER MAIN, WATER SERVICES, STORM SEWER, OR OTHER UTILITIES, WHICH ARE DAMAGED BY THE CONTRACTORS, SHALL BE REPAIRED TO THE OWNER'S SATISFACTION AT THE CONTRACTOR'S EXPENSE.
11. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING THE ENGINEER WITH AS-BUILT CONDITIONS OF THE DESIGNATED IMPROVEMENTS IN ORDER THAT THE APPROPRIATE DRAWINGS CAN BE PREPARED, IF REQUIRED. ANY CHANGES TO THE DRAWINGS OR ADDITIONAL ITEMS MUST BE REPORTED TO THE ENGINEER AS WORK PROGRESSES.
12. STORM SEWER SPECIFICATIONS –
 - PIPE – REINFORCED CONCRETE PIPE (RCP) SHALL MEET THE REQUIREMENTS OF ASTM CLASS III (MINIMUM) C-76 WITH RUBBER GASKET JOINTS CONFORMING TO ASTM C-443. HIGH DENSITY DUAL-WALL POLYETHYLENE CORRUGATED PIPE SHALL BE AS MANUFACTURED BY ADS OR EQUAL WITH WATER TIGHT JOINTS, AND SHALL MEET THE REQUIREMENTS OF AASHTO DESIGNATION M-294 TYPE "S".
 - INLETS – INLETS SHALL BE CONSTRUCTED IN ACCORDANCE WITH FILE. NO. 28 OF THE "STANDARD SPECIFICATIONS" OR APPROVED EQUAL WITH A 1'-8" X 2'-0" MAXIMUM OPENING. CURB FRAME & GRATE SHALL BE NEENAH R-3007 WITH TYPE R GRATE, OR EQUAL.
 - BACKFILL AND BEDDING – STORM SEWER SHALL BE CONSTRUCTED WITH GRAVEL BACKFILL AND CLASS "B" BEDDING IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.4.3.5 OF THE "STANDARD SPECIFICATIONS".
 - MANHOLE FRAMES AND COVERS – MANHOLE FRAMES AND COVERS SHALL REFER TO SHEET C5.0.
- FIELD TILE CONNECTION – ALL FIELD TILE ENCOUNTERED DURING CONSTRUCTION SHALL BE INCLUDED IN THE UNIT PRICE(S) FOR STORM SEWER. TILE LINES CROSSED BY THE TRENCH SHALL BE REPLACED WITH THE SAME MATERIAL AS THE STORM SEWER.
13. WATER MAIN SPECIFICATIONS –
 - PIPE – DUCTILE IRON PIPE SHALL BE CLASS 52 CONFORMING TO AWWA C151 AND CHAPTER 8.18.0 OF THE "STANDARD SPECIFICATIONS". POLYVINYL CHLORIDE (PVC) SHALL BE CLASS 200 CONFORMING TO THE REQUIREMENTS OF AWWA STANDARD C-900, CLASS 150, DR-18, WITH CAST IRON O.D. AND INTEGRAL ELASTOMERIC SEAL AND SPIGOT JOINTS. NON-METALLIC WATER MAINS SHALL BE INSTALLED WITH BLUE INSULATION TRACER WIRE AND CONFORM WITH SPS 382.1(1)(b).
 - VALVES AND VALVE BOXES – GATE VALVES SHALL BE AWWA GATE VALVES MEETING THE REQUIREMENTS OF AWWA C-500 AND CHAPTER 8.2.7.0 OF THE "STANDARD SPECIFICATIONS". GATE VALVES AND VALVE BOXES SHALL CONFORM TO LOCAL PLUMBING ORDINANCES.
 - HYDRANTS – HYDRANTS SHALL CONFORM TO THE SPECIFICATIONS OF THE CITY OF MADISON. THE DISTANCE FROM THE GROUND LINE TO THE CENTERLINE OF THE LOWEST NOZZLE AND THE LOWEST CONNECTION OF THE FIRE DEPARTMENT SHALL BE NO LESS THAN 18-INCHES AND NO GREATER THAN 23-INCHES (SEE DETAIL).
 - BEDDING AND COVER MATERIAL – PIPE BEDDING AND COVER MATERIAL SHALL BE SAND, CRUSHED STONE CHMPs OR CRUSHED STONE SCREENINGS CONFORMING TO CHAPTER 8.43.2 OF THE "STANDARD SPECIFICATIONS".
 - BACKFILL – BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE WITH CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS". GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.4.3.5 OF THE "STANDARD SPECIFICATIONS".
14. SANITARY SEWER SPECIFICATIONS –
 - PIPE – SANITARY SEWER PIPE MATERIAL SHALL BE POLYVINYL CHLORIDE (PVC) MEETING REQUIREMENTS OF ASTM D 3034, SDR-35, WITH INTEGRAL BELL TYPE FLEXIBLE ELASTOMERIC JOINTS, MEETING THE REQUIREMENTS OF ASTM D-3212.
 - BEDDING AND COVER MATERIAL – BEDDING AND COVER MATERIAL SHALL CONFORM TO THE APPROPRIATE SECTIONS OF THE "STANDARD SPECIFICATION" WITH THE FOLLOWING MODIFICATION: "COVER MATERIAL SHALL BE THE SAME AS USED FOR BEDDING AND SHALL CONFORM TO SECTION 8.43.2 (A). BEDDING AND COVER MATERIAL SHALL BE PLACED IN A MINIMUM OF THREE SEPARATE LIFTS, OR AS REQUIRED TO INSURE ADEQUATE COMPACTING OF THESE MATERIALS, WITH ONE LIFT OF BEDDING MATERIAL ENDING AT OR NEAR THE SPRINGLINE OF THE PIPE. THE CONTRACTOR SHALL TAKE CARE TO COMPLETELY WORK BEDDING MATERIAL UNDER THE HAUNCH OF THE PIPE TO PROVIDE ADEQUATE SIDE SUPPORT."
 - BACKFILL – BACKFILL MATERIAL AND INSTALLATION SHALL BE IN ACCORDANCE CHAPTER 2.6.0 OF THE "STANDARD SPECIFICATIONS". GRAVEL BACKFILL IS REQUIRED IN ALL PAVED AREAS AND TO A POINT 5 FEET BEYOND THE EDGE OF PAVEMENT. TRENCHES RUNNING PARALLEL TO AND LESS THAN 5 FEET FROM THE EDGE OF PAVEMENT SHALL ALSO REQUIRE GRAVEL BACKFILL. LANDSCAPED AREAS MAY BE BACKFILLED WITH EXCAVATED MATERIAL IN CONFORMANCE WITH SECTION 8.4.3.5 OF THE "STANDARD SPECIFICATIONS".
 - MANHOLES – MANHOLES SHALL BE CONSTRUCTED IN ACCORDANCE WITH FILE NOS. 12, 13 AND 15 OF THE "STANDARD SPECIFICATIONS" AND ALL SPECIAL PROVISIONS OF THE CITY OF MADISON.
 - MANHOLE FRAMES AND COVERS – MANHOLE FRAMES AND COVERS SHALL REFER TO SHEET C5.0.
15. WATERMAIN AND SANITARY SEWER SHALL BE INSULATED WHEREVER THE DEPTH OF COVER IS LESS THAN 6 FEET. INSULATION AND INSTALLATION OF INSULATION SHALL BE CONFORMING WITH CHAPTER 4.17.0 INSULATION OF THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN 6TH EDITION UPDATED WITH ITS LATEST ADDENDUM (TYP.).

EROSION CONTROL NOTES

1. CONTRACTOR IS RESPONSIBLE TO NOTIFY ENGINEER OF RECORD AND OFFICIALS OF ANY CHANGES TO THE EROSION CONTROL AND STORMWATER MANAGEMENT PLANS. ENGINEER OF RECORD AND OFFICIALS OF THE CITY OF MADISON OFFICIALS MUST APPROVE ANY CHANGES PRIOR TO DEVIATION FROM THE APPROVED PLANS.
2. ALL EROSION CONTROL MEASURES SHALL BE CONSTRUCTED AND MAINTAINED BY THE CONTRACTOR IN ACCORDANCE WITH THE WISCONSIN DEPARTMENT OF NATURAL RESOURCES (WDNR) TECHNICAL STANDARDS (REFERRED TO AS BMP'S) AND CITY OF MADISON ORDINANCE. IT IS THE CONTRACTORS RESPONSIBILITY TO OBTAIN A COPY OF THESE STANDARDS. CONTRACTOR SHALL BE RESPONSIBLE FOR ANY ADDITIONAL EROSION CONTROL MEASURES WHICH MAY BE NECESSARY TO MEET UNFORESSEEN FIELD CONDITIONS.
5. INSTALL PERIMETER EROSION CONTROL MEASURES (SUCH AS CONSTRUCTION ENTRANCES, SILT FENCE AND EXISTING INLET PROTECTION) PRIOR TO ANY SITE WORK, INCLUDING GRADING OR DISTURBANCE OF EXISTING SURFACE COVER, AS SHOWN ON PLAN. MODIFICATIONS TO THE APPROVED EROSION CONTROL DESIGN IN ORDER TO MEET UNFORESSEEN FIELD CONDITIONS IS ALLOWED IF MODIFICATIONS CONFORM TO BMP'S. ALL DESIGN MODIFICATIONS MUST BE APPROVED BY THE CITY OF MADISON PRIOR TO DEVIATION OF THE APPROVED PLAN.
4. ADDITIONAL EROSION CONTROL MEASURES, AS REQUESTED BY STATE INSPECTORS, LOCAL INSPECTORS, COUNTY INSPECTORS AND/OR ENGINEER OF RECORD SHALL BE INSTALLED WITHIN 24 HOURS OF REQUEST.
5. INSPECTIONS AND MAINTENANCE OF ALL EROSION CONTROL MEASURES SHALL BE ROUTINE (ONCE PER WEEK MINIMUM) TO ENSURE PROPER FUNCTION OF EROSION CONTROLS AT ALL TIMES. EROSION CONTROL MEASURES ARE TO BE IN WORKING ORDER AT THE END OF EACH WORK DAY.
6. ALL EROSION AND SEDIMENT CONTROL ITEMS SHALL BE INSPECTED WITHIN 24 HOURS OF ALL RAIN EVENTS EXCEEDING 0.5 INCHES. ANY DAMAGED EROSION CONTROL MEASURES SHALL BE REPAIRED OR REPLACED IMMEDIATELY UPON INSPECTION.
7. CONSTRUCTION ENTRANCES SHALL BE INSTALLED AT ALL LOCATIONS OF VEHICLE INGRESS/EGRESS POINTS. ADDITIONAL LOCATIONS OTHER THAN AS SHOWN ON THE PLANS MUST BE PRIOR APPROVED BY THE MUNICIPALITY. CONSTRUCTION ENTRANCES SHALL BE 50' LONG AND NO LESS THAN 12" THICK BY USE OF 3" CLEAR STONE. CONSTRUCTION ENTRANCES SHALL BE MAINTAINED BY THE CONTRACTOR IN A CONDITION WHICH WILL PREVENT THE TRACKING OF MUD OR DRY SEDIMENTS INTO ADJACENT PUBLIC STREETS AFTER EACH WORKING DAY OR MORE FREQUENTLY AS REQUIRED.
8. PAVED SURFACES ADJACENT TO CONSTRUCTION SITE VEHICLE ACCESS SHALL BE SWEEP AND/OR SCRAPED TO REMOVE ACCUMULATED SOIL, DIRT AND/OR DUST AFTER THE END OF EACH WORK DAY AND AS REQUESTED BY THE CITY OF MADISON.
9. INLET PROTECTION SHALL BE IMMEDIATELY FITTED AT THE INLET OF ALL INSTALLED STORM SEWER AND INLET PROTECTION SHALL BE IMMEDIATELY FITTED AT ALL INSTALLED CULVERT INLETS TO PREVENT SEDIMENT DEPOSITION WITHIN STORM SEWER SYSTEMS.
10. INSTALL EROSION CONTROLS ON THE DOWNSTREAM SIDE OF STOCKPILES. IF STOCKPILE REMAINS UNDISTURBED FOR MORE THAN SEVEN (7) DAYS, TEMPORARY SEEDING AND STABILIZATION IN ACCORDANCE WITH BEST MANAGEMENT PRACTICES IS REQUIRED. IF DISTURBANCE OCCURS BETWEEN NOVEMBER 15TH AND MAY 15TH, THE MULCHING SHALL BE PERFORMED BY HYDRO-MULCHING WITH A "TACKIFIER".
11. DITCH CHECKS AND APPLICABLE EROSION NETTING/MATTING SHALL BE INSTALLED IMMEDIATELY AFTER COMPLETION OF GRADING EFFORTS WITHIN DITCHES/SWALES TO PREVENT SOIL TRANSPORTATION.
12. EROSION CONTROL FOR UTILITY CONSTRUCTION (STORM SEWER, SANITARY SEWER, WATER MAIN, ETC.):
 - A. PLACE EXCAVATED TRENCH MATERIAL ON THE HIGH SIDE OF THE TRENCH.
 - B. BACKFILL, COMPACT, AND STABILIZE THE TRENCH IMMEDIATELY AFTER PIPE CONSTRUCTION.
 - C. DISCHARGE TRENCH WATER INTO A SEDIMENTATION BASIN OR FILTERING TANK IN ACCORDANCE WITH THE Dewatering TECHNICAL STANDARD NO. 1061 PRIOR TO RELEASE INTO THE STORM SEWER, RECEIVING STREAM, OR DRAINAGE DITCH.
13. ALL SLOPES 4:1 OR GREATER SHALL BE STABILIZED WITH CLASS II, TYPE B EROSION MATTING OR APPLICATION OF A WISCONSIN DEPARTMENT OF TRANSPORTATION (WDOT) APPROVED POLYMER SOIL STABILIZATION TREATMENT OR A COMBINATION THEREOF, AS REQUIRED WITHIN 7 DAYS OF REACHING FINAL GRADE AND/OR AS SOON AS CONDITIONS ALLOW. DRAINAGE SWALES SHALL BE STABILIZED WITH CLASS II, TYPE B EROSION MATTING. EROSION MATTING AND/OR NETTING USED ON-SITE SHALL BE INSTALLED IN ACCORDANCE WITH MANUFACTURER'S GUIDELINES AND WDNr TECHNICAL STANDARDS 1052 AND 1053.
14. CONTRACTOR SHALL TAKE ALL NECESSARY STEPS TO CONTROL DUST ARISING FROM CONSTRUCTION OPERATIONS. REFER TO WDNr TECHNICAL STANDARD 1068.
15. EROSION CONTROL MEASURES SHALL NOT BE REMOVED UNTIL ALL LAND DISTURBING CONSTRUCTION ACTIVITY AT THE SITE HAS BEEN COMPLETED AND THAT A UNIFORM PERENNIAL VEGETATIVE COVER HAS BEEN ESTABLISHED WITH A DENSITY OF AT LEAST 70% FOR UNPAVED AREAS AND AREAS NOT COVERED BY PERMANENT STRUCTURES OR THAT EMPLOY EQUIVALENT PERMANENT STABILIZATION MEASURES.
16. CONTRACTOR/OWNER SHALL FILE A NOTICE OF TERMINATION UPON COMPLETION OF THE PROJECT IN ACCORDANCE WITH WDNr REQUIREMENTS AND/OR PROPERTY SALE IN ACCORDANCE WITH WDNr REQUIREMENTS.
17. STABILIZATION PRACTICES:
 - 17.1. STABILIZATION MEASURES SHALL BE INITIATED AS SOON AS PRACTICABLE IN PORTIONS OF THE SITE WHERE CONSTRUCTION ACTIVITIES HAVE TEMPORARILY OR PERMANENTLY CEASED. NO MORE THAN SEVEN (7) DAYS SHALL PASS AFTER THE CONSTRUCTION ACTIVITY IN THAT PORTION OF THE SITE HAS CEASED UNLESS:
 - 17.2. THE INITIATION STABILIZATION MEASURES BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY HAS CEASED IS PRECLUDED BY SNOW COVER. IN THAT EVENT, STABILIZATION SHALL BE INITIATED AS SOON AS PRACTICABLE.
 - 17.3. CONSTRUCTION ACTIVITY WILL RESUME ON A PORTION OF THE SITE WITHIN FOURTEEN (14) DAYS FROM WHEN ACTIVITY CEASED, (I.E. THE TOTAL TIME PERIOD THAT THE CONSTRUCTION ACTIVITY IS TEMPORARILY CEASED IS LESS THAN FOURTEEN (14) DAYS. IN THAT EVENT, STABILIZATION MEASURES DO NOT HAVE TO BE INITIATED ON THAT PORTION OF THE SITE BY THE SEVENTH (7) DAY AFTER CONSTRUCTION ACTIVITY HAS TEMPORARILY CEASED.
 - 17.4. STABILIZATION MEASURES SHALL BE DETERMINED BASED ON SITE CONDITIONS AT THE TIME OF CONSTRUCTION ACTIVITY HAS CEASED, INCLUDING BUT NOT LIMITED TO WEATHER CONDITIONS AND LENGTH OF TIME MEASURE MUST BE EFFECTIVE. THE FOLLOWING ARE ACCEPTABLE STABILIZATION MEASURES:
 - PERMANENT SEEDING, IN ACCORDANCE WITH APPROVED CONSTRUCTION SPECIFICATION
 - TEMPORARY SEEDING, MAY CONSIST OF SPRING OATS(50LBS/ACRE) AND/OR WHEAT OR CEREAL RYE (150LB/ACRE)
 - HYDRO-MULCHING WITH A TACKIFIER
 - GEOTEXTILE EROSION MATTING
 - SODDING

STORMWATER FACILITIES CONSTRUCTION NOTES

1. ENGINEER SHALL BE NOTIFIED PRIOR TO INSTALLATION OF STORMWATER MANAGEMENT FACILITIES. CONSTRUCTION OF STORMWATER MANAGEMENT FACILITIES SHALL BE OBSERVED AND DOCUMENTED BY THE ENGINEER, OR AN OWNER'S REPRESENTATIVE.
2. STORMWATER MANAGEMENT FACILITIES SHALL BE INSTALLED AFTER SUBSTANTIAL COMPLETION OF FINAL SITE GRADING AND SOLS HAVE BEEN STABILIZED.
3. AREAS USED FOR TEMPORARY SEDIMENT BASINS SHALL BE REMOVED IN THEIR ENTIRETY AFTER CONSTRUCTION OF STORMWATER MANAGEMENT FACILITIES.
4. CONSTRUCTION TRAFFIC, HEAVY EQUIPMENT AND SOIL STOCKPILES SHALL NOT BE PLACED IN AREAS WHERE PROPOSED STORMWATER MANAGEMENT FACILITIES ARE LOCATED.
5. NATIVE SOIL INFILTRATION RATES BELOW STORMWATER FACILITIES SHALL BE VERIFIED BY THE OWNER'S GEOTECHNICAL ENGINEER PRIOR INSTALLATION OF FACILITIES. NATIVE SOIL INFILTRATION RATES SHALL BE EQUAL TO OR GREATER THAN DESIGN INFILTRATION RATES.
6. NATIVE SOLS SHALL BE BLENDED A MINIMUM OF TWO FEET PRIOR TO INSTALLATION OF STORMWATER INFILTRATION FACILITIES TO BREAKUP ANY LOWER PERMEABILITY SEAMS THAT MAY BE PRESENT.
7. THICKER SILT OR CLAY LAYERS SHALL BE OVER-EXCAVATED AND BACKFILLED WITH GRANULAR MATERIALS CONFORMING TO SPECIFICATIONS PER WDNr TECH STANDARD 1004.

LEGEND

	PROPERTY LINE
	RIGHT-OF-WAY
	EASEMENT LINE
	BUILDING OUTLINE
	BUILDING OVERHANG
	BUILDING SETBACK LINE
	PAVEMENT SETBACK LINE
	EDGE OF PAVEMENT
	STANDARD CURB AND GUTTER
	REJECT CURB AND GUTTER
	MOUNTABLE CURB AND GUTTER
	8" CONCRETE RIBBON CURB
	ASPHALT PAVEMENT
	HEAVY DUTY ASPHALT PAVEMENT
	CONCRETE PAVEMENT
	HEAVY DUTY CONCRETE PAVEMENT
	PROPOSED 1 FOOT CONTOUR
	PROPOSED 5 FOOT CONTOUR
	EXISTING 1 FOOT CONTOUR
	EXISTING 5 FOOT CONTOUR
	DRAINAGE DIRECTION
	GRADE BREAK
	STORMWATER MANAGEMENT AREA
	RETAINING WALL
	BOULDER WALL
	RAILING
	FENCE
	LIGHT POLE (REFER TO PHOTOMETRIC PLAN)
	ADA PARKING SIGN
	FLAG POLE
	BOLLARD
	BOLLARD WITH ADA PARKING SIGN
	BIKE RACK
	TREE REMOVAL
	SHRUB REMOVAL
	SAWOUT EXISTING PAVEMENT
	SANITARY SEWER
	WATERMAIN
	STORM SEWER
	8'x4'x4" INSULATION (PLAN VIEW)
	8'x4'x4" INSULATION (PROFILE VIEW)
	SILT FENCE
	RIP-RAP
	CONSTRUCTION ENTRANCE
	EROSION MATTING
	TURF REINFORCEMENT MATTING
	SPOT ELEVATION
	EP – EDGE OF PAVEMENT
	EG – EDGE OF CONCRETE
	BOP – BACK OF CURB
	MATCH – MATCH EXISTING GRADE
	HP – HIGH POINT
	SW – SIDEWALK
	DITCH CHECK
	INLET PROTECTION



MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN
PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		MONTH, DATE, YEAR	
REVISION SCHEDULE			
Mark	Description	Date	

SHEET TITLE

GENERAL
NOTES AND
LEGEND

SHEET NUMBER

C1.0



Toll Free (800) 242-8511



ULA PROJECT NUMBER: W22-0128-0



LAND USE APPLICATION


PROGRESS DOCUMENTS

DATE OF ISSUANCE	MONTH, DATE, YEAR
------------------	-------------------


SHEET TITLE

SHEET NUMBER

C2.0

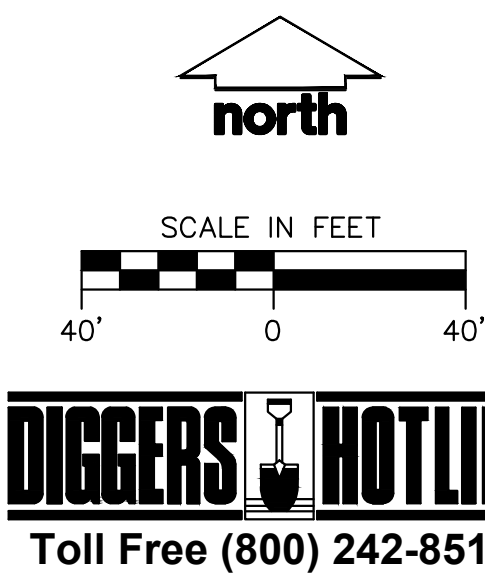

SITE WATERSHED DATA	
SITE ADDRESS	
PROPERTY ACREAGE	8.47 ACRES
NUMBER OF BUILDING STORIES	6
TOTAL BUILDING SQUARE FOOTAGE	102,743
GROSS BUILDING SQUARE FOOTAGE	442,571
NUMBER OF PARKING STALLS	
STRUCTURE	
LARGE (STRUCTURE)	490
LARGE (OUTDOOR SURFACE)	12
ACCESSIBLE	10
TOTAL SURFACE	512
NUMBER OF BICYCLE STALLS	380
NUMBER OF VISITOR BICYCLE STALLS	36
EXISTING VS. PROPOSED SITE COVERAGE	
EXISTING IMPERVIOUS SURFACE AREA	34,914 SF
EXISTING PERVIOUS SURFACE AREA	333,879 SF
EXISTING IMPERVIOUS SURFACE AREA RATIO	0.09
PROPOSED IMPERVIOUS SURFACE AREA	159,909 SF
PROPOSED PERVIOUS SURFACE AREA	208,884 SF
PROPOSED IMPERVIOUS SURFACE AREA RATIO	0.43

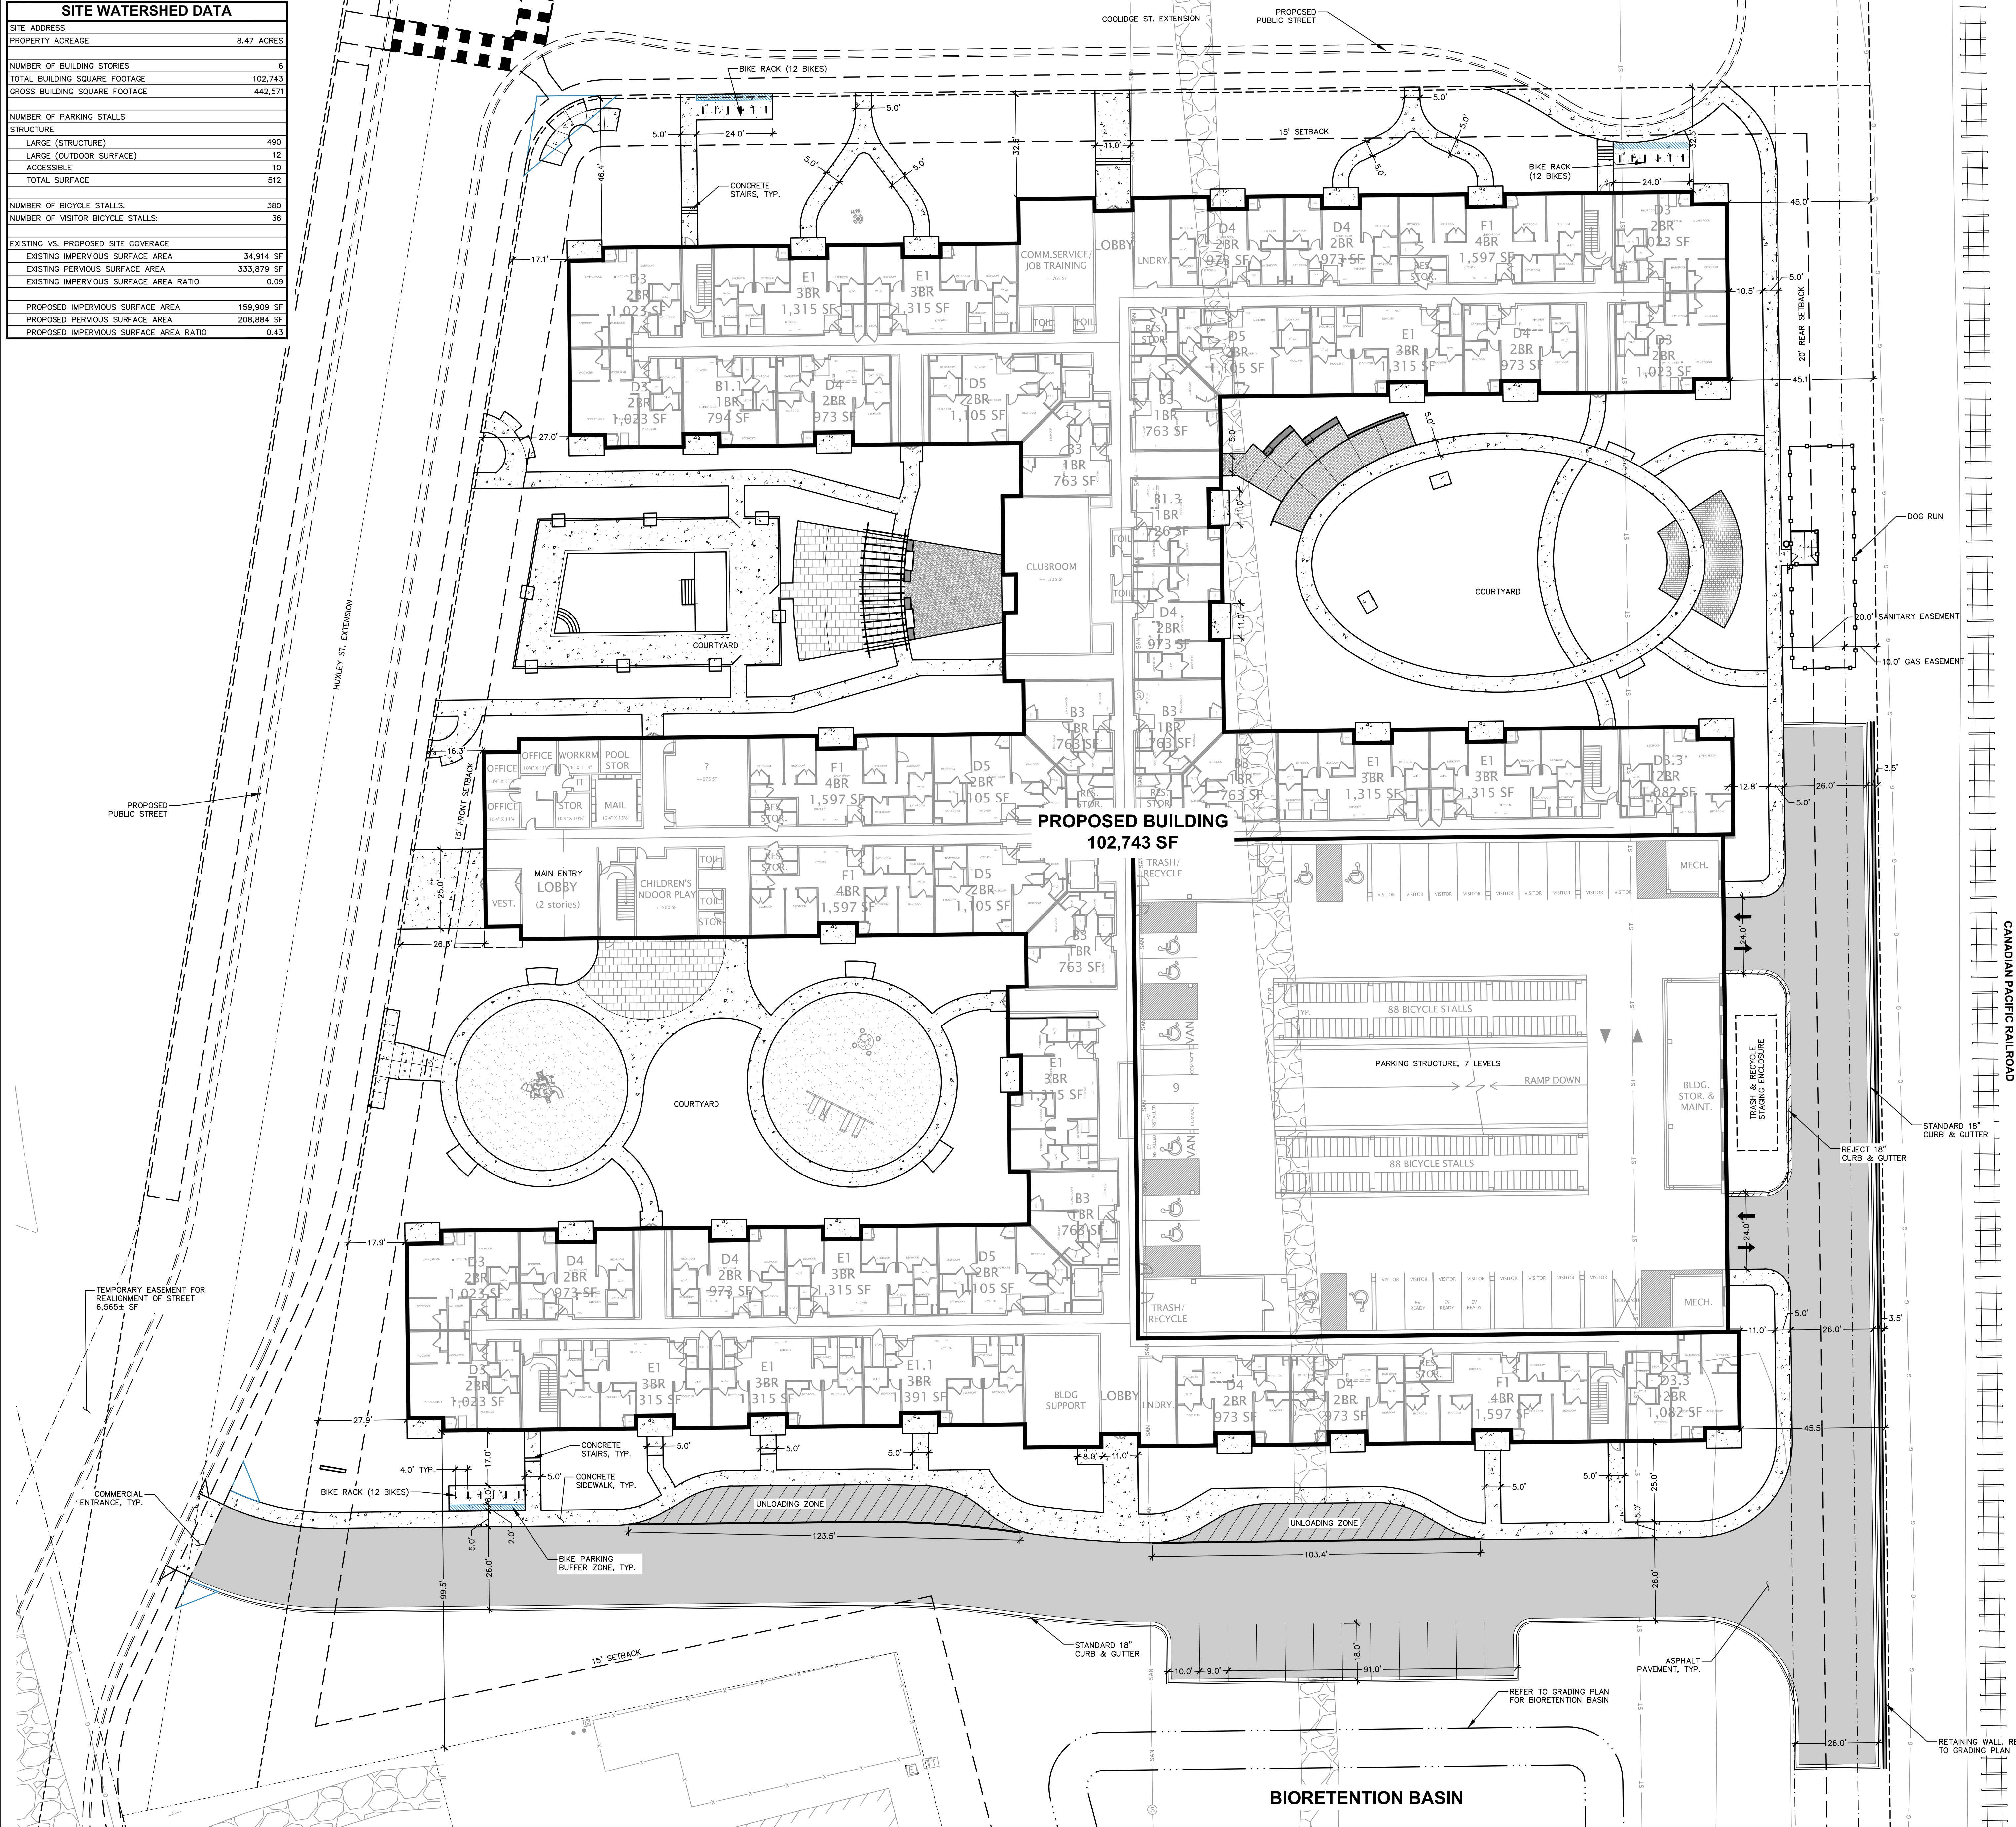

JLA
ARCHITECTS

MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark	Description	Date
------	-------------	------


SHEET TITLE

SITE PLAN

SHEET NUMBER

C3.0



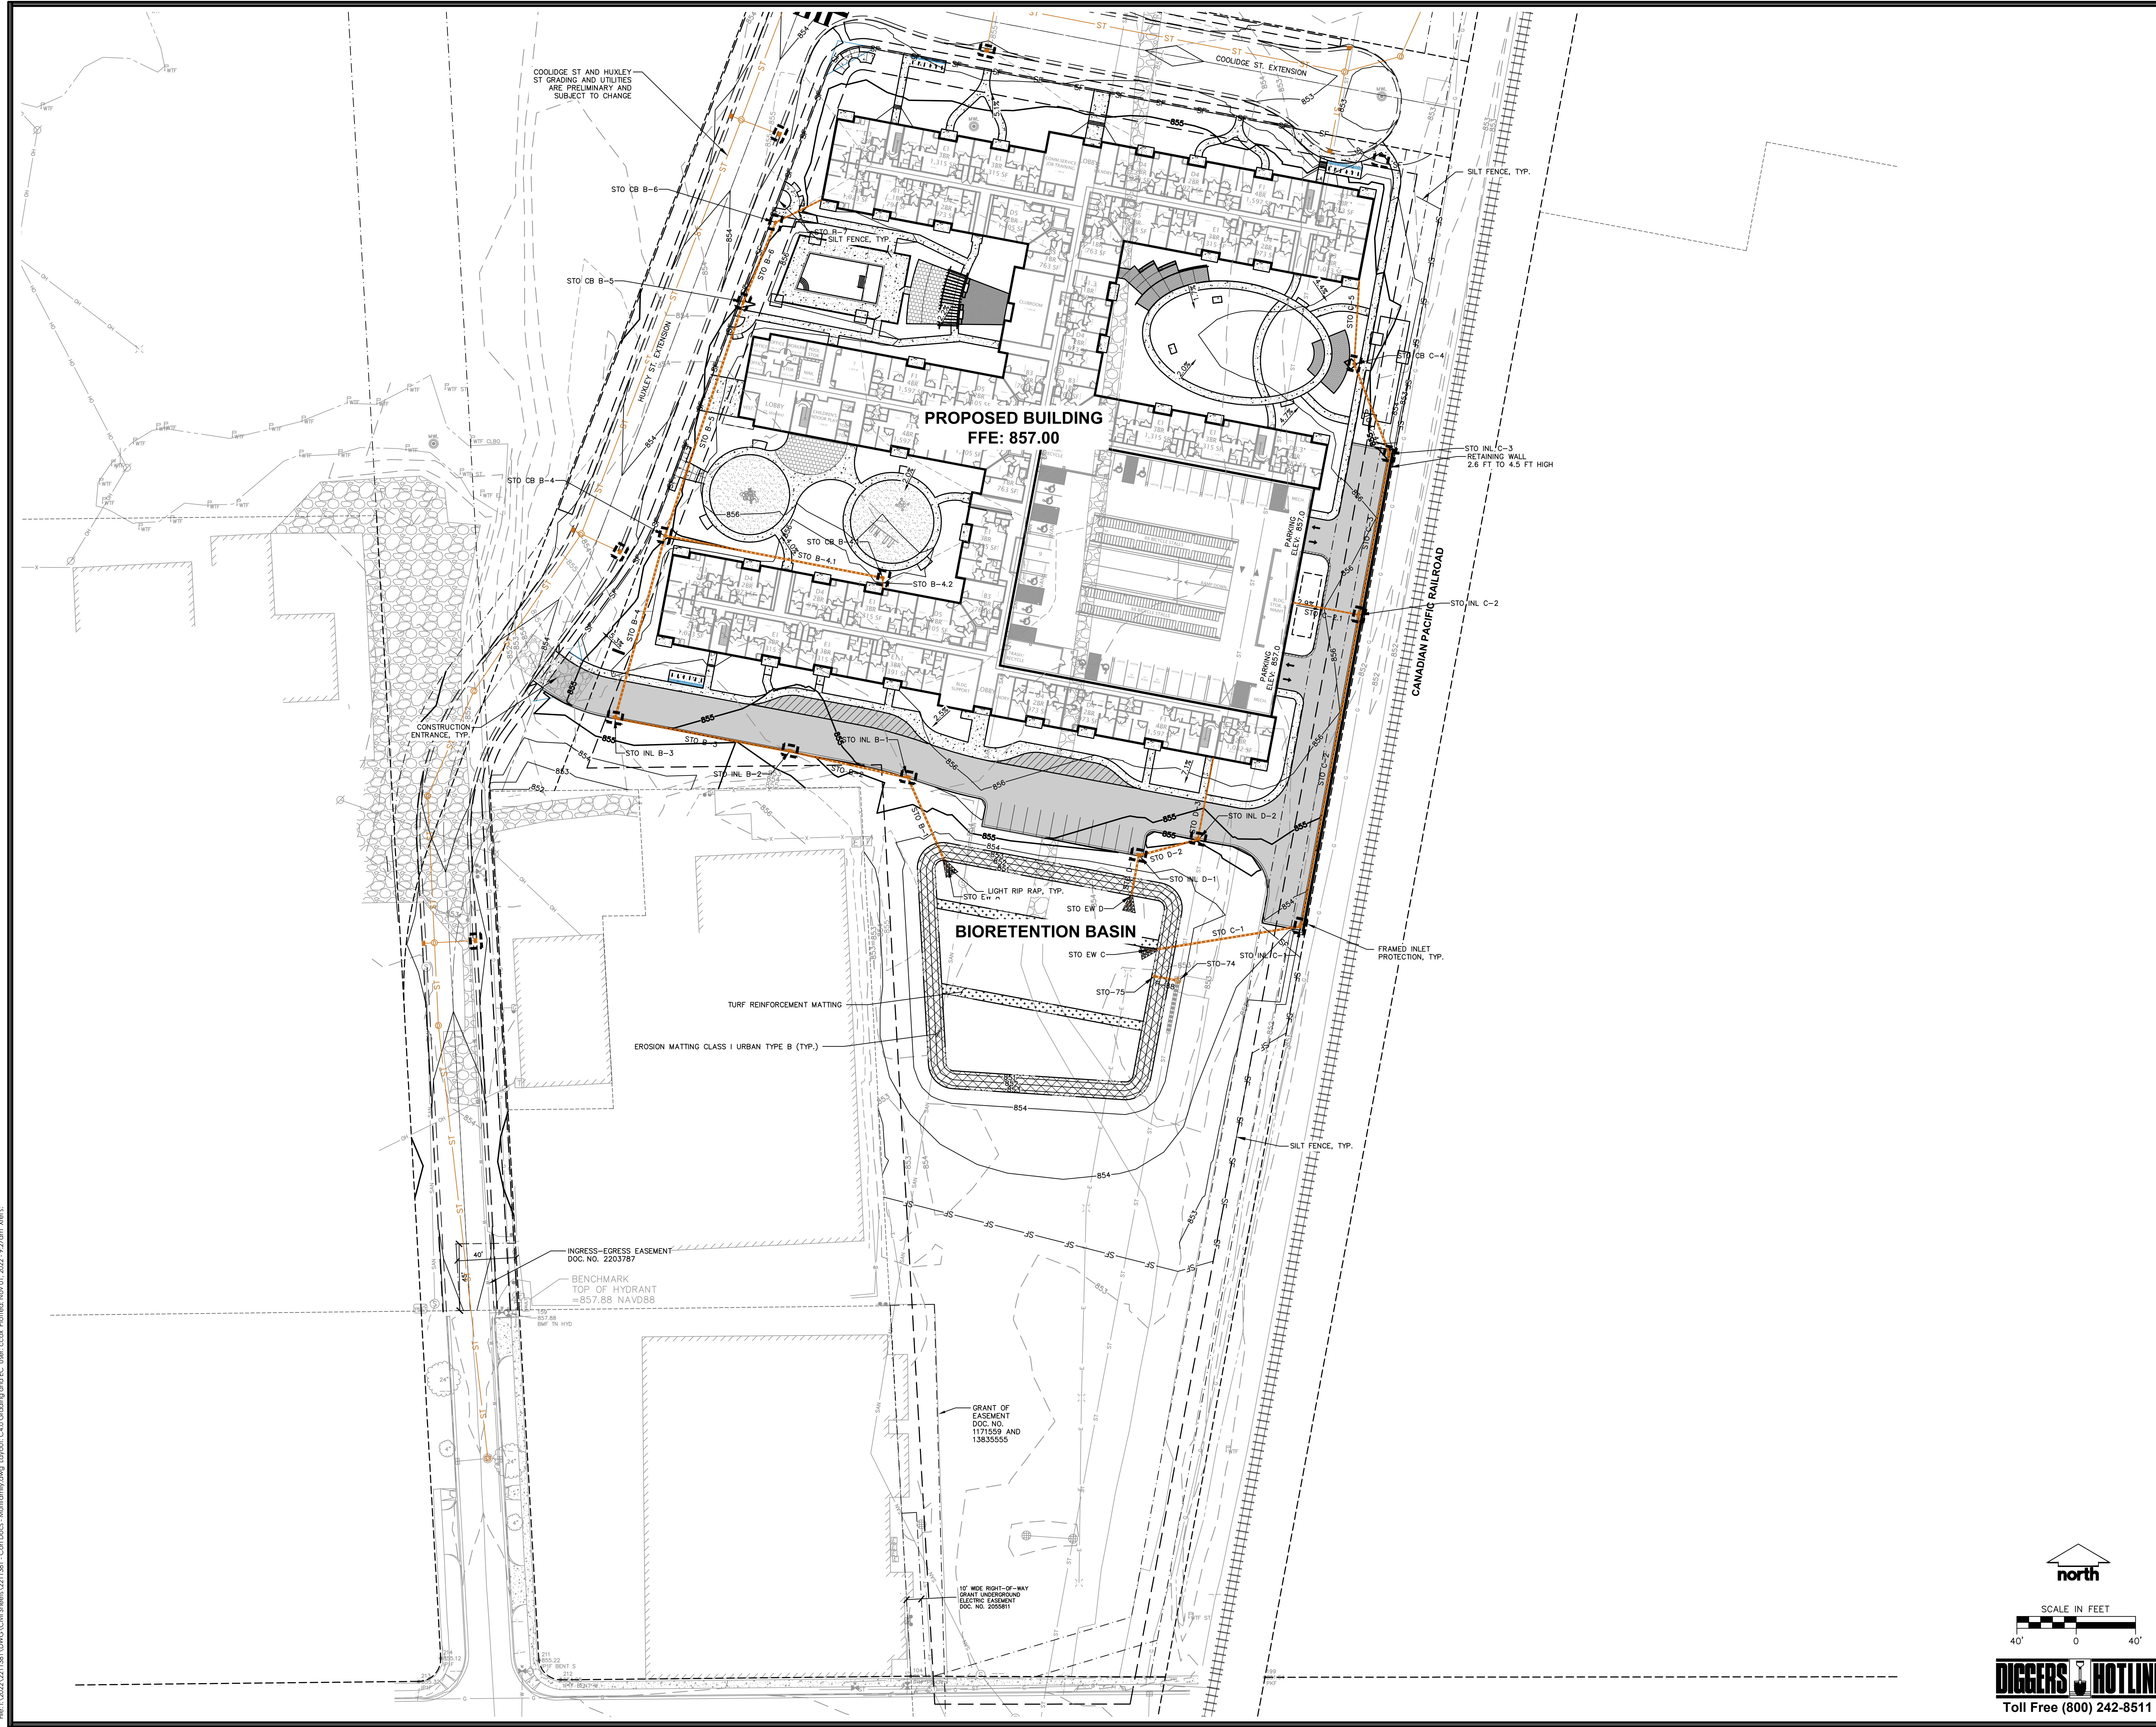



JLA
ARCHITECTS

MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



JSD



LINCOLN AVENUE CAPITAL

HARTMEYER REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		MONTH, DATE, YEAR	
REVISION SCHEDULE			
Mark	Description	Date	

SHEET TITLE

GRADING AND EROSION CONTROL PLAN

SHEET NUMBER



C4.0



40' 0 40'

DIGGERS HOTLINE
Toll Free (800) 242-8511

File: 1:2022\2111381\WACO\Civil\Sheet\2111381 - Con Docs - Multifamily.dwg | Layout: C4.0 Grading and EC User: ccoz | Printed: Nov 01, 2022 - 9:27am | xref's:

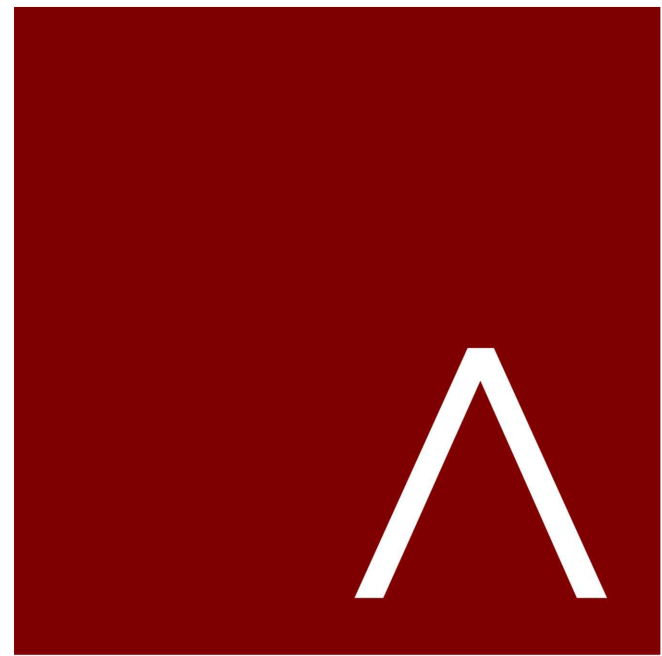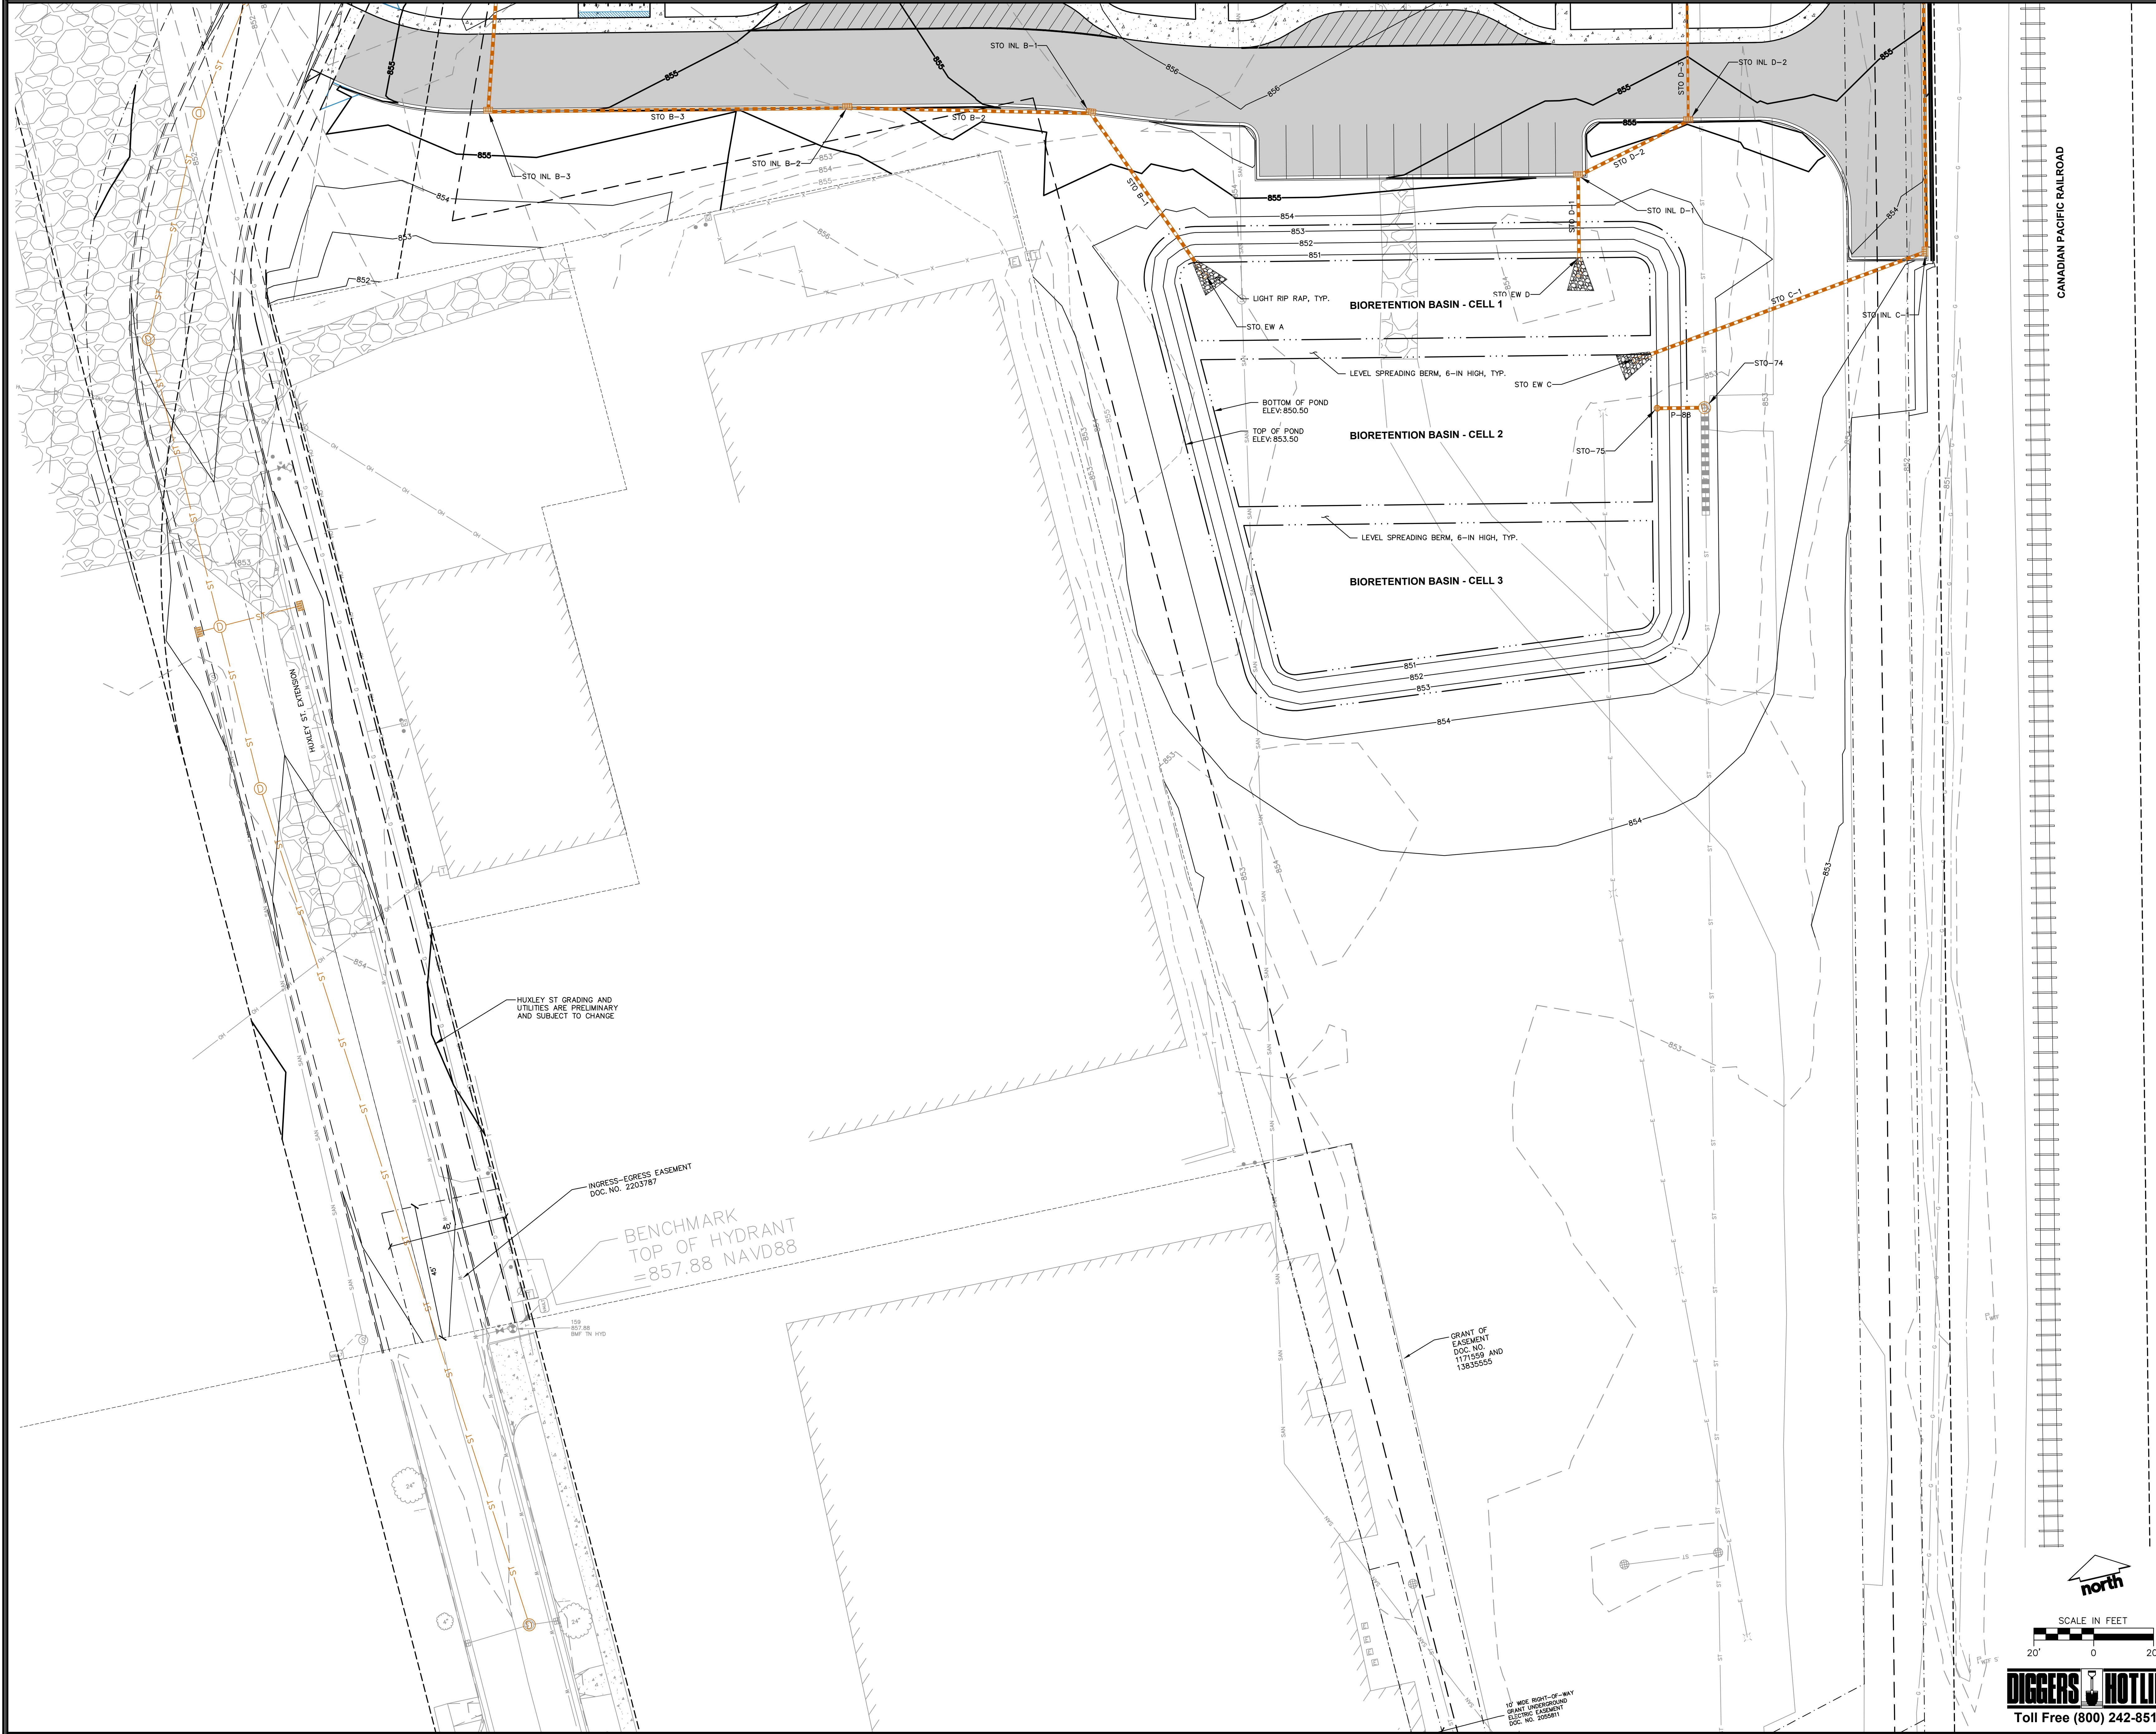

JLA
ARCHITECTS

MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark	Description	Date
------	-------------	------

SHEET TITLE


DETAILED
GRADING
PLAN

SHEET NUMBER


C4.2



SCALE IN FEET



FLEXSTORM INLET FILTERS TO MEET DANE COUNTY EROSION CONTROL STANDARDS

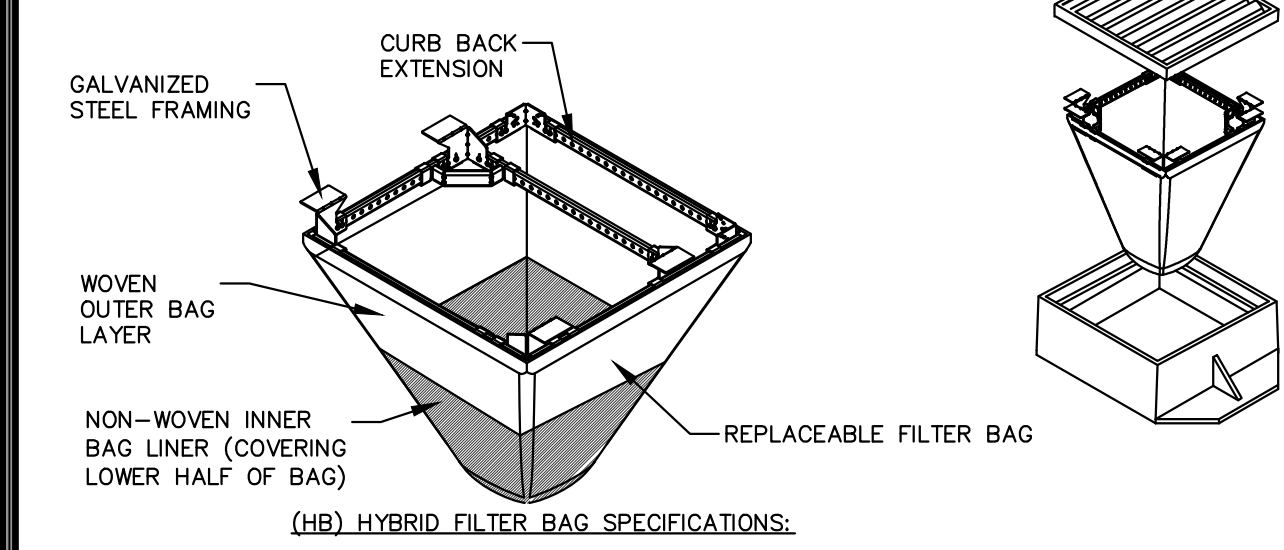

- INSTALLATION INSTRUCTIONS:**
1. REMOVE GRATE FROM THE DRAINAGE STRUCTURE
 2. CLEAN STONE AND DIRT FROM LEDGE (LIP) OF DRAINAGE STRUCTURE
 3. DROP THE INLET FILTER THROUGH THE CLEAR OPENING SUCH THAT THE HANGERS REST FIRMLY ON THE LIP OF THE STRUCTURE
 4. REPLACE THE GRATE AND CONFIRM IT IS NOT ELEVATED MORE THAN 1/8"
- MAINTENANCE GUIDELINES:**
1. EMPTY THE SEDIMENT BAG IF MORE THAN HALF FILLED WITH SEDIMENT AND DEBRIS
 2. REMOVE THE GRATE, ENGAGE THE LIFTING POINTS, AND LIFT FILTER FROM THE DRAINAGE STRUCTURE
 3. DISPOSE OF SEDIMENT AND DEBRIS BY THE ENGINEERING OR MAINTENANCE CONTRACTOR 4. ALTERNATIVELY, AN INDUSTRIAL VACUUM CAN BE USED TO COLLECT SEDIMENT FROM THE FILTER BAG


CATCH-IT INLET FILTER (Temporary Inlet Protection)

Neenah Casting	Inlet Type	Grate Size	Opening Size	Bag Cap (ft)	Flow Ratings (CFS)	ADS PIN
3067	Curb Box	35.25 x 17.75	33.0 x 15.0	4.4	2.0	62LGB6XTHB
3246A	Curb Box	35.75 x 23.875	33.5 x 21.0	4.2	1.1	62LGB3024HB
3030	Square Rect (SQ)	23 x 16	20.5 x 13.5	1.6	0.7	62MCR2316HB
3067-C	Square Rect (SQ)	35.25 x 17.75	33 x 15	3.2	1.0	62LGB30618HB
R-2501	Round (RD)	-28	-24	2.3	0.8	62MRD20HB
R-1772(2580)	Round (RD)	22.25-23.5	20.5-21	1.6	0.6	62MRD22HB


Woven and Non-Woven Geotextile Filter Bag Properties (Minimum Average Roll Values)

PROPERTY	TEST METHOD	WOVEN (OUTER)	NON-WOVEN (LINER)
TENSILE STRENGTH	ASTM D4832	350 x 150 lbs	100 lbs
SEAM STRENGTH	ASTM D4832	200 x 150 lbs	50 lbs
TEAR RESISTANCE	ASTM D4832	3000 lbs	600 lbs
PUNCTURE RESISTANCE	ASTM D4832	100 x 75 lbs	40 lbs
OPENING SIZE (AOS)	ASTM D4832	20 US STD SIEVE	40 US STD SIEVE
PERMEABILITY	ASTM D4832	1.5 sec	2.0 sec
WATER FLOW RATE	ASTM D4832	200 gal/min/ft	145 gal/min/ft
MINIMUM FILTER BAG VOLUME		2 CU YD/FT	


FRAMED INLET PROTECTION

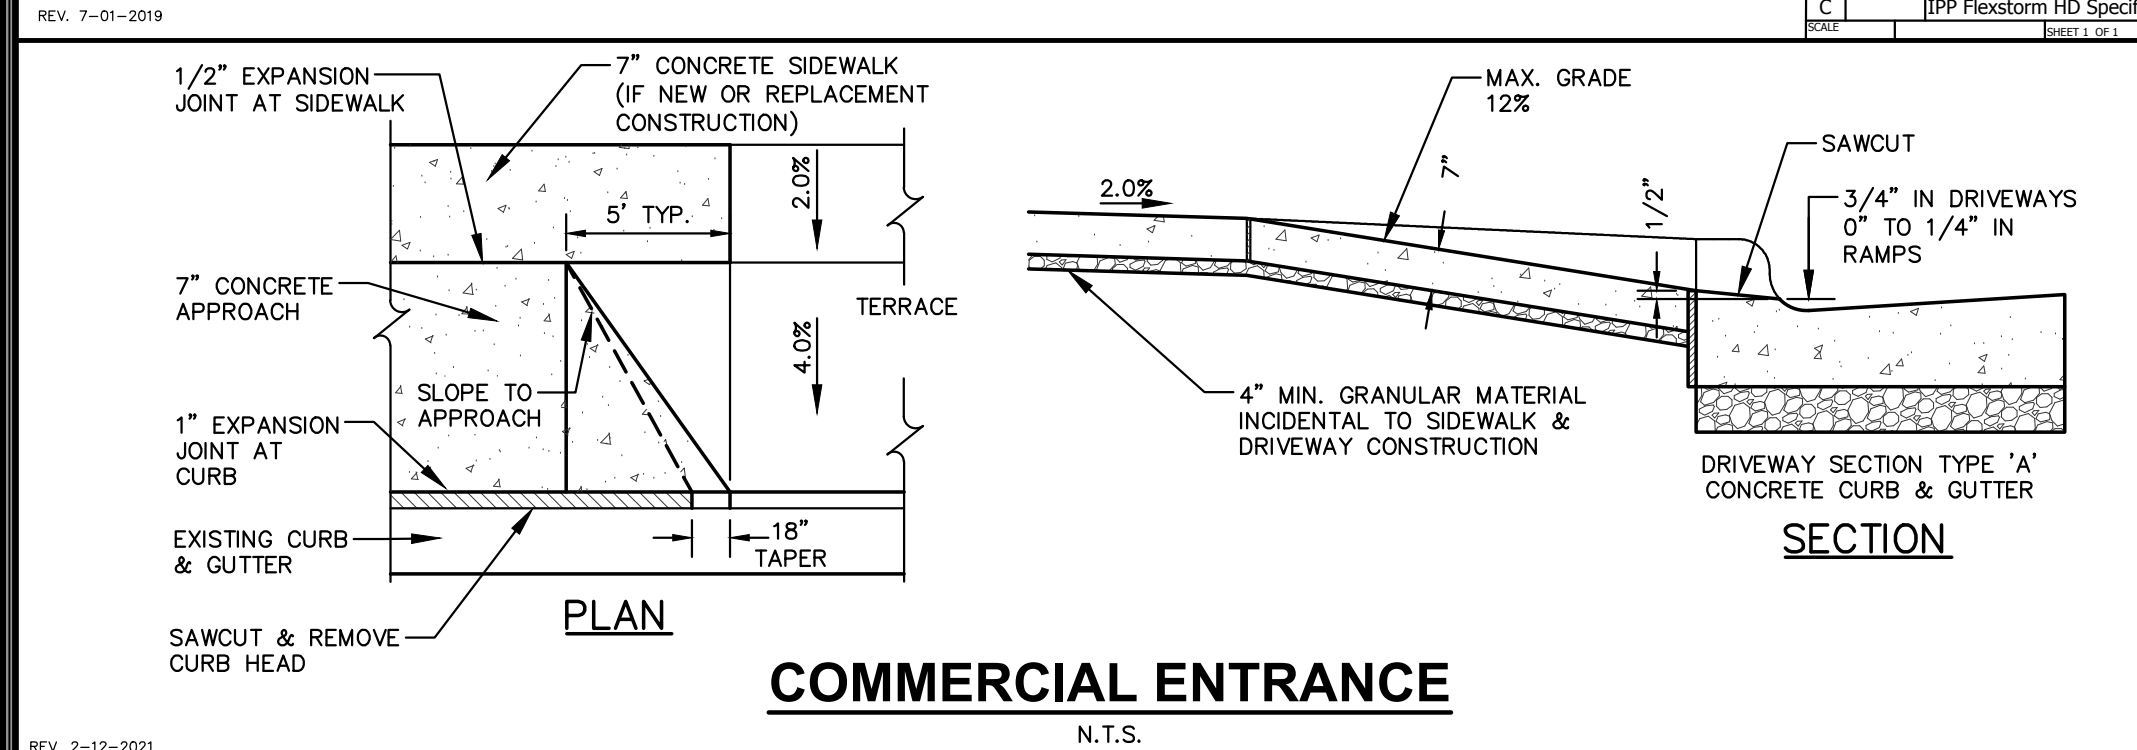

COMMERCIAL ENTRANCE

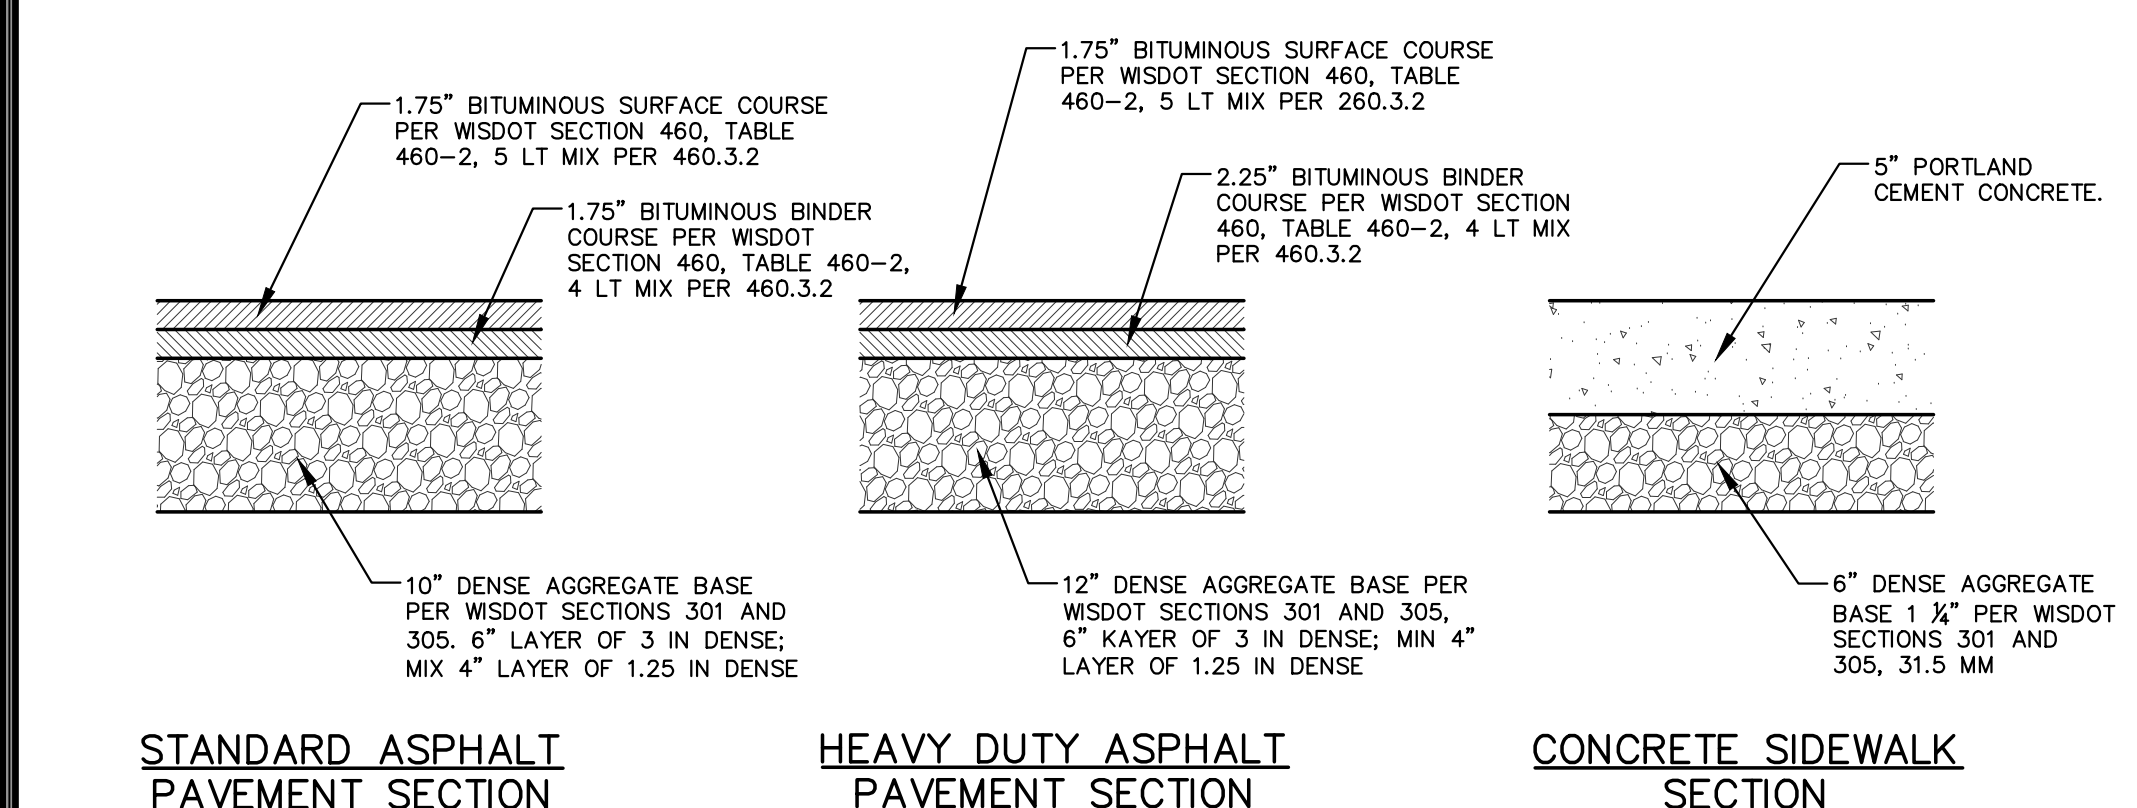



CONCRETE SIDEWALK SECTION

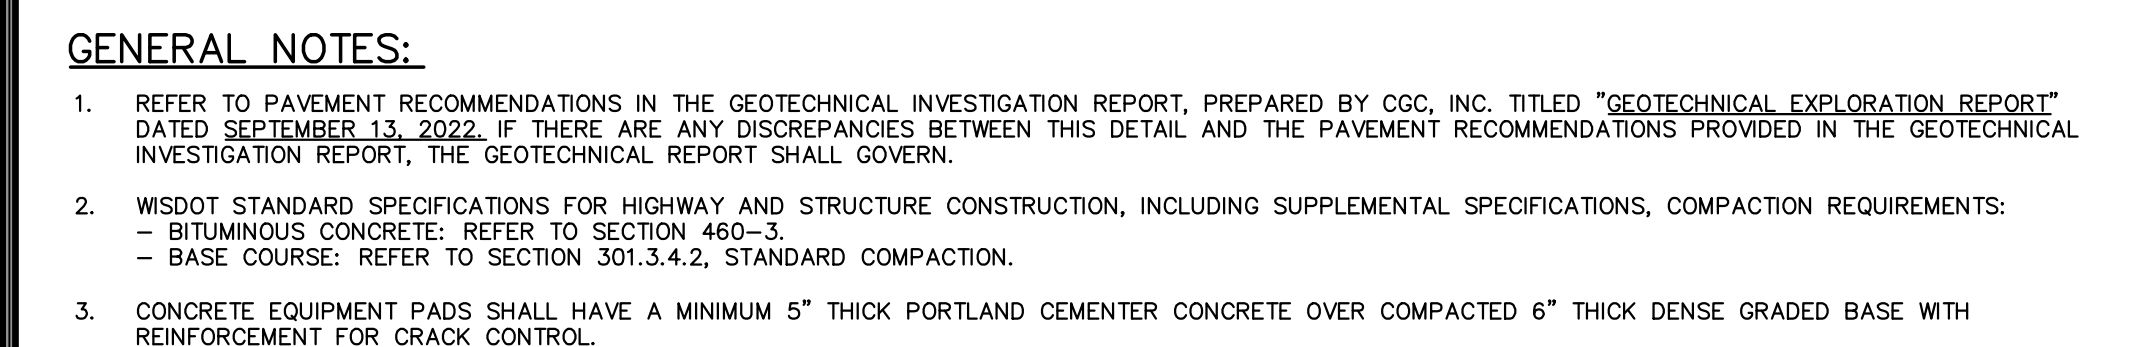


PAVEMENT SECTIONS




APRON ENDWALL W/ GRATE - RIPRAP

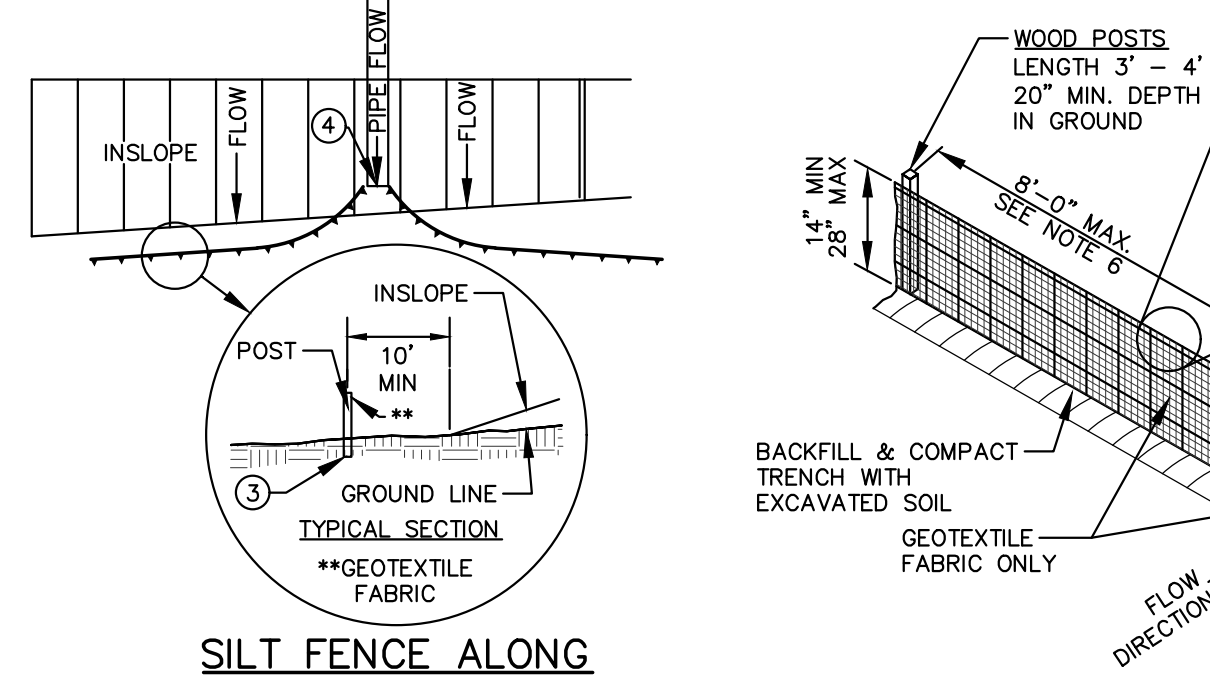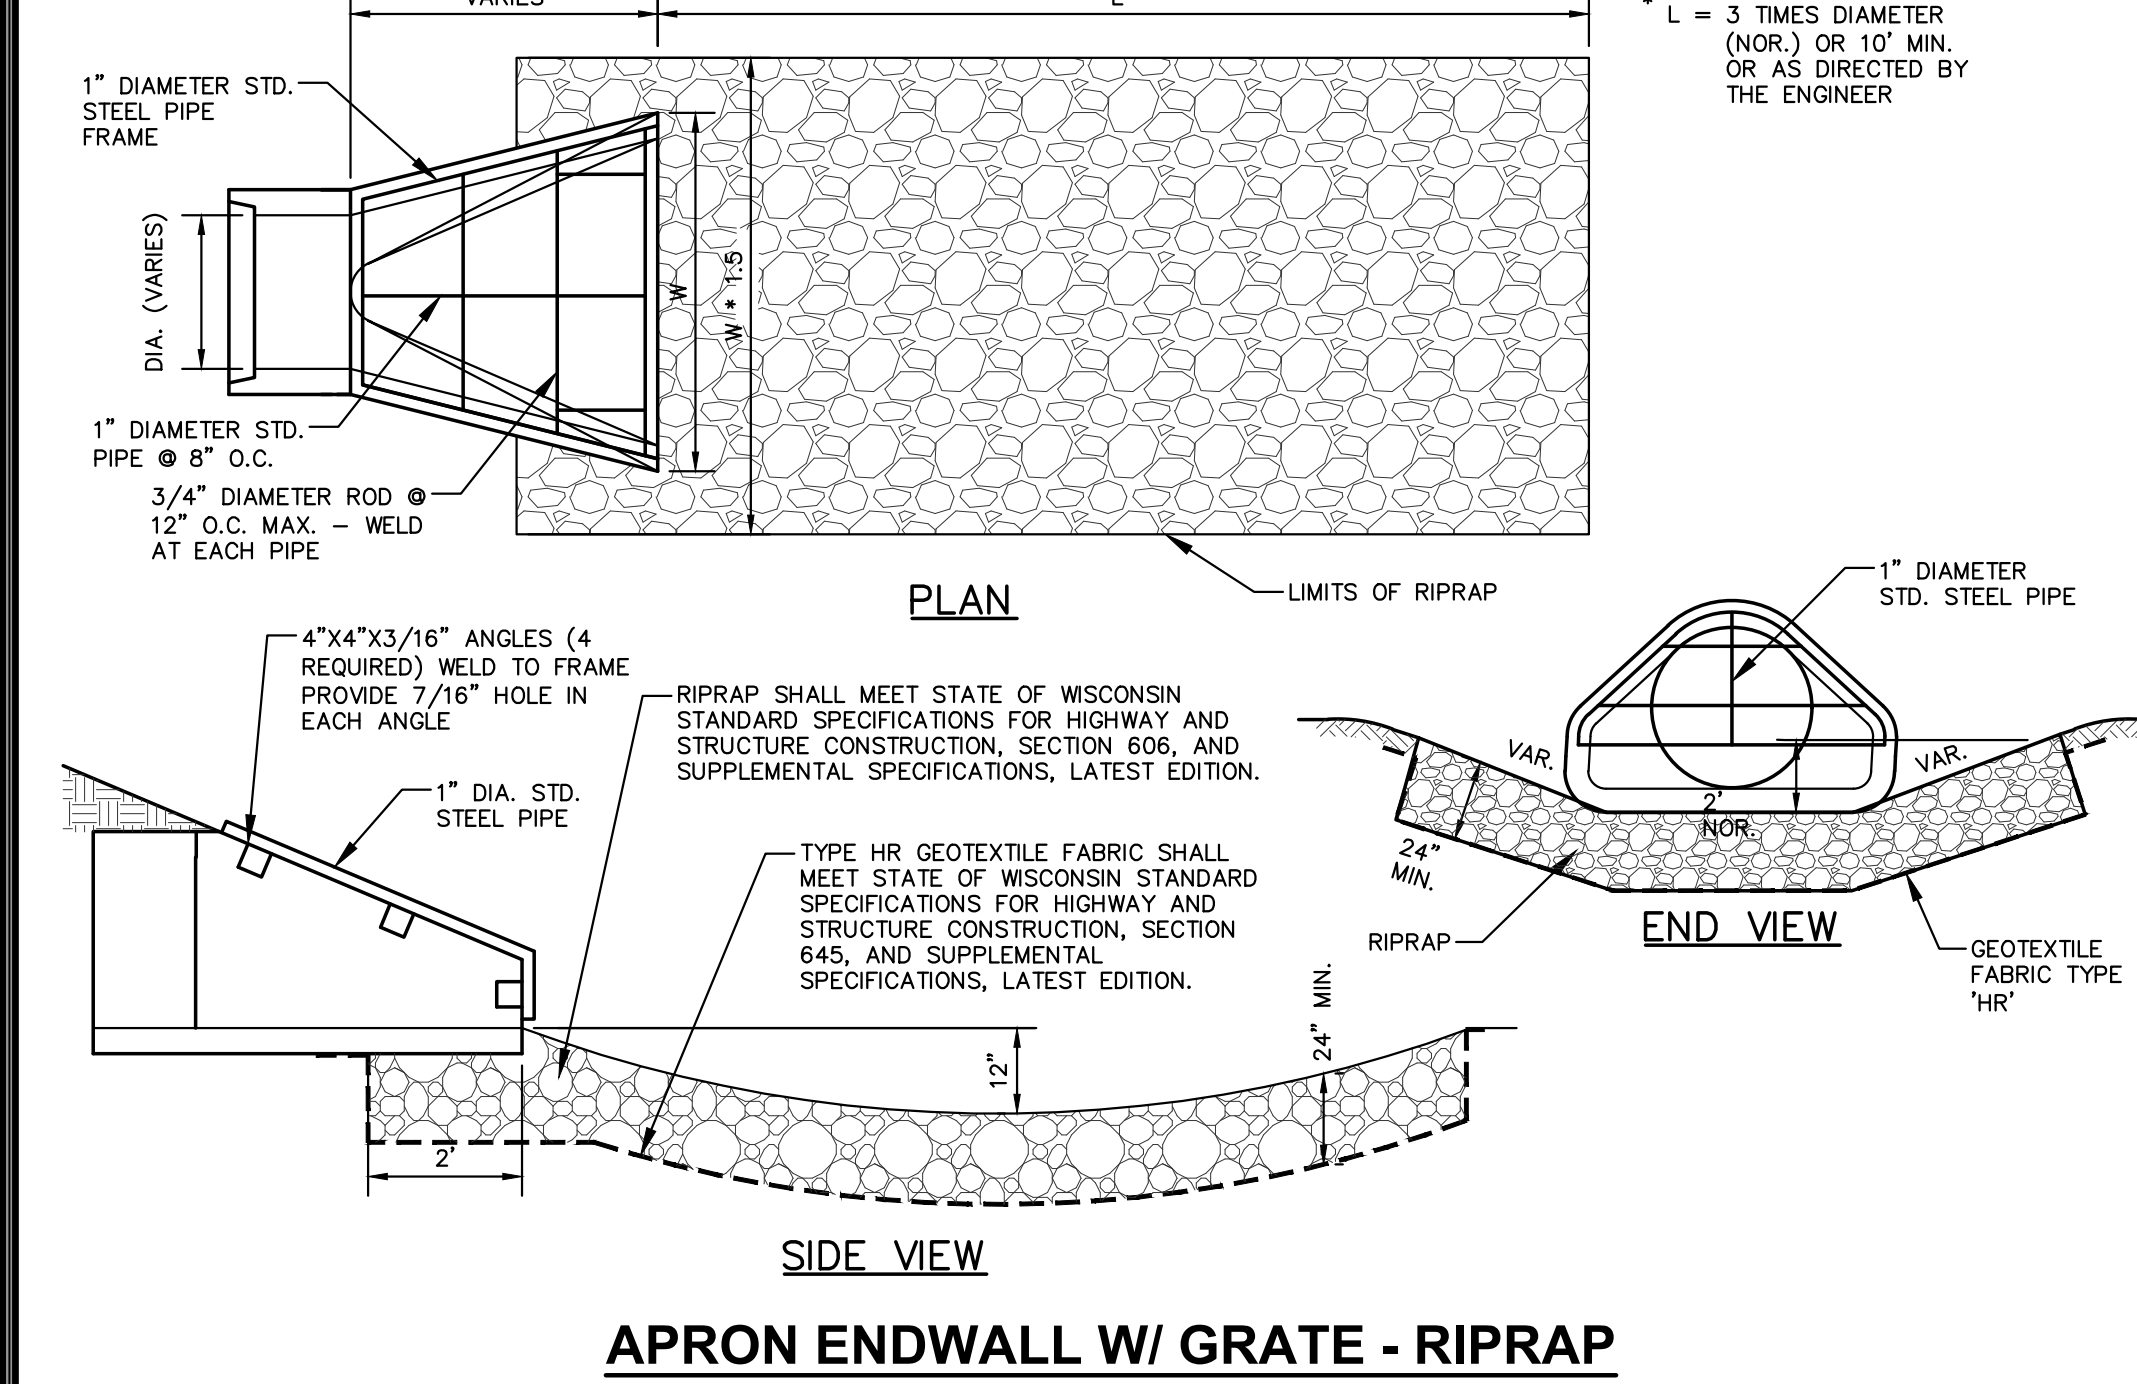


SILT FENCE TIE BACK

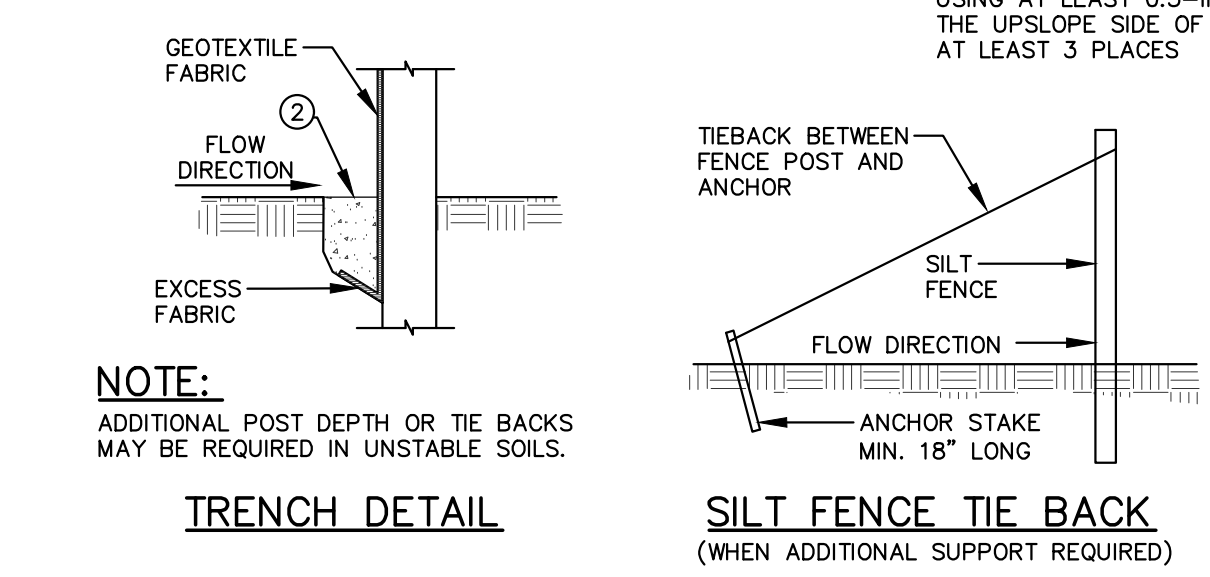


THICKENED EDGE SIDEWALK - FLUSH

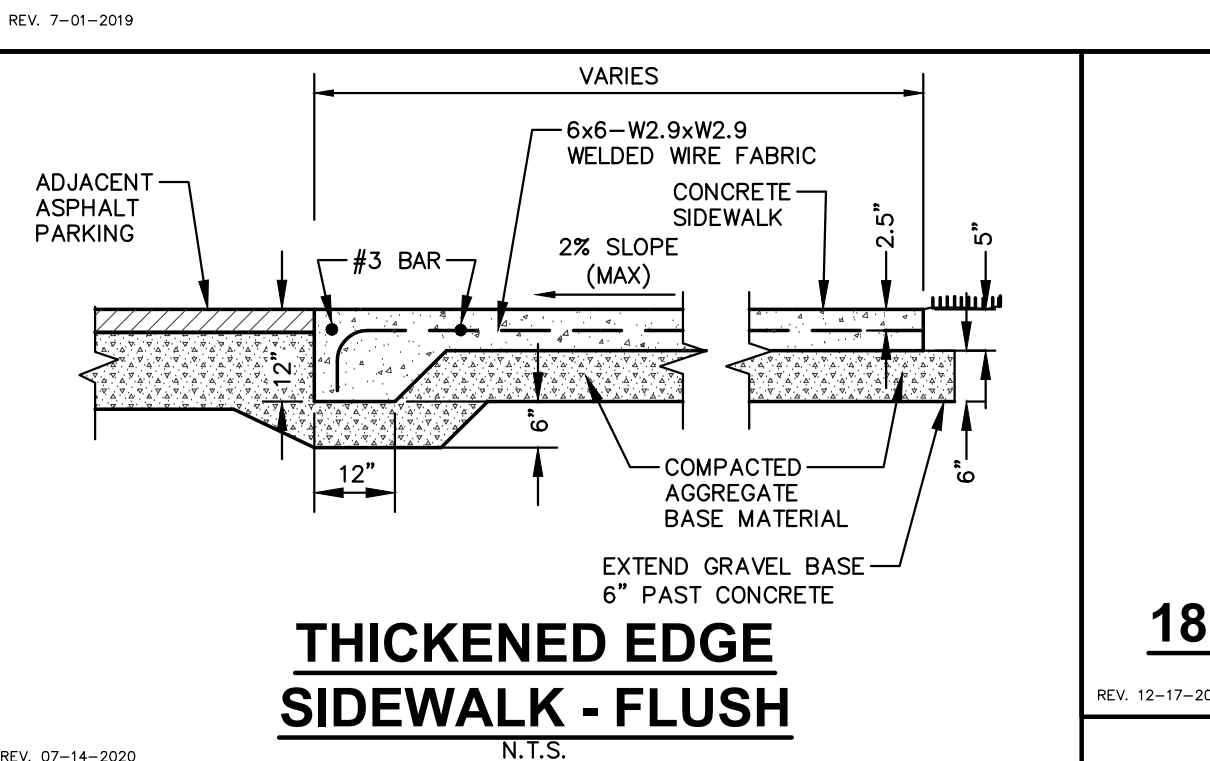

18" REJECT CURB & GUTTER

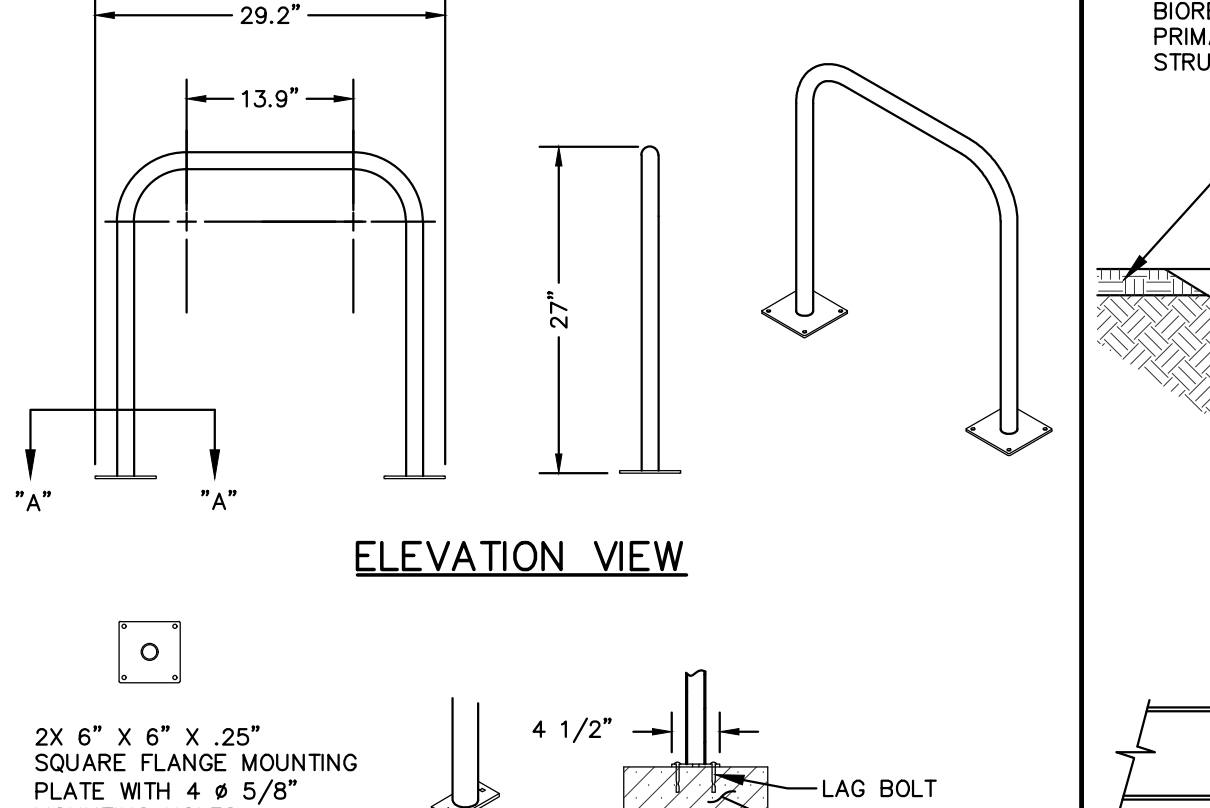


18" STANDARD CURB & GUTTER

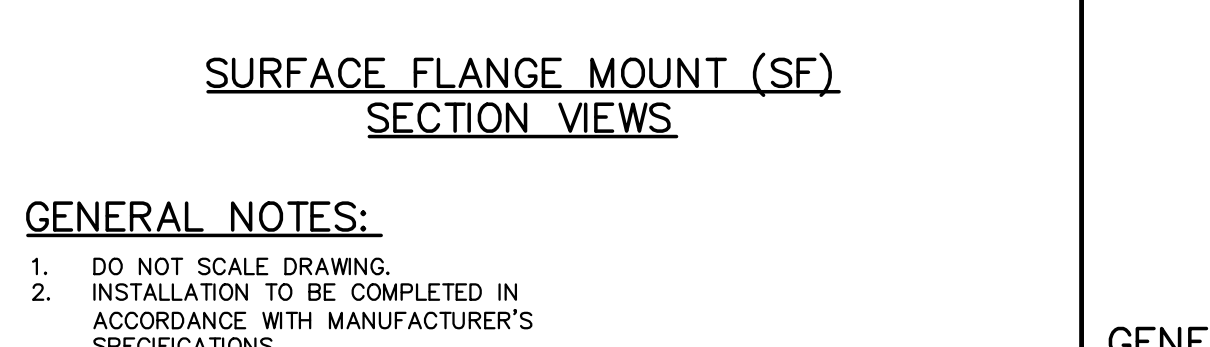


CONSTRUCTION ENTRANCE



BIORETENTION BASIN PRIMARY OUTLET STRUCTURE DETAIL

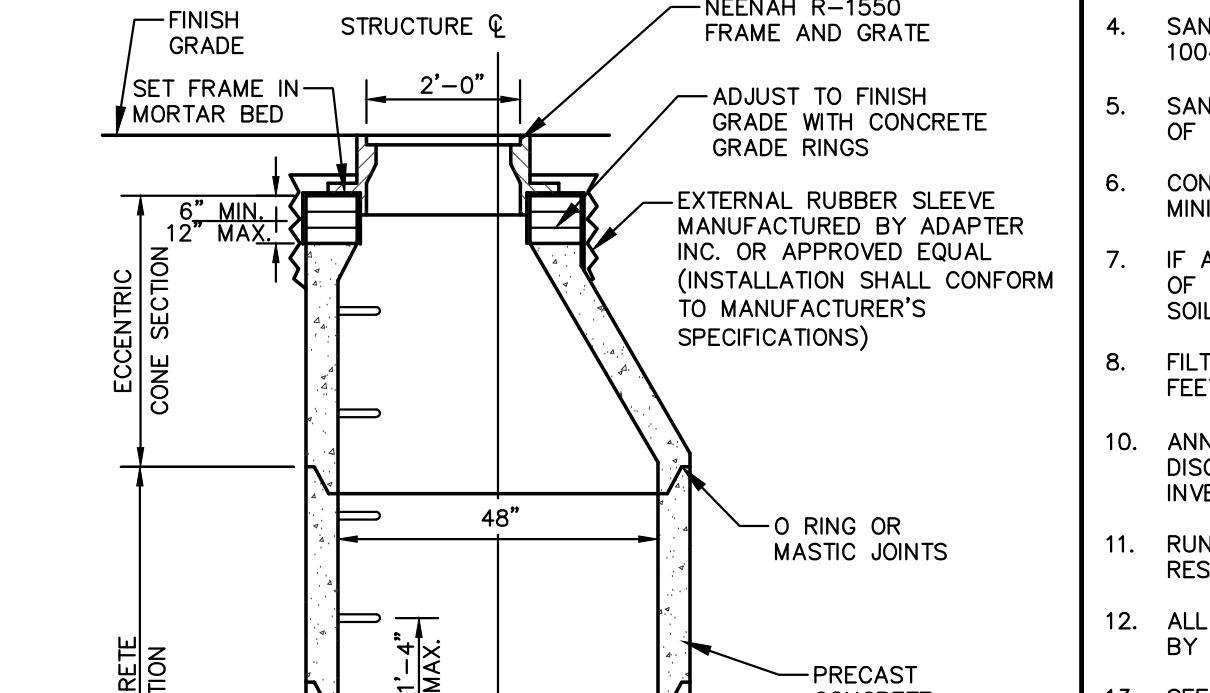


BIORETENTION BASIN EMERGENCY OVERFLOW WEIR DETAIL

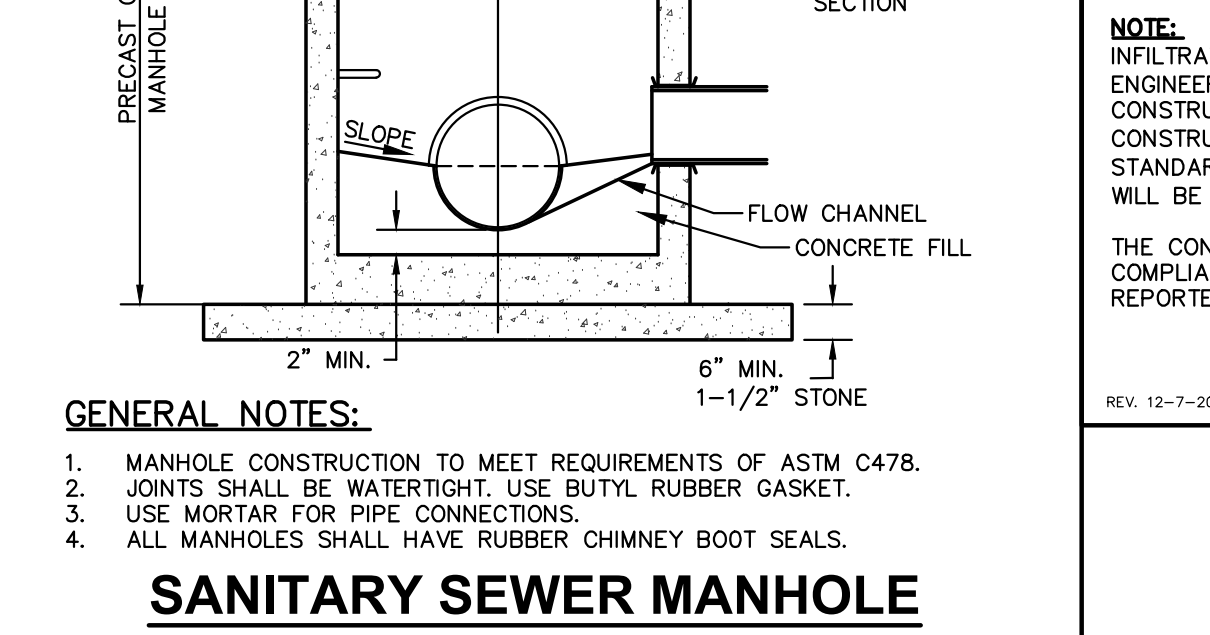

BIORETENTION BASIN




SANITARY SEWER MANHOLE

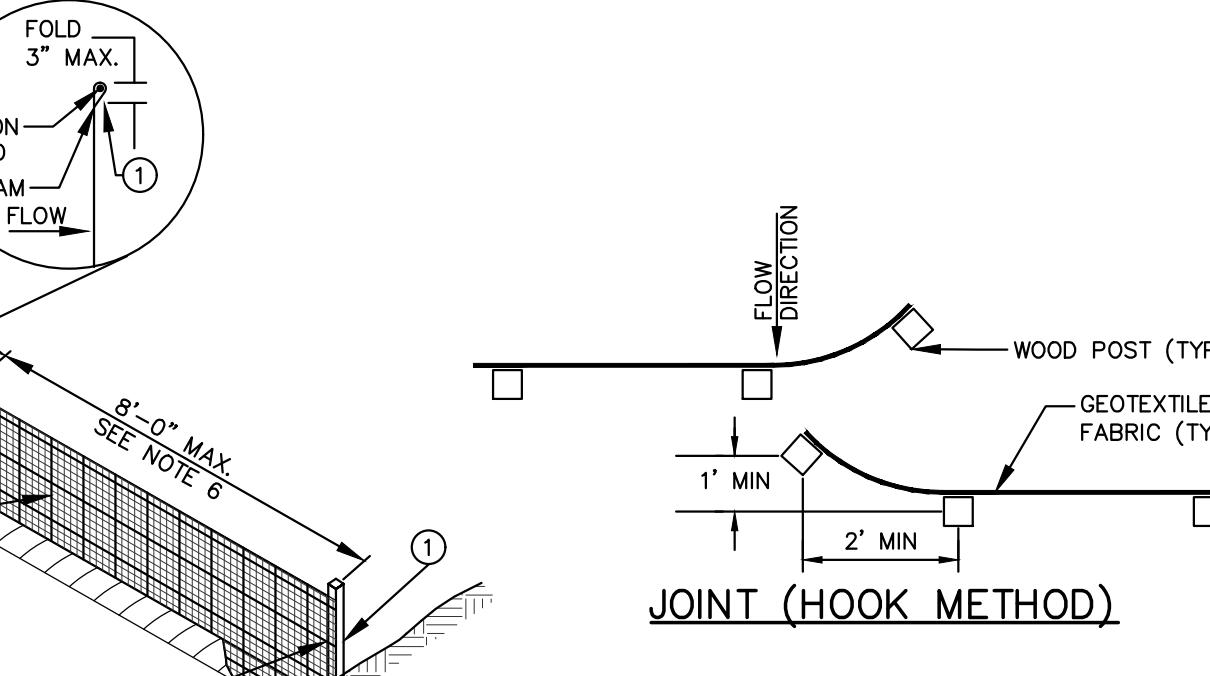


GENERAL NOTES:

1. SILT FENCE SHALL BE ANCHORED BY SPREADING AT LEAST 8-INCHES OF FABRIC IN A 4-INCH WIDE AND 6-INCH DEEP TRENCH ON THE UPSLOPE SIDE OF THE FENCE. TRENCHES SHALL NOT BE EXCAVATED WIDER OR DEEPER THAN NECESSARY FOR PROPER INSTALLATION.
2. FOLD MATERIAL TO FIT TRENCH AND BACKFILL AND COMPACT TRENCH WITH EXCAVATED SOIL.
3. WOOD POSTS SHALL BE A MINIMUM SIZE OF 1.125-INCHES x 1.125-INCHES OF DRIED OAK OR HICKORY.
4. SILT FENCE TO EXTEND ABOVE THE TOP OF PIPE.
5. SILT FENCE CONSTRUCTION AND GEOTEXTILE FABRIC SHALL CONFORM TO WDNR TECHNICAL STANDARD 1056.
6. POST SPACING SHALL BE SELECTED BASED ON GEOTEXTILE FABRIC (8- FEET FOR WOVEN & 3- FEET FOR NON-WOVEN)


STORM INLET

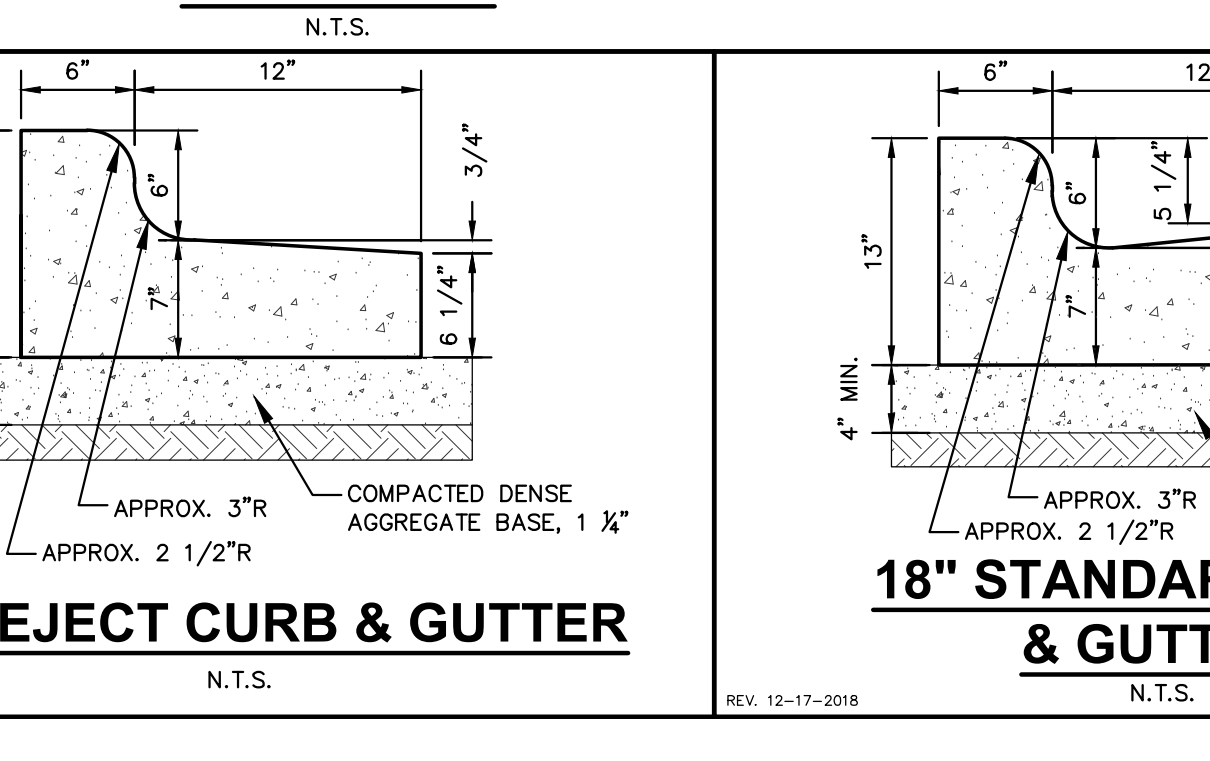


PAVEMENT SECTIONS

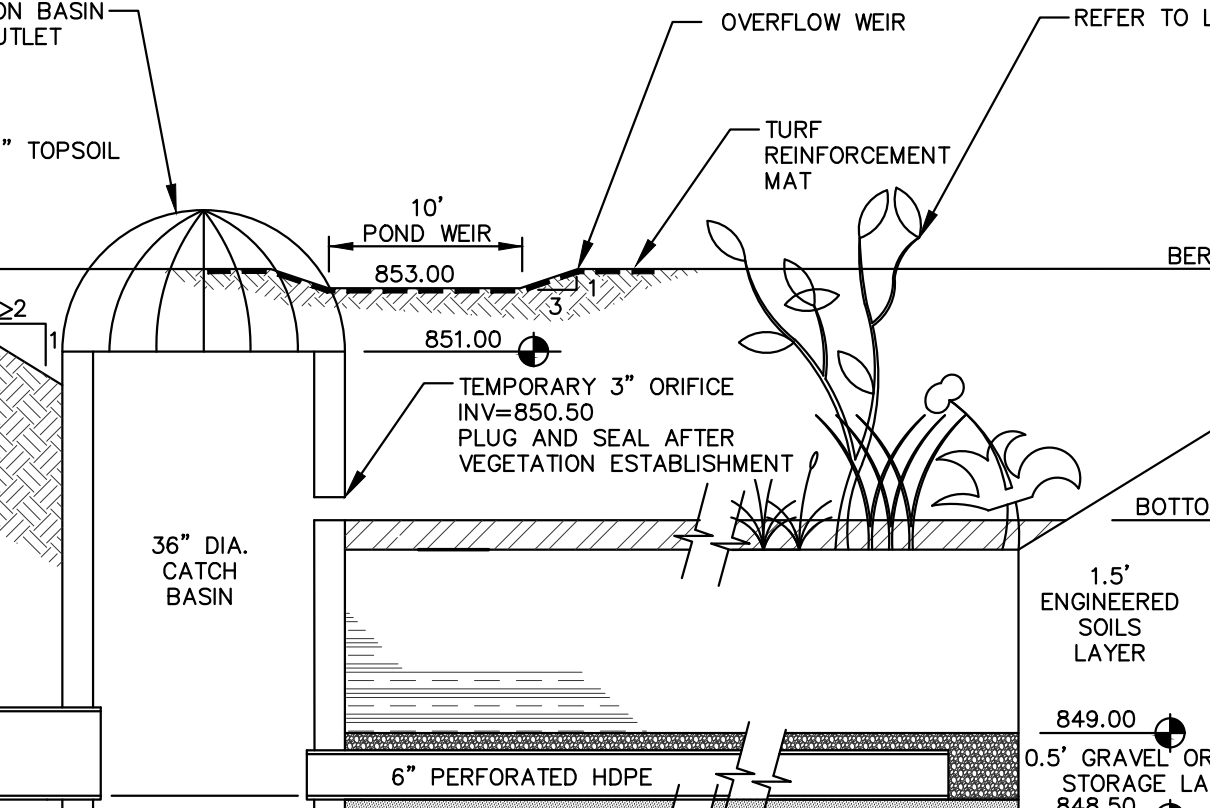


CONCRETE SIDEWALK SECTION

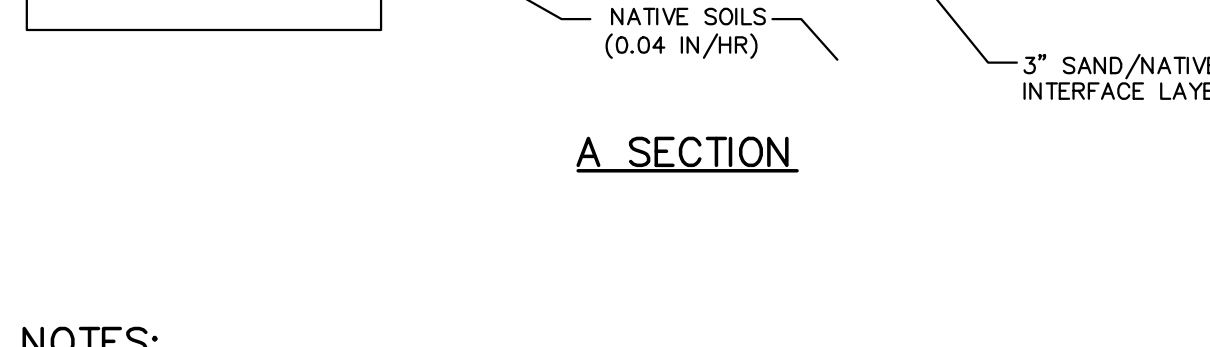


PAVEMENT SECTIONS

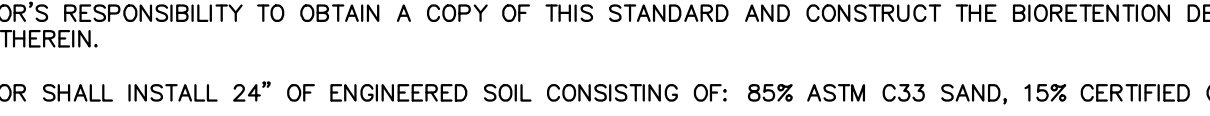

APRON ENDWALL W/ GRATE - RIPRAP

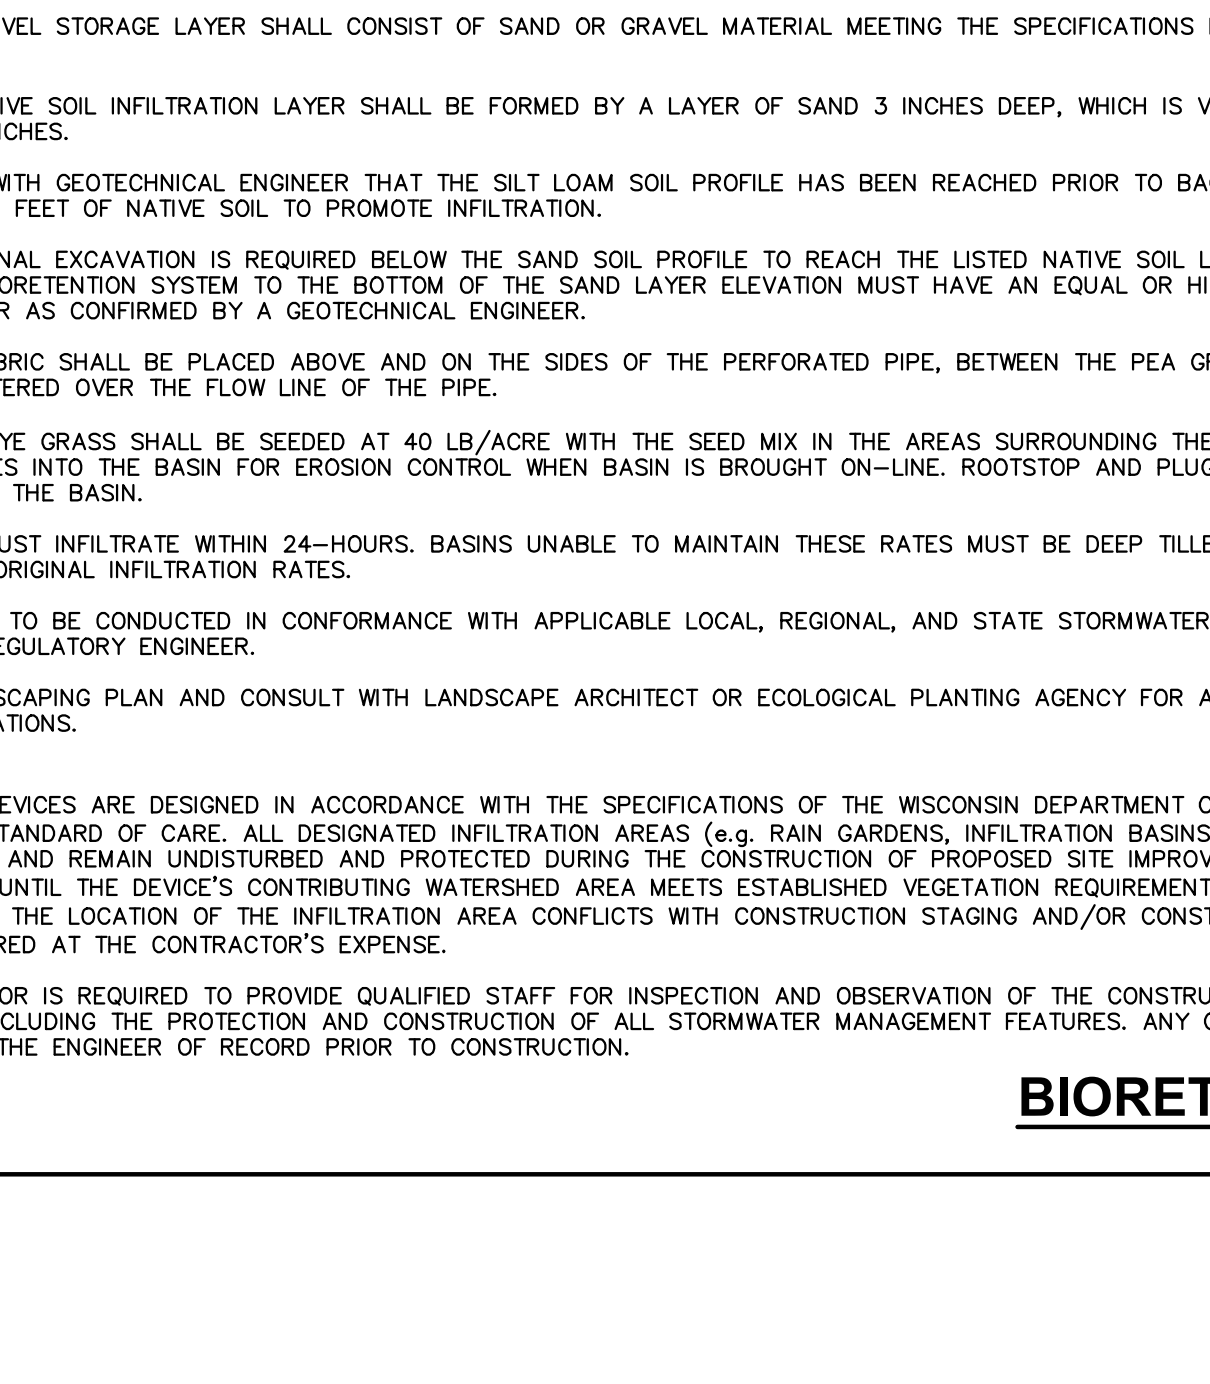


SANITARY SEWER MANHOLE

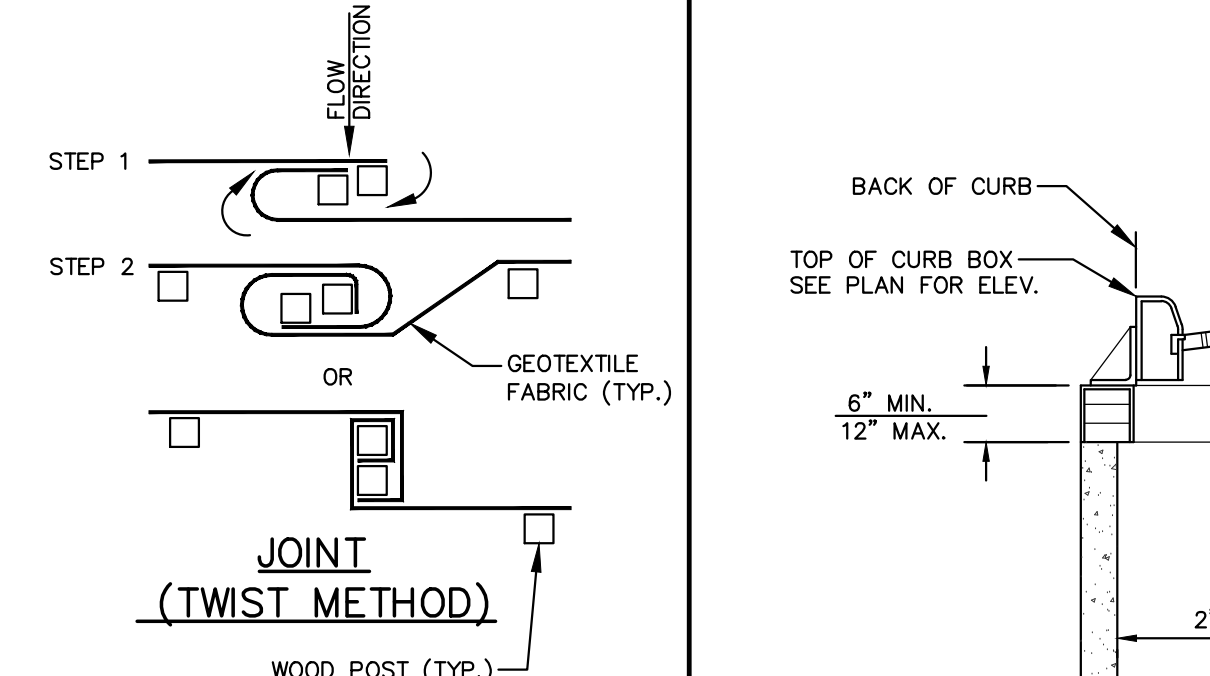


GENERAL NOTES:

1. SILT FENCE SHALL BE ANCHORED BY SPREADING AT LEAST 8-INCHES OF FABRIC IN A 4-INCH WIDE AND 6-INCH DEEP TRENCH ON THE UPSLOPE SIDE OF THE FENCE. TRENCHES SHALL NOT BE EXCAVATED WIDER OR DEEPER THAN NECESSARY FOR PROPER INSTALLATION.
2. FOLD MATERIAL TO FIT TRENCH AND BACKFILL AND COMPACT TRENCH WITH EXCAVATED SOIL.
3. WOOD POSTS SHALL BE A MINIMUM SIZE OF 1.125-INCHES x 1.125-INCHES OF DRIED OAK OR HICKORY.
4. SILT FENCE TO EXTEND ABOVE THE TOP OF PIPE.
5. SILT FENCE CONSTRUCTION AND GEOTEXTILE FABRIC SHALL CONFORM TO WDNR TECHNICAL STANDARD 1056.
6. POST SPACING SHALL BE SELECTED BASED ON GEOTEXTILE FABRIC (8- FEET FOR WOVEN & 3- FEET FOR NON-WOVEN)

STORM INLET

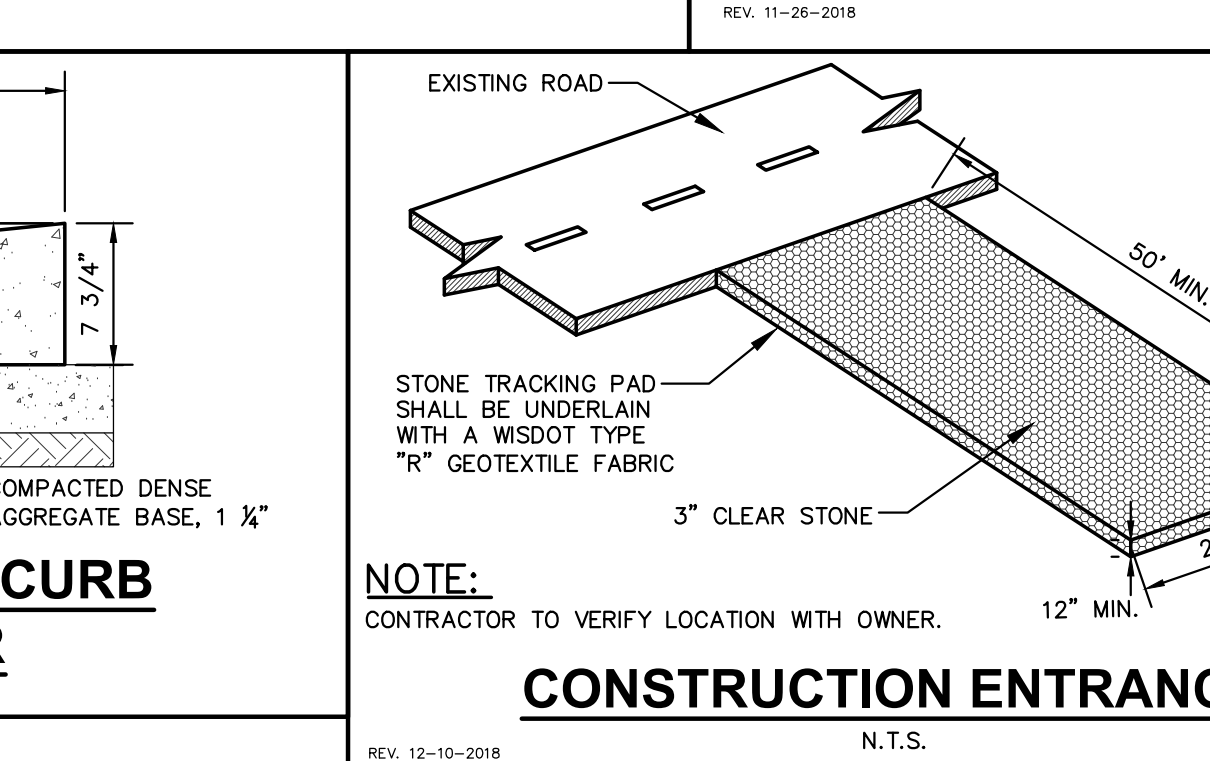

PAVEMENT SECTIONS

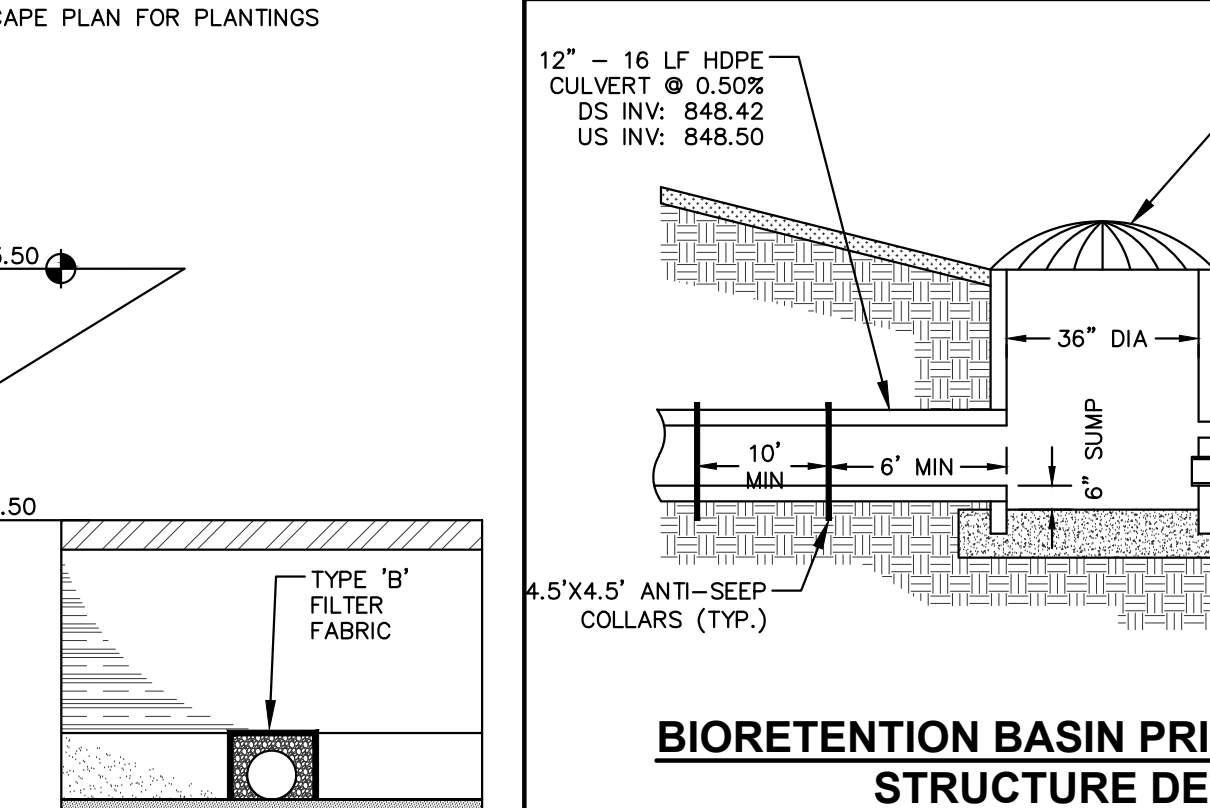


CONCRETE SIDEWALK SECTION




PAVEMENT SECTIONS



APRON ENDWALL W/ GRATE - RIPRAP

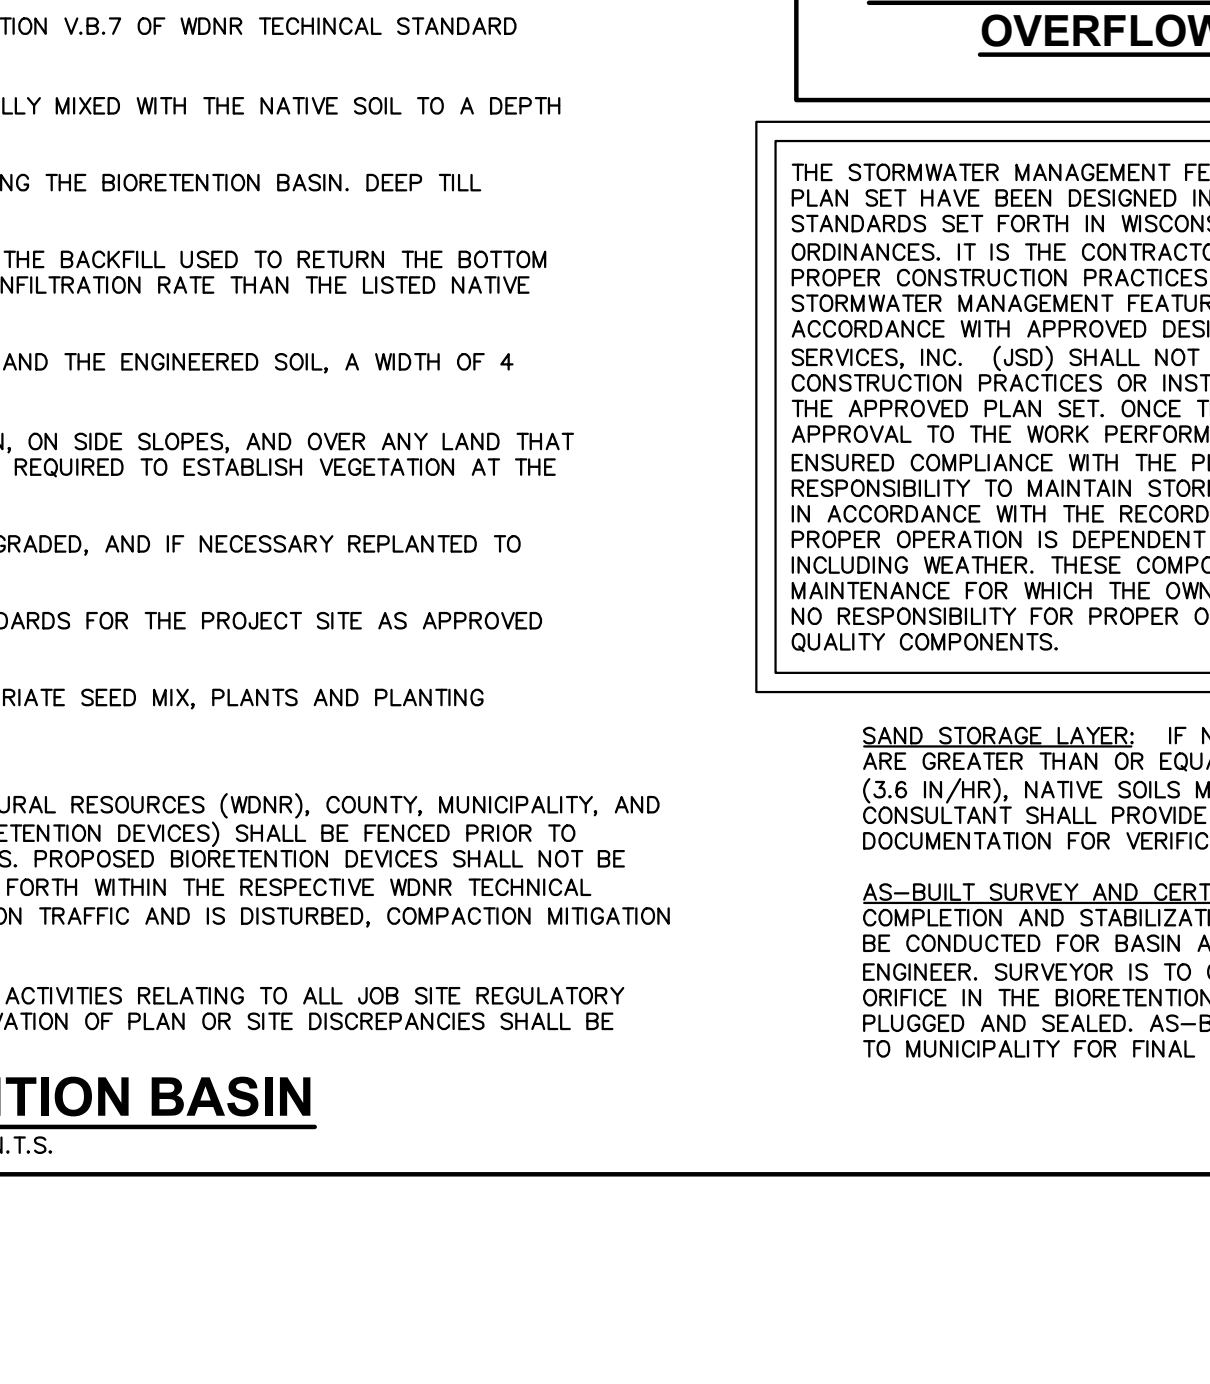

SANITARY SEWER MANHOLE

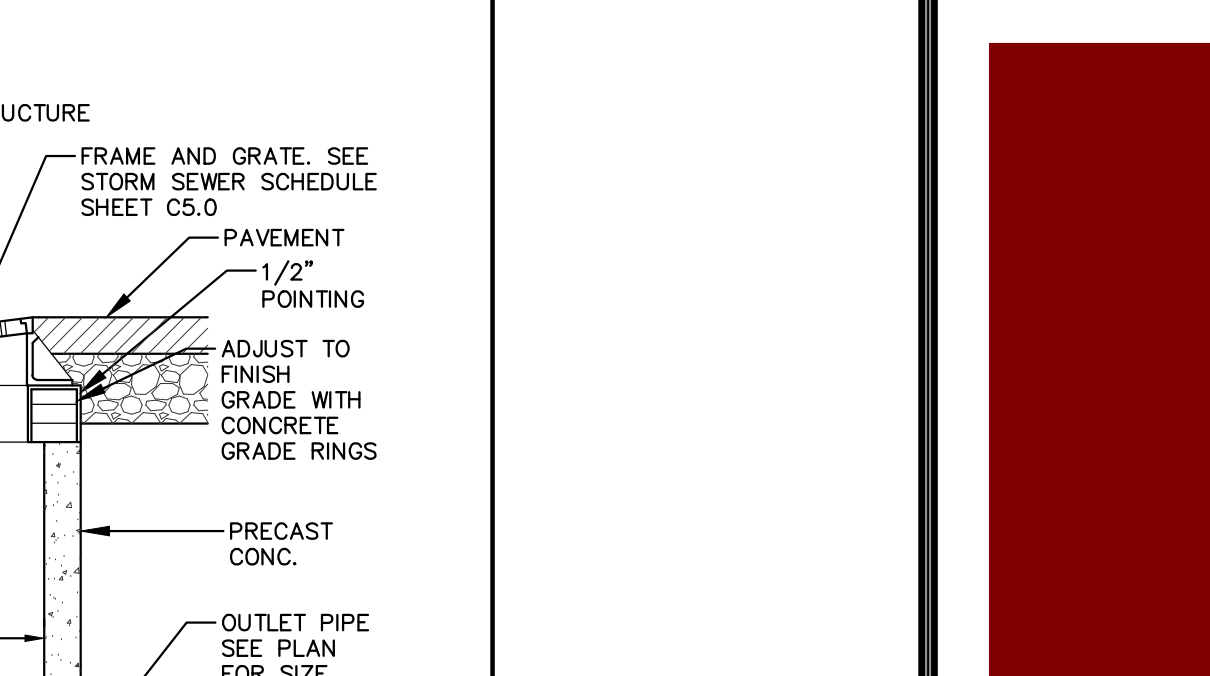


GENERAL NOTES:

1. SILT FENCE SHALL BE ANCHORED BY SPREADING AT LEAST 8-INCHES OF FABRIC IN A 4-INCH WIDE AND 6-INCH DEEP TRENCH ON THE UPSLOPE SIDE OF THE FENCE. TRENCHES SHALL NOT BE EXCAVATED WIDER OR DEEPER THAN NECESSARY FOR PROPER INSTALLATION.
2. FOLD MATERIAL TO FIT TRENCH AND BACKFILL AND COMPACT TRENCH WITH EXCAVATED SOIL.
3. WOOD POSTS SHALL BE A MINIMUM SIZE OF 1.125-INCHES x 1.125-INCHES OF DRIED OAK OR HICKORY.
4. SILT FENCE TO EXTEND ABOVE THE TOP OF PIPE.
5. SILT FENCE CONSTRUCTION AND GEOTEXTILE FABRIC SHALL CONFORM TO WDNR TECHNICAL STANDARD 1056.
6. POST SPACING SHALL BE SELECTED BASED ON GEOTEXTILE FABRIC (8- FEET FOR WOVEN & 3- FEET FOR NON-WOVEN)

STORM INLET



PAVEMENT SECTIONS

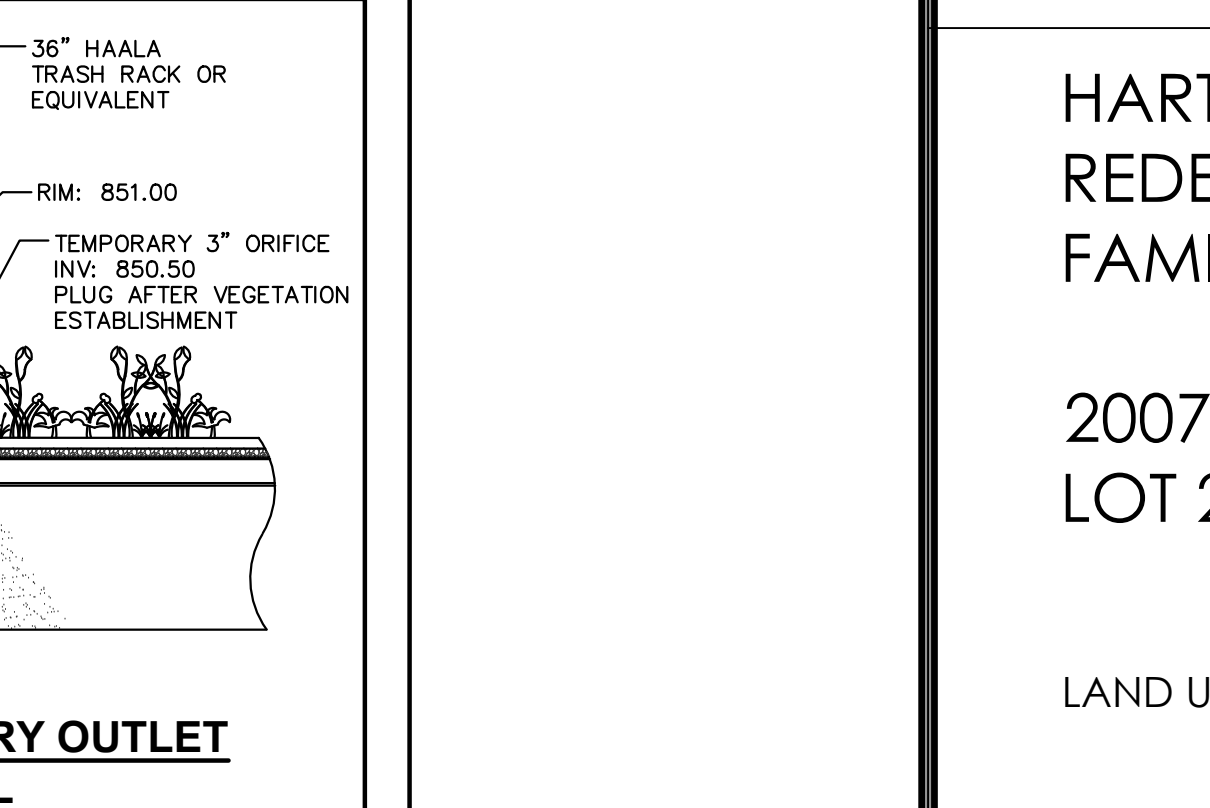


CONCRETE SIDEWALK SECTION




PAVEMENT SECTIONS



APRON ENDWALL W/ GRATE - RIPRAP

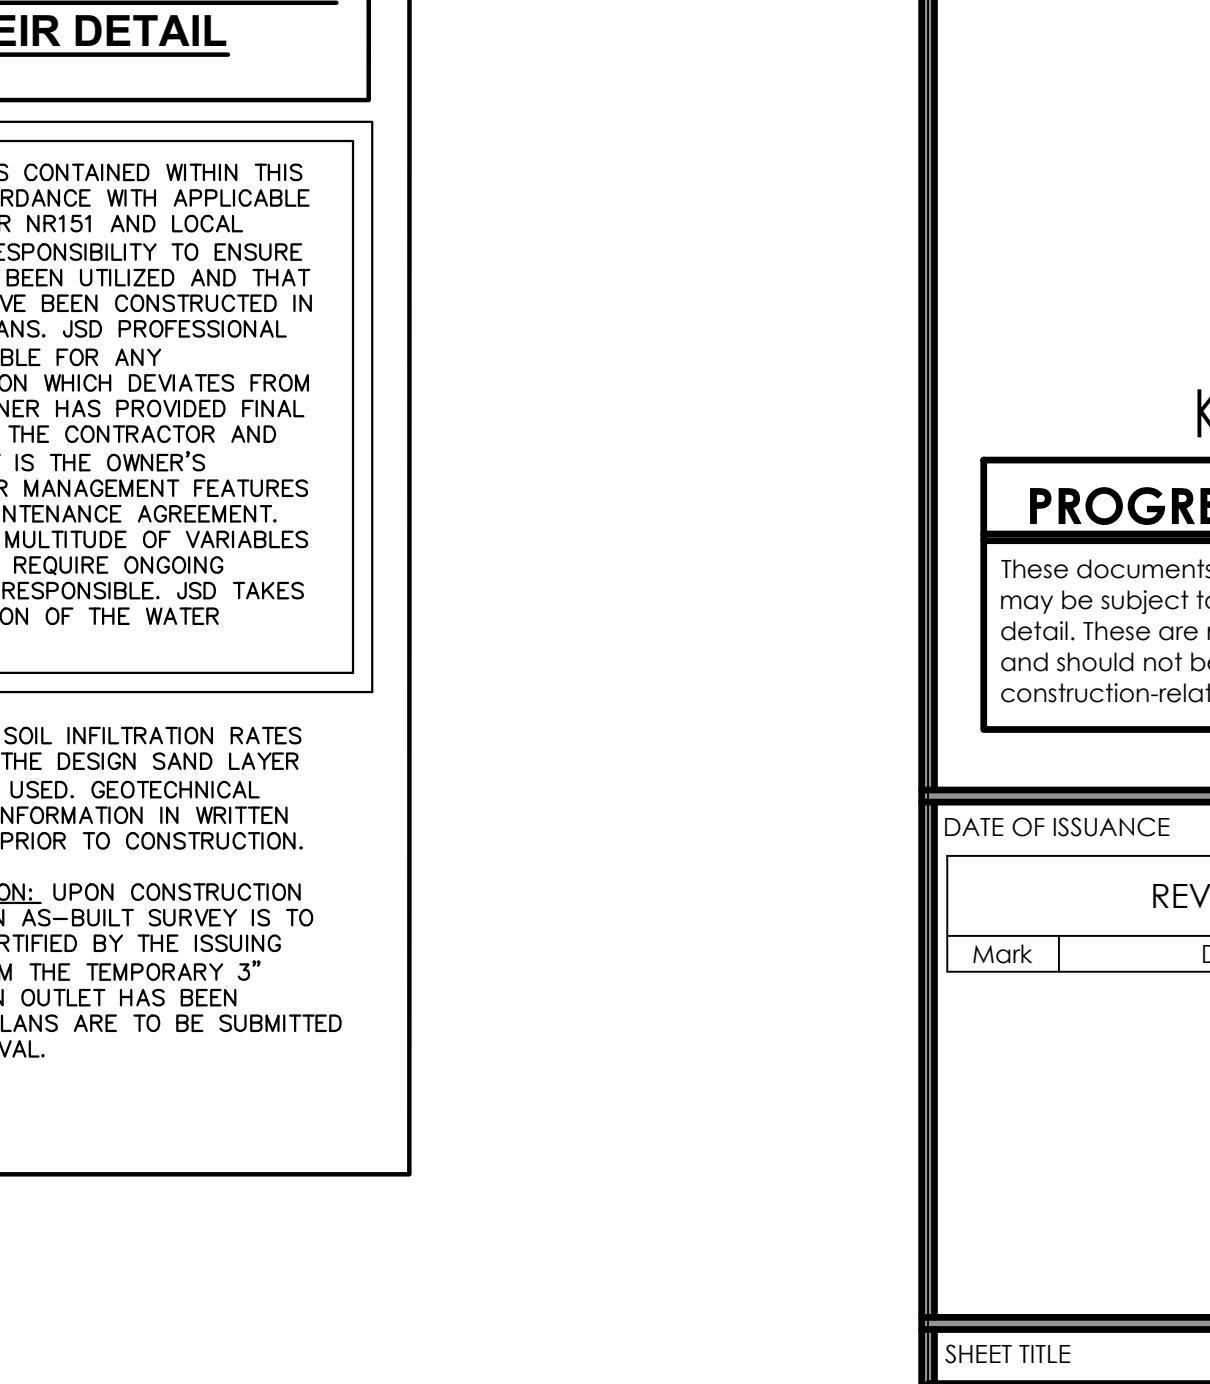

SANITARY SEWER MANHOLE

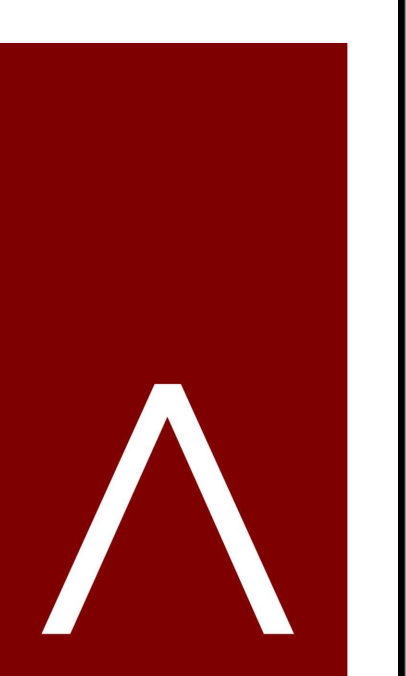

JLA ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01


JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

JLA PROJECT NUMBER: W22-0128-01

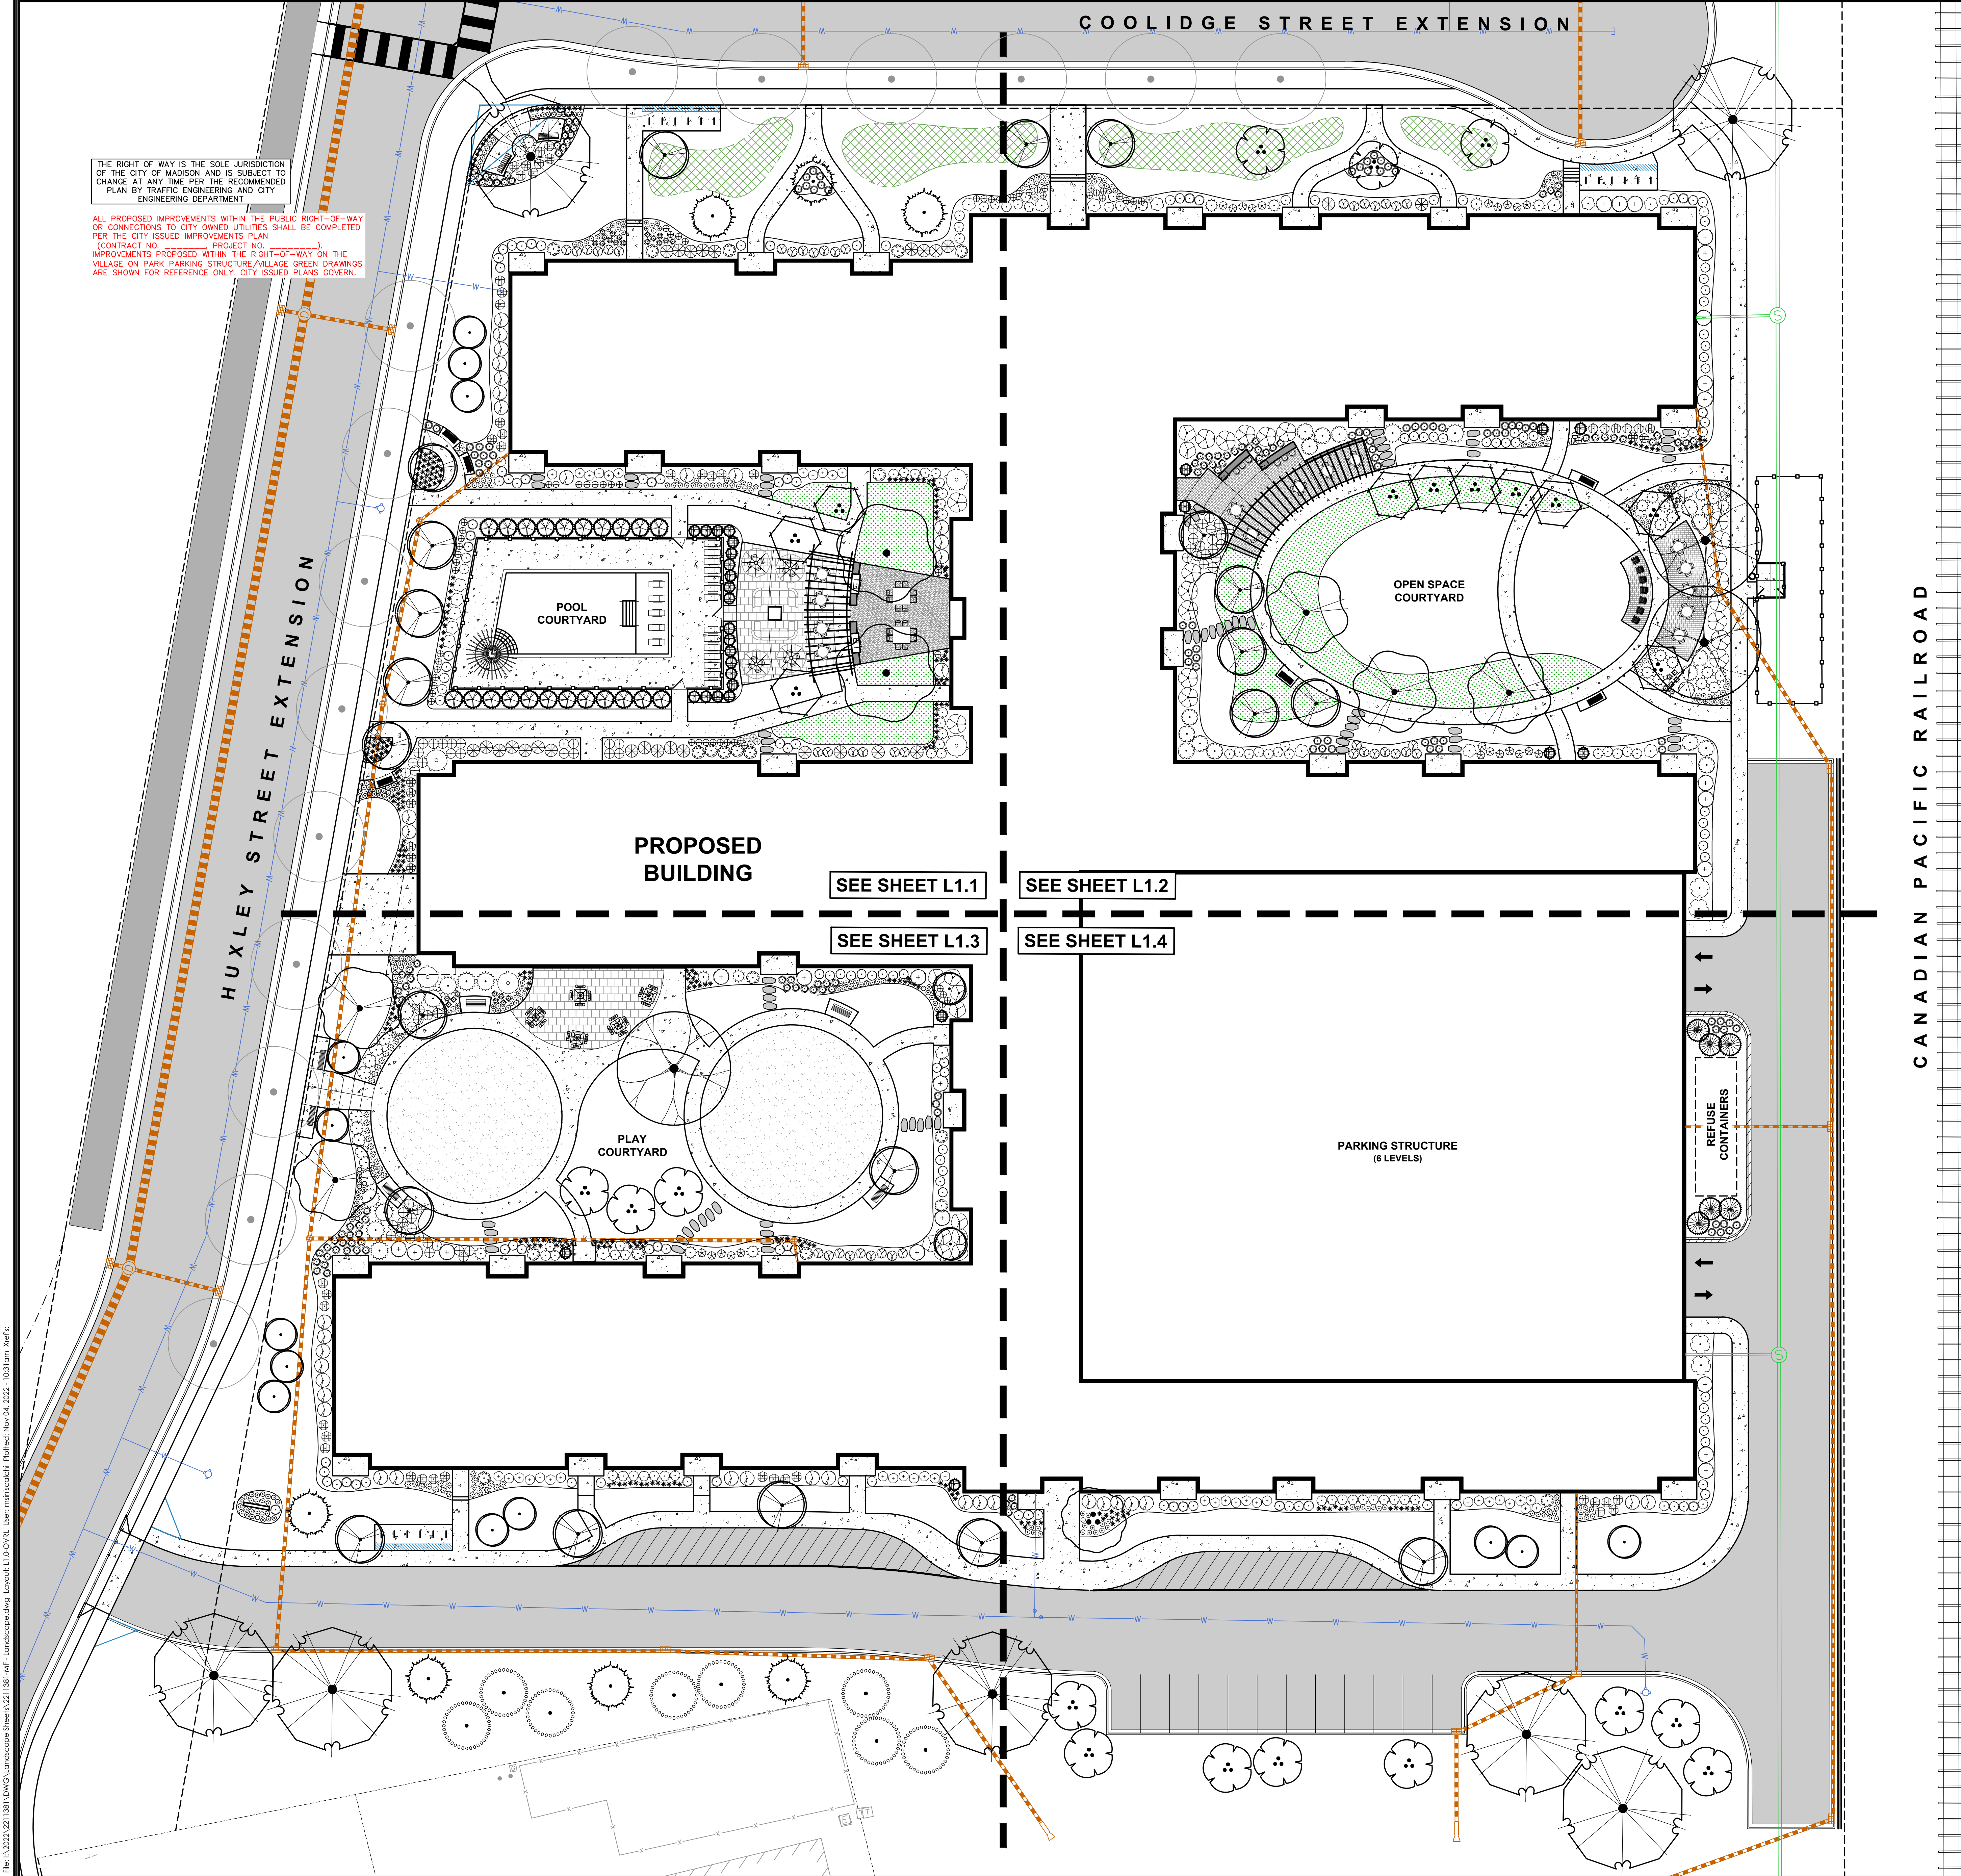


THE RIGHT OF WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT.

ALL PROPOSED IMPROVEMENTS WITHIN THE PUBLIC RIGHT-OF-WAY OR CONNECTIONS TO CITY OWNED UTILITIES SHALL BE COMPLETED PER THE CITY ISSUED IMPROVEMENTS PLAN (CONTRACT NO. _____ PROJECT NO. _____).

IMPROVEMENTS PROPOSED WITHIN THE RIGHT-OF-WAY ON THE VILLAGE OF PARK PARKING STRUCTURE/VILLAGE GREEN DRAWINGS ARE SHOWN FOR REFERENCE ONLY. CITY ISSUED PLANS GOVERN.

- LEGEND**
- PROPERTY LINE
 - RIGHT-OF-WAY
 - BUILDING OUTLINE
 - BUILDING OVERHANG
 - EDGE OF PAVEMENT
 - STANDARD CURB AND GUTTER
 - REJECT CURB AND GUTTER
 - ASPHALT PAVEMENT
 - CONCRETE PAVEMENT
 - HEAVY DUTY CONCRETE PAVEMENT
 - STORMWATER MANAGEMENT AREA
 - SANITARY SEWER
 - WATERMAIN
 - STORM SEWER
 - EXISTING SANITARY SEWER
 - EXISTING WATERMAIN
 - EXISTING STORM SEWER
 - RAILING
 - FENCE
 - LIGHT POLE (REFER TO PHOTOMETRIC PLAN)
 - ADA PARKING SIGN
 - BIKE RACK
 - POLYETHYLENE EDGING
 - SEED - NO-MOW FESCUE
 - SEED - LOW-GROWING PRAIRIE

- GENERAL NOTES**
- REFER TO THE EXISTING CONDITIONS SURVEY FOR EXISTING CONDITIONS NOTES AND LEGEND.
 - ALL WORK IN THE ROW SHALL BE IN ACCORDANCE WITH THE MUNICIPAL STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION.
 - JSD SHALL BE HELD HARMLESS AND DOES NOT WARRANT ANY DEVIATIONS BY THE OWNER/CONTRACTOR FROM THE APPROVED CONSTRUCTION PLANS THAT MAY RESULT IN DISCIPLINARY ACTIONS BY ANY OR ALL REGULATORY AGENCIES.
 - DRAWING FOR REVIEW - NOT FOR CONSTRUCTION UNLESS OTHERWISE NOTED IN THE TITLE BLOCK.
 - THE LANDSCAPE CONTRACTOR SHALL COORDINATE ALL FINE GRADING AND TOPSOILING WITH GENERAL CONTRACTOR.
 - REFER TO "LANDSCAPE DETAILS AND NOTES" SHEET FOR ADDITIONAL DETAILS, NOTES AND SPECIFICATION INFORMATION INCLUDING MATERIALS, GUARANTEE AND EXECUTION RELATED TO LANDSCAPE PLAN.
 - CONTRACTOR SHALL REVIEW SITE CONDITIONS FOR UTILITY CONFLICTS, DRAINAGE ISSUES, SUBSURFACE ROCK, AND PLANT PLACEMENT CONFLICTS PRIOR TO PLANT INSTALLATION. REPORT ANY CONDITIONS THAT MAY HAVE ADVERSE IMPACT ON PLANTING OPERATIONS TO LANDSCAPE ARCHITECT.
 - DO NOT COMMENCE PLANTING OPERATIONS UNTIL ALL ADJACENT SITE IMPROVEMENTS, IRRIGATION INSTALLATION (IF APPLICABLE), AND FINISH GRADING ARE COMPLETE.

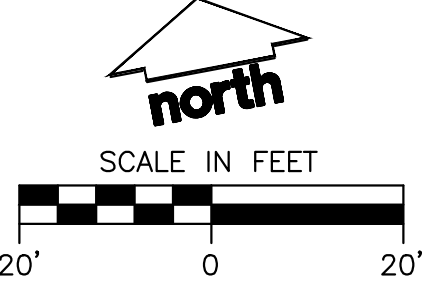

JLA ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



**HARTMEYER REDEVELOPMENT:
FAMILY HOUSING**

**2007 ROTH STREET
LOT 2**

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark	Description	Date
------	-------------	------

SHEET TITLE

**LANDSCAPE PLAN -
OVERALL**

SHEET NUMBER

L1.0



THE RIGHT OF WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT.

ALL PROPOSED IMPROVEMENTS WITHIN THE PUBLIC RIGHT-OF-WAY OR CONNECTIONS TO CITY OWNED UTILITIES SHALL BE COMPLETED PER THE CITY ISSUED IMPROVEMENTS PLAN.

CONTRACTOR NO. IMPROVEMENTS PROPOSED WITHIN THE RIGHT-OF-WAY ON THE VILLAGE ON PARK PARKING STRUCTURE/VILLAGE GREEN DRAWINGS ARE SHOWN FOR REFERENCE ONLY. CITY ISSUED PLANS GOVERN.

FUTURE STREET TREE (TYP)
AT LEAST ONE WEEK PRIOR TO PLANTING CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO SCHEDULE INSPECTION AND APPROVAL OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS.

COOLIDGE STREET EXTENSION

HUXLEY STREET EXTENSION

PROPOSED BUILDING

PLANT LIST		
EVERGREEN TREE	CODE	BOTANICAL / COMMON NAME
	PGL	Picea glauca / White Spruce
	TAD	Taxodium distichum "Micketon" TM / Shawnee Brave Bold Cypress
ORNAMENTAL TREES		
	CODE	BOTANICAL / COMMON NAME
	AMSL	Amelanchier x grandiflora "Autumn Brilliance" / Autumn Brilliance Serviceberry
	CACA	Carpinus caroliniana "J.N. Glabe" TM / Bob O' Fire American Hornbeam
	CECA	Carolinia canadensis "Columbus" / Columbus Strain Eastern Redbud
	PRMA	Prunus maackii "Jeffrey" / Goldsmith Amur Chokecherry
OVERSTORY DECIDUOUS TREES		
	CODE	BOTANICAL / COMMON NAME
	ACTR	Acer x freemanii "Marmo" / Marmo Freeman Maple
	BEPO	Betula populifolia "Whitespire" - Single / Whitespire Birch - Single
	GLTR	Gleditsia triacanthos Inermis "Shademaster" TM / Shademaster Locust
	QUBI	Quercus bicolor / Swamp White Oak
	QUSC	Quercus x schuettei / Swamp Bur Oak
UPRIGHT EVERGREEN SHRUB		
	CODE	BOTANICAL / COMMON NAME
	PHOC	Thuja occidentalis "Emerald" / Emerald Arborvitae
	PHTE	Thuja occidentalis "Tectony" / Tectony Arborvitae
	THHE	Thuja occidentalis "Hetz Wintergreen" / Hetz Wintergreen Arborvitae
DECIDUOUS SHRUBS		
	CODE	BOTANICAL / COMMON NAME
	ARME	Aronia melanocarpa "Morton" TM / Inquis Beauty Black Chokeberry
	CAFL	Calycanthus floridus "SMNGA" / Simply Scentational Sweetshrub
	CODE	BOTANICAL / COMMON NAME
	CODE	Canus sericea "Farnex" / Arctic Fire Red Twig Dogwood
	SESE	Eleocharis acicularis "Cool Splash" / Cool Splash False Honeysuckle
	FOIN	Forsythia x intermedia "Mistral" / Show Off Forsythia
	HYAR	Hydrangea arborescens "Incrediball" / Incrediball White Hydrangea
	HYAP	Hydrangea paniculata "Dip Pinky" TM / Pinky Winky Panicle Hydrangea
	HYPL	Hydrangea paniculata "Little Quick Fire" / Little Quick Fire Hydrangea
	PHGRN	Physocarpus opulifolius "Amber Jubilee" / Nimbark
	PHOPL	Physocarpus opulifolius "Little Devil" TM / Dwarf Nimbark
	PHGP	Physocarpus opulifolius "Center Glow" / Center Glow Nimbark
	RHAR	Rhus aromatica "Saw-Low" / Saw-Low Fragrant Sumac
	SPJA	Spiraea japonica "SMKSNRP" TM / Double Play Red Spirea
	SYRA	Syringa x "SMALURY" TM / Blooming Dwarf Pink Lilac
	VALU	Viburnum x subul / Judd Viburnum
	WEFL	Weigela florida "Dark Horse" / Dark Horse Weigela
EVERGREEN SHRUBS		
	CODE	BOTANICAL / COMMON NAME
	BUGV	Buxus x "Green Velvet" / Green Velvet Boxwood
	JUCHK	Juniperus chinensis "Pfizerana Kallay Compacta" / Kallay Pfizer Compact Juniper
	JUCH	Juniperus chinensis "Sea Green" / Sea Green Juniper
	RHGD	Rhododendron x "P.J.M." / P.J.M. Rhododendron
	TAMEG	Taxus x media "Dark Green" / Dark Green Yew
	TAMEE	Taxus x media "Everlow" / Everlow Yew
PERENNIALS & GRASSES		
	CODE	BOTANICAL / COMMON NAME
	ALSU	Allium x "Summer Beauty" / Summer Beauty Allium
	CMC	Catanagrostis x scutellaria "Karl Foerster" / Karl Foerster Feather Reed Grass
	CANE	Calamagrostis nepotica "Monstrous White" / Monstrous White Cornflower
	ECPM	Echinacea x "CBO Cone 2" TM / Pike Meadow Purple Coneflower
	GERN	Geranium x "Wagonwheel" / Wagonwheel Dracopis
	HEMC	Hemerocallis x "Chicago Apache" / Daylily
	PRM	Panicum virgatum "Shenandoah" / Shenandoah Switch Grass
	RUFU	Rudbeckia fulgida sultanii "Goldsturm" / Goldsturm Coneflower
	SCSC	Schizanthus lycopodium "Prairie Blues" / Prairie Blues Little Bluestem
	SPHE	Sporobolus heterostachys "Tara" / Prairie Dropseed



JLA ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark Description Date

SHEET TITLE


LANDSCAPE PLAN -
NORTHWEST


SHEET NUMBER

L1.1

CONTRACTOR NOTES

1. ALL LANDSCAPE EDGING SHALL BE ALUMINUM EDGING, UNLESS OTHERWISE DEPICTED.
2. ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH, UNLESS OTHERWISE DEPICTED.
3. ALL DISTURBED AREAS SHALL RECEIVE TURFGRASS SEED, FERTILIZER & MULCH, UNLESS OTHERWISE DEPICTED.


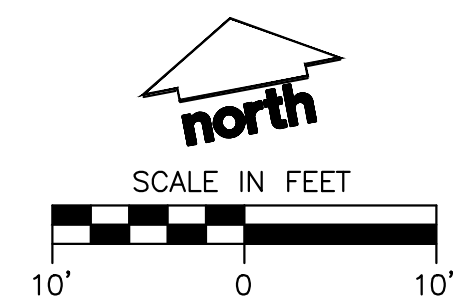


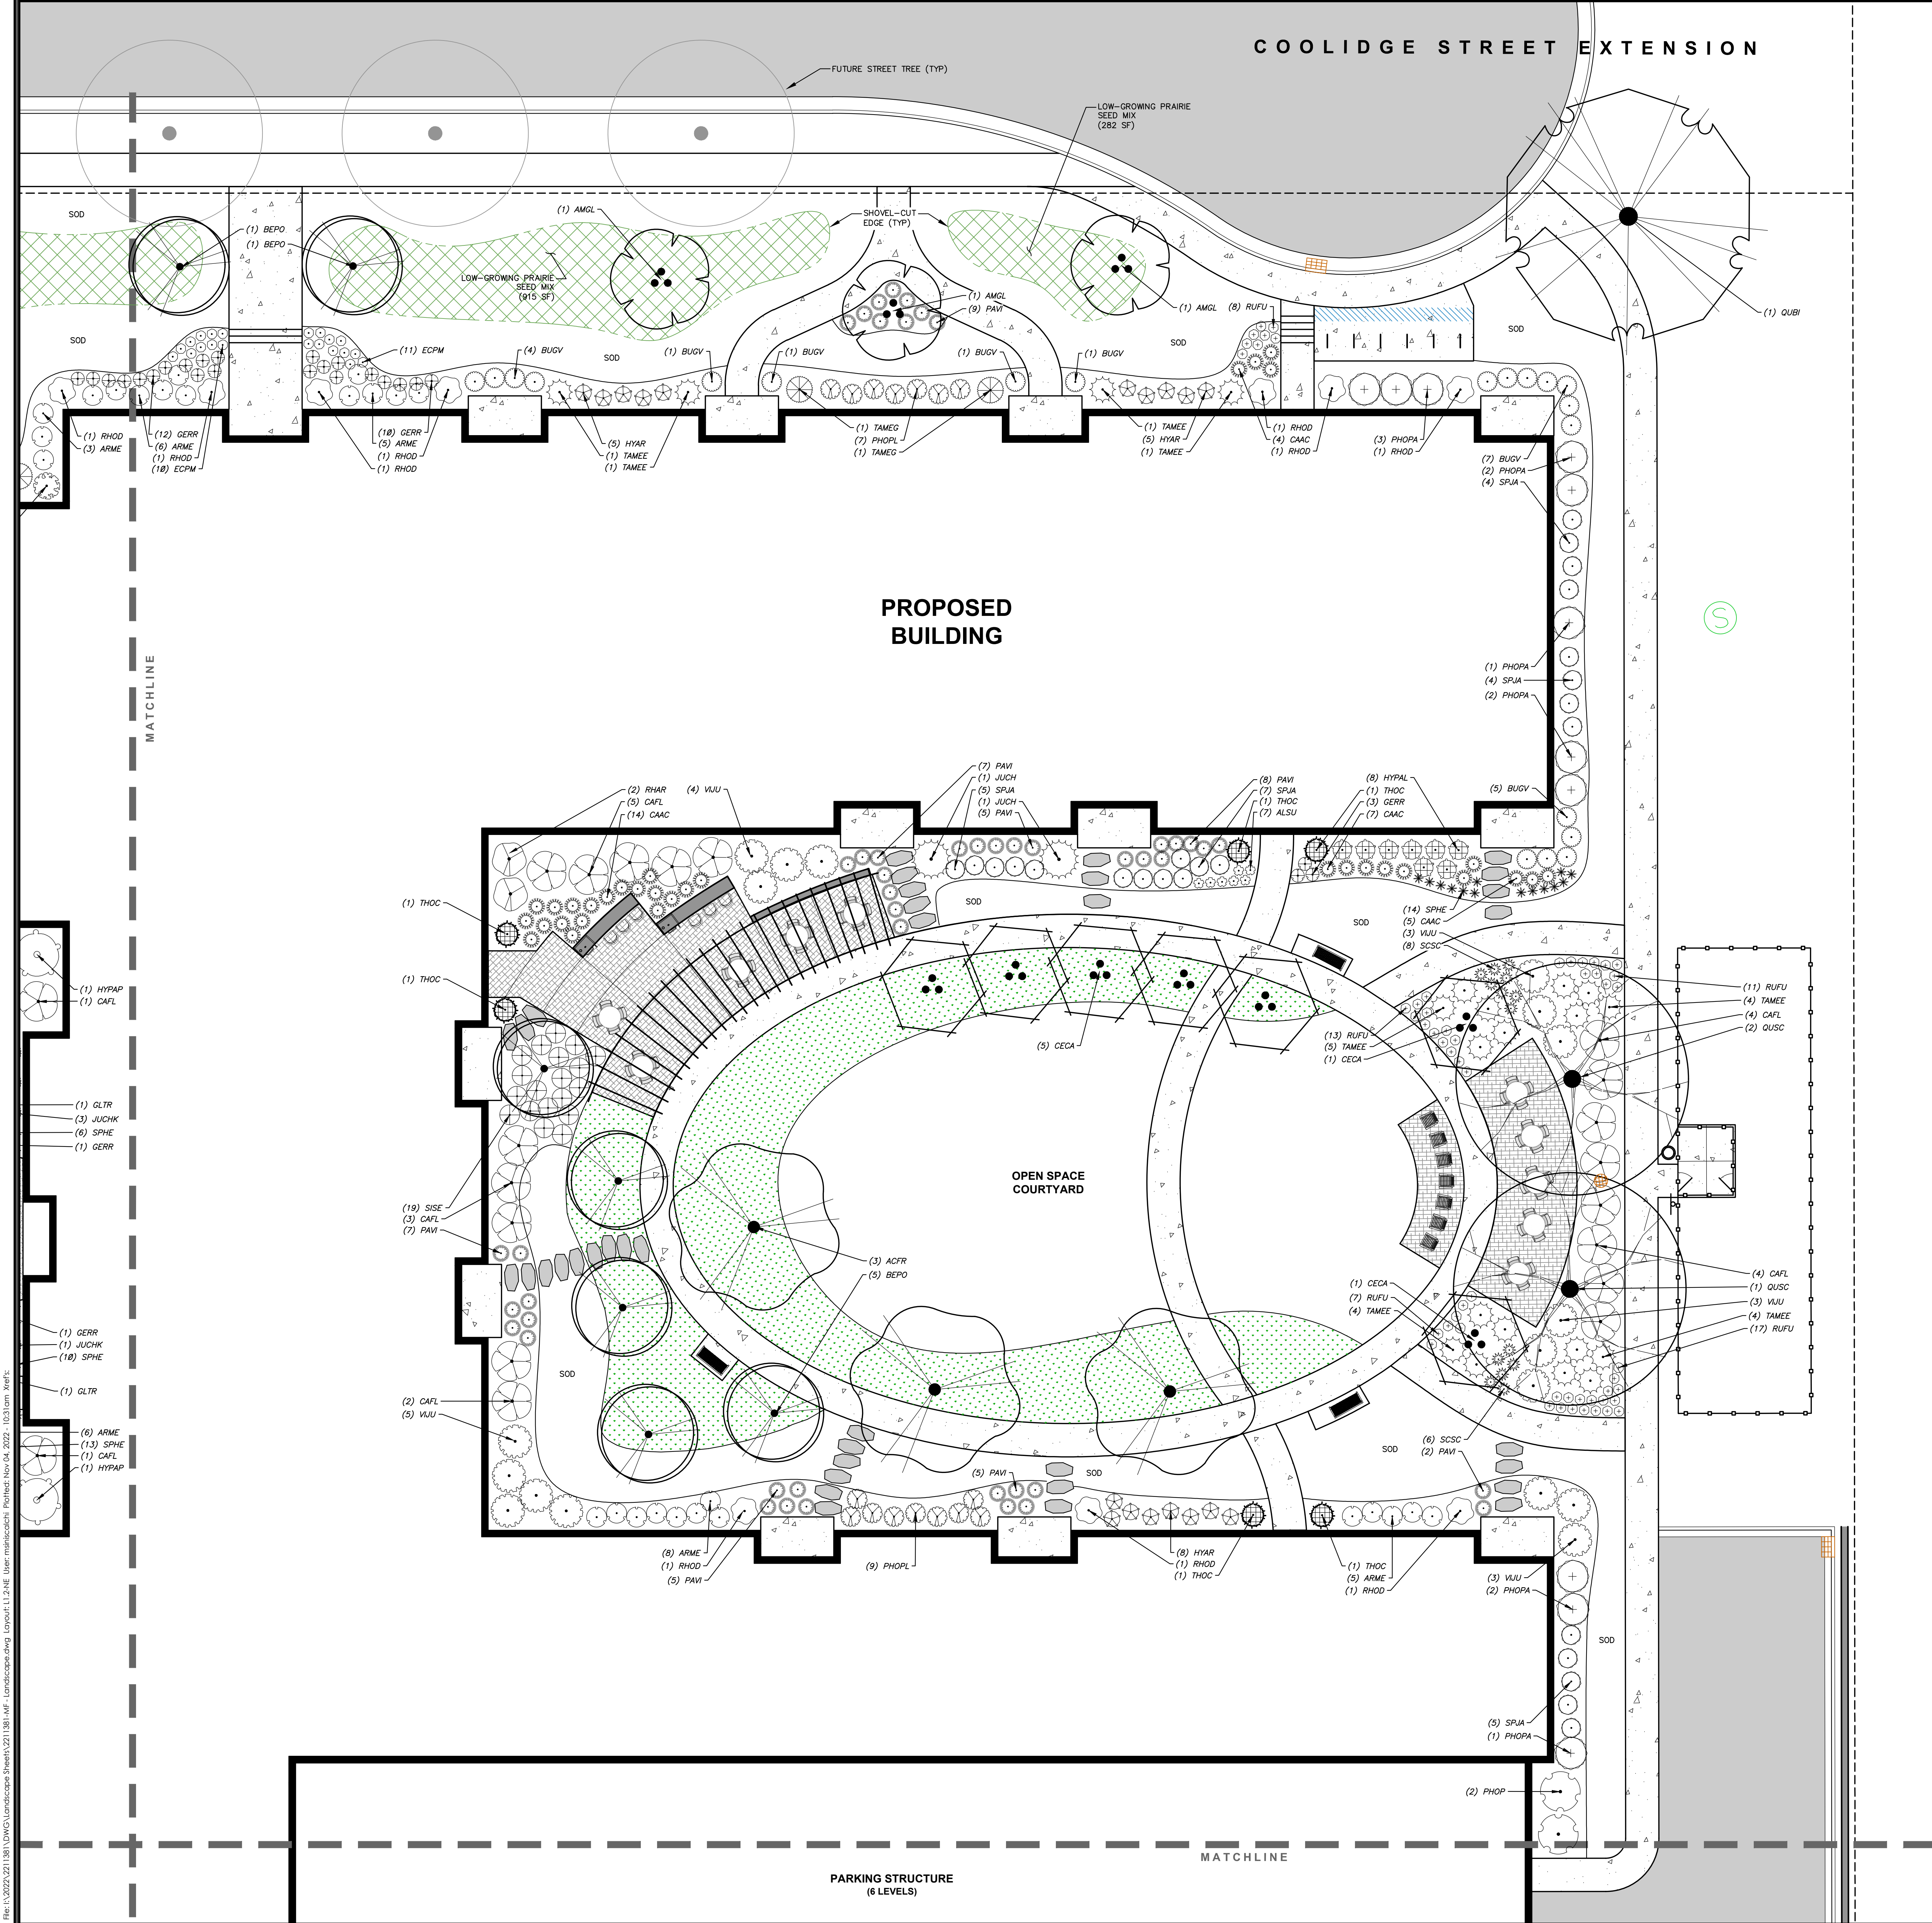

PLANT LIST		
EVERGREEN TREE	CODE	BOTANICAL / COMMON NAME
	PGL	Picea glauca / White Spruce
	TAD	Taxodium distichum 'Micketon' TM / Shawnee Brave Bald Cypress
ORNAMENTAL TREES		
	AMGL	Amelanchier x grandiflora 'Autumn Brilliance' TM / Autumn Brilliance Serviceberry
	CACA	Carpinus caroliniana 'J.N. Glabe' TM / Ball O' Fire American Hornbeam
	CECA	Carolea canadensis 'Columbus' / Columbus Strain Eastern Redbud
	PRMA	Prunus maackii 'Jeffree' / Goldsmith Amur Chokecherry
OVERSTORY DECIDUOUS TREES		
	ACFR	Acer x freemanii 'Marmo' / Marmo Freeman Maple
	BEPO	Betula populifolia 'Whispering' - Single / Whispering Birch - Single
	GLTR	Gleditsia triacanthos Inermis 'Shademaster' TM / Shademaster Locust
	QUBI	Quercus bicolor / Swamp White Oak
	QUSC	Quercus x schuetzelii / Swamp Bur Oak
UPRIGHT EVERGREEN SHRUB		
	PHOC	Thuja occidentalis 'Emerald' / Emerald Arborvitae
	PHTE	Thuja occidentalis 'Tectus' / Tectus Arborvitae
	PHWE	Thuja occidentalis 'Hetz Wintergreen' / Hetz Wintergreen Arborvitae
DECIDUOUS SHRUBS		
	ARWE	Aronia melanocarpa 'Morton' TM / Iniqua Beauty Black Chokeberry
	CAFL	Calycanthus floridus 'SMNGCA' / Simply Scentational® Sweetshrub
	COSE	Cornus sericea 'Farrow' / Arctic Fire® Red Twig Dogwood
	DISS	Diervilla sessilifolia 'Cool Splash' / Cool Splash False Honeysuckle
	FGN	Fargthia x intermedia 'Mistral' / Show Off® Fargthia
	HYAR	Hydrangea arborescens 'Incrediball' / Incrediball White Hydrangea
	HYAP	Hydrangea paniculata 'Dip Finky' TM / Pinky Winky Panicle Hydrangea
	HYPL	Hydrangea paniculata 'Little Quick Fire' / Little Quick Fire Hydrangea
	PHGR	Physocarpus opulifolius 'Amber Jubilee' / Nimbark
	PHGL	Physocarpus opulifolius 'Little Devil' TM / Dwarf Nimbark
	PHGP	Physocarpus opulifolius 'Center Glow' / Center Glow Nimbark
	RHAR	Rhus aromatica 'Saw-Low' / Saw-Low Fragrant Sumac
	SPJA	Spirea japonica 'SMKSNRP' TM / Double Play Red Spirea
	SYRA	Syringa x 'SMURRY' TM / Blooming Dwarf Pink Lilac
	VUJU	Viburnum x 'Judd' / Judd Viburnum
	WEFL	Weigela florida 'Dark Horse' / Dark Horse Weigela
EVERGREEN SHRUBS		
	BUGV	Buxus x 'Green Velvet' / Green Velvet Boxwood
	JUCH	Juniperus chinensis 'Pflanzers Kallias Compacta' / Kally Pfäzer Compact Juniper
	JUCH	Juniperus chinensis 'Sea Green' / Sea Green Juniper
	RHGD	Rhododendron x 'P.J.M.' / P.J.M. Rhododendron
	TAMEE	Taxus x media 'Dark Green' / Dark Green Yew
	TAMEE	Taxus x media 'Everlow' / Everlow Yew
PERENNIALS & GRASSES		
	ALSU	Allium x 'Summer Beauty' / Summer Beauty Allium
	CMAC	Catanagrostis x scutellaria 'Karl Foerster' / Karl Foerster Feather Reed Grass
	CANE	Calamagrostis nepeta 'Monrovia White' / Monrovia White Cornflower
	ECPM	Echinacea x 'CBO Cone 2' TM / Pike Meadowbelle Purple Coneflower
	GERN	Geranium x 'Wagoner' / Wagoner Geranium
	HEMC	Hemerocallis x 'Chicago Apache' / Daylily
	PRW	Panicum virgatum 'Shenandoah' / Shenandoah Switch Grass
	RUFU	Rudbeckia fulgida subvar. 'Goldsturm' / Goldsturm Coreflower
	SCSC	Schizanthus lycopodium 'Prairie Blues' / Prairie Blues Little Bluestem
	SPHE	Sporobolus heterolepis 'Tara' / Prairie Dropseed

CONTRACTOR NOTES

- ALL LANDSCAPE EDGING SHALL BE ALUMINUM EDGING, UNLESS OTHERWISE DEPICTED.
- ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH, UNLESS OTHERWISE DEPICTED.
- ALL DISTURBED AREAS SHALL RECEIVE TURFGRASS SEED, FERTILIZER & MULCH, UNLESS OTHERWISE DEPICTED.

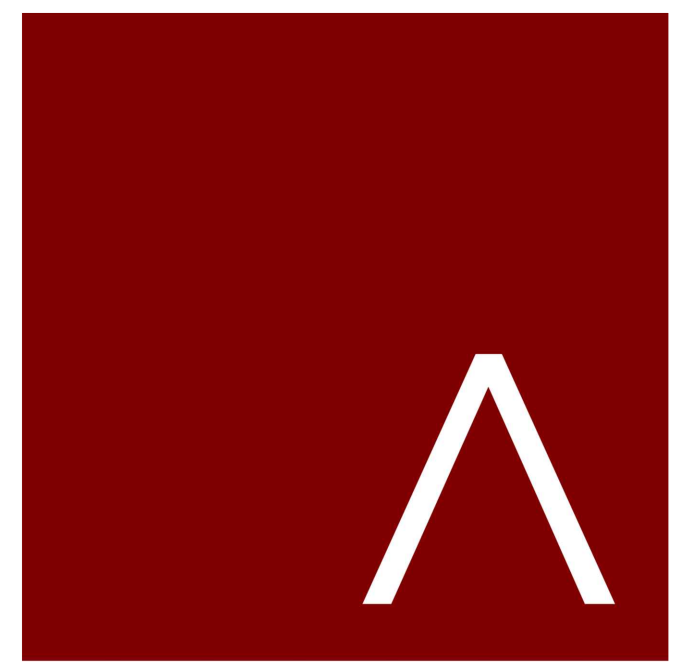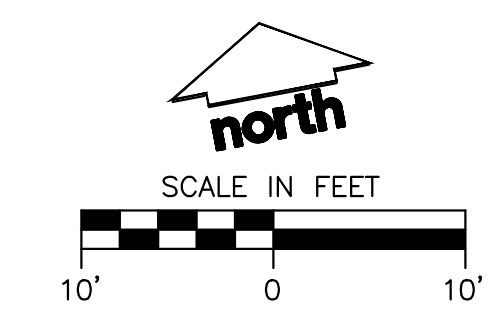

MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark	Description	Date
------	-------------	------

SHEET TITLE

LANDSCAPE PLAN -
NORTHEAST

SHEET NUMBER

L1.2

THE RIGHT OF WAY IS THE SOLE JURISDICTION OF THE CITY OF MADISON AND IS SUBJECT TO CHANGE AT ANY TIME PER THE RECOMMENDED PLAN BY TRAFFIC ENGINEERING AND CITY ENGINEERING DEPARTMENT

ALL PROPOSED IMPROVEMENTS WITHIN THE PUBLIC RIGHT-OF-WAY OR CONNECTIONS TO CITY OWNED UTILITIES SHALL BE COMPLETED PER THE CITY ISSUED IMPROVEMENTS PLAN (CONTRACT NO. _____ PROJECT NO. _____). IMPROVEMENTS PROPOSED WITHIN THE RIGHT-OF-WAY ON THE VILLAGE ON PARK PARKING STRUCTURE/VILLAGE GREEN DRAWINGS ARE SHOWN FOR REFERENCE ONLY. CITY ISSUED PLANS GOVERN.

MATCHLINE

CREATIVE PLAY AREA
(AGES 5-12)

CREATIVE PLAY AREA
(AGES 2-5)

PROPOSED
BUILDING

FUTURE STREET TREE (TYP)
AT LEAST ONE WEEK PRIOR TO
PLANTING CONTRACTOR SHALL
CONTACT CITY FORESTRY AT (608)
266-4816 TO SCHEDULE
INSPECTION AND APPROVAL OF
NURSERY TREE STOCK AND REVIEW
PLANTING SPECIFICATIONS.

PLANT LIST

EVERGREEN TREE	CODE	BOTANICAL / COMMON NAME
	PIGL	Picea glauca / White Spruce
	TADI	Taxodium distichum "Micketon" TM / Shawnee Brave Bald Cypress
ORNAMENTAL TREES	CODE	BOTANICAL / COMMON NAME
	AMGL	Ambelochier x grandiflora "Autumn Brilliance" / Autumn Brilliance Serviceberry
	CACA	Carpinus caroliniana "J.N. Gable" TM / Ball O' Fire American Hornbeam
	CECA	Cercis canadensis "Columbus" / Columbus Strain Eastern Redbud
	PRMA	Prunus maackii "Jeffrey" / Goldsmith Amur Chokecherry
OVERSTORY DECIDUOUS TREES	CODE	BOTANICAL / COMMON NAME
	ACFR	Acer x freemanii "Mormo" / Mormo Freeman Maple
	BEPO	Betula populifolia "Whitespire" - Single / Whitespire Birch - Single
	ALTR	Stedalia violaceantha Inermis "Shademoor" TM / Shademoor Locust
	QUBI	Quercus bicolor / Swamp White Oak
	QUSC	Quercus x schuettei / Swamp Bur Oak
UPRIGHT EVERGREEN SHRUB	CODE	BOTANICAL / COMMON NAME
	PHOC	Thuja occidentalis "Emerald" / Emerald Arborvitae
	THTE	Thuja occidentalis "Tectony" / Tectony Arborvitae
	THIE	Thuja occidentalis "Hetz Wintergreen" / Hetz Wintergreen Arborvitae
DECIDUOUS SHRUBS	CODE	BOTANICAL / COMMON NAME
	ARME	Aronia melanocarpa "Morton" TM / Inquisitively Black Chokeberry
	CAFL	Calycanthus floridus "SMUGA" / Simply Scentational Sweetshrub
	COSE	Cornus sericea "Farrise" / Arctic Fire Red Twig Dogwood
	SESE	Sierbia sessilifolia "Cool Splash" / Cool Splash False Honeysuckle
	FOIN	Forsythia x intermedia "Mistral" / Snow On Me Forsythia
	HYAR	Hydrangea arborescens "Incrediball" / Incrediball White Hydrangea
	HYAP	Hydrangea paniculata "Dip Pinky" TM / Pinky Winky Panicle Hydrangea
	HYPL	Hydrangea paniculata "Little Quick Fire" / Little Quick Fire Hydrangea
	PHGR	Physocarpus opulifolius "Amber Jubilee" / Winebark
	PHGR	Physocarpus opulifolius "Little Devil" TM / Dwarf Ninebark
	PHGR	Physocarpus opulifolius "Center Glow" / Center Glow Ninebark
	RHAR	Rhus aromatica "Gro-Low" / Gro-Low Fragrant Sumac
	SPJA	Spiraea japonica "SMILSWP" TM / Double Play Red Spirea
	SYRA	Syringa x "SMALURP" TM / Blooming Dwarf Pink Lilac
	VUUM	Viburnum x subsp. / Judd Viburnum
	WEFL	Wegelia florida "Dark Horse" / Dark Horse Wegelia
EVERGREEN SHRUBS	CODE	BOTANICAL / COMMON NAME
	BUGV	Buxus x "Green Velvet" / Green Velvet Boxwood
	JUCHK	Juniperus chinensis "Pfizerana Kalypso Compacta" / Holly Pfister Compact Juniper
	JUCH	Juniperus chinensis "Sea Green" / Sea Green Juniper
	RHGD	Rhododendron x "P.J.M." / P.J.M. Rhododendron
	TAMEE	Taxus x media "Dark Green" / Dark Green Yew
	TAMEE	Taxus x media "Everlow" / Everlow Yew
PERENNIALS & GRASSES	CODE	BOTANICAL / COMMON NAME
	ALSU	Allium x "Summer Beauty" / Summer Beauty Allium
	CMAC	Colomatragrostis x scutellaria "Karl Foerster" / Karl Foerster Feather Reed Grass
	CANE	Calamagrostis nepeta "Monrose White" / Monrose White Cornmint
	ECPM	Echinacea x "CBO Cone 2" TM / Pike Meadowbelle Purple Coneflower
	GERN	Geranium x "Wazone" / Wazone Dronestill
	HEMC	Hemerocallis x "Chicago Apache" / Daylily
	PRM	Panicum virgatum "Shenandoah" / Shenandoah Switch Grass
	RUFU	Rudbeckia fulgida subvar. "Goldsturm" / Goldsturm Coreflower
	SCSC	Schizanthus lycopodium "Prairie Blues" / Prairie Blues Little Buxton
	SPHE	Sporobolus heterostachys "Tara" / Prairie Dropseed



JLA ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE MONTH, DATE, YEAR

REVISION SCHEDULE

Mark	Description	Date
------	-------------	------

SHEET TITLE


LANDSCAPE PLAN -
SOUTHWEST

SHEET NUMBER

L1.3

CONTRACTOR NOTES


- ALL LANDSCAPE EDGING SHALL BE ALUMINUM EDGING, UNLESS OTHERWISE DEPICTED.
- ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH, UNLESS OTHERWISE DEPICTED.
- ALL DISTURBED AREAS SHALL RECEIVE TURFGRASS SEED, FERTILIZER & MULCH, UNLESS OTHERWISE DEPICTED.

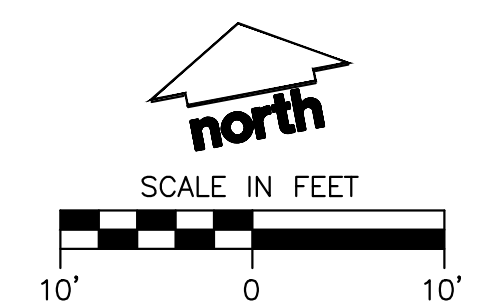


CONTRACTOR NOTES

1. ALL LANDSCAPE EDGING SHALL BE ALUMINUM EDGING, UNLESS OTHERWISE DEPICTED.
2. ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH, UNLESS OTHERWISE DEPICTED.
3. ALL DISTURBED AREAS SHALL RECEIVE TURFGRASS SEED, FERTILIZER & MULCH, UNLESS OTHERWISE DEPICTED.

1. ALL LANDSCAPE EDGING SHALL BE ALUMINUM EDGING, UNLESS OTHERWISE DEPICTED
2. ALL PLANTING BEDS SHALL RECEIVE SHREDDED HARDWOOD BARK MULCH, UNLESS OTHERWISE DEPICTED.
3. ALL DISTURBED AREAS SHALL RECEIVE TURFGRASS SEED, FERTILIZER & MULCH, UNLESS OTHERWISE DEPICTED.

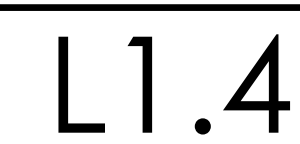

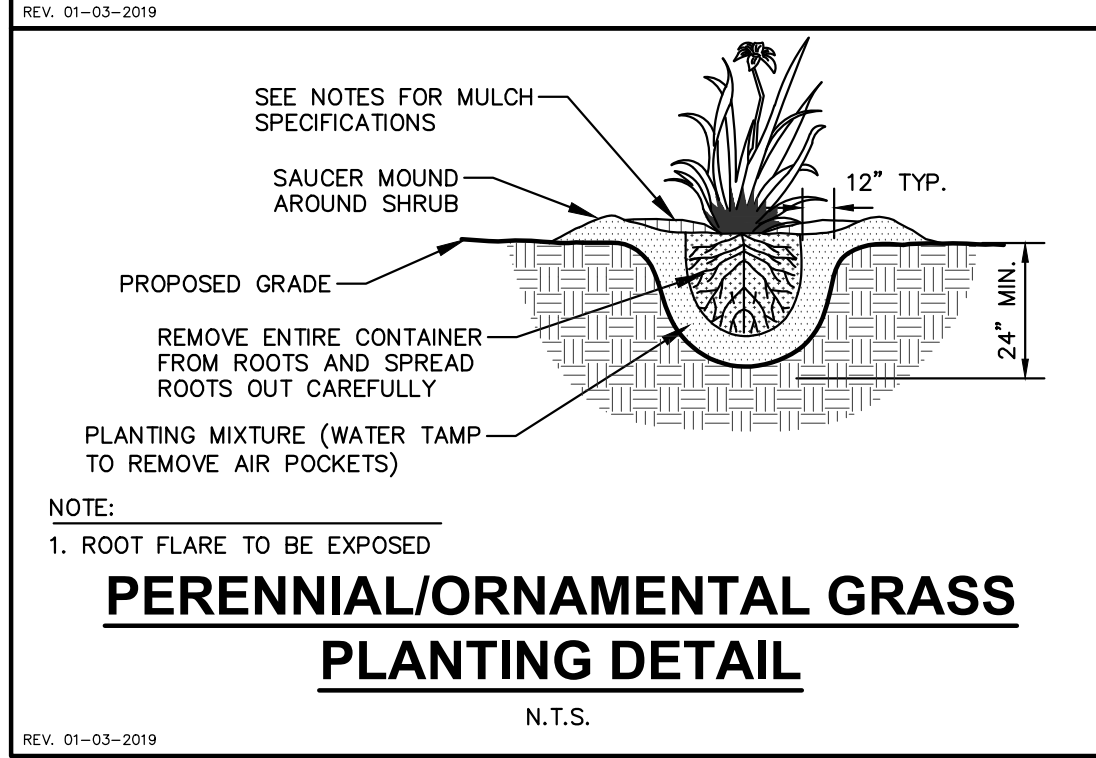

Comprehensive Plant Schedule					
Evergreen Tree	Code	Botanical / Common Name	Cont	Size	Qty
	PGL	Picea glauca / White Spruce	B & B	Min. 6' Ht.	8
	TAD	Taxodium distichum 'Mickelson' TM / Shawnee Brave Bald Cypress	B & B	Min. 6' Ht.	7
Ornamental Trees	Code	Botanical / Common Name	Cont	Size	Qty
	AMG	Amelanchier x grandiflora 'Autumn Brilliance' / Autumn Brilliance Serviceberry	B & B	1.5" Cal (Multi-Stem)	14
	CAC	Corpinus caroliniana 'J.N. Globe' TM / Ball O' Fire American Hornbeam	B & B	Min. 4' Ht.	15
	CECA	Cercis canadensis 'Columbus' / Columbus Strain Eastern Redbud	B & B	6' Ht.	10
	PRMA	Prunus maackii 'Jeffree' / Goldrush® Amur Chokecherry	B & B	Min. 6' Ht.	1
Overstory Deciduous Trees	Code	Botanical / Common Name	Cont	Size	Qty
	ACFR	Acer x freemanii 'Marmo' / Marmo Freeman Maple	B & B	2.5"Cal	5
	BEPO	Betula populifolia 'Whitespire' - Single / Whitespire Birch - Single	B & B	2.5"Cal	21
	QLTR	Gleditsia triacanthos inermis 'Shademaster' TM / Shademaster Locust	B & B	2.5"Cal	2
	QUB	Quercus bicolor / Swamp White Oak	B & B	2"Cal	7
	QUSC	Quercus x schuettei / Swamp Bur Oak	B & B	2"Cal	3
Upright Evergreen Shrub	Code	Botanical / Common Name	Cont	Size	Qty
	THOC	Thuja occidentalis 'Emerald' / Emerald Arborvitae	B & B	Min. 6' Ht.	29
	THTE	Thuja occidentalis 'Tecnhy' / Tecnhy Arborvitae	B & B	Min. 6' Ht.	6
	THIE	Thuja occidentalis 'Hetz Wintergreen' / Hetz Wintergreen Arborvitae	B & B	Min. 6' Ht.	22
Deciduous Shrubs	Code	Botanical / Common Name	Cont	Size	Qty
	ARME	Aronia melanocarpa 'Morton' TM / Iroquois Beauty Black Chokeberry	#3	Min. 24" Ht.	65
	CAL	Calycanthus floridus 'SMNCA' / Simply Scentational® Sweetshrub	B & B	Min. 36" Ht.	20
	COSE	Cornus sericea 'Farrow' / Arctic Fire® Red Twig Dogwood	B & B	Min. 24" Ht.	40
	SSE	Diervilla sessilifolia 'Cool Splash' / Cool Splash False Honeysuckle	B & B	Min. 18"-24" Ht.	61
	FOIN	Forsythia x intermedia 'Mindo' / Show Off® Forsythia	B & B	Min. 24" Ht.	19
	HYAR	Hydrangea arborescens 'Incrediball' / Incrediball White Hydrangea	#3	Min. 12"-24"	23
	HYPAP	Hydrangea paniculata 'Dip Pinky' TM / Pinky Pinky Panicle Hydrangea	B & B	Min. 24" Ht.	5
	HYPAL	Hydrangea paniculata 'Little Quick Fire' / Little Quick Fire Hydrangea	#3	Min. 12"-24"	14
	PHOPA	Physocarpus opulifolius 'Amber Jubilee' / Ninebark	B & B	Min. 24" Ht.	23
	PHODL	Physocarpus opulifolius 'Little Devil' TM / Dwarf Ninebark	#3	Min. 12"-24"	44
	PHOP	Physocarpus opulifolius 'Center Glow' / Center Glow Ninebark	B & B	Min. 24" Ht.	4
	RHAR	Rhus aromatica 'Oro-Low' / Oro-Low Fragrant Sumac	#3	Min. 12"-24"	12
	SPJA	Spiraea japonica 'SMNSJMR' TM / Double Play Red Spirea	B & B	Min. 24" Ht.	47
	SYA	Syringa x 'SMNJRPJ' TM / Bloomingrang Dwarf Pink Lilac	B & B	Min. 24" Ht.	9
	VJU	Viburnum x juddii / Judd Viburnum	#3	Min. 12"-24"	21
	WEFL	Weigela florida 'Dark Horse' / Dark Horse Weigela	B & B	Min. 12"-24"	41
Evergreen Shrubs	Code	Botanical / Common Name	Cont	Size	Qty
	BUGV	Buxus x 'Green Velvet' / Green Velvet Boxwood	3 gal	Min. 12"-24"	99
	JUCHK	Juniperus chinensis 'Pflizerana Kallays Compacta' / Kally Pflizer Compact Juniper	B & B	Min. 12" Wide	39
	JUCH	Juniperus chinensis 'Sea Green' / Sea Green Juniper	B & B	Min. 24" wide	11
	RHOD	Rhododendron x 'P.J.M.' / P.J.M Rhododendron	B & B	Min. 12"-24"	17
	TAMEG	Taxus x media 'Dark Green' / Dark Green Yew	#3	Min. 12"-24"	27
	TAMEE	Taxus x media 'Everlow' / Everlow Yew	#3	Min. 12" Wide	28
Perennials & Grasses	Code	Botanical / Common Name	Cont	Size	Qty
	ALSU	Allium x 'Summer Beauty' / Summer Beauty Allium	#1	Min. 8"-18"	112
	CAC	Calamagrostis x acutiflora 'Karl Foerster' / Karl Foerster Feather Reed Grass	#1	Min. 8"-18"	95
	CAN	Calamintha nepeta 'Monrose White' / Monrose White Calmint	#1	Min. 8"-18"	49
	ECPM	Echinacea x 'CBG Cone 2' TM / Pixie Meadowbrite Purple Coneflower	#1	Min. 8"-18"	45
	GER	Geranium x 'Rozanne' / Rozanne Cranesbill	#1	Min. 8"-18"	70
	HEMC	Hemerocallis x 'Chicago Apache' / Daylily	#1	Min. 8"-18"	40
	PAV	Panicum virgatum 'Shenandoah' / Shenandoah Switch Grass	#1	Min. 8"-18"	82
	RUFU	Rudbeckia fulgida sylvianii 'Goldsturm' / Goldsturm Coneflower	#1	Min. 8"-18"	112
	SCSC	Schizachyrium scoparium 'Prairie Blues' / Prairie Blues Little Bluestem	#1	Min. 8"-18"	39
	SPHE	Sporobolus heterolepis 'Tara' / Prairie Dropseed	#1	Min. 8"-18"	290

CONF

OWNER SHALL GUARANTEE ALL PLANTS THROUGH ONE (1) YEAR AFTER ACCEPTANCE BY THE OWNER'S

© 2008 The Authors
Journal compilation © 2008 Blackwell Publishing Ltd



Future Coolidge Street Extension

USABLE OPEN AREA CHART
FAMILY HOUSING

DENOTES USABLE OPEN
AREA ON PLAN = 53,426 SF

DENOTES USABLE OPEN AREA
PRIVATE BALCONIES
231 X 66 SF = 15,246 SF

TOTAL USABLE OPEN AREA = 68,672 SF

MINIMUM USABLE SPACE
REQUIREMENT - SQ. FT. PER
D.U. (40/D.U.)
302 TOTAL D.U. X 40 = 12,080 SF



JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE


USABLE OPEN
SPACE

SHEET NUMBER

ASP-100

Huxley Street Extension


1 USABLE OPEN SPACE
3 / 64" = 1'-0"



Luminaire Schedule						
Qty	Label	Arrangement	LLF	MPR	Description	
3	OW3	SINGLE	0.950	LITHONIA	DSK1 LED P1 4xK T3M MVOLT WBA	Lum. Watts Total Watts Lum. Lumens
0	OW4	SINGLE	0.950	LITHONIA	DSK1 LED P1 4xK T3TM MVOLT WBA	54 162 8763
0						54 324 8963

Calculation Summary							
Label	CalcType	Units	Avg	Max	Min	AvgMin	MaxMin
PROFILE	Illuminance	Fc	0.03	0.34	0.00	N/A	N/A
SITE	Illuminance	Fc	0.27	2.66	0.00	N/A	N/A
DRIVE	Illuminance	Fc	0.76	1.8	0.2	3.90	8.00
PARKING AREA 1	Illuminance	Fc	0.82	1.1	0.7	1.31	1.57
PARKING AREA 2	Illuminance	Fc	1.12	1.6	0.9	1.24	1.76





#	DATE	COMMENTS

DRAWN BY : AD

DATE : NOV 7, 2022

SCALE : 1" = 30'- 0"

HARTMEYER REDEVELOPMENT

MULTI-FAMILY SITE PLAN

MADISON, WISCONSIN

- 1 BD Unit
- 2 BD Unit
- 3 BD Unit
- 4 BD Unit
- Amenities
- Bldg. Supp./Stor.
- Circulation



FIRST FLOOR PLAN
3/64"=1' - 0"

FAMILY BUILDING DATA						
LEVEL	AUTOMOBILE PARKING					BIKE PARKING
	STANDARD	COMPACT	ADA	SUB-TOTAL	VISITOR/TOTAL	
R	62	12	-	74	-	74
6	62	12	-	74	-	74
5	62	12	-	74	-	74
4	62	12	-	74	-	74
3	54	12	-	66	-	66
2	42	12	-	54	-	54
1	1	2	10	13	17	30
T.	345	74	10	429	17	446
Ratio	/ Unit			1.42	1.48	
	/ Bedroom			0.60		

ELECTRICAL VEHICLE CHARGING STATION REQUIREMENTS FAMILY HOUSING	
TOTAL STALL IN LOT	372
EV READY 10% =	38
EV INSTALLED 2% =	8
ACCESSIBLE STATIONS	
NUMBER OF EV INSTALLED SPACES REQUIRED	3-50
MINIMUM ACCESSIBLE EV INSTALLED SPACE	1

FAMILY BUILDING DATA						
LEVEL	UNITS					BEDROOMS
	1BD	2BD	3BD	4BD	TOTAL	
6	8	23	15	6	52	123
5	8	23	15	6	52	123
4	8	23	15	6	52	123
3	8	23	15	6	52	123
2	8	21	15	6	50	119
1	8	18	12	6	44	104
T.	48	131	87	36	302	715



JLA ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER REDEVELOPMENT: FAMILY HOUSING

2007 ROTH STREET LOT 2


LAND USE APPLICATION

KEY PLAN
PROGRESS DOCUMENTS
These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE
FIRST FLOOR PLAN

SHEET NUMBER
A101

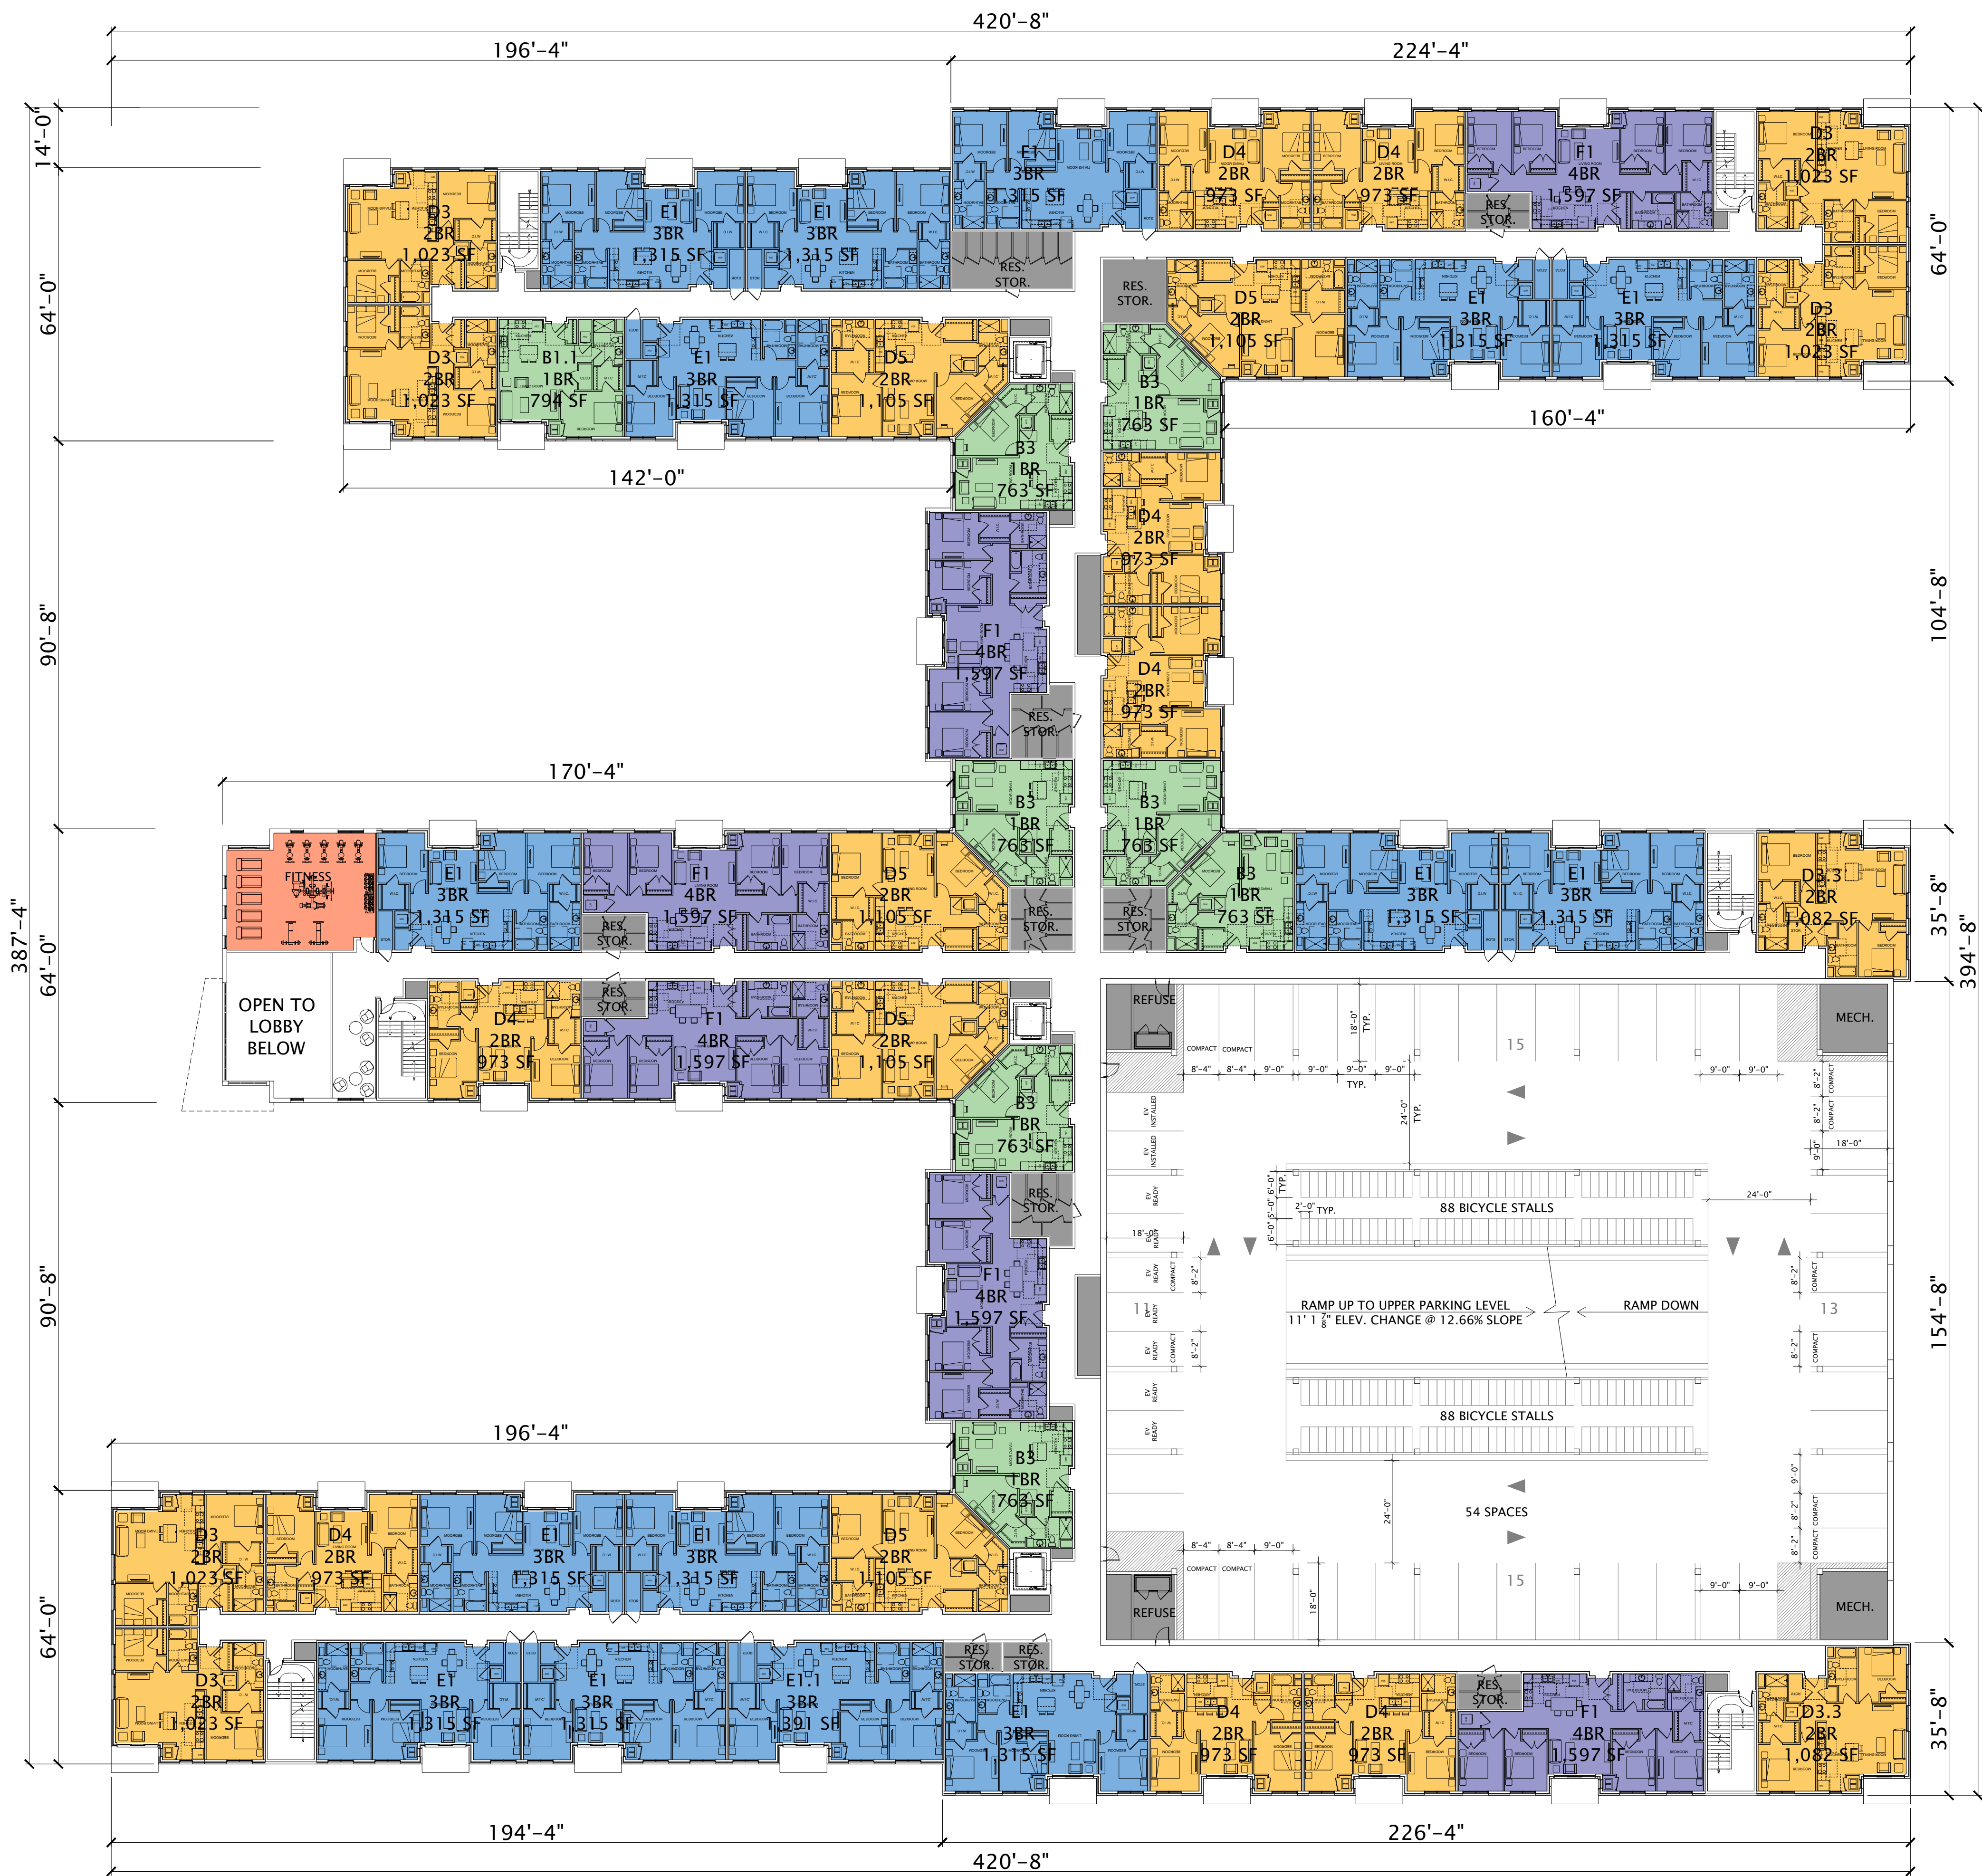

○ SECOND FLOOR PLAN
3/64"=1' - 0"

FAMILY BUILDING DATA						
LEVEL	AUTOMOBILE PARKING					BIKE PARKING
	STANDARD	COMPACT	ADA	SUB-TOTAL	VISITOR TOTAL	
R	62	12	-	74	-	74
6	62	12	-	74	-	74
5	62	12	-	74	-	74
4	62	12	-	74	-	74
3	54	12	-	66	-	66
2	42	12	-	54	-	54
1	1	2	10	13	17	30
T.	345	74	10	429	17	446
Ratio	/ Unit			1.42		1.48
	/ Bedroom			0.60		

ELECTRICAL VEHICLE CHARGING STATION REQUIREMENTS FAMILY HOUSING	
TOTAL STALL IN LOT	372
EV READY 10% =	38
EV INSTALLED 2% =	8
ACCESSIBLE STATIONS	
NUMBER OF EV INSTALLED SPACES REQUIRED	MINIMUM ACCESSIBLE EV INSTALLED SPACE
3-50	1



MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER REDEVELOPMENT: FAMILY HOUSING

2007 ROTH STREET LOT 2

LAND USE APPLICATION

KEY PLAN
PROGRESS DOCUMENTS
These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE
SECOND FLOOR PLAN

SHEET NUMBER
A102



ELECTRICAL VEHICLE CHARGING STATION REQUIREMENTS FAMILY HOUSING	
TOTAL STALL IN LOT	372
EV READY 10% =	38
EV INSTALLED 2% =	8

ACCESSIBLE STATIONS	
NUMBER OF EV INSTALLED SPACES REQUIRED	MINIMUM ACCESSIBLE EV INSTALLED SPACE
3-50	1



LINCOLN
AVENUE
CAPITAL


LAND USE APPLICATION

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.


Mark	Description	Date
------	-------------	------

SHEET NUMBER

A103



ELECTRICAL VEHICLE CHARGING STATION REQUIREMENTS FAMILY HOUSING	
TOTAL STALL IN LOT	372
EV READY 10% =	38
EV INSTALLED 2% =	8
ACCESSIBLE STATIONS	
NUMBER OF EV INSTALLED SPACES REQUIRED	MINIMUM ACCESSIBLE EV INSTALLED SPACE
3-50	1

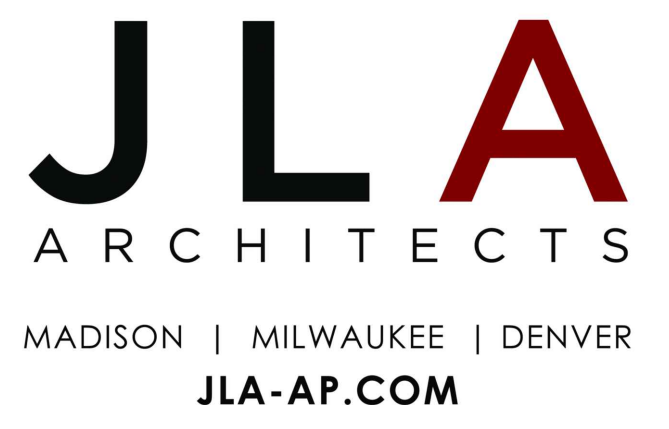

LINCOLN
AVENUE
CAPITAL


LAND USE APPLICATION


These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

REVISION SCHEDULE		
Mark	Description	Date

FOURTH - SIXTH
FLOOR PLAN


A104



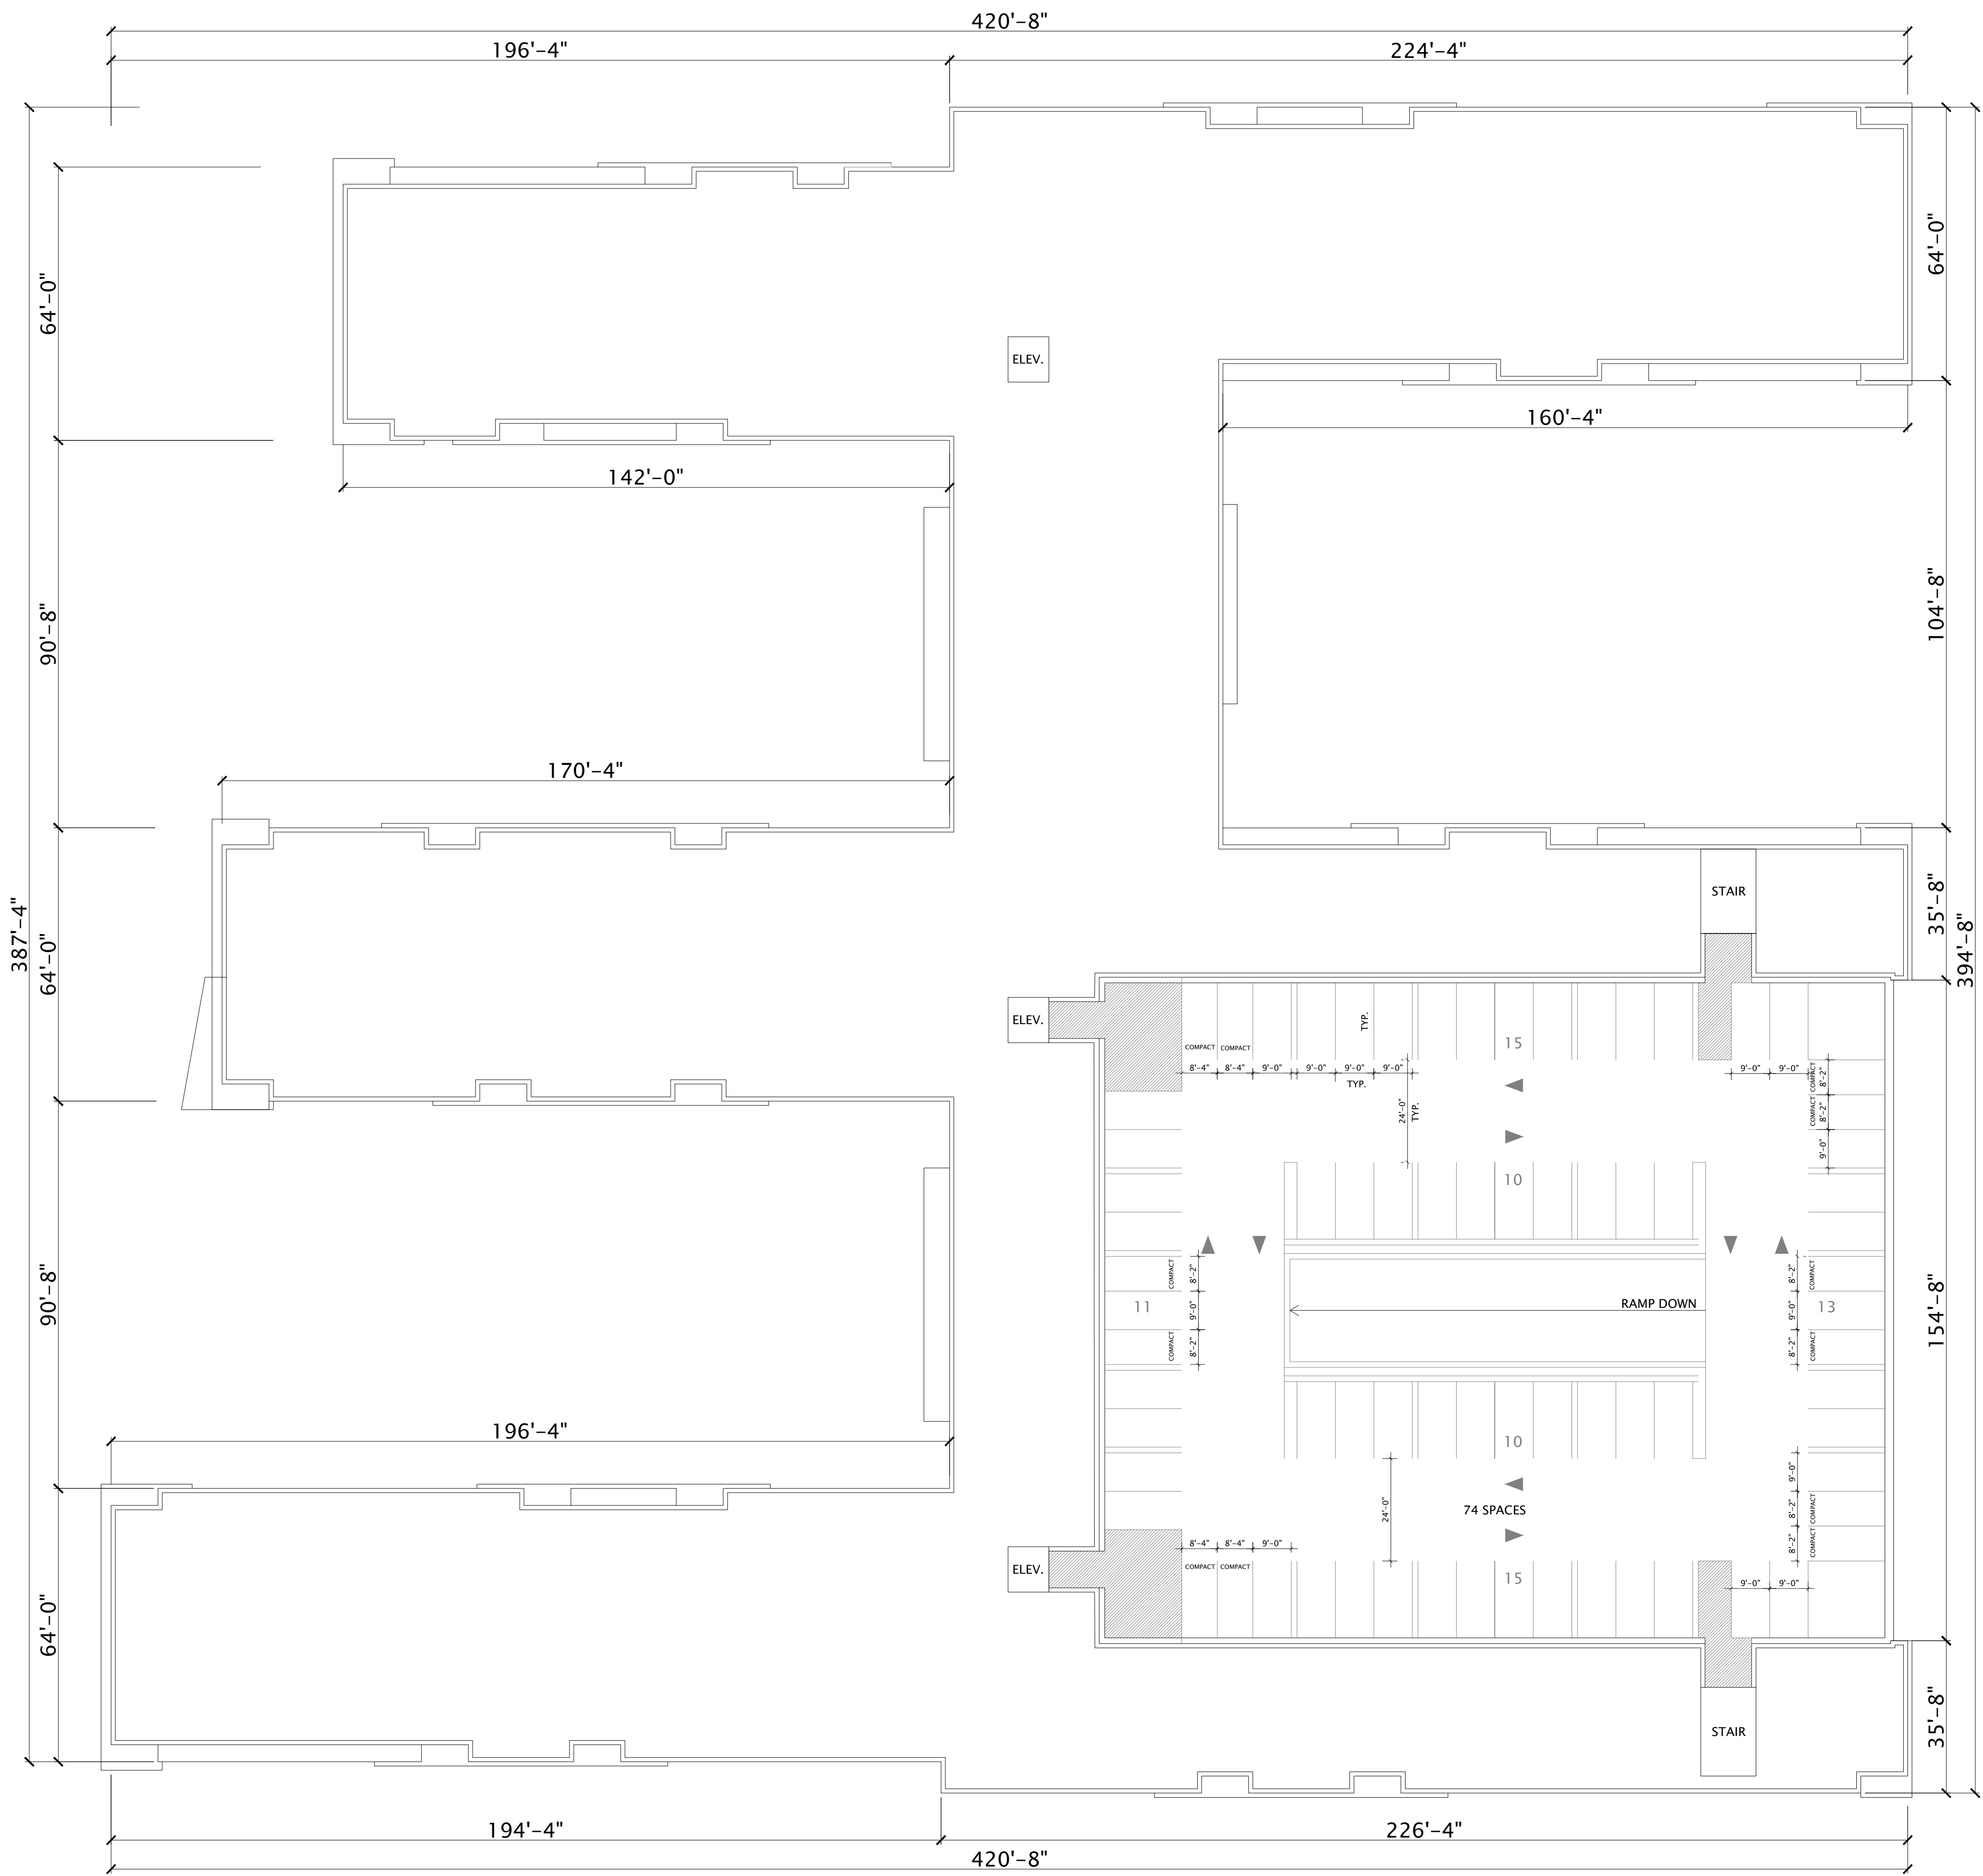


FAMILY BUILDING DATA							
LEVEL	AUTOMOBILE PARKING						BIKE PARKING
	STANDARD	COMPACT	ADA	SUB-TOTAL	VISITOR	TOTAL	
R	62	12	-	74	-	74	-
6	62	12	-	74	-	74	-
5	62	12	-	74	-	74	-
4	62	12	-	74	-	74	-
3	54	12	-	66	-	66	60
2	42	12	-	54	-	54	176
1	1	2	10	13	17	30	176
T.	345	74	10	429	17	446	412
Ratio	/ Unit			1.42		1.48	
	/ Bedroom			0.60			

ELECTRICAL VEHICLE CHARGING STATION REQUIREMENTS FAMILY HOUSING	
TOTAL STALL IN LOT	372
EV READY 10% =	38
EV INSTALLED 2% =	8
ACCESSIBLE STATIONS	
NUMBER OF EV INSTALLED SPACES REQUIRED	MINIMUM ACCESSIBLE EV INSTALLED SPACE
3-50	1



ROOF PLAN
3/64"=1' - 0"



JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

KEY PLAN

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

ROOF PLAN

SHEET NUMBER

A105


EXTERIOR MATERIALS SCHEDULE						
MARK	DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSIONS	COLOR	NOTES
1	ARTIST MURAL - TBD					
4	FIBER CEMENT SIDING 1					
6	FIBER CEMENT SIDING 4 - VERTICAL					
7	FIBER CEMENT SIDING 3 - WOODSTONE ACCENT					
8	FIBER CEMENT SIDING 5 - ACCENT					
11	MASONRY VENEER 1					



7 NORTH ELEVATION
1/16" = 1'-0"



1 WEST ELEVATION
1/16" = 1'-0"

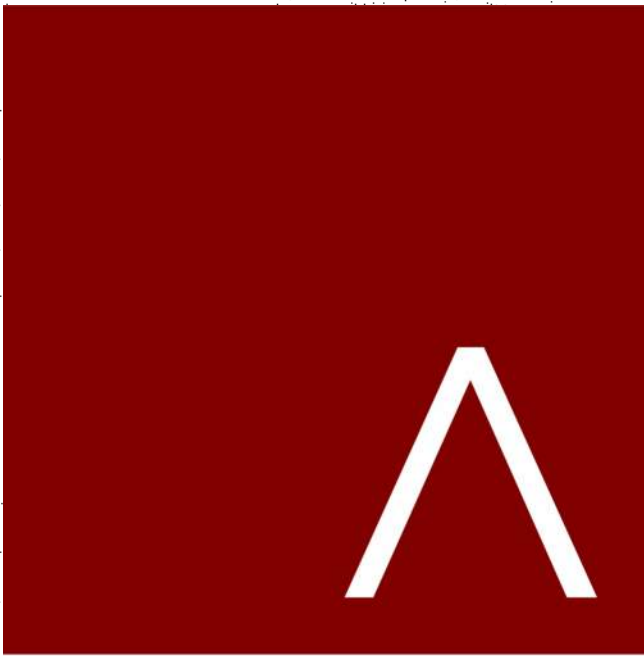

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2



LAND USE APPLICATION

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE
**EXTERIOR
ELEVATIONS**

SHEET NUMBER
A200

EXTERIOR MATERIALS SCHEDULE						
MARK	DESCRIPTION	MANUFACTURER	TYPE / STYLE	DIMENSIONS	COLOR	NOTES
1	ARTIST MURAL - TBD					
4	FIBER CEMENT SIDING 1					
6	FIBER CEMENT SIDING 4 - VERTICAL					
7	FIBER CEMENT SIDING 3 - WOODTONE ACCENT					
8	FIBER CEMENT SIDING 5 - ACQUANT					
11	MASONRY VENEER 1					

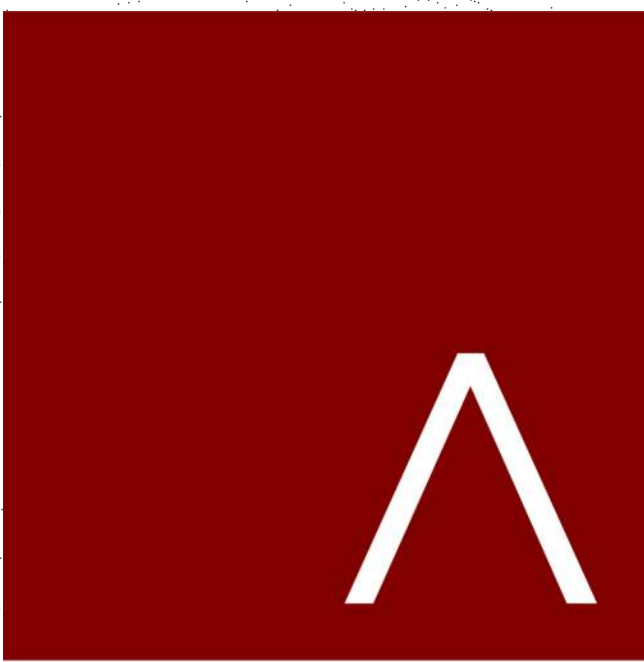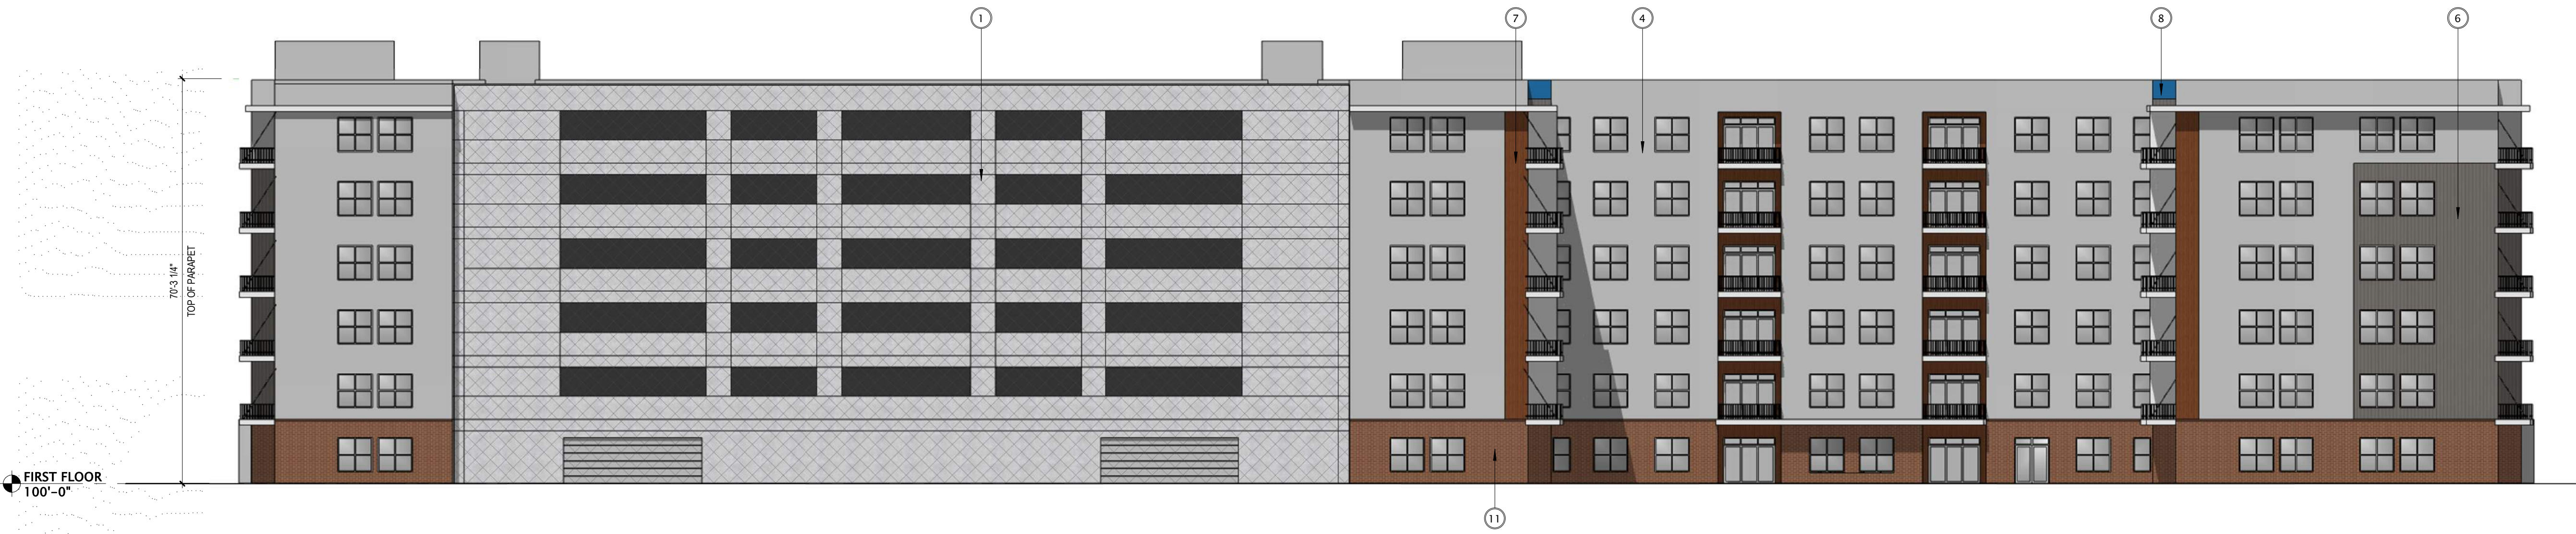

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01




HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING
2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE
**EXTERIOR
ELEVATIONS**

SHEET NUMBER
A201

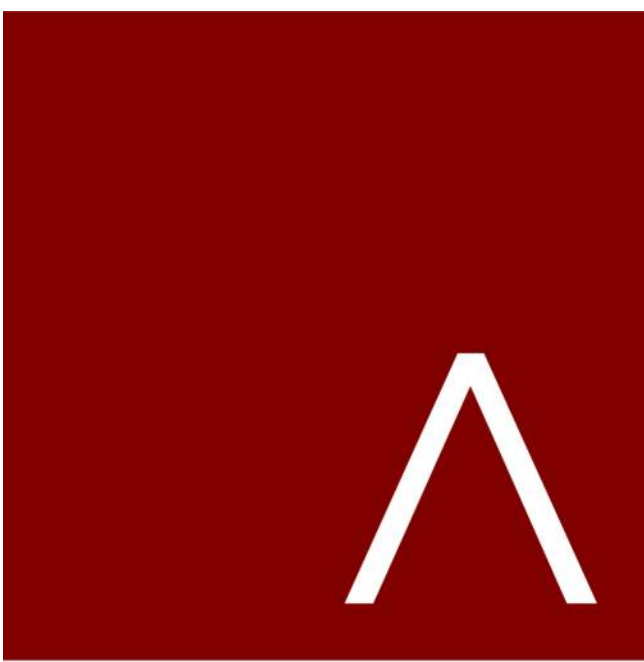

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

BIRD'S EYE VIEW
FROM SOUTHWEST

SHEET NUMBER

A204

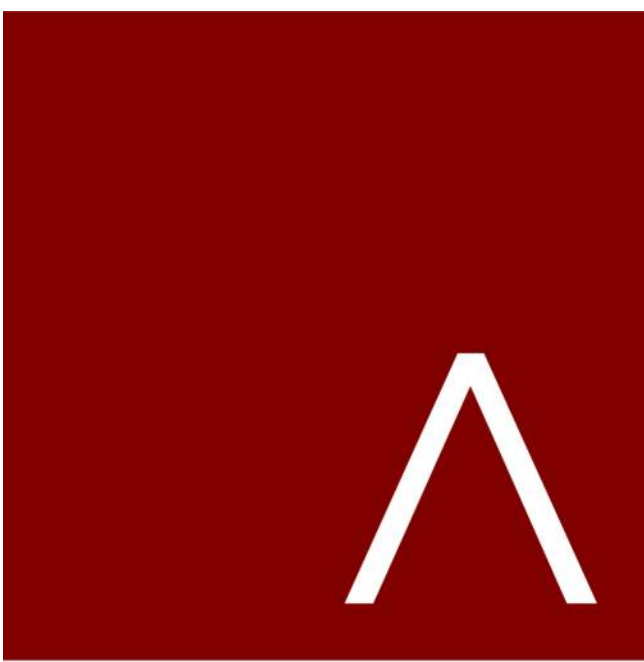

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

BIRD'S EYE VIEW
FROM WEST

SHEET NUMBER

A205

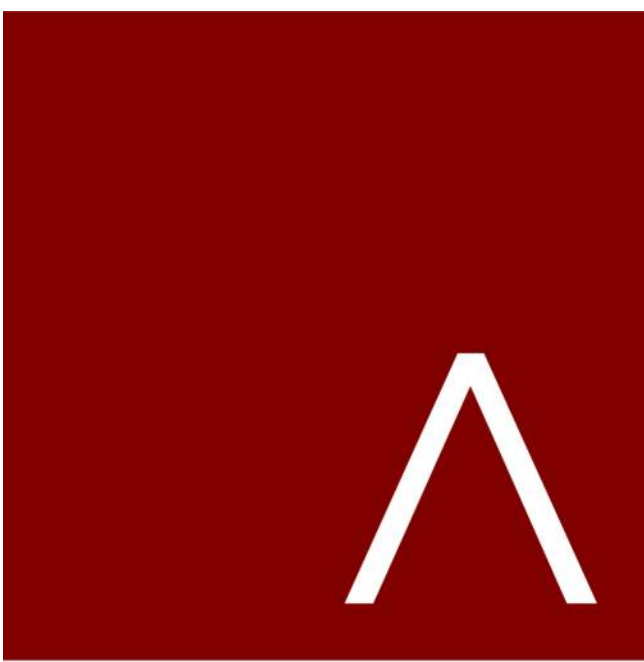

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

BIRD'S EYE VIEW
FROM NORTHWEST

SHEET NUMBER

A206

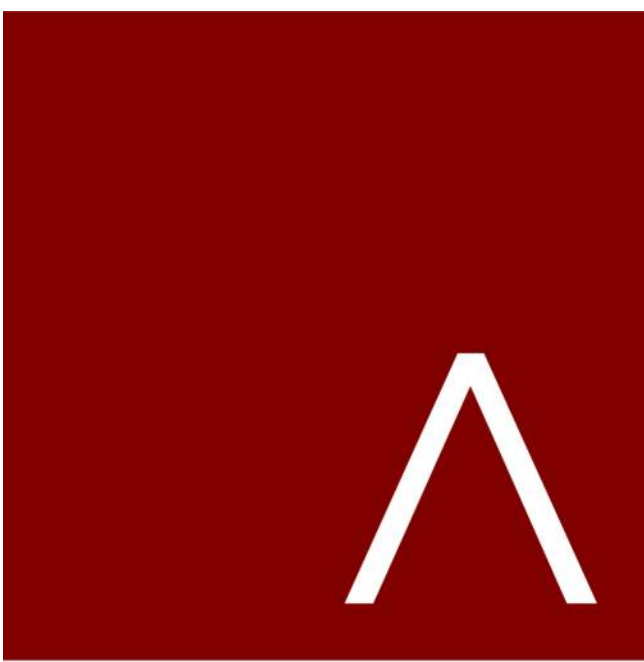

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

BIRD'S EYE VIEW
FROM EAST

SHEET NUMBER

A207

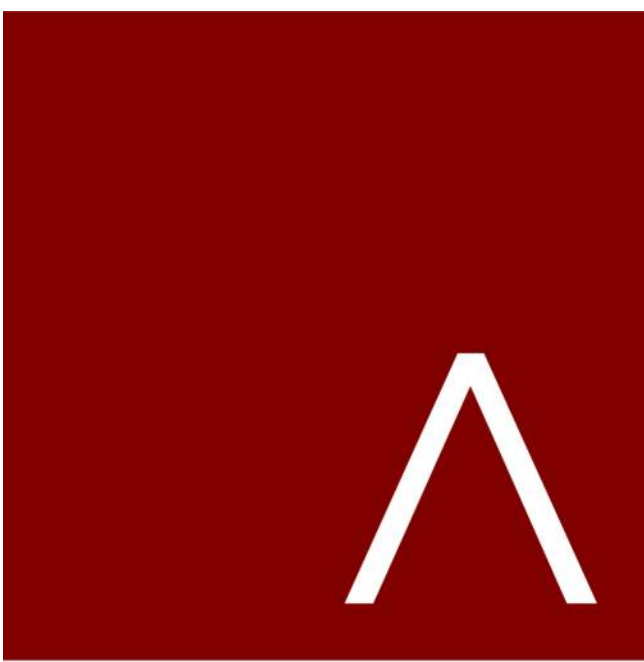

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

VIEW TO ENTRANCE

SHEET NUMBER

A208

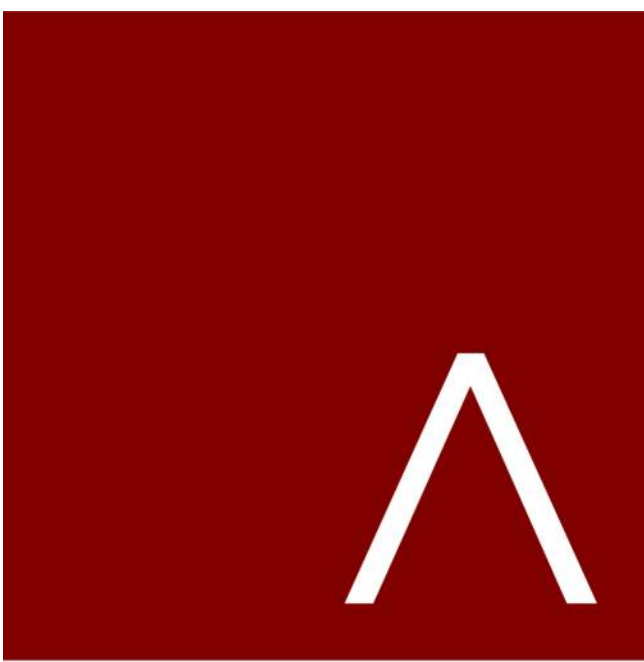

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

VIEW TO ENTRANCE

SHEET NUMBER

A209

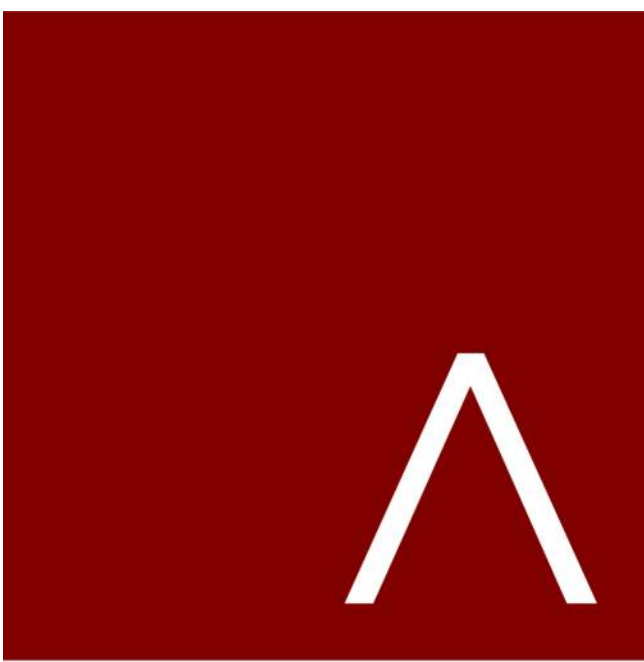

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

VIEW TO
COURTYARD 1

SHEET NUMBER

A210

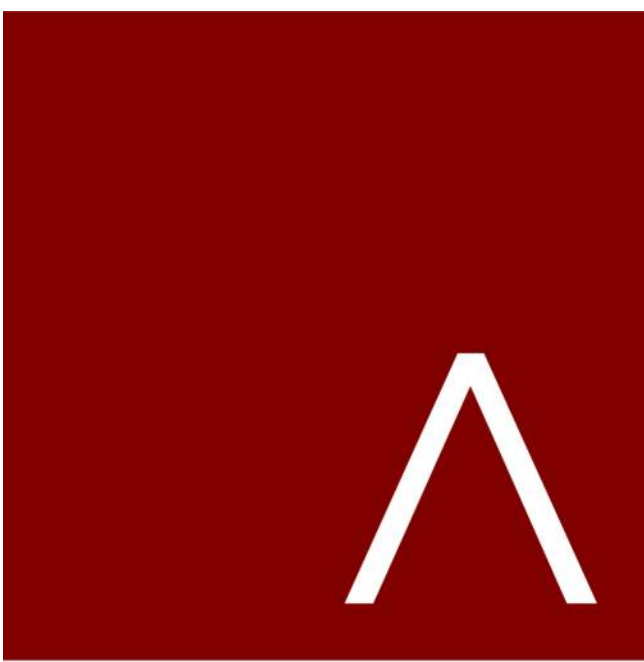

JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

LAND USE APPLICATION

DATE OF ISSUANCE NOVEMBER 7, 2022


REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

VIEW TO
COURTYARD 2

SHEET NUMBER

A211

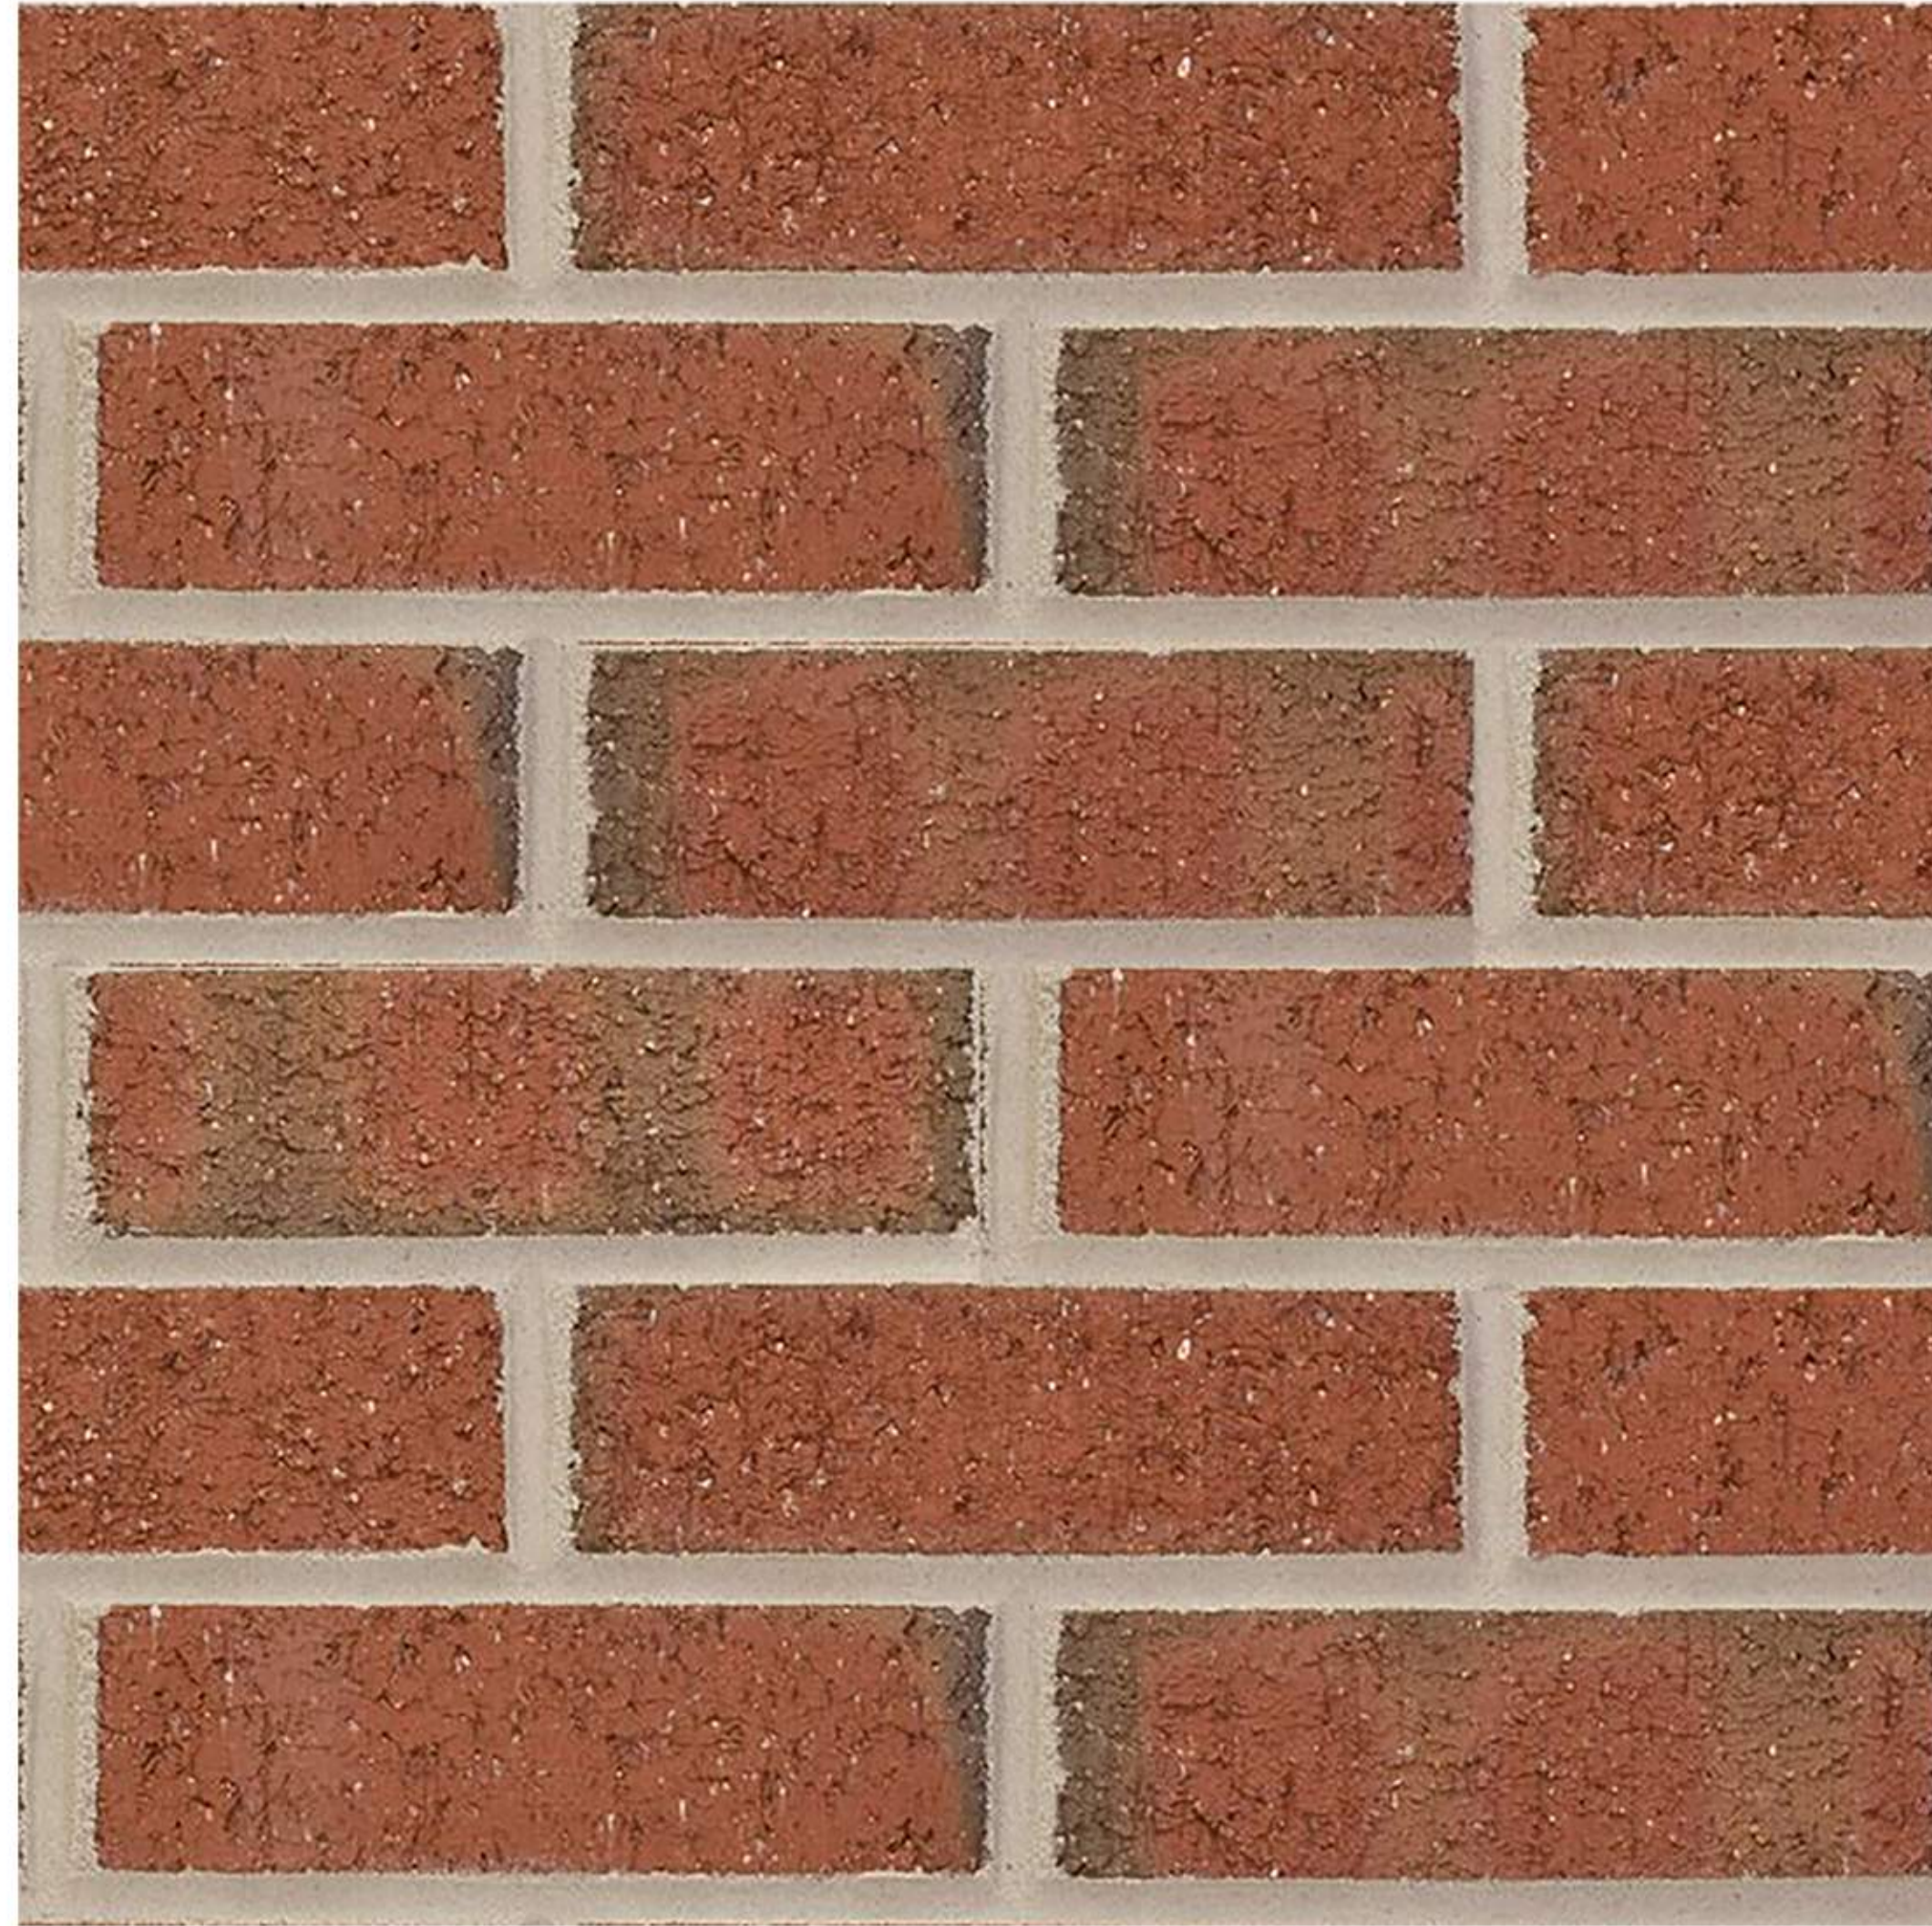


MASONRY VENEER 1




FIBER CEMENT SIDING 1




FIBER CEMENT SIDING 2
HORIZONTAL

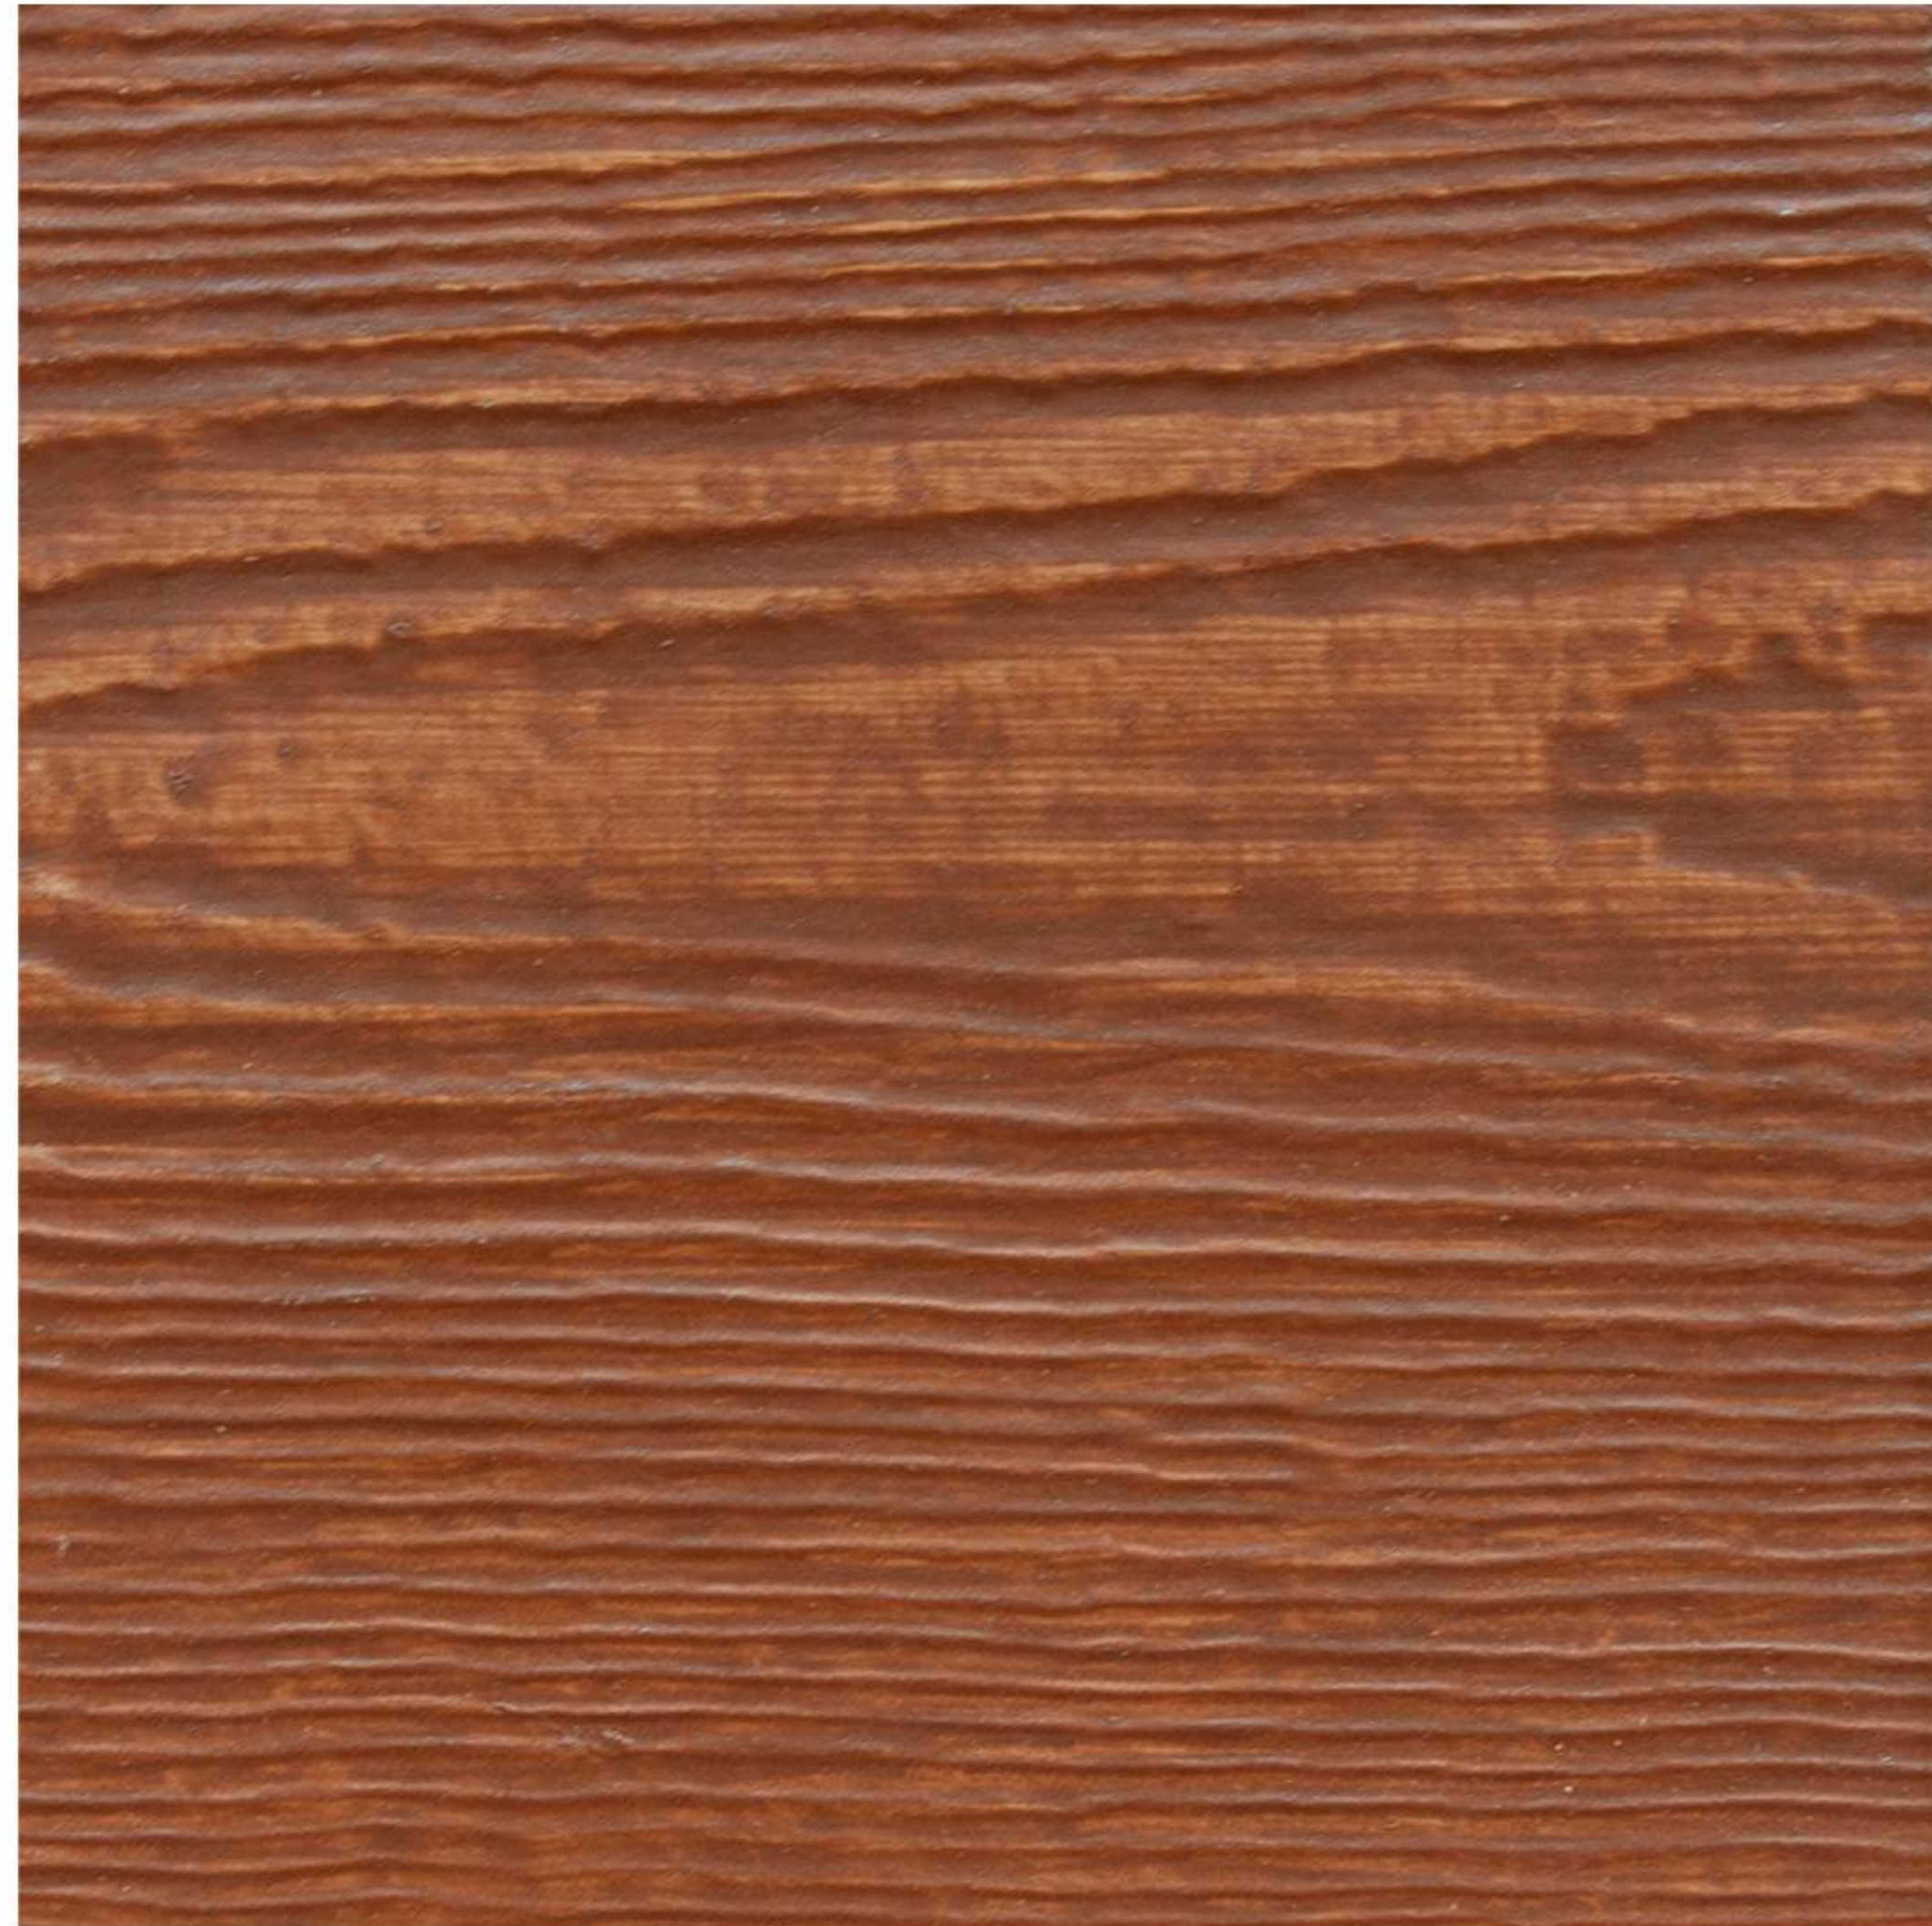

FIBER CEMENT SIDING 3
WOODTONE ACCENT

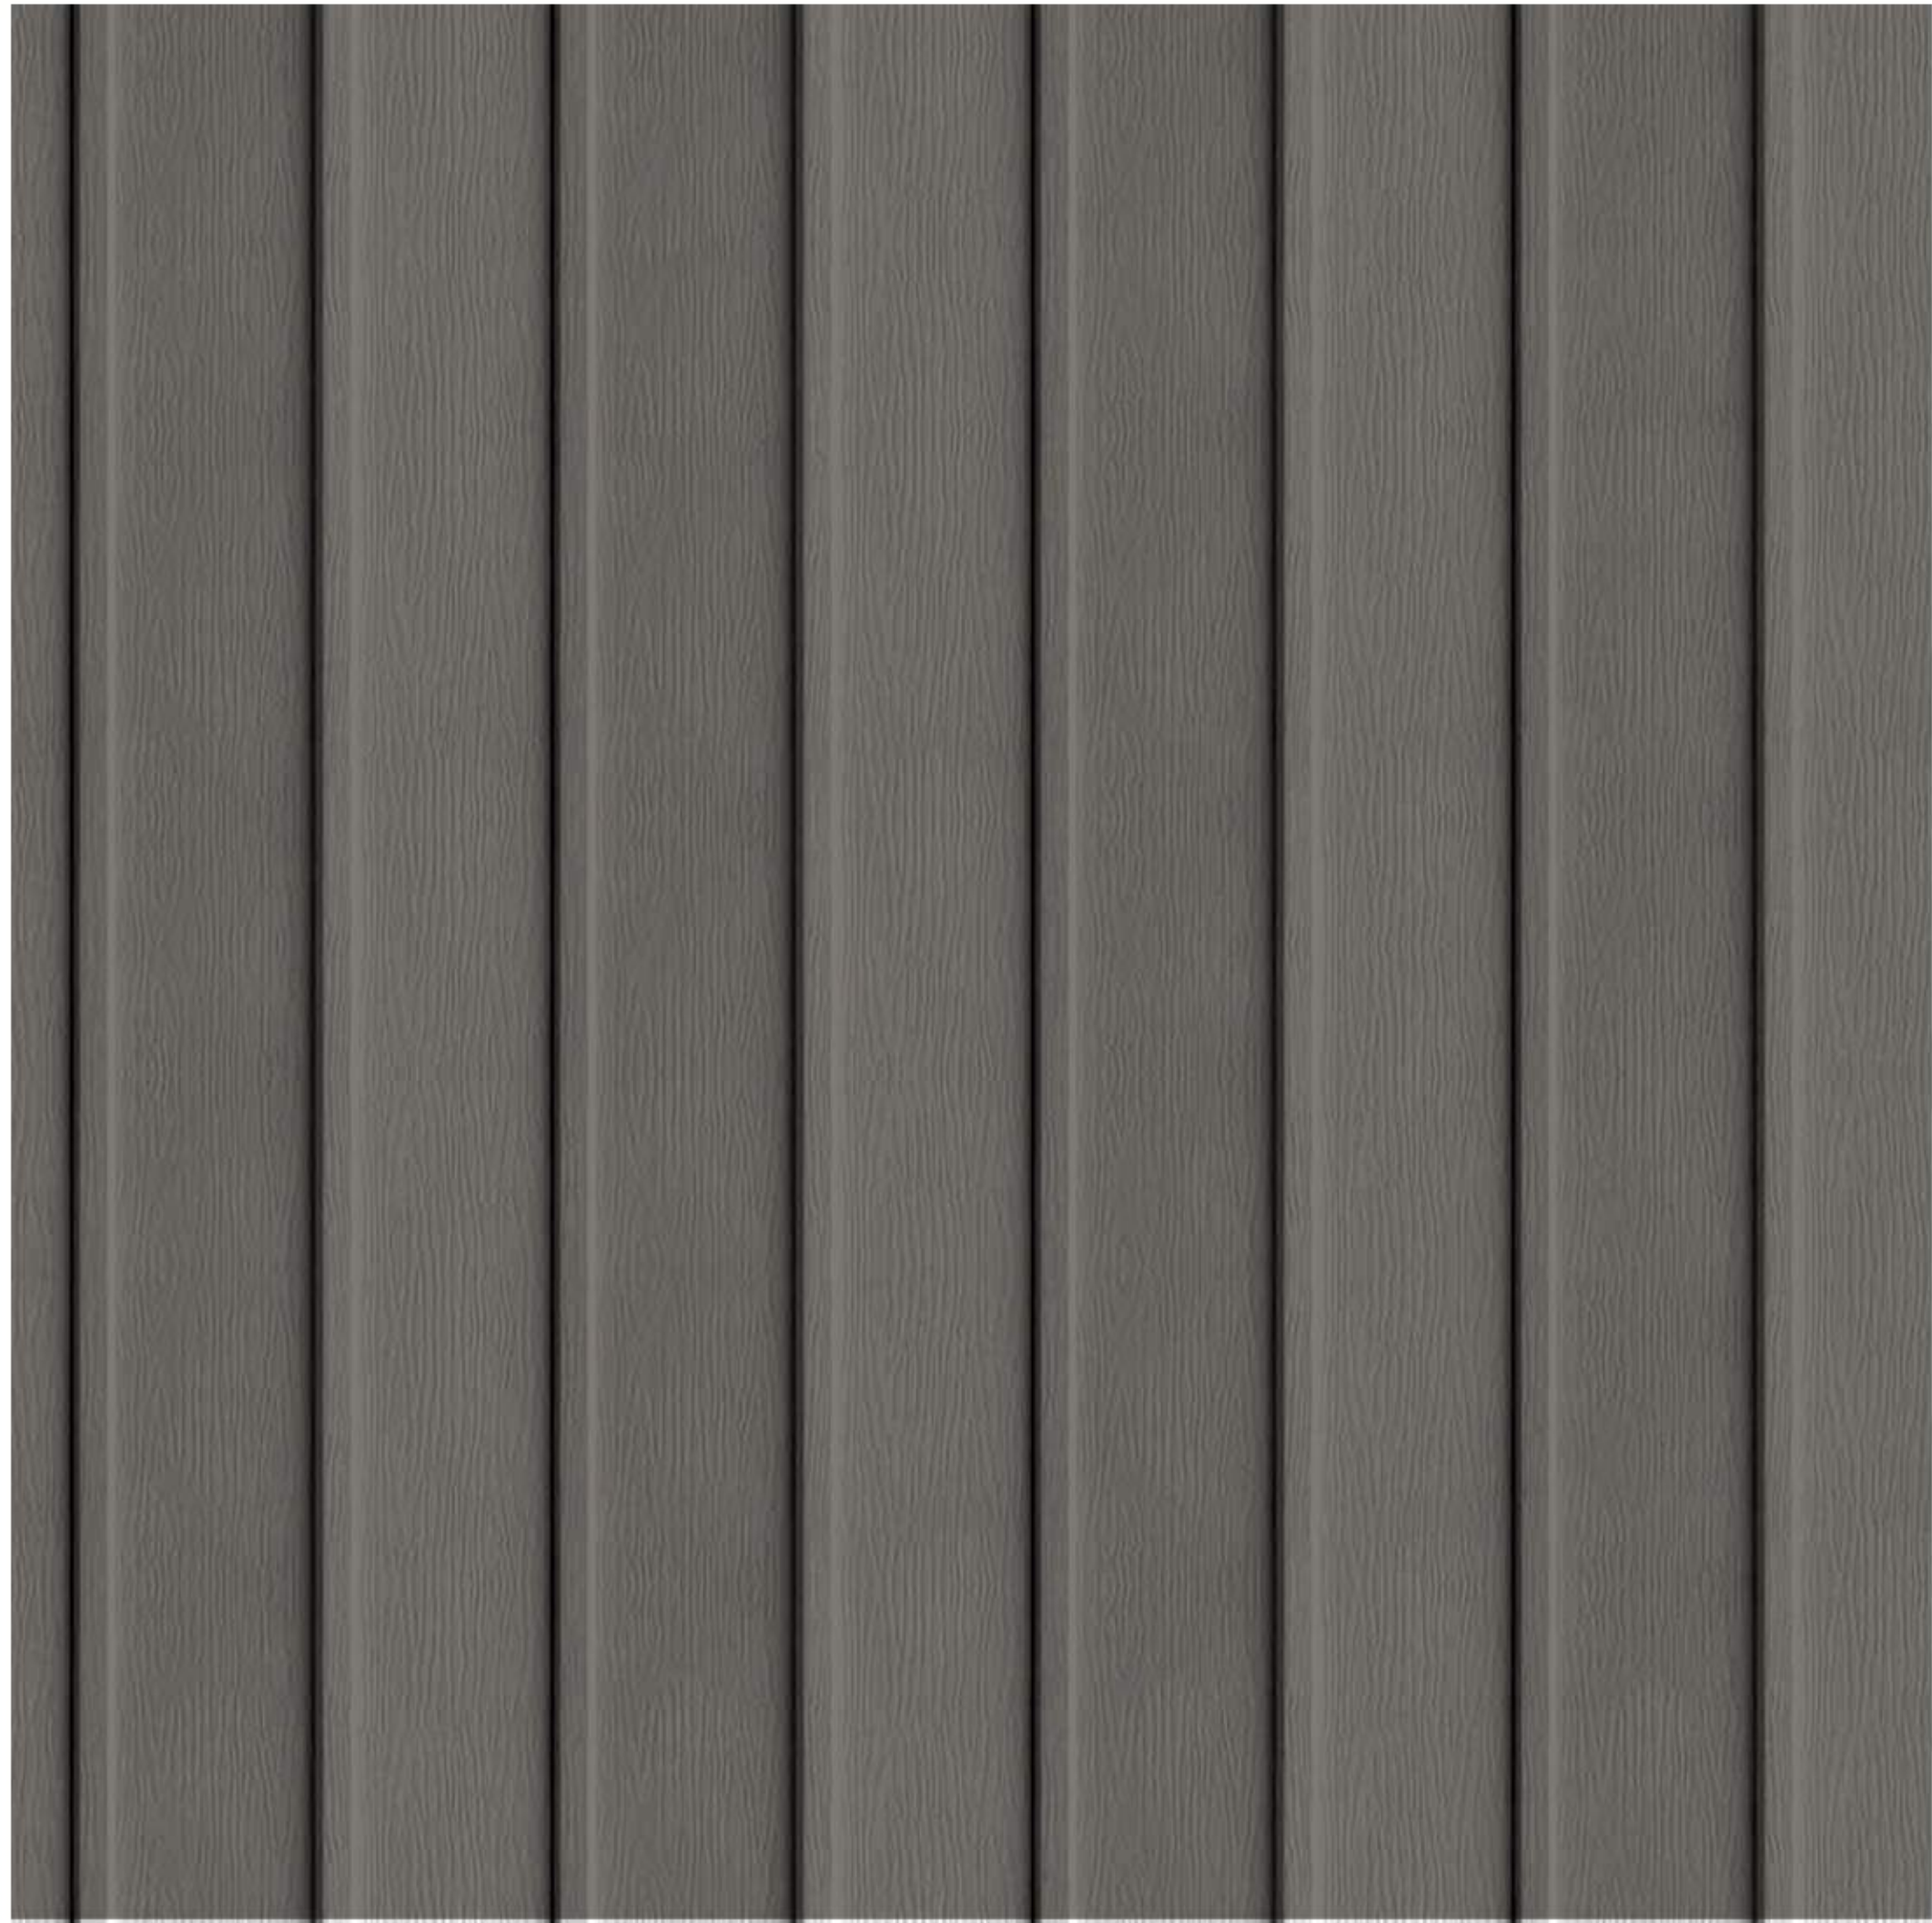

FIBER CEMENT SIDING 4
VERTICAL



FIBER CEMENT SIDING 5

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

DATE OF ISSUANCE NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

MATERIALS BOARD

SHEET NUMBER

A215



JLA
ARCHITECTS
MADISON | MILWAUKEE | DENVER
JLA-AP.COM

JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

EXTERIOR ELEVATION UPDATES

DATE OF ISSUANCE NOVEMBER 7, 2022

REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE

BIRD GLASS MATRIX

SHEET NUMBER

A220

28.129 BIRD-SAFE REQUIREMENTS:

(1) **Statement of Purpose:** The Bird-Safe Glass Requirements in this section are intended to reduce the heightened risk for bird collisions with glass on specified building designs and configurations.

(2) **Applicability:** Subsection (4) applies to all exterior construction and development activity, including the expansion of existing buildings and structures, as specified therein.

(3) **Measuring Glass Area:** Under this Ordinance, glass area shall be measured as one (1) continuous panel of glass or other transparent material, or a set of two (2) or more such panels divided by mullions of six (6) inches in width or narrower. Panels surrounded on all sides by solid walls or mullions wider than six (6) inches shall be considered individual windows. Spandrel or opaque reflectivity of 14% or less shall not be included in the calculation of glass area. See Revised Figure 1.

(4) **Bird-Safe Glass Treatment Requirements:** Glass areas on the following buildings or structures shall be treated to reduce the risk of bird collision by incorporating a pattern of visual markers that are either: a) dots or other isolated shapes that are 1/4" in diameter or larger and spaced at not more than a two-inch (2") by two-inch (2") pattern; or b) lines that are 1/8" in width or greater and spaced no more than 2" apart; low reflective opaque materials; building-integrated structures like non-glass double-skin facades, metal screens, fixed solar shading, exterior insect screens, and other features that cover the glass surface; or other similar mitigation treatments approved by the Zoning Administrator.

(a) **Buildings or structures over 10,000 square feet:** For any building or structure over 10,000 square feet in size (floor area of above-grade stories), bird-safe glass treatment is required as follows:

- For building facades where the first sixty (60) feet from grade are comprised of greater than or equal to fifty percent (50%) glass:
 - At least eighty-five percent (85%) of the glass must be treated; and
 - All glass within fifteen (15) feet of a building corner must be treated when see through or fly through conditions exist. See Figure 3.
- For building facades where the first sixty (60) feet from grade are comprised of less than fifty percent (50%) glass:
 - At least eighty-five percent (85%) of the glass on glass areas fifty (50) square feet or over must be treated; and
 - Of all glass areas over fifty (50) square feet, any glass within fifteen (15) feet of a building corner must be treated.
- All glass railings must be treated.
- All glass on enclosed building connections shall be treated up to sixty (60) feet above grade.

(b) **Sky-bridges:** For buildings and structures of any size, all glass on above-ground bridges must be treated.

(c) **At grade glass:** For buildings and structures of any size, all at grade glass features such as sound walls or glass screens must be treated.

(5) **This Ordinance shall become effective October 1, 2020.**

BIRD GLASS CALCULATIONS: FAMILY

11/7/2022

SCOTT R. CIESLAK

50+ SQ FT AND REQUIRE A BIRD GLAZING SAFETY SYSTEM ON A MIN. OF 85% OF THE GLAZING

WINDOW DESIGNATION	HEIGHT	WIDTH	# OF PANES	AREA	WALL DESIGNATION																			
					SOUTH WALL		EAST WALL		WEST WALL		NORTH WALL		NE COURTYARD - N		NE COURTYARD - S		NW COURTYARD - N		NW COURTYARD - S		SW COURTYARD - N		SW COURTYARD - S	
					GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW	GLZ AREA	# WINDOW
WINDOW A 6/0 X 6/0	5.7	5.7	4.0	32.1	4,239.2	132.0	2,665.5	83.0	4,207.1	131.0	3,596.9	112.0	1,702.1	53.0	1,509.4	47.0	1,316.7	41.0	1,798.4	56.0	1,637.9	51.0	5,395.0	65.0
WINDOW B 3/0 X 6/0	5.7	2.7	2.0	15.1	181.4	12.0	181.4	12.0	362.7	24.0	181.4	12.0	181.4	12.0	181.4	12.0	272.1	18.0	166.3	11.0	132.0	11.0	144.0	12.0
GLAZED DOUBLE SERVICE DOOR	7.5	5.7	2.0	42.8	42.8	1.0	42.8	1.0	128.3	3.0	42.8	1.0	42.8	1.0			42.8	1.0	42.8	1.0	42.8	1.0	42.8	1.0
GLAZED SINGLE SERVICE DOOR	7.5	2.7	1.0	20.3	40.5	2.0					40.5	2.0			20.3	1.0					20.3	1.0		
					4,503.8 TOTAL GLZ		2,889.7 TOTAL GLZ		4,698.0 TOTAL GLZ		3,861.5 TOTAL GLZ		1,926.2 TOTAL GLZ		1,711.0 TOTAL GLZ		1,631.5 TOTAL GLZ		2,007.4 TOTAL GLZ		1,832.9 TOTAL GLZ		5,581.8 TOTAL GLZ	
					29,561.0 WALL AREA		25,529.0 WALL AREA		27,734.0 WALL AREA		25,743.0 WALL AREA		11,267.0 WALL AREA		11,267.0 WALL AREA		10,002.0 WALL AREA		11,923.0 WALL AREA		11,923.0 WALL AREA		13,820.0 WALL AREA	
					15.24% % GLAZING		11.32% % GLAZING		16.94% % GLAZING		15.00% % GLAZING		17.10% % GLAZING		15.19% % GLAZING		16.31% % GLAZING		16.84% % GLAZING		15.37% % GLAZING		40.39% % GLAZING	

PATIO DESIGNATION	HEIGHT	WIDTH	# OF PANES	AREA	WALL DESIGNATION																			
					SOUTH WALL		EAST WALL		WEST WALL		NORTH WALL		NE COURTYARD - N		NE COURTYARD - S		NW COURTYARD - N		NW COURTYARD - S		SW COURTYARD - N		SW COURTYARD - S	
					GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO	GLZ AREA	# PATIO
P1 w/TRANSOM 9/0 X 8/0	7.7	8.3	1.0	63.9	3,386.1	53.0	766.7	12.0	766.7	12.0	3,002.8	47.0	1,150.0	18.0	1,150.0	18.0	1,150.0	18.0	958.3	15.0	180.0	15.0	288.0	24.0
					3,386.1 TOTAL GLZ		766.7 TOTAL GLZ		766.7 TOTAL GLZ		3,002.8 TOTAL GLZ		1,150.0 TOTAL GLZ		1,150.0 TOTAL GLZ		1,150.0 TOTAL GLZ		958.3 TOTAL GLZ		180.0 TOTAL GLZ		288.0 TOTAL GLZ	
					29,561.0 WALL AREA		25,529.0 WALL AREA		27,734.0 WALL AREA		25,743.0 WALL AREA		11,267.0 WALL AREA		11,267.0 WALL AREA		10,002.0 WALL AREA		11,923.0 WALL AREA		11,923.0 WALL AREA		13,820.0 WALL AREA	
					11.45% % GLAZING		3.00% % GLAZING		2.76% % GLAZING		11.66% % GLAZING		10.21% % GLAZING		10.21% % GLAZING		11.50% % GLAZING		8.04% % GLAZING		1.51% % GLAZING		2.08% % GLAZING	

SF DESIGNATION	HEIGHT	WIDTH	# OF PANES	AREA	WALL DESIGNATION																			
					SOUTH WALL		EAST WALL		WEST WALL		NORTH WALL		NE COURTYARD - N		NE COURTYARD - S		NW COURTYARD - N		NW COURTYARD - S		SW COURTYARD - N		SW COURTYARD - S	
					GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF	GLZ AREA	# SF
STOREFRONT A	8.7	5.7	2.0	49.1					147.3	3.0	98.2	2.0							294.7	6.0	196.5	4.0		
STOREFRONT B	19.8	2.7	1.0	53.5					160.4	3.0														
STOREFRONT C: CURTAINWALL	19.3	22.7		438.2					438.2	1.0	438.2	1.0												
STOREFRONT D: CURTAINWALL	19.8	8.7		171.9																	171.9	1.0		
					0.0 TOTAL GLZ		0.0 TOTAL GLZ		745.9 TOTAL GLZ		536.4 TOTAL GLZ		0.0 TOTAL GLZ		0.0 TOTAL GLZ		0.0 TOTAL GLZ		294.7 TOTAL GLZ		368.4 TOTAL GLZ		0.0 TOTAL GLZ	
					29,561.0 WALL AREA		25,529.0 WALL AREA		27,734.0 WALL AREA		25,743.0 WALL AREA		11,267.0 WALL AREA		11,267.0 WALL AREA		10,002.0 WALL AREA		11,923.0 WALL AREA		11,923.0 WALL AREA		13,820.0 WALL AREA	
					0.00% % GLAZING		0.00% % GLAZING		2.69% % GLAZING		2.08% % GLAZING		0.00% % GLAZING		0.00% % GLAZING		0.00% % GLAZING		2.47% % GLAZING		3.09% % GLAZING		0.00% % GLAZING	

SOUTH WALL	EAST WALL	WEST WALL	NORTH WALL	NE COURTYARD - N	NE COURTYARD - S	NW COURTYARD - N	NW COURTYARD - S	SW COURTYARD - N	SW COURTYARD - S
7,889.9 TOTAL GLZ	3,656.3 TOTAL GLZ	6,210.6 TOTAL GLZ	7,400.7 TOTAL GLZ	3,076.2 TOTAL GLZ	2,861.0 TOTAL GLZ	2,781.5 TOTAL GLZ	3,260.5 TOTAL GLZ	2,381.2 TOTAL GLZ	5,869.8 TOTAL GLZ
29,561.0 WALL AREA	25,529.0 WALL AREA	27,734.0 WALL AREA	25,743.0 WALL AREA	11,267.0 WALL AREA	11,267.0 WALL AREA	10,002.0 WALL AREA	11,923.0 WALL AREA	11,923.0 WALL AREA	13,820.0 WALL AREA
26.69% % GLAZING	14.32% % GLAZING	22.39% % GLAZING	28.75% % GLAZING	27.30% % GLAZING	25.39% % GLAZING	27.81% % GLAZING	27.35% % GLAZING	19.97% % GLAZING	42.47% % GLAZING



1 NORTH ELEVATION BIRGLASS
1/16" = 1'-0"



2 WEST ELEVATION BIRGLASS
1/16" = 1'-0"



4 SOUTH ELEVATION BIRGLASS
1/16" = 1'-0"



3 EAST ELEVATION BIRGLASS
1/16" = 1'-0"

- GLAZING KEYNOTES
- 1 WINDOW A: 6/0 X 6/0
 - 2 WINDOW B: 3/0 X 6/0
 - 3 GLAZED SINGLE SERVICE DOOR
 - 4 GLAZED DOUBLE SERVICE DOOR
 - 5 P1: 9/0 X 6'-8" PATIO DOOR WITH 1'-4" TRANSOM
 - 6 STOREFRONT A
 - 7 STOREFRONT B
 - 8 STOREFRONT C: CURTAINWALL
 - 9 STOREFRONT D: CURTAINWALL



JLA PROJECT NUMBER: W22-0128-01



HARTMEYER
REDEVELOPMENT:
FAMILY HOUSING

2007 ROTH STREET
LOT 2

EXTERIOR ELEVATION UPDATES

DATE OF ISSUANCE		NOVEMBER 7, 2022
REVISION SCHEDULE		
Mark	Description	Date

SHEET TITLE		
EXTERIOR ELEVATIONS - BIRGLASS		
SHEET NUMBER		

A221

FEATURES & SPECIFICATIONS

INTENDED USE — Typical applications include corridors, lobbies, conference rooms and private offices.

CONSTRUCTION — Galvanized steel mounting/plaster frame; galvanized steel junction box with bottom-hinged access covers and spring latches. Reflectors are retained by torsion springs.

Vertically adjustable mounting brackets with commercial bar hangers provide 3-3/4" total adjustment.

Two combination 1/2"-3/4" and four 1/2" knockouts for straight-through conduit runs. Capacity: 8 (4 in, 4 out). No. 12 AWG conductors, rated for 90°C.

Accommodates 12"-24" joist spacing.

Passive cooling thermal management for 25°C standard; high ambient (40°C) option available. Light engine and drivers are accessible from above or below ceiling.

Max ceiling thickness 1-1/2".

OPTICS — LEDs are binned to a 3-step SDCM; 80 CRI minimum. 90 CRI optional.

LED light source concealed with diffusing optical lens.

General illumination lighting with 1.0 S/MH and 55° cutoff to source and source image.

Self-flanged anodized reflectors in specular, semi-specular, or matte diffuse finishes. Also available in white and black painted reflectors.

ELECTRICAL — Multi-volt (120-277V, 50/60Hz) 0-10V dimming drivers mounted to junction box, 10% or 1% minimum dimming level available.

0-10V dimming fixture requires two (2) additional low-voltage wires to be pulled.

70% lumen maintenance at 60,000 hours.

LISTINGS — Certified to US and Canadian safety standards. Wet location standard (covered ceiling). IP55 rated. ENERGY STAR® certified product.

BUY AMERICAN — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.



A+ Capable options indicated by this color background.



LDN6

**6" Open and WallWash LED
Non-IC
New Construction Downlight**



battery pack



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LDN6 35/15 L06AR LSS MVOLT EZ10

LDN6							
Series	Color temperature	Lumens ¹		Aperture/Trim Color		Finish	Voltage
LDN6 6" round	27/ 2700K	05	500 lumens	25	2500 lumens	L06 Downlight	MVOLT Multi-volt 120 120V 277 277V 347 ³ 347V
	30/ 3000K	07	750 lumens	30	3000 lumens	AR Clear	
	35/ 3500K	10	1000 lumens	40	4000 lumens	WR ² White	
	40/ 4000K	15	1500 lumens	50	5000 lumens	BR ² Black	
	50/ 5000K	20	2000 lumens			LSS Semi-specular	
						LD Matte diffuse	
						LS Specular	

Driver	Options	
GZ10 0-10V driver dims to 10%	SF ⁴	Single fuse
GZ1 0-10V driver dims to 1%	TRW ⁵	White painted flange
D10 Minimum dimming 10% driver for use with JOT	TRBL ⁵	Black painted flange
D1 Minimum dimming 1% driver for use with JOT	EL ⁶	Emergency battery pack with integral test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS
EZ10 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 10%	ELR ⁶	Emergency battery pack with remote test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS
	ELSD ⁶	Emergency battery pack with self-diagnostics, integral test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS
	ELRSD ⁶	Emergency battery pack with self-diagnostics, remote test switch. 10W Constant Power, Not Certified in CA Title 20 MAEDBS
EZ1 0-10V eldoLED driver with smooth and flicker-free deep dimming performance down to 1%	E10WCP ⁶	Emergency battery pack, 10W Constant Power with integral test switch. Certified in CA Title 20 MAEDB
	E10WCPR ⁶	Emergency battery pack, 10W Constant Power with remote test switch. Certified in CA Title 20 MAEDB
EDAB eldoLED DALI SOLDRIIVE dim to dark	NPP16D ⁷	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1).
	NPP16DER ⁷	nLight® network power/relay pack with 0-10V dimming for non-eldoLED drivers (GZ10, GZ1). ER controls fixtures on emergency circuit.
	N80 ⁸	nLight™ Lumen Compensation
	JOT ¹³	Wireless room control with "Just One Touch" pairing
	NPS80EZ ⁷	nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1).
	NPS80EZER ⁷	nLight® dimming pack controls 0-10V eldoLED drivers (EZ10, EZ1). ER controls fixtures on emergency circuit.
	HAO ¹¹	High ambient option
	CP ¹²	Chicago Plenum
	RRL ^{___}	RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Available only in RRLA, RRLB, RRLAE, and RRLC12S. Refer to RRL spec sheet on www.acuitybrands.com for the RELOC product specifications.
	NLTAIR2 ^{9, 10, 14}	nLight® Air enabled
	NLTAIRER2 ^{9, 10}	nLight® AIR Dimming Pack Wireless Controls. Controls fixtures on emergency circuit, not available with battery pack options
	NLTAIREM2 ^{9, 10}	nLight® AIR Dimming Pack Wireless Controls. UL924 Emergency Operation, via power interrupt detection. Available with battery pack options.
	BAA	Buy America(n) Act Compliant
	90CRI	High CRI (90+)

Accessories: Order as separate catalog number.

PS1055CP	FMC Power Sentry battery pack, T20 compliant, field installable, 10w constant power
EAC ISSM 375	Compact interruptible emergency AC power system
EAC ISSM 125	Compact interruptible emergency AC power system
GRA68 JZ	Oversized trim ring with 8" outside diameter
SCA6	Sloped Ceiling Adapter. Degree of slope must be specified (5D, 10D, 15D, 20D, 25D, 30D). Ex: SCA6 10D

Notes

- Overall height varies based on lumen package; refer to dimensional chart on page 3.
- Not available with finishes.
- Not available with emergency options.
- Must specify voltage 120V or 277V.
- Available with clear (AR) reflector only.
- 12.5" of plenum depth or top access required for battery pack maintenance.
- Specify voltage. ER for use with generator supply EM power. Will require an emergency hot feed and normal hot feed.
- Fixture begins at 80% light level. Must be specified with NPS80EZ or NPS80EZ ER. Only available with EZ10 and EZ1 drivers.
- Not available with CP, NPS80EZ, NPS80EZER, NPP16D, NPP16DER or N80 options.
- NLTAIR2, NLTAIRER2 and NLTAIREM2 not recommended for metal ceiling installations.
- Fixture height is 6.5" for all lumen packages with HAO.
- Must specify voltage for 3000lm and above. 5000lm with marked spacing 24 L x 24 W x 14 H. Not available with emergency battery pack option.
- Must specify D10 or D1 driver. Not available with nLight options. Not available with CP. Not recommended for metal ceiling installation. Not for use with emergency backup power systems other than battery packs.
- When combined with EZ1 or EZ10 drivers, can be used as a normal power sensing device for nLight AIR devices and luminaires with EM options.

LDN6

PHOTOMETRY

Distribution Curve


Distribution Data

Output Data


Coefficient of Utilization

Illuminance Data at 30" Above Floor for
a Single Luminaire


LDN6 35/10 L06AR, input watts: 10.44, delivered lumens: 987.10, LM/W = 94.54, spacing criterion at 0= 1.02, test no. ISF 30716P262.

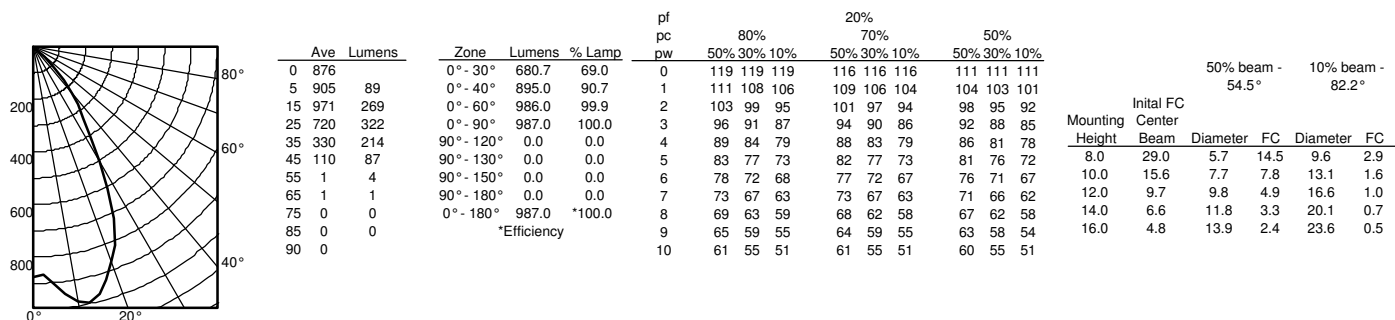

LDN6 35/15 L06AR, input watts: 17.52, delivered lumens: 1572.9, LM/W = 89.77, spacing criterion at 0= 1.02, test no. ISF 30716P265.

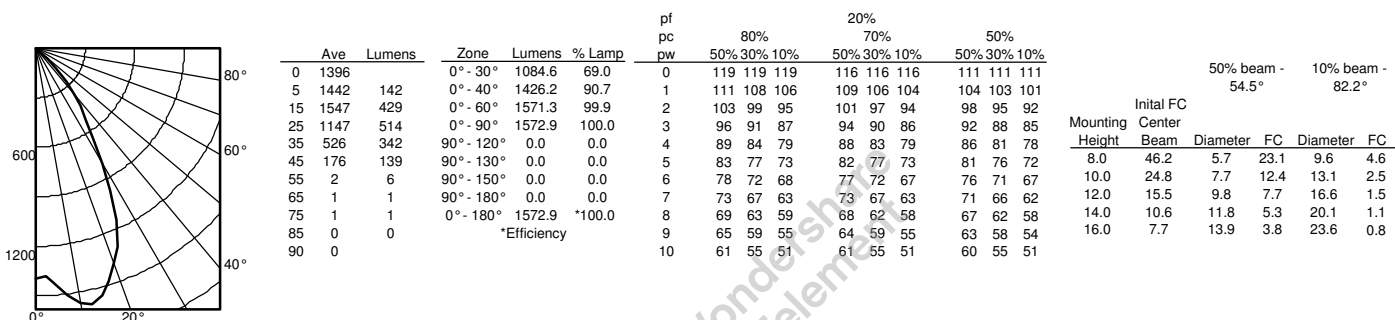


LDN6 35/30 L06AR, input watts: 34.75, delivered lumens: 3138.5, LM/W = 90.31, spacing criterion at 0= 1.02, test no. ISF 30716P274.

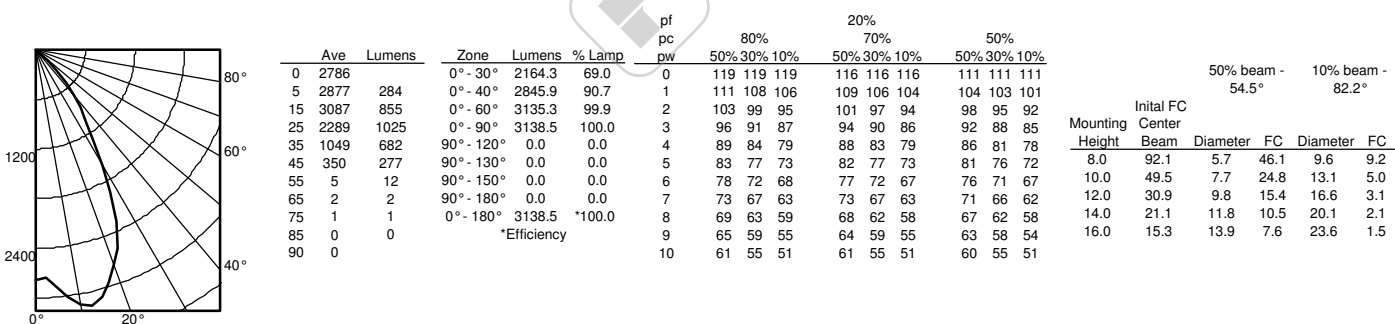

LDN6


* All dimensions are inches (centimeters) unless otherwise noted.

LDN6 500 - 1500 LUMENS

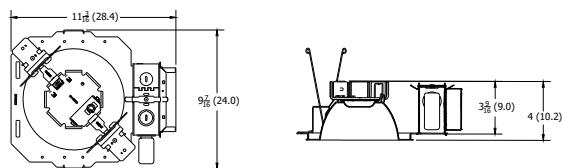


Aperture: 6-1/4" (15.9)
Ceiling Opening: 7-1/8" (18.1)
Overlap Trim: 7-1/2" (19.1)

LDN6 2000 - 3000 LUMENS

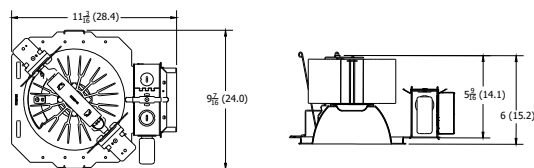


Aperture: 6-1/4" (15.9)
Ceiling Opening: 7-1/8" (18.1)
Overlap Trim: 7-1/2" (19.1)

LDN6 4000 - 5000 LUMENS

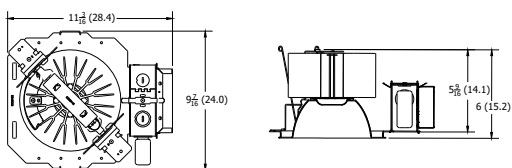


Marked Spacing: 24 x 24 x 10
Aperture: 6-1/4" (15.9)
Ceiling Opening: 7-1/8" (18.1)
Overlap Trim: 7-1/2" (19.1)

LDN6 CP

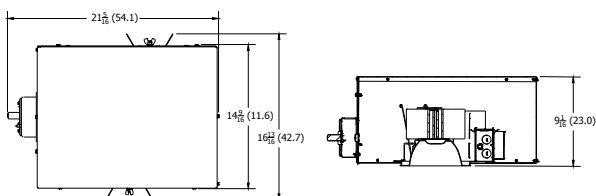

Aperture: 6-1/4" (15.9)
Ceiling Opening: 7-1/8" (18.1)
Overlap Trim: 7-1/2" (19.1)

LDN6 EL

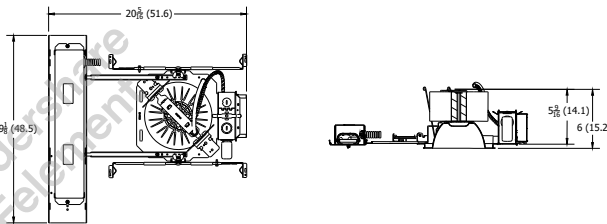

Marked Spacing above 3000 Lumens: 24 x 24 x 10
Aperture: 6-1/4" (15.9)
Ceiling Opening: 7-1/8" (18.1)
Overlap Trim: 7-1/2" (19.1)

LDN6			
Nominal Lumens	Lumens	Wattage	Lm/W
500	527.9	5.8	90.5
750	758.1	8.9	85.1
1000	950.1	10.4	91.0
1500	1514	17.5	86.4
2000	2006	22.5	89.1
2500	2504	28.3	88.6
3000	3021	34.8	86.9
4000	4008	44.3	90.6
5000	4975	57.7	86.3

HOW TO ESTIMATE DELIVERED LUMENS IN EMERGENCY MODE

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$

P = Output power of emergency driver. P = 10W for PS1055CP

LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

The LPW rating is also available at Designlight Consortium.

LUMEN OUTPUT MULTIPLIERS - FINISH			
	Clear (AR)	White (WR)	Black (BR)
Specular (LS)	1.0	N/A	N/A
Semi-specular (LSS)	0.950	N/A	N/A
Matte diffuse (LD)	0.85	N/A	N/A
Painted	N/A	0.87	0.73

LUMEN OUTPUT MULTIPLIERS - CCT					
	2700K	3000K	3500K	4000K	5000K
80CRI	0.950	0.966	1.000	1.025	1.101

Notes

- Tested in accordance with IESNA LM-79-08.
- Tested to current IES and NEMA standards under stabilized laboratory conditions.
- CRI: 80 typical.

LDN6

ADDITIONAL DATA



The Sensor Switch JOT enabled solution offers a wireless, app-free approach to single room lighting control. JOT enabled products use Bluetooth® Low Energy (BLE) technology to enable wireless dimming and switching.

Diagram



LDN6 Series

Sensor Switch
WSXA JOT

- Power:** Install JOT enabled fixtures and controls as instructed.
- Pair:** Insert the pairing tool into the pinhole on the wall switch; press and hold any button for 6 seconds.
- Play:** Once paired, each fixture will individually dim down to 10% brightness. All products will be fully functional.

COMPATIBLE 0-10V WALL-MOUNT DIMMERS		
MANUFACTURER	PART NO.	POWER BOOSTER AVAILABLE
Lutron®	Diva® DDTV	
	Diva® DVSCVT	
	Nova T® NTFTV	
	Nova® NFTV	
Leviton®	AWSMT-7DW	CN100
	AWSMG-7DW	PE300
	AMRMG-7DW	
	Leviton Centura Fluorescent Control System	
	IllumaTech® IP7 Series	
Synergy®	ISD BC	RDMFC
	SLD LPCS	
	Digital Equinox (DEQ BC)	
Douglas Lighting Controls	WPC-5721	
Entertainment Technology	Tap Glide TG600FAM120 (120V)	
	Tap Glide Heatsink TGH1500FAM120 (120V)	
	Oasis OA2000FAMU	
Honeywell	EL7315A1019	EL7305A1010 (optional)
	EL7315A1009	
HUNT Dimming	Preset slide: PS-010-IV and PS-010-WH	
	Preset slide: PS-010-3W-IV and PS-010-3W-WH	
	Preset slide, controls FD-010: PS-IFC-010-IV and PS-IFC-010-WH-120/277V	
	Preset slide, controls FD-010: PS-IFC-010-3W-IV and PS-IFC-010-3W-WH-120/277V	
	Remote mounted unit: FD-010	
Lehigh Electronic Products	Solitaire	PBX
PDM Electrical Products	WPC-5721	
Starfield Controls	TR61 with DALI interface port	RT03 DALI.net Router
WattStopper®	LS-4 used with LCD-101 and LCD-103	

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

LDN6

EXAMPLE

Group Fixture Control*

*Application diagram applies for fixtures with eldoLED drivers only.


nPS 80 EZ Dimming/Control Pack (qty: 2 required)

nPODM 2P DX Dual On/Off/Dim Push-Button WallPod

nCM ADCX Daylight Sensor with Automatic Dimming Control

nCM PDT 9 Dual Technology Occupancy Sensor

Description: This design provides a dual on/off/dim wall station that enables manual control of the fixtures in Row A and Row B separately. Additionally, a daylight harvesting sensor is provided so the lights in Row B can be configured to dim automatically when daylight is available. An occupancy sensor turns off all lights when the space is vacant.

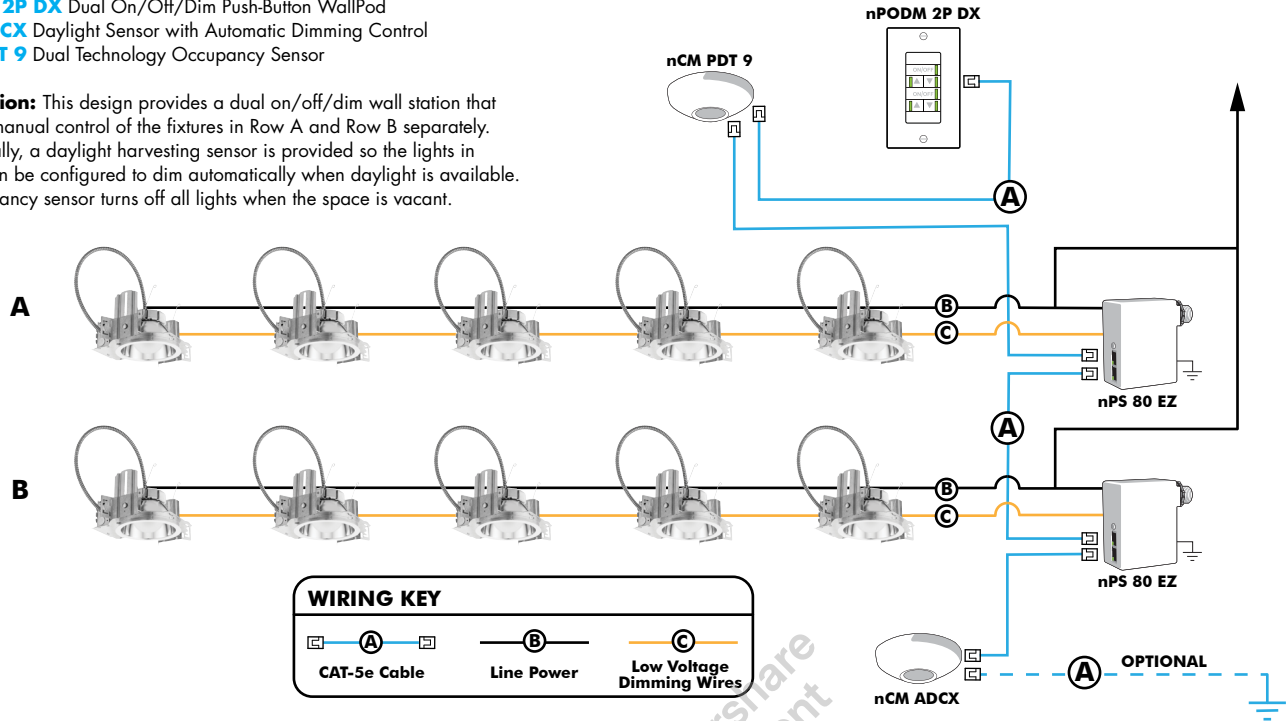

Choose Wall Controls

nLight offers multiple styles of wall controls - each with varying features and user experience.



Push-Button Wallpod
Traditional tactile buttons and LED user feedback



Graphic Wallpod
Full color touch screen provides a sophisticated look and feel

nLight® Wired Controls Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlight for complete listing of nLight controls.

WallPod Stations	Model number	Occupancy sensors	Model Number
On/Off	nPODM (Color)	Small motion 360°, ceiling (PIR/dual Tech)	nCM 9 / nCM PDT 9
On/Off & Raise/Lower	nPOD DX (Color)	Large motion 360°, ceiling (PIR/dual tech)	nCM 10 / nCM PDT 10
Graphic Touchscreen	nPOD GFX (Color)	Wide View (PIR/dual tech)	nWV 16 / nWV PDT 16
Photocell controls	Model Number	Wall Switch w/ Raise/Lower (PIR/dual tech)	nWSX LV DX / nWSX PDT LV DX
Dimming	nCM ADCX	Cat-5 cables (plenum rated)	Model Number
		10', CAT5 10FT	CAT5 10FT J1
		15, CAT5 15FT	CAT5 15FT J1

LDN6

nLight® AIR Control Accessories:

Order as separate catalog number. Visit www.acuitybrands.com/products/controls/nlightair.

Wall switches

On/Off single pole

On/Off two pole

On/Off & raise/lower single pole

On/Off & raise/lower two pole

On/Off & raise/lower single pole

Model number

rPODB [color]

rPODB 2P [color]

rPODB DX [color]

rPODB 2P DX [color]

rPODBZ DX WH¹**Notes**

- 1 Can only be ordered with the RES7Z zone control sensor version.

UL924 Sequence of Operation

The below information applies to all nLight AIR devices with an EM option.

- EM devices will remain at their high-end trim and ignore wireless lighting control commands, unless a normal-power-sensed (NPS) broadcast is received at least every 8 seconds.
- Using the CLAIRITY+ mobile app, EM devices must be associated with a group that includes a normal power sensing device to receive NPS broadcasts.
- Only non-emergency rPP20, rLSXR, rSBOR, rSDGR, and nLight AIR luminaires with version 3.4 or later firmware can provide normal power sensing for EM devices. See specification sheets for control devices and luminaires for more information on options that support normal power sensing.

nLight AIR

nLight AIR is the ideal solution for retrofit or new construction spaces where adding communication is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each Lithonia LDN Luminaire. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.

**Simple as 1,2,3**

1. Install the nLight® AIR fixtures with embedded smart sensor
2. Install the wireless battery-powered wall switch
3. With CLAIRITY app, pair the fixtures with the wall switch and if desired, customize the sensor settings for the desired outcome



d^{series}

D-Series Size 1

Legacy LED Area Luminaire



Buy American

Catalog

Number


Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

Specifications

EPA:	1.01 ft ² (0.09 m ²)
Length:	33" (83.8 cm)
Width:	13" (33.0 cm)
Height H1:	7-1/2" (19.0 cm)
Height H2:	3-1/2"
Weight (max):	27 lbs (12.2 kg)

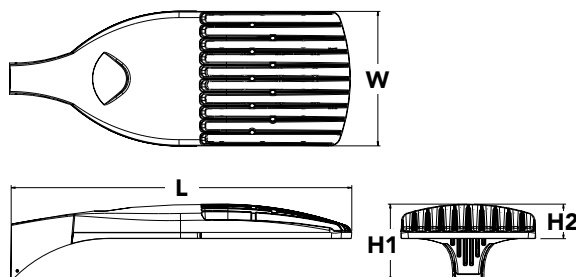

Introduction

The modern styling of the D-Series is striking yet unobtrusive - making a bold, progressive statement even as it blends seamlessly with its environment. The D-Series distills the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The outstanding photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. It is ideal for replacing up to 750W metal halide in pedestrian and area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

Ordering Information

EXAMPLE: DSX1 LED P7 40K T3M MVOLT SPA NLTAIR2 PIRHN DDBXD G1

DSX1 LED					
Series	LEDs	Color temperature	Distribution	Voltage	Mounting
DSX1 LED	Forward optics P1 P4 ¹ P7 ¹ P2 P5 ¹ P8 P3 P6 ¹ P9 ¹ Rotated optics P10 ² P12 ² P11 ² P13 ^{1,2}	30K 3000 K 40K 4000 K 50K 5000 K	T1S Type I short (Automotive) T2S Type II short T2M Type II medium T3S Type III short T3M Type III medium T4M Type IV medium TFTM Forward throw medium T5VS Type V very short ³ T5S Type V short ³ T5M Type V medium ³ T5W Type V wide ³ BLC Backlight control ⁴ LCCO Left corner cutoff ⁴ RCCO Right corner cutoff ⁴	MVOLT ⁵ XVOLT (277V-480V) ^{6,7,8} 120 ⁹ 208 ⁹ 240 ⁹ 277 ⁹ 347 ⁹ 480 ⁹	Shipped included SPA Square pole mounting RPA Round pole mounting ¹⁰ WBA Wall bracket ³ SPUMBA Square pole universal mounting adaptor ¹¹ RPUMBA Round pole universal mounting adaptor ⁹ Shipped separately KMA8 DDBXD U Mast arm mounting bracket adaptor (specify finish) ¹²

Control options	Other options	Finish (required)	Generation (required)
Shipped installed NLTAIR2 nLight AIR generation 2 enabled ¹³ PIRHN Network, high/low motion/ambient sensor ¹⁴ PER NEMA twist-lock receptacle only (controls ordered separately) ¹⁵ PER5 Five-pin receptacle only (controls ordered separately) ^{15,16} PER7 Seven-pin receptacle only (controls ordered separately) ^{15,16} DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) ¹⁷ DS Dual switching ^{18,19,20}	Shipped installed HS House-side shield ²³ SF Single fuse (120, 277, 347V) ⁹ DF Double fuse (208, 240, 480V) ⁹ L90 Left rotated optics ² R90 Right rotated optics ² HA 50°C ambient operations ¹ BAA Buy America(n) Act Compliant Shipped separately BS Bird spikes ²⁴ EGS External glare shield	DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLTXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white	G1 Generation 1

Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ²⁵
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ²⁵
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ²⁵
DSHORT SBK U	Shorting cap ²⁵
DSX1HS 30C U G1	House-side shield for P1, P2, P3, P4 and P5 ²³
DSX1HS 40C U G1	House-side shield for P6 and P7 ²³
DSX1HS 60C U G1	House-side shield for P8, P9, P10, P11 and P12 ²³
PUMBA DDBXD U G1*	Square and round pole universal mounting bracket (specify finish) ²⁶
KMA8 DDBXD U	Mast arm mounting bracket adaptor (specify finish) ¹²
DSX1EGS (FINISH) U G1	External glare shield


For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES

- HA not available with P4, P5, P6, P7, P9 and P13.
- P10, P11, P12 or P13 and rotated optics (L90, R90) only available together.
- Any Type 5 distribution with photocell, is not available with WBA.
- Not available with HS.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- XVOLT only suitable for use with P3, P5, P6, P7, P9 and P13.
- XVOLT works with any voltage between 277V and 480V.
- XVOLT not available with fusing (SF or DF) and not available with PIR, PIRH, PIR1FC3V, PIRH1FC3V.
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V. XVOLT not available with fusing (SF or DF).
- Suitable for mounting to round poles between 3.5" and 12" diameter.
- Universal mounting brackets intended for retrofit on existing, pre-drilled poles only. 1.5 G vibration load rating per ANCI C136.31. Only usable when pole's drill pattern is NOT Lithonia template #8.
- Must order fixture with SPA option. KMA8 must be ordered as a separate accessory; see Accessories information. For use with 2-3/8" diameter mast arm (not included).
- Must be ordered with PIRHN. Sensor cover available only in dark bronze, black, white and natural aluminum colors.
- Must be ordered with NLTAIR2. For more information on nLight Air 2 visit [this link](#).
- Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting cap included.
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls. Node with integral dimming.
- DMG not available with PIRHN, PER5, PER7, PIR, PIRH, PIR1FC3V or PIRH1FC3V, FAO.
- Provides 50/50 fixture operation via (2) independent drivers. Not available with PER, PER5, PER7, PIR or PIRH. Not available P1, P2, P3, P4 or P5.
- Requires (2) separately switched circuits.
- Reference Controls Options table on page 4.
- Reference Motion Sensor default settings table on page 4 to see functionality.
- Not available with other dimming controls options.
- Not available with BLC, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- Must be ordered with fixture for factory pre-drilling.
- Requires luminaire to be specified with PER, PER5 or PER7 option. See Control Option Table on page 4.
- For retrofit use only. Only usable when pole's drill pattern is NOT Lithonia template #8.


Options

EGS - External Glare Shield

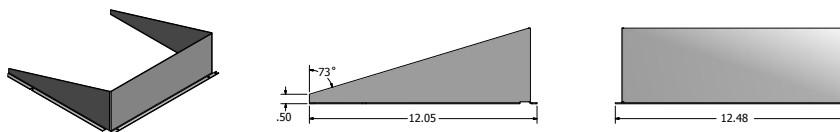

Drilling

HANDHOLE ORIENTATION

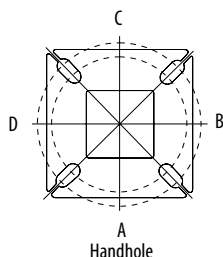

Tenon Mounting Slipfitter

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS

DSX1 Area Luminaire - EPA


*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type						
DSX1 LED	1.013	2.025	1.945	3.038	2.850	3.749

	Drilling Template	Minimum Acceptable Outside Pole Dimension					
SPA	#8	2-7/8"	2-7/8"	3.5"	3.5"	3"	3.5"
RPA	#8	2-7/8"	2-7/8"	3.5"	3.5"	3"	3.5"
SPUMBA	#5	2-7/8"	3"	4"	4"	3.5"	4"
RPUMBA	#5	2-7/8"	3.5"	5"	5"	3.5"	5"

Template #8

Top of Pole


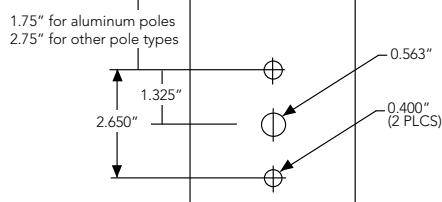


Photometric Diagrams


To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Area Size 1 homepage](#).

Isofootcandle plots for the DSX1 LED P7 40K G1. Distances are in units of mounting height (25').


LEGEND

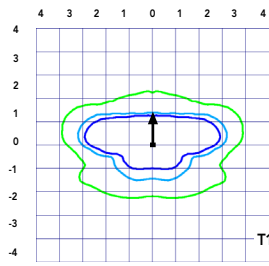


Test No. LTL23211 tested in accordance with IESNA LM-79-08.

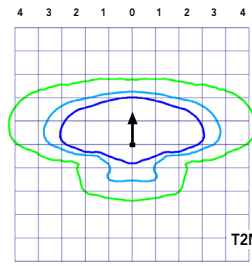


Test No. LTL23164B tested in accordance with IESNA LM-79-08.

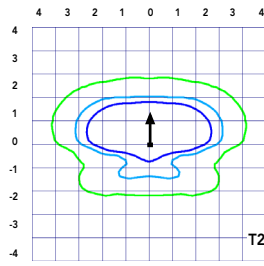


Test No. LTL23222 tested in accordance with IESNA LM-79-08.

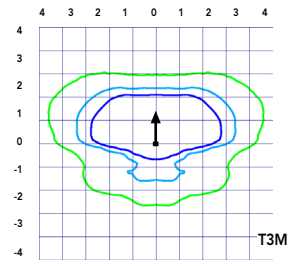


Test No. LTL23271 tested in accordance with IESNA LM-79-08.

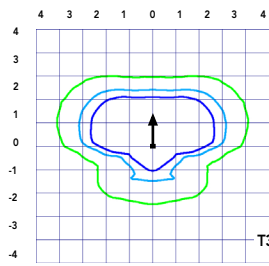


Test No. LTL23211 tested in accordance with IESNA LM-79-08.

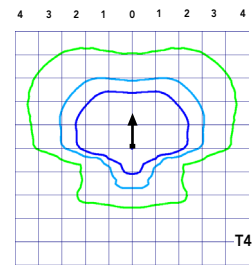


Test No. LTL23164B tested in accordance with IESNA LM-79-08.

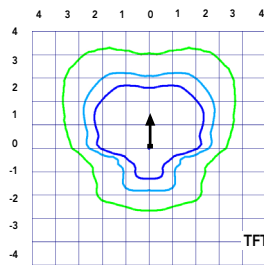


Test No. LTL23222 tested in accordance with IESNA LM-79-08.

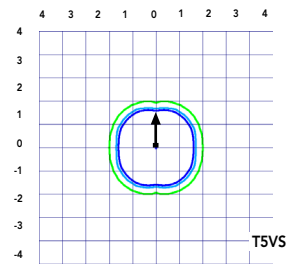


Test No. LTL23271 tested in accordance with IESNA LM-79-08.

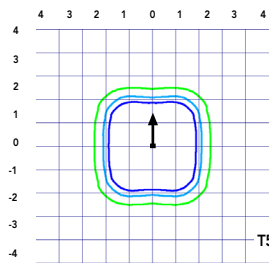


Test No. LTL23211 tested in accordance with IESNA LM-79-08.

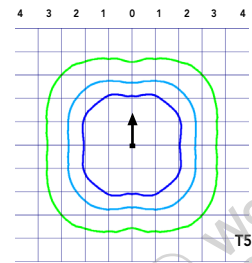


Test No. LTL23164B tested in accordance with IESNA LM-79-08.

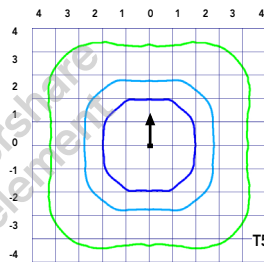


Test No. LTL23222 tested in accordance with IESNA LM-79-08.

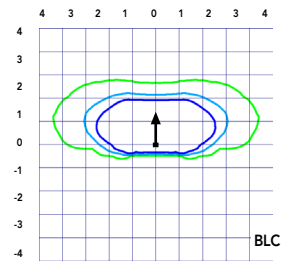

Test No. LTL23271 tested in accordance with IESNA LM-79-08.

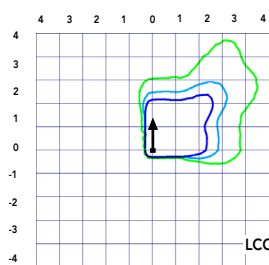

Test No. LTL23211 tested in accordance with IESNA LM-79-08.

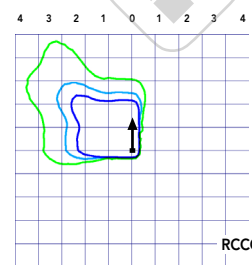

Test No. LTL23164B tested in accordance with IESNA LM-79-08.

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15°C	59°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the platforms noted in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.96
50,000	0.92
100,000	0.85

Motion Sensor Default Settings

Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*for use when motion sensor is used as dusk to dawn control.

Electrical Load

					Current (A)					
	Performance Package	LED Count	Drive Current	Wattage	120	208	240	277	347	480
Forward Optics (Non-Rotated)	P1	30	530	54	0.45	0.26	0.23	0.19	0.10	0.12
	P2	30	700	70	0.59	0.34	0.30	0.25	0.20	0.16
	P3	30	1050	102	0.86	0.50	0.44	0.38	0.30	0.22
	P4	30	1250	125	1.06	0.60	0.52	0.46	0.37	0.27
	P5	30	1400	138	1.16	0.67	0.58	0.51	0.40	0.29
	P6	40	1250	163	1.36	0.78	0.68	0.59	0.47	0.34
	P7	40	1400	183	1.53	0.88	0.76	0.66	0.53	0.38
	P8	60	1050	207	1.74	0.98	0.87	0.76	0.64	0.49
	P9	60	1250	241	2.01	1.16	1.01	0.89	0.70	0.51
Rotated Optics (Requires L90 or R90)	P10	60	530	106	0.90	0.52	0.47	0.43	0.33	0.27
	P11	60	700	137	1.15	0.67	0.60	0.53	0.42	0.32
	P12	60	1050	207	1.74	0.99	0.87	0.76	0.60	0.46
	P13	60	1250	231	1.93	1.12	0.97	0.86	0.67	0.49

Controls Options

Nomenclature	Description	Functionality	Primary control device	Notes
FA0	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FA0 device	Cannot be used with other controls options that need the 0-10V leads
DS	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire
PIR or PIRH	Motion sensors with integral photocell. PIR for 8-15' mounting; PIRH for 15-30' mounting	Luminaires dim when no occupancy is detected.	Acuity Controls SBGR	Also available with PIRH1FC3V when the sensor photocell is used for dusk-to-dawn operation.
NLTAR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclipse.	nLight Air rSDGR	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
30	530	P1	54W	T1S	6,457	2	0	2	120	6,956	2	0	2	129	7,044	2	0	2	130
				T2S	6,483	1	0	1	120	6,984	2	0	2	129	7,072	2	0	2	131
				T2M	6,450	2	0	2	119	6,948	2	0	2	129	7,036	2	0	2	130
				T3S	6,468	1	0	2	120	6,967	1	0	2	129	7,055	1	0	2	131
				T3M	6,279	2	0	2	116	6,764	2	0	2	125	6,849	2	0	2	127
				T4M	6,327	1	0	2	117	6,816	1	0	2	126	6,902	1	0	2	128
				TFTM	6,464	1	0	2	120	6,963	1	0	2	129	7,051	1	0	2	131
				TSVS	6,722	2	0	0	124	7,242	3	0	0	134	7,334	3	0	0	136
				TSS	6,728	2	0	1	125	7,248	2	0	1	134	7,340	2	0	1	136
				TSM	6,711	3	0	1	124	7,229	3	0	1	134	7,321	3	0	2	136
				TSW	6,667	3	0	2	123	7,182	3	0	2	133	7,273	3	0	2	135
				BLC	5,299	1	0	1	98	5,709	1	0	2	106	5,781	1	0	2	107
				LCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80
				RCCO	3,943	1	0	2	73	4,248	1	0	2	79	4,302	1	0	2	80
30	700	P2	70W	T1S	8,249	2	0	2	118	8,886	2	0	2	127	8,999	2	0	2	129
				T2S	8,282	2	0	2	118	8,923	2	0	2	127	9,035	2	0	2	129
				T2M	8,240	2	0	2	118	8,877	2	0	2	127	8,989	2	0	2	128
				T3S	8,262	2	0	2	118	8,901	2	0	2	127	9,013	2	0	2	129
				T3M	8,021	2	0	2	115	8,641	2	0	2	123	8,750	2	0	2	125
				T4M	8,083	2	0	2	115	8,708	2	0	2	124	8,818	2	0	2	126
				TFTM	8,257	2	0	2	118	8,896	2	0	2	127	9,008	2	0	2	129
				TSVS	8,588	3	0	0	123	9,252	3	0	0	132	9,369	3	0	0	134
				TSS	8,595	3	0	1	123	9,259	3	0	1	132	9,376	3	0	1	134
				TSM	8,573	3	0	2	122	9,236	3	0	2	132	9,353	3	0	2	134
				TSW	8,517	3	0	2	122	9,175	4	0	2	131	9,291	4	0	2	133
				BLC	6,770	1	0	2	97	7,293	1	0	2	104	7,386	1	0	2	106
				LCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79
				RCCO	5,038	1	0	2	72	5,427	1	0	2	78	5,496	1	0	2	79
30	1050	P3	102W	T1S	11,661	2	0	2	114	12,562	3	0	3	123	12,721	3	0	3	125
				T2S	11,708	2	0	2	115	12,612	2	0	2	124	12,772	2	0	2	125
				T2M	11,648	2	0	2	114	12,548	3	0	3	123	12,707	3	0	3	125
				T3S	11,679	2	0	2	115	12,582	2	0	2	123	12,741	2	0	2	125
				T3M	11,338	2	0	2	111	12,214	3	0	3	120	12,369	3	0	3	121
				T4M	11,426	2	0	3	112	12,309	2	0	3	121	12,465	2	0	3	122
				TFTM	11,673	2	0	2	114	12,575	2	0	3	123	12,734	2	0	3	125
				TSVS	12,140	3	0	1	119	13,078	3	0	1	128	13,244	3	0	1	130
				TSS	12,150	3	0	1	119	13,089	3	0	1	128	13,254	3	0	1	130
				TSM	12,119	4	0	2	119	13,056	4	0	2	128	13,221	4	0	2	130
				TSW	12,040	4	0	3	118	12,970	4	0	3	127	13,134	4	0	3	129
				BLC	9,570	1	0	2	94	10,310	1	0	2	101	10,440	1	0	2	102
				LCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76
				RCCO	7,121	1	0	3	70	7,671	1	0	3	75	7,768	1	0	3	76
30	1250	P4	125W	T1S	13,435	3	0	3	107	14,473	3	0	3	116	14,657	3	0	3	117
				T2S	13,489	2	0	2	108	14,532	3	0	3	116	14,716	3	0	3	118
				T2M	13,420	3	0	3	107	14,457	3	0	3	116	14,640	3	0	3	117
				T3S	13,457	2	0	2	108	14,496	2	0	2	116	14,680	2	0	2	117
				T3M	13,064	3	0	3	105	14,073	3	0	3	113	14,251	3	0	3	114
				T4M	13,165	2	0	3	105	14,182	2	0	3	113	14,362	2	0	3	115
				TFTM	13,449	2	0	3	108	14,488	2	0	3	116	14,672	2	0	3	117
				TSVS	13,987	4	0	1	112	15,068	4	0	1	121	15,259	4	0	1	122
				TSS	13,999	3	0	1	112	15,080	3	0	1	121	15,271	3	0	1	122
				TSM	13,963	4	0	2	112	15,042	4	0	2	120	15,233	4	0	2	122
				TSW	13,872	4	0	3	111	14,944	4	0	3	120	15,133	4	0	3	121
				BLC	11,027	1	0	2	88	11,879	1	0	2	95	12,029	1	0	2	96
				LCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72
				RCCO	8,205	1	0	3	66	8,839	1	0	3	71	8,951	1	0	3	72
30	1400	P5	138W	T1S	14,679	3	0	3	106	15,814	3	0	3	115	16,014	3	0	3	116
				T2S	14,739	3	0	3	107	15,878	3	0	3	115	16,079	3	0	3	117
				T2M	14,663	3	0	3	106	15,796	3	0	3	114	15,996	3	0	3	116
				T3S	14,703	2	0	3	107	15,839	3	0	3	115	16,039	3	0	3	116
				T3M	14,274	3	0	3	103	15,377	3	0	3	111	15,571	3	0	3	113
				T4M	14,384	2	0	3	104	15,496	3	0	3	112	15,692	3	0	3	114
				TFTM	14,695	2	0	3	106	15,830	3	0	3	115	16,030	3	0	3	116
				TSVS	15,283	4	0	1	111	16,464	4	0	1	119	16,672	4	0	1	121
				TSS	15,295	3	0	1	111	16,477	4	0	1	119	16,686	4	0	1	121
				TSM	15,257	4	0	2	111	16,435	4	0	2	119	16,644	4	0	2	121
				TSW	15,157	4	0	3	110	16,328	4	0	3	118	16,534	4	0	3	120
				BLC	12,048	1	0	2	87	12,979	1	0	2	94	13,143	1	0	2	95
				LCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71
				RCCO	8,965	1	0	3	65	9,657	1	0	3	70	9,780	1	0	3	71

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Forward Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
40	1250	P6	163W	T1S	17,654	3	0	3	108	19,018	3	0	3	117	19,259	3	0	3	118
				T2S	17,725	3	0	3	109	19,095	3	0	3	117	19,336	3	0	3	119
				T2M	17,634	3	0	3	108	18,997	3	0	3	117	19,237	3	0	3	118
				T3S	17,682	3	0	3	108	19,048	3	0	3	117	19,289	3	0	3	118
				T3M	17,166	3	0	3	105	18,492	3	0	3	113	18,726	3	0	3	115
				T4M	17,299	3	0	3	106	18,635	3	0	4	114	18,871	3	0	4	116
				TFTM	17,672	3	0	3	108	19,038	3	0	4	117	19,279	3	0	4	118
				TSVS	18,379	4	0	1	113	19,800	4	0	1	121	20,050	4	0	1	123
				T5S	18,394	4	0	2	113	19,816	4	0	2	122	20,066	4	0	2	123
				T5M	18,348	4	0	2	113	19,766	4	0	2	121	20,016	4	0	2	123
				T5W	18,228	5	0	3	112	19,636	5	0	3	120	19,885	5	0	3	122
				BLC	14,489	2	0	2	89	15,609	2	0	3	96	15,806	2	0	3	97
				LCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72
				RCCO	10,781	1	0	3	66	11,614	1	0	3	71	11,761	2	0	3	72
40	1400	P7	183W	T1S	19,227	3	0	3	105	20,712	3	0	3	113	20,975	3	0	3	115
				T2S	19,304	3	0	3	105	20,796	3	0	3	114	21,059	3	0	3	115
				T2M	19,205	3	0	3	105	20,689	3	0	3	113	20,951	3	0	3	114
				T3S	19,257	3	0	3	105	20,745	3	0	3	113	21,008	3	0	3	115
				T3M	18,695	3	0	3	102	20,140	3	0	3	110	20,395	3	0	4	111
				T4M	18,840	3	0	4	103	20,296	3	0	4	111	20,553	3	0	4	112
				TFTM	19,246	3	0	4	105	20,734	3	0	4	113	20,996	3	0	4	115
				TSVS	20,017	4	0	1	109	21,564	4	0	1	118	21,837	4	0	1	119
				T5S	20,033	4	0	2	109	21,581	4	0	2	118	21,854	4	0	2	119
				T5M	19,983	4	0	2	109	21,527	5	0	3	118	21,799	5	0	3	119
				T5W	19,852	5	0	3	108	21,386	5	0	3	117	21,656	5	0	3	118
				BLC	15,780	2	0	3	86	16,999	2	0	3	93	17,214	2	0	3	94
				LCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70
				RCCO	11,742	2	0	3	64	12,649	2	0	3	69	12,809	2	0	3	70
60	1050	P8	207W	T1S	22,490	3	0	3	109	24,228	3	0	3	117	24,535	3	0	3	119
				T2S	22,581	3	0	3	109	24,326	3	0	3	118	24,634	3	0	3	119
				T2M	22,465	3	0	4	109	24,201	3	0	4	117	24,507	3	0	4	119
				T3S	22,526	3	0	4	109	24,267	3	0	4	117	24,574	3	0	4	119
				T3M	21,869	3	0	4	106	23,558	3	0	4	114	23,857	3	0	4	115
				T4M	22,038	3	0	4	106	23,741	3	0	4	115	24,041	3	0	4	116
				TFTM	22,513	3	0	4	109	24,253	3	0	4	117	24,560	3	0	4	119
				TSVS	23,415	5	0	1	113	25,224	5	0	1	122	25,543	5	0	1	123
				T5S	23,434	4	0	2	113	25,244	4	0	2	122	25,564	4	0	2	123
				T5M	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123
				T5W	23,221	5	0	4	112	25,016	5	0	4	121	25,332	5	0	4	122
				BLC	18,458	2	0	3	89	19,885	2	0	3	96	20,136	2	0	3	97
				LCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72
				RCCO	13,735	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72
60	1250	P9	241W	T1S	25,575	3	0	3	106	27,551	3	0	3	114	27,900	3	0	3	116
				T2S	25,678	3	0	3	107	27,663	3	0	3	115	28,013	3	0	3	116
				T2M	25,547	3	0	4	106	27,521	3	0	4	114	27,869	3	0	4	116
				T3S	25,616	3	0	4	106	26,791	3	0	4	111	27,945	3	0	4	116
				T3M	24,868	3	0	4	103	27,597	3	0	4	115	27,129	3	0	4	113
				T4M	25,061	3	0	4	104	26,997	3	0	4	112	27,339	3	0	4	113
				TFTM	25,602	3	0	4	106	27,580	3	0	4	114	27,929	3	0	4	116
				TSVS	26,626	5	0	1	110	28,684	5	0	1	119	29,047	5	0	1	121
				T5S	26,648	4	0	2	111	28,707	5	0	2	119	29,070	5	0	2	121
				T5M	26,581	5	0	3	110	28,635	5	0	3	119	28,997	5	0	3	120
				T5W	26,406	5	0	4	110	28,447	5	0	4	118	28,807	5	0	4	120
				BLC	20,990	2	0	3	87	22,612	2	0	3	94	22,898	2	0	3	95
				LCCO	15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71
				RCCO	15,619	2	0	4	65	16,825	2	0	4	70	17,038	2	0	4	71

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Rotated Optics

LED Count	Drive Current	Power Package	System Watts	Dist. Type	30K (3000 K, 70 CRI)					40K (4000 K, 70 CRI)					50K (5000 K, 70 CRI)				
					Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
60	530	P10	106W	T1S	13,042	3	0	3	123	14,050	3	0	3	133	14,228	3	0	3	134
				T2S	13,200	3	0	3	125	14,220	3	0	3	134	14,400	3	0	3	136
				T2M	12,966	4	0	4	122	13,968	4	0	4	132	14,145	4	0	4	133
				T3S	13,193	4	0	4	124	14,212	4	0	4	134	14,392	4	0	4	136
				T3M	12,766	4	0	4	120	13,751	4	0	4	130	13,925	4	0	4	131
				T4M	12,944	4	0	4	122	13,945	4	0	4	132	14,121	4	0	4	133
				TFTM	13,279	4	0	4	125	14,305	4	0	4	135	14,486	4	0	4	137
				TSVS	13,372	3	0	1	126	14,405	4	0	1	136	14,588	4	0	1	138
				TSS	13,260	3	0	1	125	14,284	3	0	1	135	14,465	3	0	1	136
				TSM	13,256	4	0	2	125	14,281	4	0	2	135	14,462	4	0	2	136
				TSW	13,137	4	0	3	124	14,153	4	0	3	134	14,332	4	0	3	135
				BLC	10,906	3	0	3	103	11,749	3	0	3	111	11,898	3	0	3	112
				LCCO	7,789	1	0	3	73	8,391	1	0	3	79	8,497	1	0	3	80
				RCCO	7,779	4	0	4	73	8,380	4	0	4	79	8,486	4	0	4	80
60	700	P11	137W	T1S	16,556	3	0	3	121	17,835	3	0	3	130	18,061	4	0	4	132
				T2S	16,757	4	0	4	122	18,052	4	0	4	132	18,280	4	0	4	133
				T2M	16,460	4	0	4	120	17,732	4	0	4	129	17,956	4	0	4	131
				T3S	16,747	4	0	4	122	18,041	4	0	4	132	18,270	4	0	4	133
				T3M	16,204	4	0	4	118	17,456	4	0	4	127	17,677	4	0	4	129
				T4M	16,432	4	0	4	120	17,702	4	0	4	129	17,926	4	0	4	131
				TFTM	16,857	4	0	4	123	18,159	4	0	4	133	18,389	4	0	4	134
				TSVS	16,975	4	0	1	124	18,287	4	0	1	133	18,518	4	0	1	135
				TSS	16,832	4	0	1	123	18,133	4	0	2	132	18,362	4	0	2	134
				TSM	16,828	4	0	2	123	18,128	4	0	2	132	18,358	4	0	2	134
				TSW	16,677	4	0	3	122	17,966	5	0	3	131	18,193	5	0	3	133
				BLC	13,845	3	0	3	101	14,915	3	0	3	109	15,103	3	0	3	110
				LCCO	9,888	1	0	3	72	10,652	2	0	3	78	10,787	2	0	3	79
				RCCO	9,875	4	0	4	72	10,638	4	0	4	78	10,773	4	0	4	79
60	1050	P12	207W	T1S	22,996	4	0	4	111	24,773	4	0	4	120	25,087	4	0	4	121
				T2S	23,276	4	0	4	112	25,074	4	0	4	121	25,392	4	0	4	123
				T2M	22,863	4	0	4	110	24,630	5	0	5	119	24,941	5	0	5	120
				T3S	23,262	4	0	4	112	25,060	4	0	4	121	25,377	4	0	4	123
				T3M	22,508	4	0	4	109	24,247	5	0	5	121	24,554	5	0	5	119
				T4M	22,824	5	0	5	110	24,588	5	0	5	119	24,899	5	0	5	120
				TFTM	23,414	5	0	5	113	25,223	5	0	5	122	25,543	5	0	5	123
				TSVS	23,579	5	0	1	114	25,401	5	0	1	123	25,722	5	0	1	124
				TSS	23,380	4	0	2	113	25,187	4	0	2	122	25,506	4	0	2	123
				TSM	23,374	5	0	3	113	25,181	5	0	3	122	25,499	5	0	3	123
				TSW	23,165	5	0	4	112	24,955	5	0	4	121	25,271	5	0	4	122
				BLC	19,231	4	0	4	93	20,717	4	0	4	100	20,979	4	0	4	101
				LCCO	13,734	2	0	3	66	14,796	2	0	4	71	14,983	2	0	4	72
				RCCO	13,716	4	0	4	66	14,776	4	0	4	71	14,963	4	0	4	72
60	1250	P13	231W	T1S	25,400	4	0	4	110	27,363	4	0	4	118	27,709	4	0	4	120
				T2S	25,709	4	0	4	111	27,695	4	0	4	120	28,046	4	0	4	121
				T2M	25,253	5	0	5	109	27,204	5	0	5	118	27,548	5	0	5	119
				T3S	25,694	5	0	5	111	27,679	5	0	5	120	28,029	5	0	5	121
				T3M	24,861	5	0	5	108	26,782	5	0	5	116	27,121	5	0	5	117
				T4M	25,210	5	0	5	109	27,158	5	0	5	118	27,502	5	0	5	119
				TFTM	25,861	5	0	5	112	27,860	5	0	5	121	28,212	5	0	5	122
				TSVS	26,043	5	0	1	113	28,056	5	0	1	121	28,411	5	0	1	123
				TSS	25,824	4	0	2	112	27,819	5	0	2	120	28,172	5	0	2	122
				TSM	25,818	5	0	3	112	27,813	5	0	3	120	28,165	5	0	3	122
				TSW	25,586	5	0	4	111	27,563	5	0	4	119	27,912	5	0	4	121
				BLC	21,241	4	0	4	92	22,882	4	0	4	99	23,172	4	0	4	100
				LCCO	15,170	2	0	4	66	16,342	2	0	4	71	16,549	2	0	4	72
				RCCO	15,150	5	0	5	66	16,321	5	0	5	71	16,527	5	0	5	72

FEATURES & SPECIFICATIONS

INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65). Low EPA (1.01 ft²) for optimized pole wind loading.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. The D-Series Size 1 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

ELECTRICAL

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L85/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. DSX Size 1, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensors with on-board photocells feature field-adjustable programming and are suitable for mounting heights up to 30 feet.

nLIGHT AIR CONTROLS

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaires can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclipse. Additional information about nLight Air can be found [here](#).

INSTALLATION

Included mounting block and integral arm facilitate quick and easy installation. Stainless steel bolts fasten the mounting block securely to poles and walls, enabling the D-Series Size 1 to withstand up to a 3.0 G vibration load rating per ANSI C136.31. The D-Series Size 1 utilizes the AERIS™ series pole drilling pattern (template #8). NEMA photocontrol receptacle are also available.

LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP65 rated. Rated for -40°C minimum ambient. U.S. Patent No. D672,492 S. International patent pending.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

BUY AMERICAN

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/buy-american for additional information.

WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/customer-support/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.