# **URBAN DESIGN COMMISSION APPLICATION**



City of Madison Planning Division Madison Municipal Building, Suite 017 215 Martin Luther King, Jr. Blvd. P.O. Box 2985 Madison, WI 53701-2985 (608) 266-4635



FOR OFFICE USE ONLY:	
Date Received	☐ Initial Submittal
Paid	■ Revised Submittal

	(,				
	desired meeting da project requires be submittals, a com	ons of this application, including the lite and the action requested. If your oth UDC and Land Use application appleted Land Use Application and mittal materials are also required to	Si necesiti acceder o Yog tias ntaub nt	ed an interpreter, translator, materials in alternate formats or other accommodations to ese forms, please call the Planning Division at (608) 266-4635.  a interprete, traductor, materiales en diferentes formatos, u otro tipo de ayuda para estos formularios, por favor llame al (608) 266-4635.  koj xav tau ib tug neeg txhais lus, tus neeg txhais ntawv, los sis xav tau cov awv ua lwm hom ntawv los sis lwm cov kev pab kom paub txog cov lus qhia thu rau Koog Npaj (Planning Division) (608) 266-4635.	
1. Project Information					
	Address (list all addresses on the project site): 1904 Bartillon Di		rive (forn	nerly 1902 Bartillon)	
		on - Dane County - Men's Homeless Shelter			
_					
2.		(check all that apply) and Requested Da	ate		
	UDC meeting date	•			
	New developr			ously-approved development	
	☐ Informational	☐ Initial Approval	V	Final Approval	
3.	3. Project Type				
	☐ Project in an U	rban Design District	Sign	nage	
	Project in the Downtown Core District (DC), Urban			Comprehensive Design Review (CDR)	
	<ul> <li>Mixed-Use District (UMX), or Mixed-Use Center District (MXC)</li> <li>Project in the Suburban Employment Center District (SEC), Campus Institutional District (CI), or Employment Campus District (EC)</li> </ul>			Modifications of Height, Area, and Setback	
				Sign Exceptions as noted in Sec. 31.043(3), MGO	
	☐ Planned Develo	opment (PD)	Other  Please specify		
				Please specify	
	☐ Specific Ir	nplementation Plan (SIP)		Public Project	
	☐ Planned Multi-	Use Site or Residential Building Complex			
Л	Applicant Agent	and Property Owner Information			
4.		Carl Miller		Dimension IV Madison Design Group	
	Applicant name	6515 Grand Teton Plaza; Suite 120		mpany Dimension IV Madison Design Group  V/State/7ip Madison, WI 53719	
	Street address	608.829.4457	City/State/Zip Madison, WI 53719  Email cmiller@dimensionivmadison.com		
	Telephone	000.023.4437	_		
	Project contact per	rson Jon Evans	_ Coi	mpany City of Madison; Engineering Division	
	Street address	210 Martin Luther King Jr. Blvd, Room 115	_	y/State/Zip Madison, WI 53703	
	Telephone	608.243.5893	_ Em	ail jevans@cityofmadison.com	
	Property owner (if	not applicant) City of Madison			
	Street address	210 Martin Luther King Jr. Blvd	_ City	y/State/Zip Madison, WI 53703	
Telephone		Email			

### **URBAN DESIGN COMMISSION APPROVAL PROCESS**



#### Introduction

The City of Madison's Urban Design Commission (UDC) has been created to:

- Encourage and promote high quality in the design of new buildings, developments, remodeling, and additions so as to maintain and improve the established standards of property values within the City.
- Foster civic pride in the beauty and nobler assets of the City, and in all other ways possible assure a functionally efficient and visually attractive City in the future.

#### **Types of Approvals**

There are three types of requests considered by the UDC:

- Informational Presentation. A request for an Informational Presentation to the UDC may be requested prior to seeking any
  approvals to obtain early feedback and direction before undertaking detailed design efforts. Applicants should provide
  details on the context of the site, design concept, site and building plans, and other relevant information to help the UDC
  understand the proposal and provide feedback. (Does not apply to CDR's or Signage Modification requests)
- <u>Initial Approval</u>. Applicants may, at their discretion, request Initial Approval of a proposal by presenting preliminary design information. As part of their review, the Commission will provide feedback on the design information that should be addressed at Final Approval stage.
- <u>Final Approval.</u> Applicants may request Final Approval of a proposal by presenting all final project details. Recommendations or concerns expressed by the UDC in the Initial Approval must be addressed at this time.

#### **Presentations to the Commission**

The Urban Design Commission meets virtually via Zoom, typically on the second and fourth Wednesdays of each month at 4:30 p.m. Applicant presentations are strongly encouraged, although not required. Prior to the meeting, each individual speaker is required to complete an online registration form to speak at the meeting. A link to complete the online registration will be provided by staff prior to the meeting. Please note that individual presentations will be limited to a **maximum of three (3) minutes**. The pooling of time may be utilized to provide one speaker more time to present, however the additional time will be based on the number of registrants from the applicant team, i.e. two (2) applicant registrants = six (6) minutes for one (1) speaker.

Primarily, the UDC is interested in the appearance and design quality of projects. Emphasis should be given to the site plan, landscape plan, lighting plan, building elevations, exterior building materials, color scheme, and graphics. Please note that presentation slides, in a PDF file format, are required to be submitted **the Friday before** the UDC meeting.

## **URBAN DESIGN DEVELOPMENT PLANS CHECKLIST**



The items listed below are minimum application requirements for the type of approval indicated. Please note that the UDC and/or staff may require additional information in order to have a complete understanding of the project.

	,		
1. Informa	tional Presentation		
	Locator Map  Letter of Intent (If the project is within an Urban Design District, a summary of how the development proposal addresses the district criteria is required)  Contextual site information, including photographs and layout of adjacent buildings/structures  Site Plan  Two-dimensional (2D) images of proposed buildings or structures.	Providing additional information beyond these minimums may generate a greater level of feedback from the Commission.	<ol> <li>Requirements for All Plan Sheets</li> <li>Title block</li> <li>Sheet number</li> <li>North arrow</li> <li>Scale, both written and graphic</li> <li>Date</li> <li>Fully dimensioned plans, scaled at 1"= 40' or larger</li> <li>** All plans must be legible, including the full-sized landscape and lighting plans (if required)</li> </ol>
2. Initial A	pproval		
,	Letter of Intent (If the project is within a Urban Design District, a summary of		

☐ Proposed signage graphics (fully dimensioned, scaled drawings, including materials and colors, and night view)

Illustration of the proposed signage that meets Ch. 31, MGO compared to what is being requested

☐ Perspective renderings (emphasis on pedestrian/automobile scale viewsheds)

Graphic of the proposed signage as it relates to what the Ch. 31, MGO would permit



#### 5. Required Submittal Materials

#### Application Form

A completed application form is required for <u>each</u> UDC appearance. For projects also requiring Plan Commission approval, applicants must also have submitted an accepted application for Plan Commission consideration prior to obtaining any formal action (Initial or Final Approval) from the UDC.

#### ☑ Letter of Intent

- If the project is within an Urban Design District, a summary of how the development proposal addresses the district criteria is required.
- For signage applications, a summary of how the proposed signage is consistent with the applicable Comprehensive Design Review (CDR) or Signage Modification review criteria is required.
- **Development Plans** (Refer to checklist on Page 4 for plan details)

N/A | Filing Fee (Refer to Section 7 (below) for a list of application fees by request type)

#### **☑** Electronic Submittal

- Complete electronic submittals <u>must</u> be received prior to the application deadline before an application will be scheduled
  for a UDC meeting. Late materials will not be accepted. All plans must be legible and scalable when reduced. Individual
  PDF files of each item submitted should be submitted via email to <u>UDCapplications@cityofmadison.com</u>. The email
  must include the project address, project name, and applicant name.
- Email Size Limits. Note that an individual email cannot exceed 20MB and it is the responsibility of the applicant to present files in a manner that can be accepted. Applicants who are unable to provide the materials electronically should contact the Planning Division at (608) 266-4635 for assistance.

#### **☑** Notification to the District Alder

• Please provide an email to the District Alder notifying them that you are filing this UDC application. Please send this as early in the process as possible and provide a copy of that email with the submitted application.

#### 6. Applicant Declarations

- 1. Prior to submitting this application, the applicant is required to discuss the proposed project with Urban Design Commission staff.

  This application was discussed with <u>Jessica Vaughn, Lisa McNabola, Jenny Kirchgatter, Kevin Fircho</u> on <u>6/1/2023</u>.
- 2. The applicant attests that all required materials are included in this submittal and understands that if any required information is not provided by the application deadline, the application will not be placed on an Urban Design Commission agenda for consideration.

Name of applicant Carl Miller	Relationship to property Architect
Authorizing signature of property owner <u>Jonath</u>	nan Evans Digitally signed by  Date 12/11/2023

#### 7. Application Filing Fees

Fee payments are due by the submittal date. Payments received after the submittal deadline may result in the submittal being scheduled for the next application review cycle. Fees may be paid in-person, via US Mail, or City drop box. If mailed, please mail to: City of Madison Building Inspection, P.O. Box 2984, Madison, WI 53701-2984. The City's drop box is located outside the Municipal Building at 215 Martin Luther King, Jr. Blvd. on the E Doty Street side of the building. Please make checks payable to City Treasurer, and include a completed application form or cover letter indicating the project location and applicant information with all checks mailed or submitted via the City's drop box.

Please consult the schedule below for the appropriate fee for your request:

 · · · · · · · · · · · · · · · · · · ·
Urban Design Districts: \$350 (per §33.24(6) MGO).
Minor Alteration in the Downtown Core District (DC) or Urban Mixed-Use District (UMX): \$150 (per §33.24(6)(b) MGO)
Comprehensive Design Review: \$500 (per §31.041(3)(d)(1)(a) MGO)
Minor Alteration to a Comprehensive Sign Plan: \$100 (per §31.041(3)(d)(1)(c) MGO)
All other sign requests to the Urban Design Commission, including, but not limited to: appeals from the decisions of the Zoning Administrator, requests for Sign Modifications

approvals: \$300 (per §31.041(3)(d)(2) MGO)

A filing fee is not required for the following project applications if part of the combined application process involving both Urban Design Commission and Plan Commission:

- Project in the Downtown Core District (DC), Urban Mixed-Use
   District (UMX), or Mixed-Use Center District (MXC)
- Project in the Suburban Employment Center District (SEC), Campus Institutional District (CI), or Employment Campus District (EC)
- Planned Development (PD): General Development Plan (GDP) and/or Specific Implementation Plan (SIP)
- Planned Multi-Use Site or Residential Building Complex

(of height, area, and setback), and additional sign code



February 5th, 2023

City of Madison - Planning Division Madison Municipal Building, Suite 017 215 Martin Luther King Jr. Blvd. P.O. Box 2985 Madison, WI 53701-2985

RE: City of Madison – Dane County – Men's Homeless Shelter UDC Final Approval Letter of Intent – 1904 Bartillon Drive (formerly 1902 Bartillon Drive)

#### Dear Urban Design Commission:

Please see the attached final approval submittal packet for the City of Madison and Dane County Men's Homeless Shelter. This packet outlines the design for the development of a new purposebuilt homeless shelter located on Bartillon Drive.

#### Project & Site:

The proposed project consists of a single, two-story building with a 22,625 GSF footprint, totaling 43,605 sf. There is a 42' easement along Stoughton Road.

#### Zoning:

The proposed project is a permitted use as a mission house in Commercial Center District (CC) zoning. Additionally, the project is in a Transit Oriented Development Overlay (TOD) district.

#### **Building Changes:**

In response to the feedback we received, we made the following changes:

- We removed the green wall from the building.
  - Where the green wall was removed on the recessed Southern wall, we will be incorporating a mosaic art installation.
  - o The mosaic will be integrated into the wall and generally flush with the brick.
  - Where the mosaic is in the metal panel and not brick, we plan to use dark bronze trim and flashing around it.
- We reconfigured the window dimensions and mullion locations to create clear and organized datums.
- We revised the band around the top to create a clearer top, middle, and bottom to the building.
- We introduced siding changes along the east elevation to pick up the rhythm of the windows. In lieu of spandrel windows we incorporated ACM siding, which is already used on the project, with the same patterning as the windows.
- We revised our detailing to create greater relief and changes in plane between our materials.
- We revised our lighting fixtures to be a consistent dark bronze color in order to blend in laza, Suite 120 with the masonry.

  Madison, Wisconsin 53719

p 608.829.4444 f 608.829.4445

- We changed the upper metal wood-looking siding to a darker color that picks up some of the warmth from our brick.
- We revised the fencing material to be vertical to match the vertical siding on the building.
- We better integrated mechanical louvers into the datums and patterns of the building, integrating into storefront where we were able.

Thank you for your time and consideration. We look forward to the opportunity to present our project on February 14<sup>th</sup>, 2024.

Regards, -Carl Miller **Project Team:** 

Owner: City of Madison / Dane County partnership

City of Madison

Madison Municipal Building 215 Martin Luther King Jr. Blvd.

Madison, WI 53703

Jon Evans (jevans@cityofmadison.com)
Bryan Cooper (bcooper@cityofmadison.com)

**Dane County** 

City-County Building, Room 426 210 Martin Luther King Jr. Blvd.

Madison, WI 53703

Casey Becker (becker.casey@countyofdane.com)

Operator: Porchlight

306 North Brooks St. Madison, WI 53715

Karla Thennes (<a href="mailto:kthennes@porchlight.org">kthennes@porchlight.org</a>)
Kim Sutter (<a href="mailto:ksutter@porchlight.org">ksutter@porchlight.org</a>)

Architect: Dimension IV Madison Design Group

6515 Grand Teton Plaza; Suite 120

Madison, WI 53719

Carl Miller (<a href="mailto:cmiller@dimensionivmadison.com">cmiller@dimensionivmadison.com</a>)
Jim Gersich (<a href="mailto:jgersich@dimensionivmadison.com">jgersich@dimensionivmadison.com</a>)

Civil Engineer & Snyder and Associates

Landscape Architecture: 5010 Voges Road

Madison, WI 53718

Scott Anderson (<u>sanderson@snyder-associates.com</u>)
Andy Meessmann (<u>ameessmann@snyder-associates.com</u>)

# DIMENSION

Madison Design Group

architecture · interior design · planning 6515 Grand Teton Plaza, Suite 120, Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensioniymadison com





CITY CONTRACT # 9358 CITY PROJECT # 13346

www.dimensionivmadison.com

Architecture :

Project Owner:

## CITY OF MADISON - DANE COUNTY - MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE. MADISON, WI

# Madison East DM

NEIGH	 	





STATE MAP

PROJECT/BUILDING DATA NEW 2 STORY - HOMELESS SHELTER SERVING PRIMARILY MEN WITH PATIOS WITHOUT PATIOS = 51,575 GSF = 44,085 GSF IRST ELOOR AREA = 22 625 GSF = 22 625 GSF = 22,605 GSF

= 21 460 GSF

= 21,460 GSF

SECOND ELOOR AREA = 21,460 GSF = 3,695 GSF = 25,155 GSF

SHEET LIST G1 - COVER SHEET V1 - SITE SURVE G2 - SITE PHOTOS

G2 - SITE PHOTOS G3 - SITE PLAN CONTEXT G4 - ADJACENT BUILDINGS C200 - EXISTING SITE AND DEMO PLAN C300 - SITE PLAN C301 - DIMENSIONED SITE PLAN

C301 - DIMENSIONED SITE PLAN
C310 - FIRE ACCESS PLAN
C400 - GRADING PLAN
C400 - GRADING PLAN
C500 - UTILITY PLAN
C500 - UTILITY PLAN
C500 - UTILITY PLAN
L100 - LANDSCAPE NOTES
L201 - PLANTING PLAN
L201 - RAPEN PLANTING
L201 - PLANTING PLAN
L201 - SITE POWER PLAN
L201 - SITE POWER PLAN
L201 - RAPEN PLAN

A2 - EXTERIOR ELEVATIONS A2 - EXTERIOR ELEVATIONS A2C - EXTERIOR ELEVATIONS COLOR A4 - PROPOSED BUILDING MASSING 3D A5 - RENDERING A6 - RENDERING

Trauma Informed **Shopworks Architecture** 

301 West 45th Avenue, Denver, Colorado Design Consultant : p: 303.433.4094 www.shopworksarc.com

p: 608.829.4444

Civil Engineering & Landscape **Snyder and Associates** 

Architecture:

5010 Voges Rd, Madison, WI 53718

Dimension IV - Madison Design Group

6515 Grand Teton Plaza, Suite 120, Madison, WI 53719

p: 608.838.0444 www.snyder-associates.com

Structural Engineering: **Oneida Total Integrated Enterprises** 

5100 Eastpark Blvd Suite 300, Madison, WI 53718

p: 608.243.6470 www.otie.com

IBC Engineering Mechanical, Electrical, ATTN: Dennis Hess Plumbing and Fire Protection:

N8 W22195 Johnson Dr, Suite 180, Waukesha, WI 53186 p: 262.549.1190 www.ibcengineering.com

Convergent Technologies Design Group Technology, Security Design:

448 W 37th Street, 7D, New York NY 10018 p: 646.475.5116 www.ctdginc.com

Food and Laundry Design: Stewart Design Associates

5325 Wall Street, Suite 2600, Madison, WI 53718 www.stewdesign.com

p: 608.271.8554

LEED and HabLab Madison, WI 53703 Sustainability:

www.hablab.llc

City of Madison & Dane County Partnership 251 Martin Luther King Jr. Blvd. Madison, WI 53703


p: 608.266.4071 www.cityofmadison.com

Porchlight **Shelter Operator:** 

306 North Brooks St., Madison, WI 53719 p: 608.257.2534 www.porchlightinc.org

**UDC FINAL APPROVAL** 

02/05/2024 PROJECT # 22061

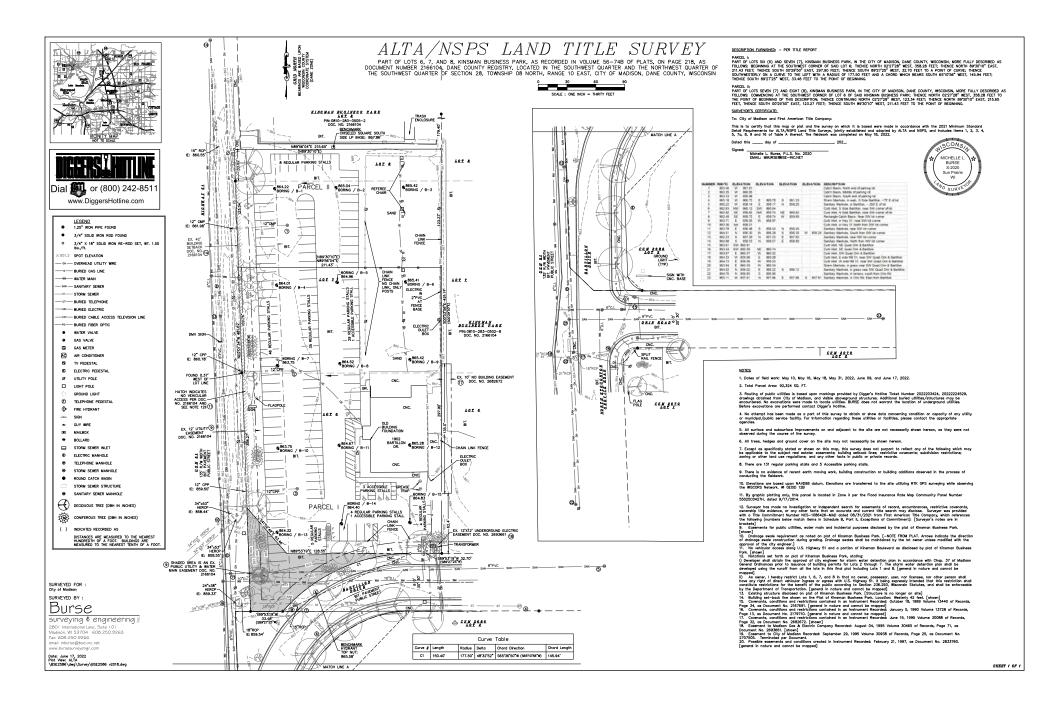

View from Bartillon Dr. SE

General View from Bartillon Dr. S



View from N Stoughton Rd. SW



View down Bartillon Dr. SW



View from N Stoughton Rd. NW



View down Bartillon Dr. SE



Aerial view Looking East



architecture - Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimension/vmadison.com



SHELTER 1904 BARTILLON DRIVE, MADISON, WI

#### **UDC INITIAL APPROVAL**

11/01/2023

22061

DATE OF ISSUE:

**PRELIMINARY** 

NOT FOR CONSTRUCTION

PROJECT #

SITE PHOTOS



6515 Grand Teton Plaza, Sulte 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



SHELTER

1904 BARTILLON DRIVE,
MADISON, WI

# UDC INITIAL APPROVAL

11/01/2023

DATE OF ISSUE:

OF ISSUE:

PRELIMINARY


NOT FOR CONSTRUCTION

PROJECT#

2206

SITE PLAN CONTEXT

G3

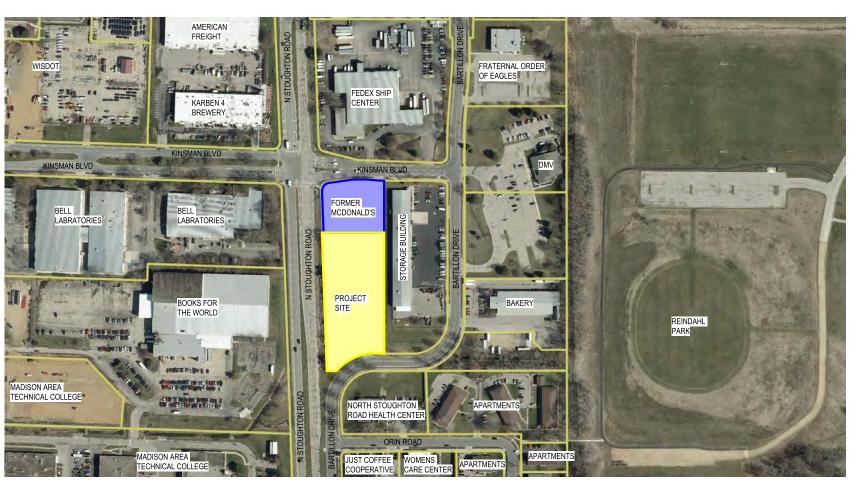



NORTH STOUGHTON HEALTH CENTER



APARTMENTS



BAKERY



STORAGE BUILDING



DMV



FRATERNAL ORDER OF EAGLES



DIMENSION IV

Medison Design Group architecture - interior design - planning 6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 (608.829.4445 dimensionivmadison.com

CITY OF MADISON -DANE COUNTY -MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE, MADISON, WI



FEDEX SHIP CENTER

BELL LABS



FORMER MCDONALDS



KARBEN 4 BREWERY



BOOKS FOR THE WORLD



MATC



11/01/2023

22061

DATE OF ISSUE:


**PRELIMINARY** 

NOT FOR CONSTRUCTION

PROJECT #

**ADJACENT** 

**BUILDINGS** 

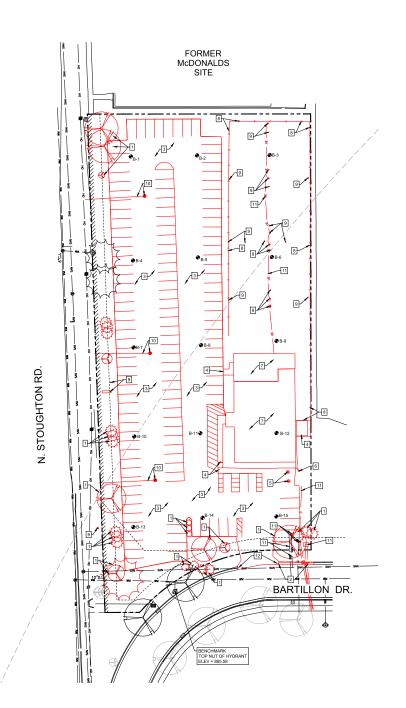

#### PLAN NOTES:

CONTRACTOR SHALL VERIFY ALL SITE CONDITIONS PRIOR TO COMMENCING WORK ON SITE

CONTRACTOR SHALL CALL FOR UTILITY LOCATIONS PRIOR TO COMMENCING WORK ON SITE

EXISTING SITE CONDITIONS BASED ON ALTA SURVEY BY: BURSE SURVEYING & ENGINEERING PHONE: 608-250-9283 DATED: JUNE 17, 2022

CONTRACTOR SHALL PROVIDE ALL NECESSARY EROSION CONTROL MEASURES PER TOWN, VILLAGE, COUNTY AND STATE SPECIFICATIONS. ALL MEASURES ARE TO BE IN PLACE PRIOR TO COMMENCING WORK ON SITE. ALL MEASURES SHALL BE MAINTAINED UNTIL SITE SOILS ARE STABILZED. SEE SHEET SWP1-SWP4-FOR MORE INFORMATION

CONTRACTOR TO OBTAIN ALL NECESSARY PERMITS FOR DEMOLITION AND CONSTRUCTION PRIOR TO COMMENCING ANY WORK ON SITE.

ALL DAMAGED ASPHALT ON BARTILLON DRIVE SHALL BE PATCHED TO THE CENTERLINE OF THE ROAD WITH A MINIMUM 10' WIDTH.

ALL EROSION CONTROL DEVICES SHALL BE INSTALLED PRIOR TO DEMOLITION ACTIVITIES. EXISTING ASPHALT REMOVAL SHALL BE COORDINATED WITH GEOTHERMAL CONTRACTOR

#### SITE PLAN KEYNOTES

- 1. REMOVE EXISTING TREES AND SHRUBS IN THEIR ENTIRETY, CLEAR AND GRUB
- 2. EXISTING CURB HEADS TO BE REMOVED FOR NEW DRIVEWAY APPROACH
- 3. REMOVE EXISTING ASPHALT PAVEMENT COORDINATE WITH GEOTHERMAL CONTRACTOR
- 4. REMOVE EXISTING CONCRETE SIDEWALKS
- 5. REMOVE EXISTING GREASE INTERCEPTOR
- 6. REMOVE EXISTING RETAINING WALL
- 7. REMOVE EXISTING BUILDING AND CONCRETE PATIO INCLUDING FOOTINGS / FOUNDATION
- 8. REMOVE EXISTING FENCE AND POSTS ENTIRELY
- 9. REMOVE MISC. SITE OBJECTS (LIGHT POLES, FLAG POLE, SIGN, ETC.)
- 10. REMOVE EXISTING STORM INLETS AND CONNECTED PIPES
- 11. ABANDON EXISTING UTILITIES PER CITY OF MADISON STANDARDS
- 12. REMOVE EXISTING DRIVEWAY APPROACH AND INFILL WITH NEW CONCRETE CURB & GUTTER



erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444

www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS **SHELTER**


1904 BARTILLON DR. MADISON, WI 53704

DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
BEVISIONS:	

#### **PRELIMINARY** NOT FOR CONSTRUCTION

EX. SITE & DEMO. PLAN



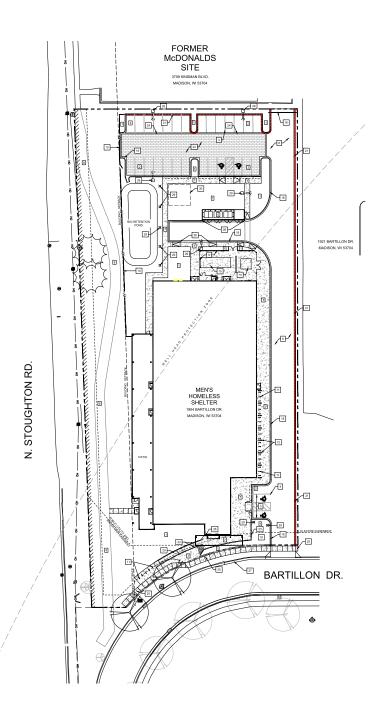

#### SITE PLAN KEYNOTES

- LANDSCAPE AREA,
- 2. OFF. STREET PARKING STALLS.
  STRENIEG. "WIDE IS TALL LINES, USE HIGH VISIBILITY YELLOW PAINT.
  STACES PROVIDED
  (28) "9" X 20" OF ACCESSBILE PARKING
  (29 "9" X 20" OF ACCESSBILE PARKING
  (1) "9" X 20" OF ACCESSBILE PARKING
- A.D.A. ACCESSIBLE PARKING SPACE WITH LOADING ZONE. PROVIDE APPROPRIATE STRIPING AND PAVEMENT MARKINGS.
- 4" WIDE, HIGH VISIBILITY, PAVEMENT STRIPING, LANE MARKINGS AND TEXT COLOR: YELLOW PAINT SHALL MEET CITY OF MADISON SPECIFICATIONS
- 5. DUMPSTER ENCLOSURE AREA WITH 6" DEPTH CONCRETE PAD
- 6. 6" DEPTH (MIN.) CONCRETE PAVEMENT WITH #3 REBAR 3" O.C.
- 5" DEPTH CONCRETE SIDEWALK / PATIK
- 10' WIDE HARD SURFACE PEDESTRIAN / BIKE PATH UNDER SEPARATE CONTRACT BY THE CITY OF MADISON (DESIGN BY OTHERS)
- 9. 6' HIGH TYPE 1 METAL FENCE WITH DOUBLE GATE
- 10. 6' HIGH TYPE 2 METAL FENCE
- 11. BIKE RACK LOCATIONS, SPACING PER CITY OF MADISON BIKE RACK REQUIREMENTS
- 12. COLUMNS FOR ROOF SUPPORT, SEE ARCHITECTURAL PLANS
- 13. CONCRETE PATIO AREA
- 14 TRANSFORMER LOCATION
- 15. BACKUP GENERATOR
- 16. GATE LOCATION
- 17. EMERGENCY SERVICE KNOX BOX
- 18. STANDARD 18" CONCRETE CURB
- 19. POTENTIAL ART LOCATION
- 20 DEDESTRIAN DAMP
- 20. PEDESTRIAN RAMP
- 21. 18" CONCRETE REJECT CURB
- 22. PERMEABLE PAVERS, SEE DETAIL 6 ON SHEET C 601
- 23. PROPOSED RAILING, BY OTHERS
- 24. CONCRETE RIBBON CURB, SEE DETAIL ON C 601
- 25. STANDARD CITY OF MADISON SIDEWALK. SIDEWALK ON PRIVATE PROPERTY TO SAVE MATURE TREES
- 26. ENTRY CANOPY
- 27.  $\pm$  40 LF INFILL / MATCH INTO EXISTING CURB AND GUTTER
- 28. DRIVEWAY SECTION OF CURB AND GUTTER
- 9. SITE LIGHT POLES BOLLARD STYLE AND STREET LIGHT STYLE
- 30. FUTURE PAVILLIO

#### NOTE:

CONTRACTOR SHALL FIELD VERIFY ALL EXISTING UTILITIES ON AND ADJACENT TO THE SITE PRIOR TO THE START OF THE PROJECT.

RADII ARE FROM FACE OF CURB

DIMENSIONS ARE FROM FACE OF CURB

#### SITE INFORMATION

COMMERCIAL CENTER
TOTAL SITE AREA: 92,324 SF / 2.12 ACRES
TOTAL DISTURBED AREA: 96,785 SF / 2.22 ACRES
PAVED AREA: 19,185 SF
BUILDING AREA: 28,402 SF

BUILDING AREA: 26,402 SF FUTURE PAVILION AREA: 420 SF SIDEWALK / PICNIC AREA: 7,546 SF

#### PARKING STALL COUNT

STANDARD PARKING: 29 STALLS
ADA PARKING 2 STALLS WITH LOADING ZONE
TRUCK PARKING 1 UNLOADING STALL

ADA PARKING STALL REQUIREMENTS: ADA STALLS REQUIRED ON SITE = 1 ADA STALLS SHOWN ON THE PLANS = 2 (1 VAN)

BIKE PARKING STALL COUNT

BIKE PARKING: 42 STALLS (COVERED) BIKE PARKING: 10 STALLS (UNCOVERED)

#### BUILDING HEIGHTS - 5 STORIES / 78' MAXIMUM

OVERALL HEIGHT 28'-0" TOP OF SECOND FLOOR ROOF

#### BUILDING SETBACKS

SEE THE CITY OF MADISON CODE OF ORDINANCES CHAPTER 28.068 - COMMERCIAL CENTER DISTRICT



erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444

www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704


DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
BEVISIONS:	

# PRELIMINARY NOT FOR CONSTRUCTION

PROJECT #

SITE PLAN



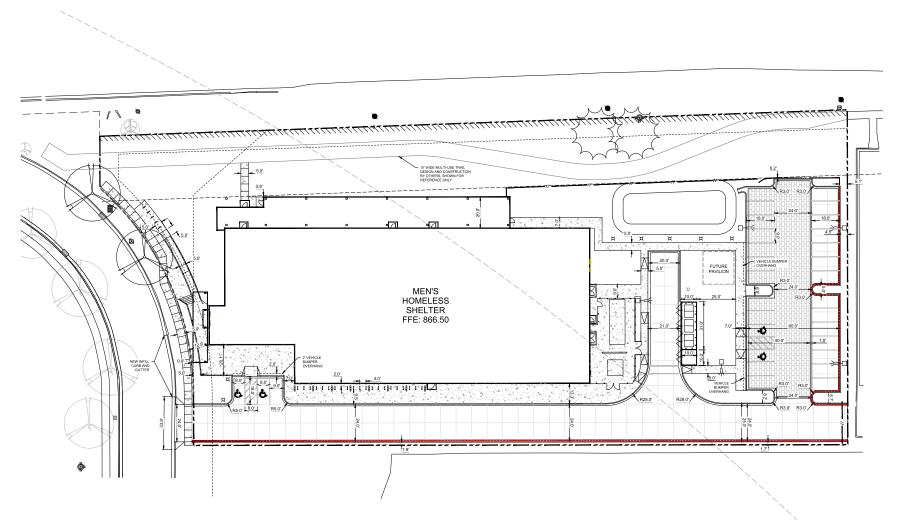



erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimension/madison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704

DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	


# PRELIMINARY NOT FOR CONSTRUCTION

PROJECT #

DIMENSION SITE PLAN





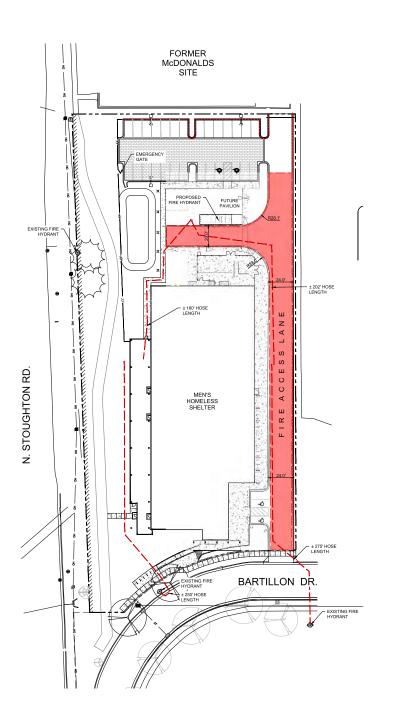



erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimension/madison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704


DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	

# PRELIMINARY NOT FOR CONSTRUCTION

DDO IECT #

FIRE ACCESS PLAN



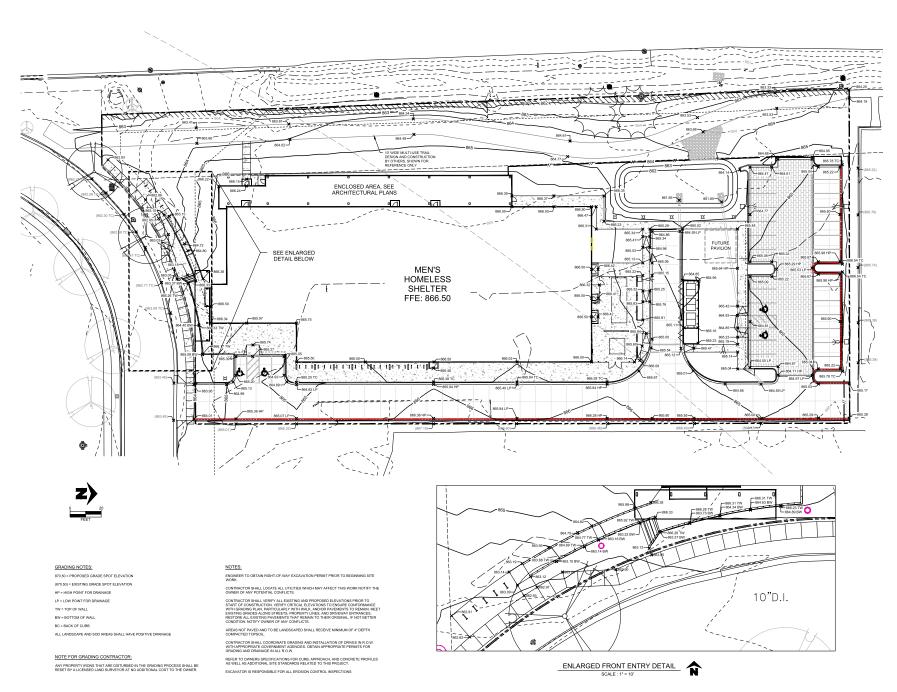

DIMENSION IN Madison Design Group

erchitecture (interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimension/madison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER


1904 BARTILLON DR. MADISON, WI 53704

DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	

# PRELIMINARY NOT FOR CONSTRUCTION

PROJECT #

**GRADING PLAN** 

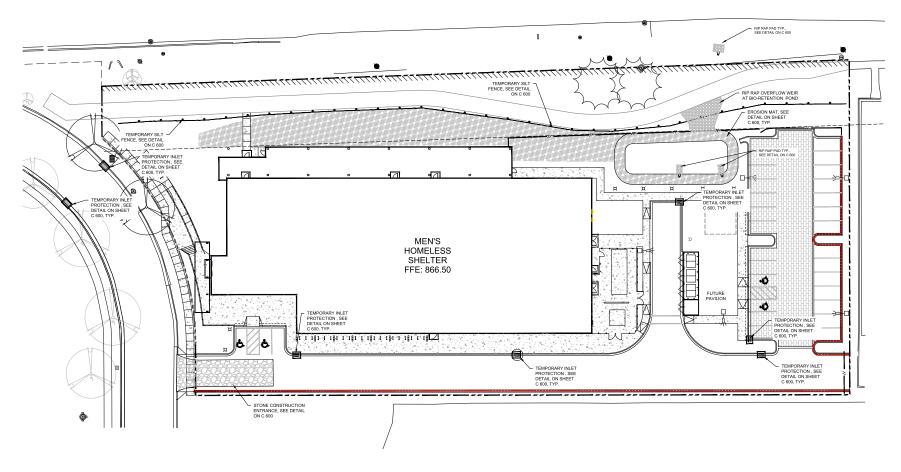

#### CONSTRUCTION SEQUENCE

\*INSTALL EROSION/SEDIMENT CONTROL MEASURES

'INSTALL STORMWATER MANAGEMENT SEDIMENT BASINS

'INSTALL STORM SEWER 'INSTALL STRUCTURES

"REMOVE EROSION CONTROL MEASURES ONLY AFTER ALL PAVEMENTS HAVE BEEN INSTALLED AND ALL SOILS HAVE BEEN STABILIZED

#### EROSION CONTROL NOTES

ALL SILT FENCE MUST BE INSTALLED BY THE CONTRACTOR AND INSPECTED BY THE CITY OF MADISON PRIOR TO ANY SITE WORK.

SITE EROSION CONTROL MEASURES MUST BE IN PLACE AT ALL TIMES. SHOULD DEVICES BE REMOVED FOR WORK ACCESS, THEY SHALL BE REINSTALLED AT THE END OF EACH WORK DAY UNIT PAYEMENTS NAVE BEEN INSTALLED AND ALL LANDSCAPE AREAS HAVE BEEN MULCHED AND SOCIOED. SEEDED AREAS MUST EXHBIT MINIMUM OF 70%, SOIL COVERAGE.

#### $\underline{\text{CONTRACTOR'S RESPONSIBILITY FOR EROSION CONTROL AND LEED SUBMITTALS}}$

- TRACK IMPLEMENTATION OF THE ESC PLAN BY KEEPING WRITTEN RECORDS AND DATE-STAMPED PHY NARRATIVE DESCRIPTION OF ESC PLAN BIPLEMENTATION SHOULD INCLUDE THE FOLLOWING: 2.1. TIMING OF THE BIPLEMENTATION PLAN
   SPECIFIC CONTROL MEASURES APPLIED ON SITE
   SAMMATINANCE PROTOCOLS USED TO BESIDE THE PROPER PLANCTION OF CONTROL MEASURES
   MANITEMANCE PROTOCOLS USED TO BESIDE THE PROPER PLANCTION OF CONTROL MEASURES

- CONTRACTOR IS RESPONSIBLE FOR COMPLETING THE LEED ONLINE CREDIT TEMPLATE AND ATTACHING THE NARRATIVE DESCRIBED ABOVE.
- THE LEED PROJECT ADMINISTRATOR WILL DETERMINE IF THE INFORMATION PREPARED BY THE CONTRACTOR IS SATISFACTORY FOR GBCI SUBMISSION.





erchitecture interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30


#### MENS HOMELESS **SHELTER**

1904 BARTILLON DR. MADISON, WI 53704

DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	

#### PRELIMINARY NOT FOR CONSTRUCTION

**EROSION** CONTROL PLAN

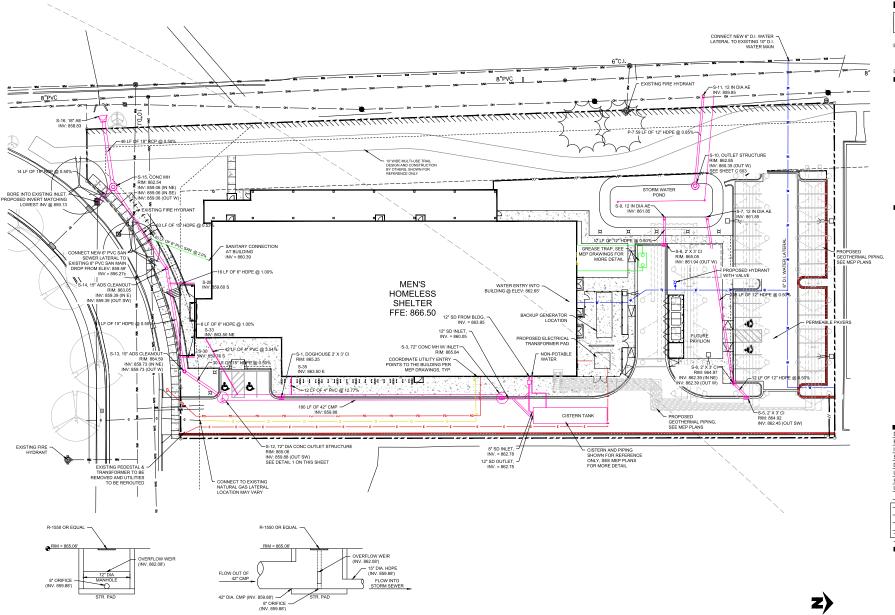

1 OUTLET STRUCTURE S-12 DETAIL C500 SCALE: NTS

DIMENSION

erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704


DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	

PRELIMINARY	
NOT FOR	
CONSTRUCTION	

PROJECT #

UTILITY PLAN



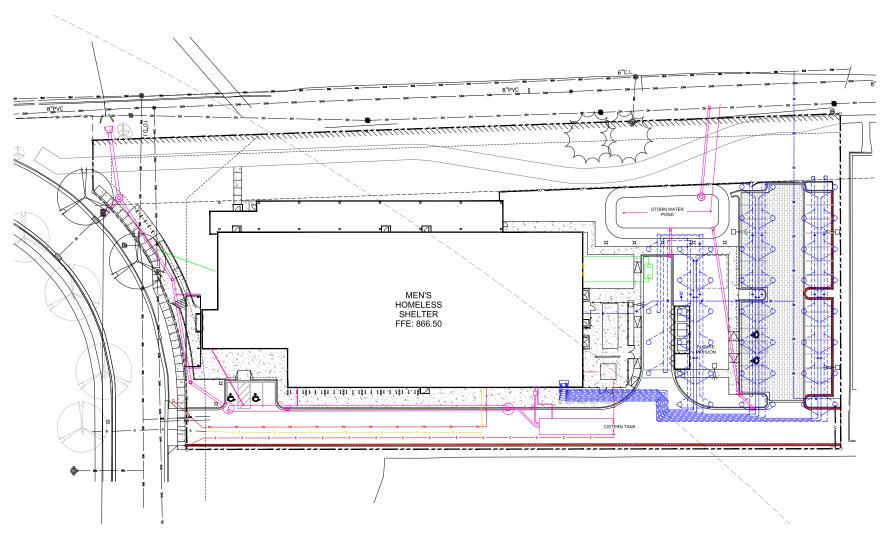

THIS SHEET IS FOR REFERENCE ONLY. SEE MEP PLANS FOR GEOTHERMAL LAYOUT AND DESIGN.





erchitecture (Interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704

DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
UDC	2/05/2024
REVISIONS:	

# PRELIMINARY NOT FOR CONSTRUCTION

PROJECT #

GEOTHERMAL PLAN

#### GENERAL LANDSCAPE NOTES

- UTILITY WARNING: THE UTILITIES SHOWN HAVE BEEN LOCATED FROM FIELD SURVEY INFORMATION AND/OR RECORDS OBTAINED. THE SURVEYOR MAKES NO QUARANTEE THAT THE UTILITIES SHOWN COMPRISE ALL SUCH UTILITIES IN THE AREA. EITHER IN SERVICE OR ABANDOBE. THE SURVEY FURTHER DOES NOT WARRANT THAT THE UTILITIES SHOWN ARE IN THE EXACT LOCATION INDICATED.
- 2 NOTICY LITTLITY OWNERS PRIOR TO REGINNING ANY CONSTRUCTION CONTRACTOR IS RESPONSIBLE FOR DETERMINING ANY CONSTRUCTION.

  LOCATION AND DEPTH OF ALL UTILITIES. AVOID DAMAGE TO UTILITIES AND

  SERVICES DURING CONSTRUCTION. ANY DAMAGE DUE TO THE CONTRACTOR'S CARELESSNESS SHALL BE CORRECTED AT THE CONTRACTOR'S EXPENSE. COORDINATE AND COOPERATE WITH UTILITY COMPANIES DURING
- THE CONTRACTOR SHALL FOLLOW THE LANDSCAPE PLANS AS CLOSELY AS POSSIBLE. ANY SUBSTITUTION OR ALTERATION SHALL NOT BE ALLOWED WITHOUT APPROVAL OF THE OWNER'S REPRESENTATIVE. OVERALL PLANT
- 4 ALL PLANT MATERIAL SHALL AT LEAST MEET MINIMUM REQUIREMENTS SHOWN N THE "AMERICAN STANDARDS FOR NURSERY STOCK" (ANSI Z60.1-LATEST
- MULCH SHALL NOT BE PLACED AROUND THE COLLAR OF SHRUB OR TREE. PROVIDE A MINIMUM OF 2" BETWEEN MULCH AND COLLAR OF SHRUB OR TREE.
- ALL PLANT MATERIAL SHALL BE GROWN IN ZONE CAPABLE OF WITHSTANDING LOCAL CLIMATE AND GROWING CONDITIONS.
- 7. TREE OR SHRUB SHALL STAND PLUMB. DO NOT ALLOW AIR POCKETS TO FORM
- 8 LIVE PLANTS CAN BE PLANTED IN THE FIELD DURING THE GROWING SEASON LIVE PLANTS CAN BE LAWRED IN THE HELD DURING THE ENCOVING SEASON IN FROM MAY 1 THROUGH OCTOBER 1. ANY SUGGESTED PLANTING TIMES NOT IN THIS WINDOW SHALL BE APPROVED W. JANDSCAPE ARCHITECT. IF PLANTING OCCURS OUTSIDE OF THIS WINDOW, ADDITIONAL MEASURES MAY NEED TO BE TAKEN (I.E. MULCH) TO INSURE PLANT SURVIVAL. IN THESE INSTANCES, THE CONTRACT PRICE MAY NEED TO BE ADJUSTED ACCORDINGLY.
- PLANTS SHOULD BE WATERED IN AFTER INSTALLATION TO ENSURE THEIR SURVIVAL. THIS TYPICALLY INVOLVES WATERING AT TIME OF INSTALLATION AND 2 TIMES WEEKLY FOR A ONE MONTH PERIOD OR UNITL GROUND FREEZE UP IF NATURAL RAINFALLS ARE INSUFFICIENT. A SINGLE WATERING EVENT INVOLVES WATERING THE SOIL IN THE REANTED AREAS TO THE POINT OF SATURATION BUT STOPPING SHORT OF SOIL DISPLACEMENT, SHOULD VERY DRY CONDITIONS DEVELOP WITHIN ONE YEAR OF PLANTING ADDITIONAL WATERINGS MAY BE NECESSARY, CONSULTANT OR LANDSCAPE ARCHITECT WILL DETERMINE THIS AND CONTRACT PRICES MAY BE ADJUSTED TO ACCOMMODATE THIS ACTION.
- 10. ALL PLANT MATERIAL SHALL BE SPECIMEN QUALITY, HEALTHY, FREE OF DISEASE AND INSECTS AND SHALL HAVE HEALTHY, WELL-DEVELOPED ROOT SYSTEMS, PLANTS SHALL ALSO BE FREE FROM PHYSICAL DAMAGE OR OTHER CONDITIONS THAT WOULD PREVENT VIGOROUS GROWTH.
- ALL PROPOSED PLANTS SHALL BE LOCATED AS SHOWN ON PLANS. ALL TREES TO BE PLANTED A MINIMUM DISTANCE OF 5 FEET FROM PAVEMENTS AND 6 FEET FROM ALL HYDRANTS
- 12. CONTRACTOR IS RESPONSIBLE FOR PLANTS AWAITING INSTALLATION AND SHALL PROTECT THEM FROM INJURY AND THEFT
- 13. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING ALL PLANT QUANTITIES. GRAPHIC QUANTITIES TAKES PRECEDENCE OVER WRITTEN QUANTITIES.
- 14. THE OWNER'S REPRESENTATIVE RESERVES THE RIGHT TO INSPECT AND TAG ALL PLANT INLTERIAL PRIOR TO SHEPPIND TO THE SITE. BUIL CLASES, THE ALL CASES, THE MATERIAL PROOR TO SHEPPIND THE STEEL PLANT MATERIAL DOES NOT MEET THE INTERIOR ON SHE THE PLANT MATERIAL DOES NOT MEET THE MINIMUM SPECIFIED STADARDAD IDENTIFIED ON THE PLANT SHE CONTRACTOR SHALL COORDINATE WITH THE OWNER'S REPRESENTATIVE FOR INSPECTION AND APPROVAL OF ALL MATERIALS AND PRODUCTS PRIOR TO INSTALLATION.
- 15. THE OWNER'S REPRESENTATIVE MAY ELECT TO UPSIZE PLANT MATERIAL AT THE OWNERS REPRESENTATIVE MAY ELECT TO UPSIZE PLANT MATERIAL AT THER DISCRETION BASED ON SELECTION. AVAILABILITY, OR TO ENHANCE SPECIFIC AREAS OF THE PROJECT. THE CONTRACTOR SHALL VERRIFY PLANT SHE CONTRACTOR SHALL VERRIFY PLANT SHE CONTRACTOR SHALL VERRIFY PLANT SHE PLANT SHE CONTRACTOR SHALL VERRIFY PLANT SHE PLA
- 16. THE CONTRACTOR SHALL WARRANTY ALL CONTRACTED WORK AND MATERIALS FOR A PERIOD OF ONE YEAR AFTER SUBSTANTIAL COMPLETION HAS BEEN ISSUED BY THE OWNER'S REPRESENTATIVE FOR THE ENTIRE PROJECT UNLESS OTHERWISE SPECIFIED IN THE CONTRACT DOCUMENTS.
- MINIMUM SLOPES ON LANDSCAPE AREAS SHALL BE 2%: MAXIMUM SLOPE SHAL BE 25% UNLESS SPECIFICALLY IDENTIFIED ON THE PLANS OR APPROVED BY THE OWNER'S REPRESENTATIVE.
- 18. PRIOR TO INSTALLATION OF PLANT MATERIALS, AREAS THAT HAVE BEEN COMPACTED OR DISTURBED BY CONSTRUCTION ACTIVITY SHALL BE THOROUGHLY LOOSENED TO A DEPTH OF 8" 12".
- ALL LANDSCAPED AREAS ARE TO RECEIVE ORGANIC SOIL PREPARATION PER RATE IDENTIFIED BY A SOIL TEST.
- 20. TREES SHALL NOT BE LOCATED IN DRAINAGE SWALES, DRAINAGE AREAS, OR UTILITY EASEMENTS. CONTACT OWNER'S REPRESENTATIVE FOR RELOCATION OF PLANTS IN QUESTIONABLE AREAS PRIOR TO INSTALLATION.
- 21. THE CENTER OF EVERGREEN TREES SHALL NOT BE PLACED CLOSER THAN 8' AND THE CENTER OF ORNAMENTAL TREES CLOSER THAN 6' FROM A SIDEWALK, STREET OR DRIVE LANE.

- 22. ALL EVERGREEN TREES SHALL BE FULLY BRANCHED TO THE GROUND AND SHALL NOT EXHIBIT SIGNS OF ACCELERATED GROWTH AS DETERMINED BY THE OWNERS REPRESENTATIVE.
- . ALL TREES ARE TO BE STAKED AND GUYED PER DETAILS FOR A PERIOD OF 1 YEAR. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING STAKES AT THE END OF 1 YEAR FROM ACCEPTANCE OF LANDSCAPE INSTALLATION BY THE OWNER'S REPRESENTATIVE. OBTAIN APPROVAL BY OWNER'S REPRESENTATIVE. PRIOR TO REMOVAL.
- 24. ALL TREES INSTALLED ABOVE RETAINING WALLS UTILIZING GEO-GRID MUST BE HAND DUG TO PROTECT GEO-GRID. IF GEO-GRID MUST BE CUT TO INSTALL TREES, APPROVAL MUST BE GIVEN BY OWNER'S REPRESENTATIVE PRIOR TO
- ALL TREES IN SEED OR TURF AREAS SHALL RECEIVE MULCH RINGS, OBTAIN APPROVAL FROM OWNER'S REPRESENTATIVE FOR ANY TREES THAT WILL NOT BE MULCHED FOR EXCESSIVE MOISTURE REASONS
- 26 EXISTING TURE AREAS THAT ARE DISTURBED DURING CONSTRUCTION ESTABLISHMENT AND THE MAINTENANCE PERIOD SHALL BE RESTORED WITH NEW SOD TO MATCH EXISTING TURF SPECIES. DISTURBED NATIVE AREAS WHICH ARE TO REMAIN SHALL BE OVER SEEDED AND RESTORED WITH SPECIFIED SEED
- WHEN COMPLETE, ALL GRADES SHALL BE WITHIN +/- 1/8" OF FINISHED GRADES AS SHOWN ON THE PLANS.
- . PRIOR TO THE PLACEMENT OF MULCH AND WEED FABRIC, A GRANULAR, PRE-EMERGENT, WEED CONTROL AGENT SHALL BE ADDED TO ALL PLANTING BEDS IN ACCORDANCE WITH THE MANUFACTURERS INSTRUCTION, EXCEPT AROUND ORNAMENTAL GRASSES.
- 29. THE CONTRACTOR IS EXPECTED TO KNOW AND UNDERSTAND THE CITY AND COUNTY SPECIFICATIONS FOR LANDSCAPE. IN CASES OF DISCREPANCIES THE HIGHER OF THE TWO STANDARDS SHALL HAVE PRECEDENCE.
- 30. ALL TREES PLANTED WITHIN RIGHT-OF-WAY WILL INCLUDE CITY APPROVED ROOT BARRIERS

#### CITY LANDSCAPE REGULATIONS

DEVELOPMENT REQUIREMENT:
REQUIRED LANGUAGES SHALL BE CALCULATED BASED UPON THE TOTAL
REQUIRED LANGUAGED ARE SHALL BE CALCULATED BASED UPON THE TOTAL
REQUIRED CANGUAGED ARE SHALL BE CALCULATED BASED DEFINED AS THAT AREA
WITHIN A SINGE CONTIGUIOUS BOYONDAY WHICH BY MADE UP OF STRUCTURES,
PARKING, DRIVEWAYS AND DOCKINGLOADING FACILITIES, BUT EXCLUDING THE
AREA OF ANY BUILDING FOOTPRINT AT GRADE, LAND DESIGNATED FOR OPEN
SPACE USES SUCH AS ATHLETIC FIELDS, MOUNDEVELOPED LAND AREA ON THE
SPACE USES SUCH AS ATHLETIC FIELDS, MOUNDEVELOPED LAND AREA ON THE POINTS DEPENDING ON THE SIZE OF THE LOT AND ZONING DISTRICT.

5 LANDSCAPE POINTS SHALL BE PROVIDED FOR EACH 300 SF OF DEVELOPED AREA

TOTAL DEVELOPMENT AREA: 65,922 SF TOTAL LANDSCAPE POINTS REQUIRED: 1,099

DEVELOPMENT FRONTAGE:

1 OVERSTORY TREE AND 5 SHRUBS FOR EACH 30 LF OF LOT FRONTAGE

BARTILLON DRIVE: 125 LF / 30 = 5 TREES AND 21 SHRUBS

1 TREES PROVIDED\* AND 146 SHRUBS

1 TREES PROVIDED\* AND 146 SHRUBS

1 BUILDING FACADE'S ADJACENCY TO PUBLIC SIDEWALK AND MAXIMUM SETBACK OF

20' PER TOO ZONING CODE LIMIT PLANTING ANY ADDITIONAL TREES.

STOUGHTON ROAD (HWY 51): 1 (3 EVERGREENS COUNTED AS 1 PER CODE) 2 EXISTING EVERGREENS

9 CANOPY TREES
12 TREES 'PROVIDED AND 0 SHRUBS'"
"PROPOSED MULTI-USE TRAIL LIMITS TREE PLACEMENT
"PROJECT PROGRAM REQUIRES HIGH VISIBILITY TO BUILDING AND PATRONS - NO
SHRUBS PROVIDED TO MAINTAIN UNDOSTRUCTE O VISUAL SIGHTLINES.

#### INTERIOR PARKING LOT SCREENING: REQUIREMENT:

- RUIKEMENT: 8% OF ASPHALT OR CONCRETE AREA OF THE PARKING LOT SHALL BE DEVOTED. TO INTERIOR PLANTING ISLANDS, PENINSULAS, OR LANDSCAPE STRIPS. 7,300 SF OF PARKING X 8% = 584 SF OF REQUIRED LANDSCAPE.
- 1 CANOPY TREE FOR EVERY 160 SF OF REQUIRED LANDSCAPE AREA. 584 / 160 = 3.65 TREES REQUIRED

PROVIDED: 2 TREES  $^{\ast}$  \*GEOTHERMAL WELL FIELD LIMITS PLACEMENT OF CANOPY TREES AT PARKING LOT.



PLANT	SCHE	DULE							
			DOTANICAL NAME	COMMONINAME	CIZE	TVDE	DOINTS	DOINTS	
	ICODE	IQIY	BOTANICAL NAME	COMMON NAME	ISIZE	TYPE	POINTS	POINTS	
(·)	CO2	3	Carya ovata	Shagbark Hickory	2.5" Cal.	B&B	35	105	
$\overline{\odot}$	GD	2	Gymnocladus dioica 'Espresso'	Kentucky Coffeetree	2.5" Cal.	B&B	35	70	
	QM	1	Quercus macrocarpa	Burr Oak	2.5" Cal.	B&B	35	35	
$\odot$	QV	3	Quercus velutina	Black Oak	2.5" Cal.	B&B	35	105	
$\bigcirc$	uc	1	Ulmus x 'Cathedral'	Cathedral Elm	2.5" Cal.	B&B	35	35	
EVERGREI	EN TREE	s							
	PB2	3	Picea mariana	Black Spruce	5` Ht.	B&B	35	105	
0	тв	12	Thuja occidentalis 'Brandon'	Brandon Arborvitae	4° Ht.	B&B	10	120	
<u>O</u>	TS2	9	Thuja occidentalis 'Skinner Dwarf'	Skinner Dwarf Arborvitae	4° Ht.	B&B	10	90	
ORNAMEN	TAL TRE	ES .		I					
$\bigcirc$	AX	2	Amelanchier x grandiflora	Apple Serviceberry	1.5" Cal.	B&B	15	30	
QD   2   Cymnoctadus dioica "Espresso"   Kientucky Coffeetree   2.5" Cal.   848   35   70									
_	_		T	ı		T			
$\odot$	AR	9	Amelanchier alnifolia 'Regent'	Regent Serviceberry	3 gal.	Pot	3	27	
$\odot$	AM2	39	Arctostaphylos uva-ursi "Massachusetts'	Massachusetts Kinnikinnick	3 gal.	Pot	3	117	
$\overline{\odot}$	CF	6	Cornus sericea 'Farrow' TM	Arctic Fire Red Twig Dogwood	3 gal.	Pot	3	18	
$\overline{\odot}$	DF	9	Dasiphora fruticosa	Bush Cinquefoil	3 gal.	Pot	3	27	
	JB2	8	Juniperus horizontalis 'Blue Rug'	Blue Rug Juniper	3 gal.	Pot	4	32	
00110050									
$\sim$	вв	38	Bouteloua gracilis 'Blonde Ambition'	Blonde Ambition Blue Grama	1 gal.	Pot	2	76	
$\sim$	SP	26	Sporobolus heterolepis	Prairie Dropseed	1 gal.	Pot	2	52	
		077/			0.75	DELLA DICO			
		JUIY	BOTANICAL NAME	COMMON NAME	ISIZE	REMARKS		1,044 PROI	POSED LANDSCAPE POIN
		1,664 sf	GREENROOF	GREENROOF	flat	SEE SPECFICATIONS		1,114 TOTA	TING LANDSCAPE POINT: IL POINTS
SYMBOL	CODE	QTY	BOTANICAL NAME	COMMON NAME	SIZE	TYPE			
	1	I						-	
	TB2		50% FESCUE 50% BLUEGRASS BLEND	Sod	sod				
	NN2	14,173 sf	Native Seed	Native Seed	seed	Short Prairie for Medium Soils			
	ITION PLI	JGS							
BIORETEN									

DIMENSION Madison Design Brown

erchitecture interior design - planning 6515 Grand Teton Plaza, Suite 120

Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER


1904 BARTILLON DR. MADISON, WI 53704

DAT	E OF ISSUE:	12/29/202
PRE	-DESIGN	3/23/202
INFO	DRMATIONAL MEETING	6/12/202
SCH	IEMATIC DESIGN	6/16/202
	IGN DEVELOPMENT	8/18/202
UDC	3	12/08/202
99%	REVIEW SET	12/15/202
UDC		2/05/2024

REVISIONS

PRELIMINARY NOT FOR CONSTRUCTION

LANDSCAPE NOTES

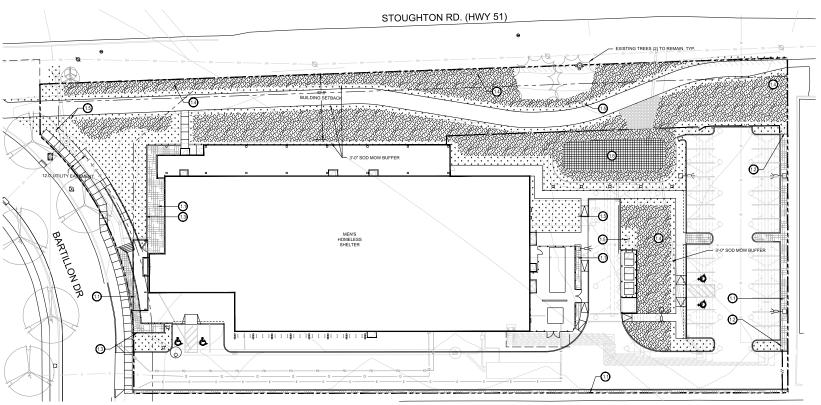



erchitecture interior design . planning 6515 Grand Teton Plaza, Suite 120

Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704



1,334 Bio Plugs Bio Plugs

#### LANDSCAPE LEGEND



HARDWOOD MULCH SHRUB BED

— — — — METAL EDGER

#### HARDSCAPE, MULCHING, & SEEDING CONSTRUCTION NOTES

- LANDSCAPE MATERIAL
   PROVIDE 3" DEPTH SHREDDED HARDWOOD MULCH AROUND ALL
   STANDALONE TREES TO A MIN. 3-FOOT PERIMETER, AND IN ALL
   AREAS NOTED ON PLANS OVER GEOTEXTIE WEED CONTROL
   FARRIC, NO WEED CONTROL FARRIC SHEQUIED IN MOSCAPE
   GROWNDOOMEN OF PERENNIAL AREAS, MULCHED LANDSCAPE
   SEE OF A WIN OF REFIGER TRY WHEN PERIMETER IS NOT A CAPE
   SEE OF A WIN OF REFIGER TRY WHEN PERIMETER IS NOT A CAPE SEE PLAN FOR EDGER TYPE.
- METAL EDGER 
  PLANTER CURB 
  STORT PRAIRIE POR MEDIUM SOILS 
  PROVIDED BY PRAIRIE NURSERY (www.prairienrursery.com) OR 
  APPROVIDE DE YERAIRIE NURSERY (www.prairienrursery.com) OR 
  APPROVIDE DE QUAL. 
  SOD 
  BIORETENTION PLUG MIX, SEE NOTES AND PLUG LIST

#### BIORETENTION PLANTING NOTES BIORETENTION SHALL CONFORM TO WIS. DNR TECH STANDARD 1004.

- ENGINEERED SOIL SHALL CONSIST OF 70%-85% SILICA SAND AND 15%-30% COMPOST WITH A PH OF 5.5-6.5
- BIORETENTON BASINS SHALL BE EXCAVATED AND USED AS SEDIMENT TRAPS DURING CONSTRUCTION. UPON COMPLETION OF CONSTRUCTION AND SITE STRAIL DATA TO THE ANSWERS SHALL LANGE AND ENGINEERED SOIL SHALL BE FALCED TO WITHIN THREE INCHES OF FINAL GRADE. ONCE THE ENGINEERED SOIL SHALL BE FALCED A COCONIT PIESRE NAT SHALL BE ADDED ON TOP OF THE ENGINEERED SOIL SHALL BE ADDED ON TOP OF THE ENGINEERED SOIL SHALL SHALL BE ADDED ON TOP OF THE ENGINEERED SOIL SHALL SHALL BE ADDED ON TOP OF THE ENGINEERED SOIL.

4. FIELD INFILTRATION TESTING: IMMEDIATELY AFTER ROUGH

- FIELD INFILTRATION TESTING: IMMEDIATELY AFTER ROUGH GRADING OF STORMAYTER BIORINI-TRATION AND INFILTRATION AND INFIRMATION A
- SPECIFIC SPECIES OR CONTAINER SIZE SUGGESTED SUBSTITUTIONS SHALL BE PRESENTED TO CONSULTANT ALONG WITH THE REASONS FOR THE SUGGESTIONS. WITH CONSULTANT OR PROJECT ENGINEERS APPROVAL, SUBSTITUTIONS MAY BE MADE.
- LIVE PLANTS CAN BE PLANTED IN THE FIELD DURINGTHE GROWING SEASON FROM MAY 1 THROUGH OCTOBER 1. ANY SUGGESTED PLANTING TIMES NOT IN THIS WINDOW SHALL BE APPROVED BY CONSULTANT OR ENGINEER IF PLANTING OCCURS OUTSIDE OF THIS WINDOW ADDITIONAL MEASURES MAY NEED TO BE TAKEN (I.E. MULCH) TO ENSURE PLANT SURVIVAL. IN THESE INSTANCES, THE CONTRACT PRICE MAY NEED TO BE ADJUSTED ACCORDINGLY.

- ALL PLANTED MATERIALS WILL BE WARRANTED BY INSTALLATION CONTRACTOR TO BE IN HEALTHY CONDITION WITH A REPLACEMENT GUARANTEE FOR A PERIOD OF ONE YEAR FROM THE DATE OF PLANTING.
- NATIVE FLANTS SHOULD BE WATERED IN AFTER INSTALLATION TO ENSURE THEIR SURVIVAL. THIS TYPICALLY INVOLVES WEEKLY FOR A ONE MONTH FERRIDO OR UNTIL GROUND FREEZE UP IT A ONE MONTH FERRIDO OR UNTIL GROUND FREEZE UP IT FIRMS OF A CONTROLL OF THE FRANCE OF THE FORM DETERMINE THIS AND CONTRACT PRICES MAY BE ADJUSTED TO ACCOMMODATE THIS ACTION.
- PLANTS SHALL BE PLANTED IN THE BIORETENTION AREA AT A MINIMUM OF ONE PLANT PER EVERY 12" ON CENTER.
- UPON COMPLETION OF EXCAVATING & GRADING OPERATIONS, A LOOSE, FRIABLE PLANT BED SHALL BE PREPARED FOR INSTALLATION OF NATIVE PLANT PLUGS.
- CARE SHALL BE TAKEN TO MINIMIZE SOIL COMPACTION DURING CARE SHALL BE TAKEN TO MINIMIZE SOIL COMPACTION DURING CONSTRUCTION ACTIVITY. BY EXAMPLE OF A STANDARD SOIL PENETROMETER (COMPACTION TESTER), THE TOPSOIL COMPACTION READINGS SHALL BE LESS THAN 200 PSI AT THE 0-6 INCH DEPTH AND LESS THAN 250 PSI AT THE 6-18 INCH DEPTHS IN ALL AREAS TO BE PLANTED.
- 12. UNDULATIONS OR IRREGULARITIES IN THE PLANT BED WHICH WOULD INTERFERE WITH A CONSISTENT SEEDING OPERATION SHALL BE LEVELED PRIOR TO FINAL SEEDING.
- FINAL PLANTING AREA SHOULD BE GRADED SUCH THAT THE AREAS TO BE PLANTED SHALL CONSIST OF A SMOOTH, FREE DRAINING, EVEN SURFACE WITH A LOOSE POROUS TEXTURE.
- 14 PLANT DIVERSITY SHALL BE FOUNDLY DISTRIBUTED THROUGHOUT THE BIORETENTION BASIN BASED ON THE PLANT LIST ON THIS SHEET.

WILDFLOWERS		GRASSES & SEDGES			
Common Name	Scientific Name	Common Name	Scientific Name		
Nodding Pink Onlan	Allium cemuum	Big Bluestern	Andropogon gerardii		
Pale Indian Plantain	Amoglossum atriplicifolium	Bottlebrush Sedge	Carex comosa		
Red Milkweed	Asclepias incamata	Porcupine Sedge	Carex hystericina		
New England Aster	Aster novae-angliae	Awl Fruited Sedge	Carex stipata		
White False Indigo	Baptisia alba	Fox Sedge	Carex vulpinoidea		
Joe Pye Weed	Eupatorium maculatum	Canada Wild Rye	Elymus canadensis		
Baneset	Eupatorium perfoliatum	Virginia Wild Rye	Elymus virginicus		
Dogtooth Daisy	Helenium autumnale	Switchgrass	Panicum virgatum		
Ox Eye Sunflower	Heliopsis helianthoides	Dark Green Bulrush	Scirpus atrovirens		
Wild Iris	tris shrevei	Indiangrass	Sorghastrum nutans		
Blue Flag Iris	tris versicolor	Prairie Cordgrass	Spartina pectinata		
Prairie Blazing Star	Liatris pycnostachya				
Dense Blazing Star	Liatris spicata				
Great Blue Lobelia	Lobelia siphilitica				
Bergamot	Monarda fistulosa				
Yellow Coneflower	Ratibida pirmata				
Black Eyed Şusan	Rudbeckia hirta				
Sweet Black Eyed Susan	Rudbeckia subtomentosa				
Brown Eyed Susan	Rudbeckia triloba				
Wild Senna	Senna hebecarpa				
Rosinweed	Silphium integrifolium				
Cupplant	Silphium perfoliatum				
Prairie Dock	Silphium terebinthinaceum				
Ohio Goldenrod	Solidago chicensis				
Blue Vervain	Verbena hastata				
Ironweed	Vernonia fasciculata				
Golden Alexanders	Zizia auroa				

BIORETENTION PLUG MIX


12/29/202
3/23/202
6/12/202
6/16/202
8/18/202
12/08/202
12/15/202
2/05/2024

REVISIONS

PRELIMINARY	_
PRELIMINARY	
HOT FOR	
NOT FOR	
CONSTRUCTION	
	-

MULCH, SEED, AND SOD PLAN

L 200

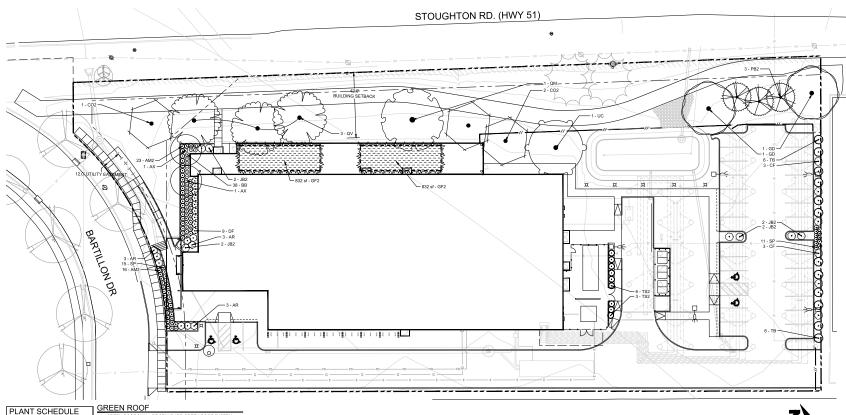

CODE COMMON NAME

SHRUBS

CF Arctic Fire Red Twig Dogwood

JB2 Blue Rug Juniper

DF Bush Cinquefoil

Massachusetts Kinnikinnick

GREEN ROOF SHALL BE STANDARD GREEN ROOF SYSTEM RROVIDED BY LIVE ROOF (titles/lilward) com/). PLANT TYPE SHALL BE:
HEATHER MIX
BASE SHALL BE:
BASE SHALL BE:
BASE SHALL BE:
SHALL BE:
BASE SHALL BE:
BASE SHALL BE:
SHALL BE:
BASE SHALL BE:
BASE SHALL BE:
SHALL





architecture interior design planning 6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719

p608.829.4444 f608.829.4445 dimensionivmadison.com



5010 VOGES ROAD MADISON, WI 53718 608-838-0444 www.snyder-associates.com PROJECT # 122.1182.30

#### MENS HOMELESS SHELTER

1904 BARTILLON DR. MADISON, WI 53704


DATE OF ISSUE:	12/29/2022
PRE-DESIGN	3/23/2023
INFORMATIONAL MEETING	6/12/2023
SCHEMATIC DESIGN	6/16/2023
DESIGN DEVELOPMENT	8/18/2023
UDC	12/08/2023
99% REVIEW SET	12/15/2023
LIDC	2/05/2024

REVISIONS:

1	PRELIMINARY
- 1	
- 1	NOTFOR
1	CONSTRUCTION
- 1	

PLANTING PLAN

L 201

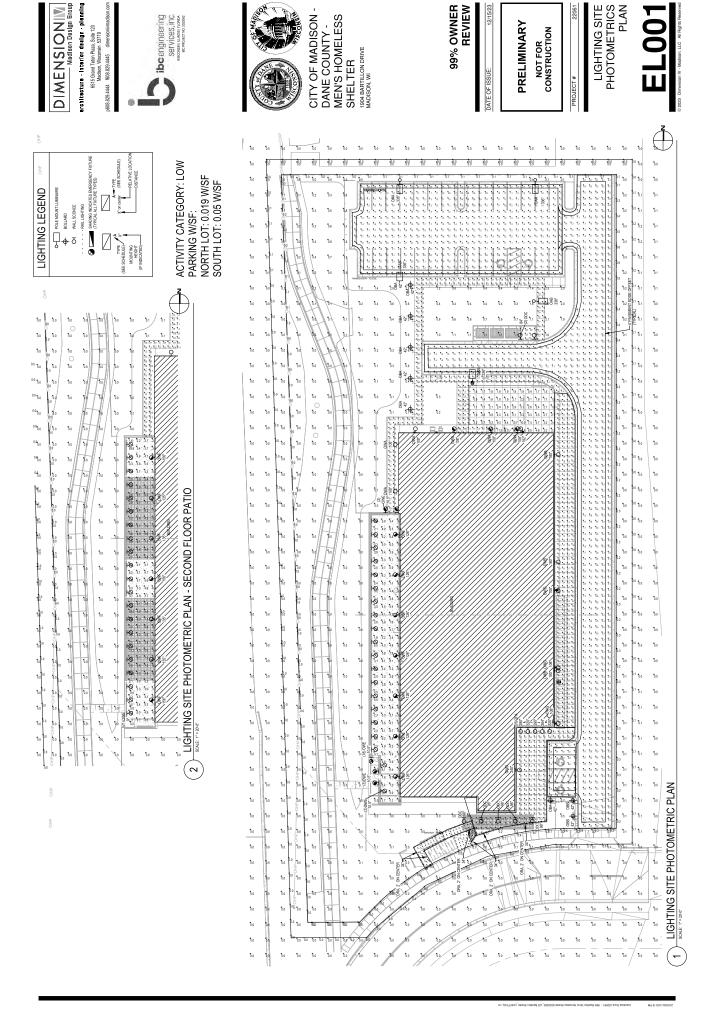

		LUMINAIRE SCH	HEDLILE			
TAG	LABEL	LUMINAIRE LUMENS	LLF	LUMINAIRE WATTS	LUMENS/WATT	FULL CUTOFF
OAA	DSX1 LED P1 40K 70CRI BLC3	5522	0.9	50.9	108.49	YES
OAB	DSX1 LED P1 40K 70CRI T3LG	6784	0.9	50.9	133.28	YES
OBA	PA7R-NU3-12L-010-4K7	881	0.9	22	40.05	YES
OBB	PA7R-NU4-12L-010-4K7	1063	0.9	22	48.32	YES
ODC	DE-LED-TR-X100-FL-12439915-12	1129	0.9	12.7427	88.60	YES
OFA	PS3-10-20°	1320	0.9	12	110.00	NO
ORA	LPOD40-DIR-PCLENS-ASYMREFW	. 158	0.9	2	79.00	YES
OWA	WDGE2 LED P2SW 40K 80CIR VW	2074	0.9	15	138.27	YES
OWB	DSX0 LED P1 40K 70CRI TFTM_1	4109	0.9	33	124.52	YES
owc	WDGE3 LED P1 40K 70CRI RFT 40	7592	0.9	52	146.00	YES
OWD	DSX0 LED P1 40K 70CRI TFTM	4896	0.9	33.21	147.43	YES
OWE	LE-40601-S-W40 REV_2	155	0.9	13.5	11.48	NO
OWF	WDGE2 LED P3 40K 80CRI VW	3214	0.9	22.55	142.53	YES
OWG	WDGE2 LED P2 40K 70CRI T1S	2326	0.9	18.98	122.55	YES

LIGHTING CONTROL BASIS OF DESIGN						
AREA		LIGHTING CONTROL INTENT - CODE IN EFFECT: IECC 2015; DESIGNED TO IECC 2021 & LEED V4 (ASHRAE 90.1-2010)	SEE NOTE			
	1.	LIGHTS SHALL TURN "ON" AT DUSK IN RESPONSE TO DAYLIGHT LEVELS VIA ASTRONOMICAL TIMECLOCK THROUGH LIGHTING CONTROL SYSTEM.				
	2.	LIGHTS SHALL DIM BY AT LEAST 50% BETWEEN THIRTY MINUTES AFTER THE CLOSE OF BUSINESS FOR THE DAY OR AFTER THE END OF NORMAL OFFICE HOURS OF THE MAJORITY OF EMPLOYEES UNTIL OPEN OF BUSINESS, UNLESS OTHERWISE NOTED BELOW.				
		a. WALLPACKS WITH INTEGRATED MOTION SENSORS (TYPES OWA, OWB, OWC, OWD, OWF, OWS: DURING ANY PERIOD OF TIME THAT NO ACTIVITY IS DETECTED FOR 15 MINUTES, WALLPACK LIGHTS SHALL REDUCE BY AT LEAST 50% POWER OUTPUT VIA MOTION SENSOR.				
EXTERIOR BUILDING MOUNTED		LIGHTS SHALL RETURN TO FULL BRIGHTNESS UPON DETECTION OF ACTIVITY.	1,2			
		b. EMERGENCY FIXTURES SHALL NOT DIM DURING OVERNIGHT HOURS.				
	3.	LIGHTS SHALL TURN "OFF" AT DAWN IN RESPONSE TO DAYLIGHT LEVELS VIA ASTRONOMICAL TIMECLOCK THROUGH LIGHTING CONTROL SYSTEM.				
	4.	WALL SWITCH SHALL TURN FIXTURES "ON" OFF" DURING DAYLIGHT HOURS FOR MAINTENANCE.				
	1.	LIGHTS (TYPES GAA, GAB, GBA) SHALL TURN "ON" AT DUSK IN RESPONSE TO DAYLIGHT LEVELS VIA ASTRONOMICAL TIMECLOCK THROUGH LIGHTING CONTROL SYSTEM.				
EXTERIOR SITE LIGHTING		a. DURING ANY PERIOD OF TIME THAT NO ACTIVITY IS DETECTED FOR 15 MINUTES, WALLPACK LIGHTS SHALL REDUCE BY AT LEAST 50% POWER OUTPUT VIA MOTION SENSOR. LIGHTS SHALL RETURN TO FULL BRIGHTNESS UPON DETECTION OF ACTIVITY.				
(POLES)	2.	LIGHTS SHALL TURN "OFF" AT DAVIN IN RESPONSE TO DAVLIGHT LEVELS VIA ASTRONOMICAL TIMECLOCK THROUGH LIGHTING CONTROL SYSTEM.	1,2			
	3.	WALL SWITCH SHALL TURN FIXTURES "ON")*OFF" DURING DAYLIGHT HOURS FOR MAINTENANCE.				

#### REMARKS

- A. PROVIDE ALL COMPONENTS AND ACCESSORIES NECESSARY FOR A COMPLETE AND FUNCTIONAL INSTALLATION
- A. PROVIDE ALL COMPONENTS AND ACCESSORIES NECESSARY FOR A COMPLETE AND FUNCTIONAL INSTALLATION.
   B. DIMMING THRESHOLD OF THE DAYLIGHT SENSOR SHALL NOT BE EXCEEDED FOR LIGHTS WITHIN THE DAYLIGHT ZONE.
- C. COORDINATE ALL PROGRAMMING WITH OWNER.
- D. PROVIDE POWER PACKS AS REQUIRED TO ACCOMMODATE CONTROL ZONES AND CIRCUITS OUTLINED ABOVE, IN SWITCH STATION SCHEDULE, AND ON DRAWINGS, NOT REQUIRED WHEN CONTROL-ENABLED DRIVERS OR A RELAY PAVEL ARE SPECIFIED.
- E. COORDINATE ALL LIGHTING CONTROL SYSTEM INTERFACE AND PROGRAMMING WITH BUILDING AUTOMATION SYSTEM (BAS) INTERFACES AND PROGRAMMING, AND WITH OTHER TRADES TO PROVIDE A FULLY INTEGRATED AND FUNCTIONAL SYSTEM.
- F. LIGHTING CONTROLS SHALL INTEGRATE TO BAS THROUGH OWNERS NETWORK AND VIA BACNET IP. COORDINATE WITH BUILDING OWNER FOR STATIC IP ADDRESS AND CONNECTION REQUIREMENTS TO OWNERS NETWORK.
- G. LIGHTING DESIGNATED AS EMERGENCY LIGHTS SHALL BE CONTROLLED VIA SPACE CONTROLS WITH NORMAL POWER LIGHTING AND SHALL IMMEDIATELY LILLIMINATE LIPONLOSS OF NORMAL POWER FOR NOT LESS THAN BOMINITES, UNLESS ON-ERMISE NOTED. PROVIDE A LLIVING BRANCH CROLL'S EMERGENCY TEMPERS SHITCH FOR EACH INTERFOR ZONE WHERE ALL OF THE LUMINAMESS WITHIN A ROOMSPACE ARE ON EMERGENCY POWER PROVIDE A LLIVIN BREAZY (AUTOMATIC LOND CONTROL RELAY) FOR BEALMANING APPLICATIONS.

#### NOTES

- FIXTURES SHALL BE NETWORKED TO THE LIGHTING CONTROL PANEL.
- 2. POWER PACK CONTROLLING LIGHT FIXTURE SHALL BE ADJACENT TO PANEL SERVING FIXTURES. POWER PACK SHALL BE LABELLED WITH CIRCUIT AND FIXTURES BEING SERVED.

DIMENSION Madison Design Group

#### erchitecture - interior design - plenning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com





CITY OF MADISON -DANE COUNTY -MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE MADISON, WI

#### 99% OWNER REVIEW

DATE OF ISSUE:

12/15/23

PRELIMINARY


NOT FOR
CONSTRUCTION

PROJECT #

ROJECT# 22

LIGHTING SITE SCHEDULES



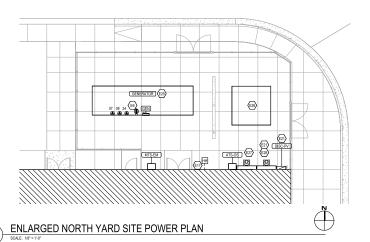

#### SITE POWER LEGEND

DUPLEX RECEPTACLE GFI DUPLEX RECEPTACLE SPECIAL PURPOSE OUTLET

OH. - WALL MOUNTED JUNCTION BOX

TRANSOCKET W METER

Ø MOTOR

SURFACE MOUNT PANEL RECESSED PANEL Ü NON-FUSED DISCONNECT  $\square_1$ FUSED DISCONNECT

# SPECIAL PURPOSE OUTLET NUMBER
(SEE SCHEDULE) (SEE SCHEDULE)

#### **KEY NOTES**

KEY NOTE TO CONTROL BY THE PROPERTY OF THE PRO

DIMENSION Medison Design Group

architecture - interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 f608.829.4445 dimensionivmadison.com





1904 BARTILLON DRIVE MADISON, WI



100% CD REVIEW SET


12/01/23

DATE OF ISSUE:


**PRELIMINARY** NOT FOR CONSTRUCTION

PROJECT #

**ELECTRICAL SITE PLAN** 

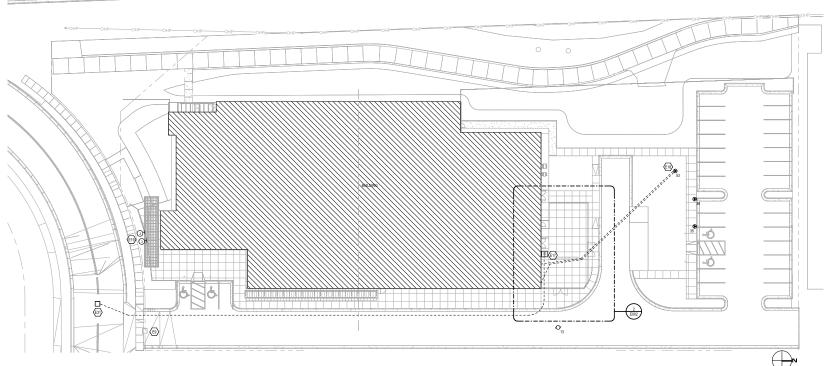

ELECTRICAL SITE POWER PLAN

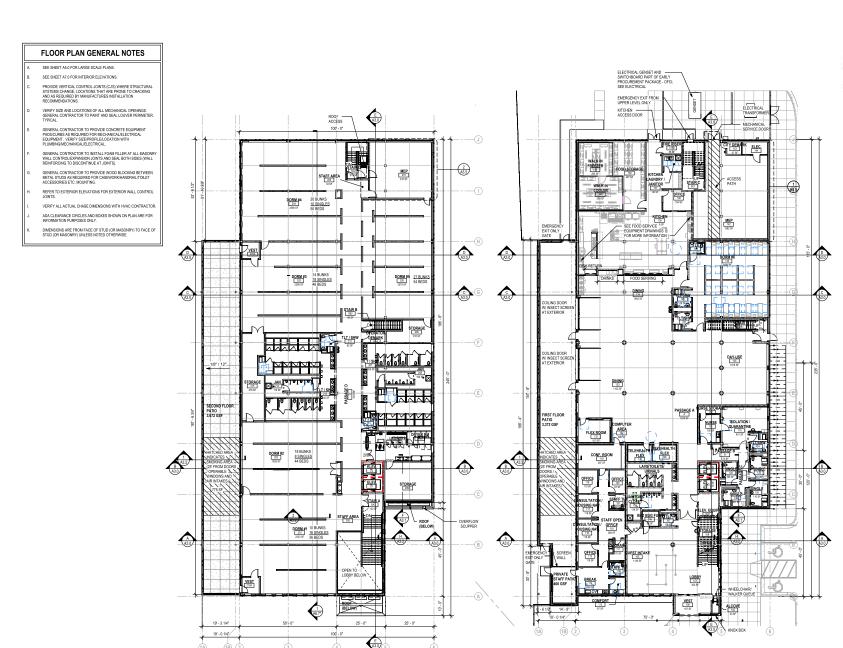

DIMENSION IN Madison Design Group

architecture · interior design · planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719

p608.829.4444 f608.829.4445 dimensionivmadison.com

CITY CONTRACT # 9358





CITY OF MADISON -DANE COUNTY -MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE, MADISON, WI

99% OWNER REVIEW SET

DATE OF ISSUE:

PRELIMINARY

NOT FOR CONSTRUCTION

PROJECT #

OVERALL FLOOR PLANS

22061

2 SECOND FLOOR PLAN


"WF = 10"

"IN TO 100


FIRST FLOOR PLAN


0′ 4′ 8′ 16′ N

Autobiek Dock/20051 - 1904 Bertillon Drae Horneless Shellen?

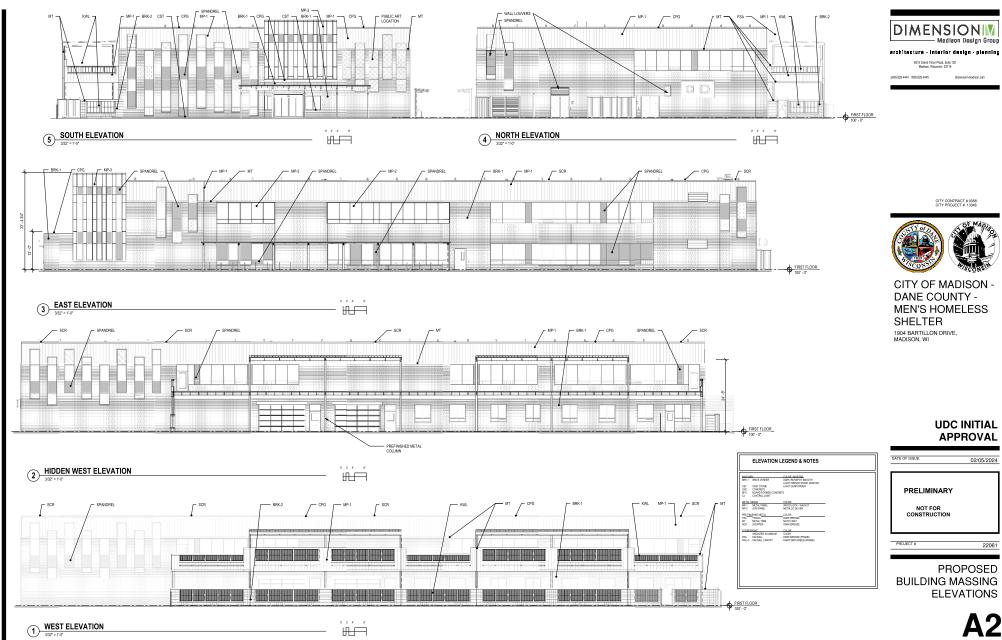



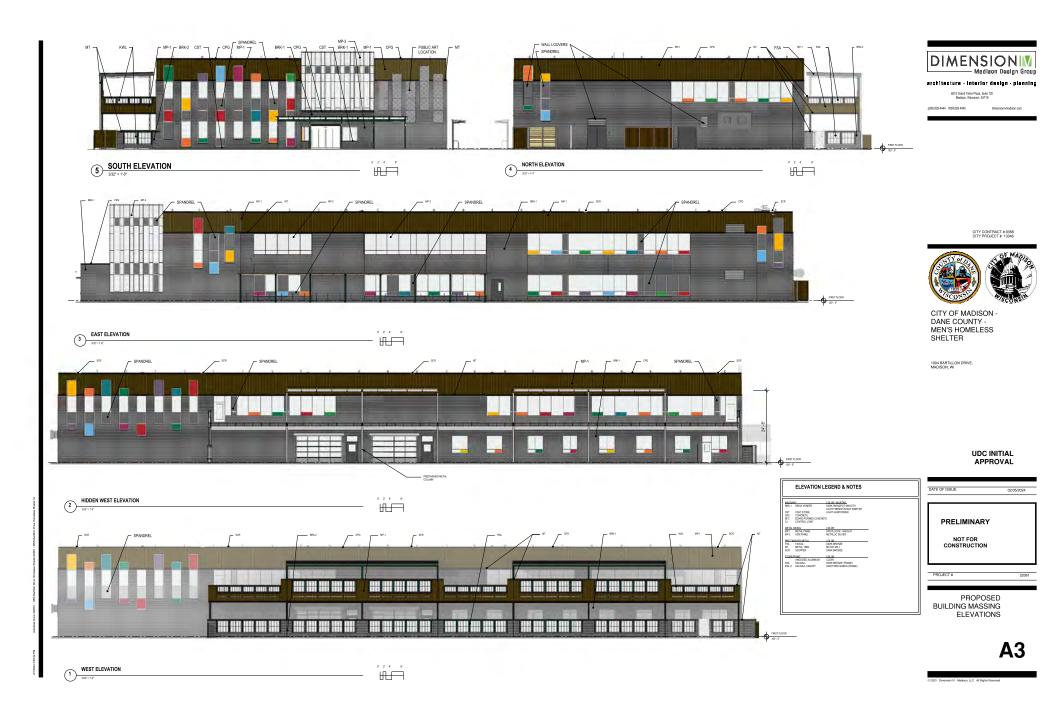

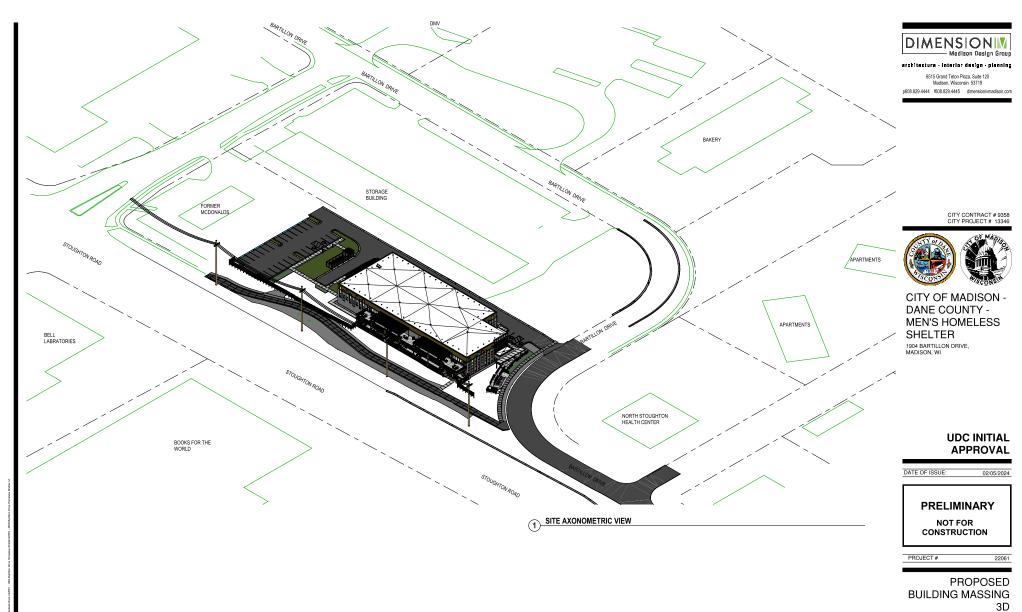

**A**4

2023 Dimension IV - Madison LLC All Binhts Res





#### CITY OF MADISON -DANE COUNTY -MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE, MADISON, WI

## UDC INITIAL APPROVAL

11/01/2023

DATE OF ISSUE:

OF ISSUE:

PRELIMINARY

NOT FOR CONSTRUCTION

PROJECT#

\_\_\_\_\_

PROPOSED BUILDING MASSING 3D

**A**5

1 VIEW FROM BARTILLON

architecture - interior design - planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719 p608.829.4444 (608.829.4445 dimensionivmadison.com





CITY OF MADISON -DANE COUNTY -MEN'S HOMELESS SHELTER

1904 BARTILLON DRIVE, MADISON, WI

## UDC INITIAL APPROVAL

DATE OF ISSUE:

SSUE: 11/01/2023

PRELIMINARY


NOT FOR CONSTRUCTION

PROJECT#


IECT# 22

PROPOSED BUILDING MASSING 3D

<u>A6</u>

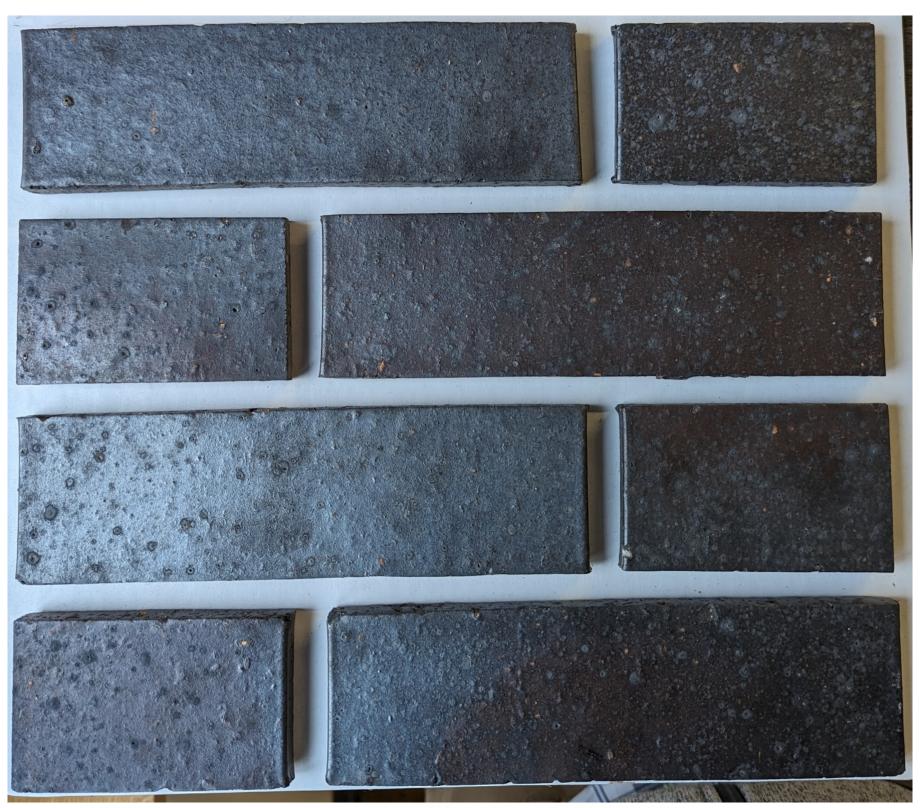


BRICK - RAVENSWOOD IRONSPOT SMOOTH LOWER WALLS

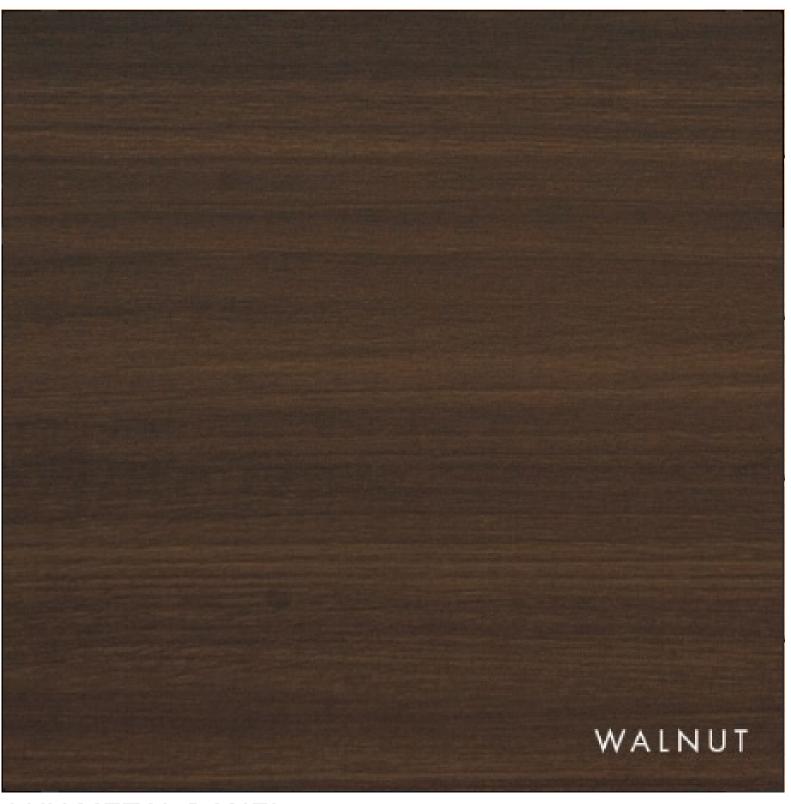

LUX METAL PANEL - WALNUT UPPER WALLS, UPPER PATIO, FENCE



ACM PANEL - SILVER METALIC WALLS AT ENTRY

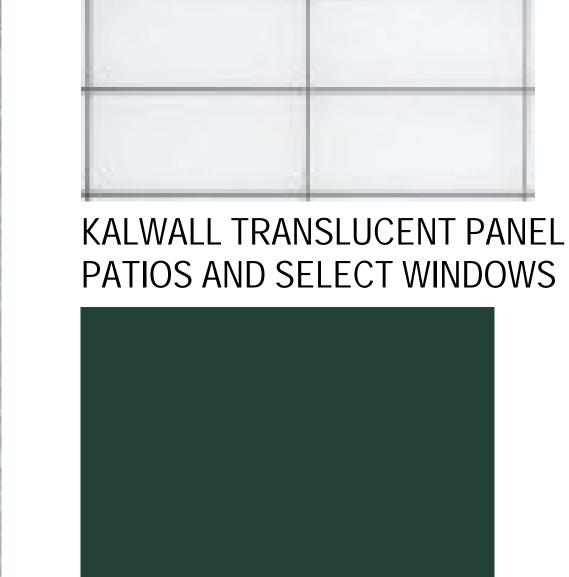


HARTFORD GREEN ENTRY CANOPY, CANOPY STRUCTURES



STOREFRONT - KAWNEER 541UT ANODIZED ALUMINUM




CAST STONE - LIGHT GUNPOWDER STOREFRONT SILLS

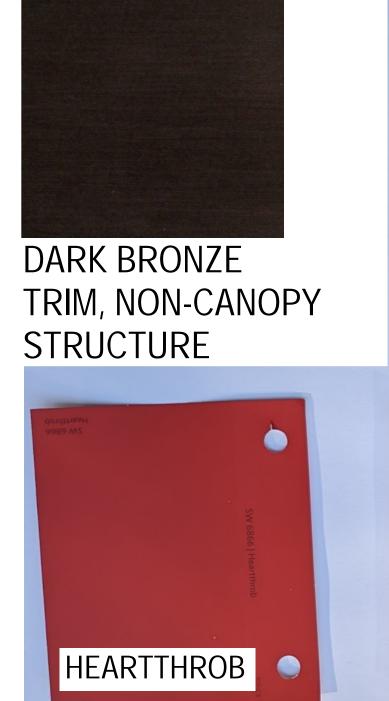

CARDINAL GLASS LAMINATED GLASS GLAZING INFILL COLORS - AS NOTED ABOVE




PLAN SECTION WALL TRANSITION @ ACM AND MASONRY

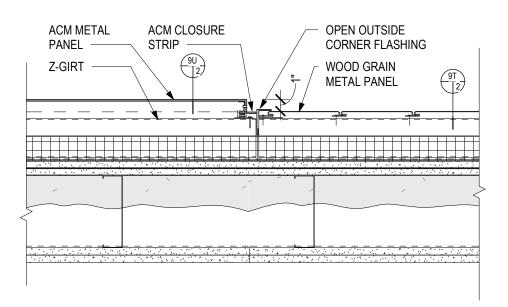

5 PLAN SECTION WALL TRANSITION @ ACM PANEL AND METAL PANEL

WEATHER RESISTIVE BARRIER TO

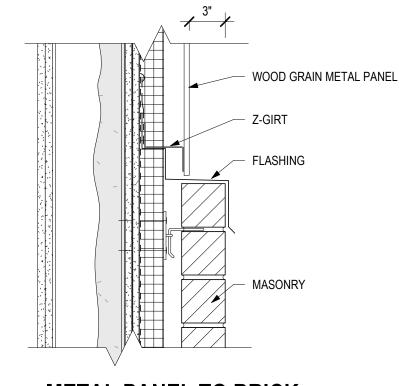

METAL PANEL TO BRICK

FULLY ADHERED

- CONTINUOUS PREFINISHED METAL COPING SYSTEM

WEATHER RESISTIVE
BARRIER TO LAP OVER
TOP OF ROOF EDGE

CLOSURE TRIM TO MATCH

COPING. WEEPS 24" O.C.

ROOFING MEMBRANE TO

CONTINUE OVER EDGE OF ROOF.

LAP OVER WEATHER RESISTIVE

BARRIER AND SEAL WITH A

TERMINATION BAR.

MINERAL WOOL

- CLT DECK; SEE

GLULAM STRUCTURE

GLULAM STRUCTURE;

METAL STUD SLOTTED

DEFLECTION TOP TRACK

FILL GAP WITH MINERAL

WOOL INSULATION

SEE STRUCTURAL

FIRE CAULK

STRUCTURAL

BEYOND; SEE

STRUCTURAL


TPO ROOFING MEMBRANE

WITH CLIPS

TRANSITION

1.1/2" = 1'-0"

CITY CONTRACT # 9358 CITY PROJECT # 13346





MEN'S HOMELESS

DIMENSION

architecture · interior design · planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719

p608.829.4444 f608.829.4445 dimensionivmadison.com

Madison Design Group

SHELTER
1904 BARTILLON DRIVE,

MADISON, WI

UDC FINAL APPROVAL

DATE OF ISSUE:

02/05/2024

PRELIMINARY

NOT FOR CONSTRUCTION

PROJECT #


22061

MATERIAL TRANSITION DETAILS

**A7** 

**FULLY ADHERED** TPO ROOFING MEMBRANE CONTINUOUS PREFINISHED METAL COPING SYSTEM WITH CLIPS WEATHER RESISTIVE TOP OF ROOF EDGE WEEP VENTS @ 16" O.C. AT TOP OF WALL CONTINUE OVER EDGE OF ROOF. LAP OVER WEATHER RESISTIVE BARRIER AND SEAL WITH A TERMINATION BAR. MINERAL WOOL INSULATION CLT DECK; SEE STRUCTURAL GLULAM STRUCTURE BEYOND; SEE STRUCTURAL GLULAM STRUCTURE; SEE STRUCTURAL FIRE CAULK METAL STUD SLOTTED DEFLECTION TOP TRACK FILL GAP WITH MINERAL WOOL INSULATION



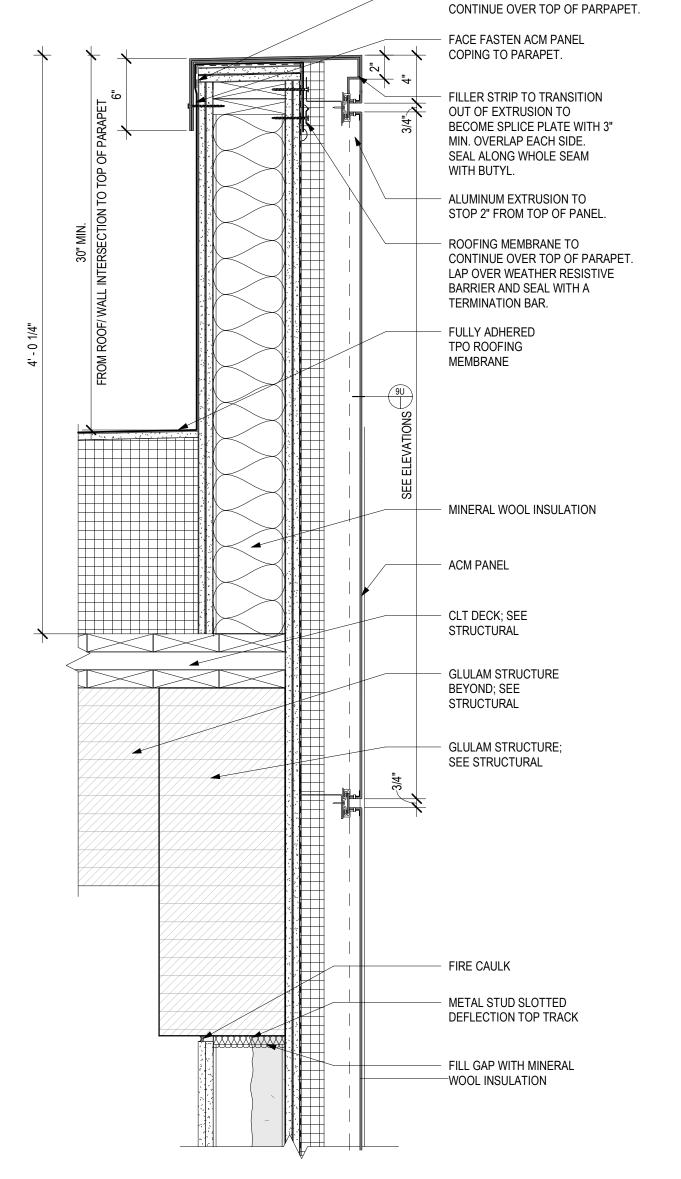









architecture · interior design · planning

6515 Grand Teton Plaza, Suite 120 Madison, Wisconsin 53719

CITY CONTRACT # 9358

CITY PROJECT # 13346

**UDC FINAL** 

**APPROVAL** 

**PRELIMINARY** 

**NOT FOR** 

CONSTRUCTION

ARCH SITE PLAN


© 2023 Dimension IV - Madison, LLC All Rights Reserved

12/11/2023

22061


p608.829.4444 f608.829.4445 dimensionivmadison.com

ACCESSIBLE PARKING SIGNS (SEE CIVIL FOR SIGNAGE)

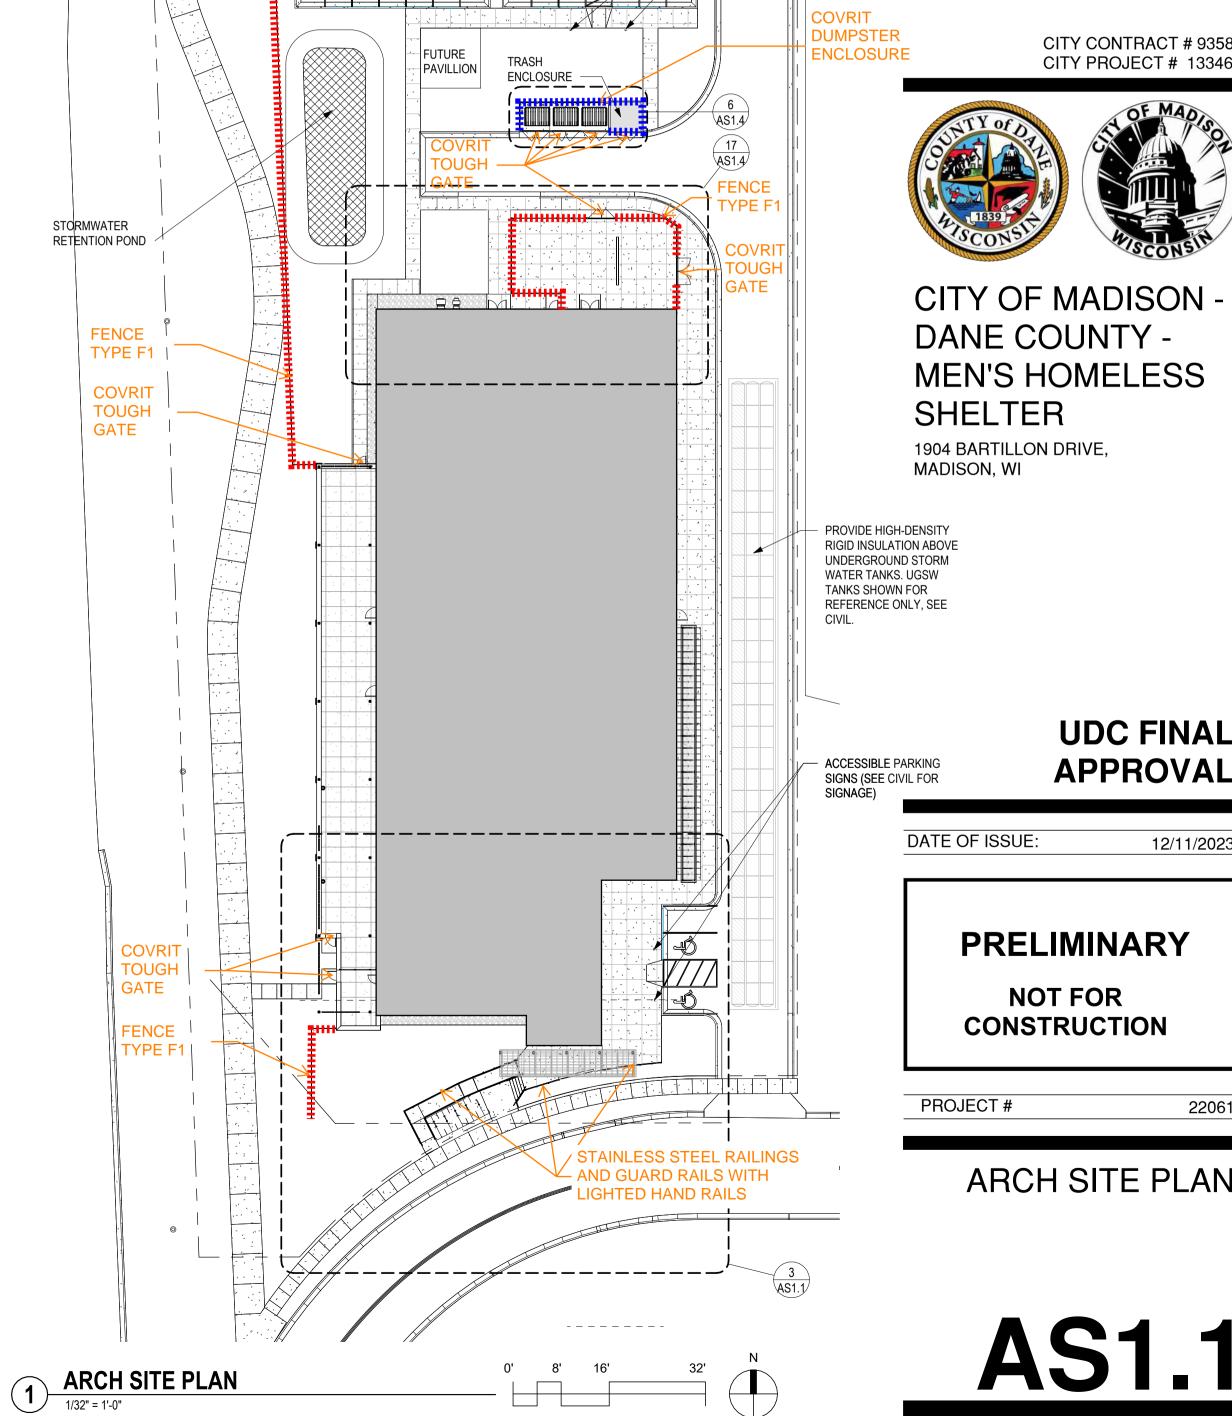

FENCES, GATES, TRASH ENCLOSURES,

SCREENING LOCATIONS AND TYPES

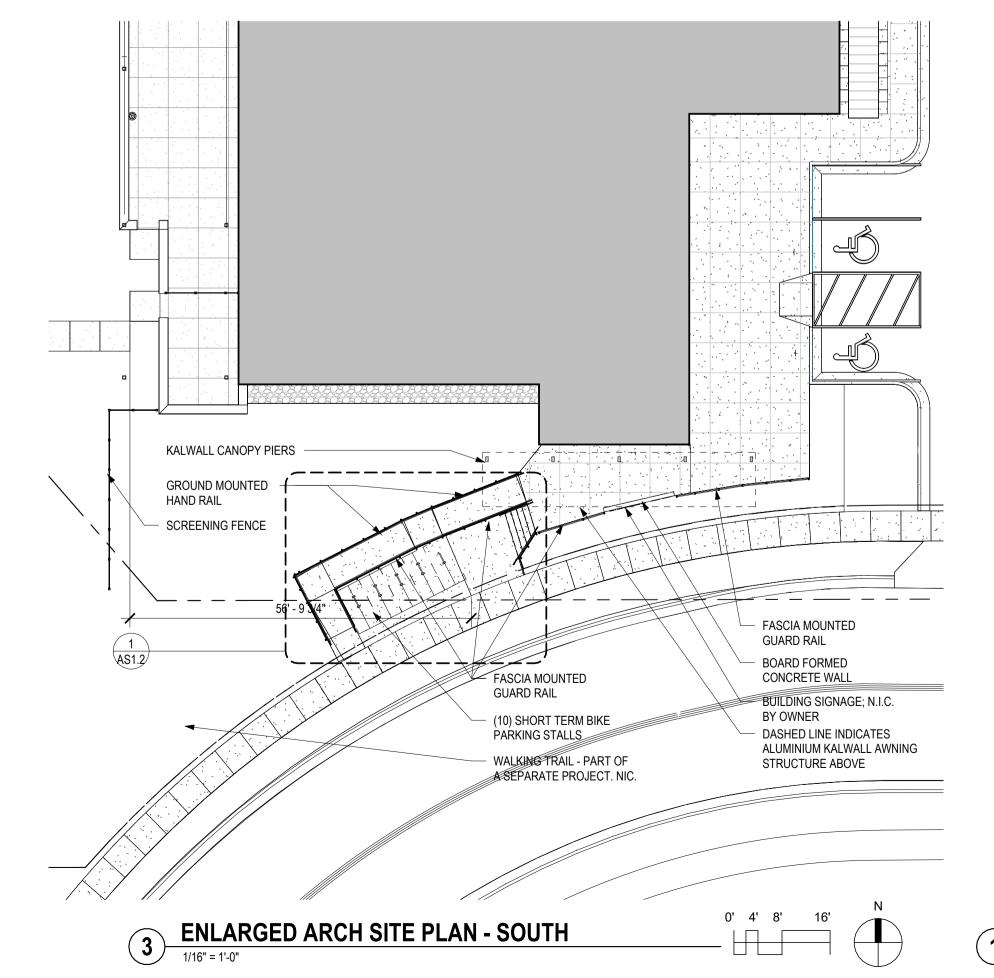





# **COVRIT**®

# **COVER ALL YOUR BASES**

For any enclosure needs, Covrit® has your back, front, and sides. Covrit walls, gates, and dumpster enclosures redefine any space and are the go-to solution for hiding, protecting, or partitioning anything on your property.



# **HIGH-QUALITY CONSTRUCTION**

Professional grade extruded aluminum frames with powder-coated finishes

# STREAMLINED INSTALLATION

Directly mounting to concrete slabs without the need for footings

## **TAILORED DIMENSIONS**

Crafting Distinctive Spaces with Both Standard and Customized Designs

## TOUGHGATE™ INTEGRATION

ToughGate™ doors & gates used on every Covrit® enclosure

CITYSCAPESINC.COM

# **ENGINEERED WOOD INFILLS**

- Frames are 6063 T6 extruded aluminum
- Woodgrain surface planks are 1" thick 100% cellular PVC or composite LLDPE
- 1/2" or 2 1/2" Extruded Aluminum Stiffeners
- Sherwin Williams 4000 Series Powder-Coated Components

**DUMPSTER ENCLOSURE** 

• Optional digitally printed graphics with UV resistant Nazdar ink









(Standard Stiffener)




(Wide Stiffener)







THIS IMAGE SHOWS THE COLOR **COMBINATION** 







DARK HICKORY

















WOODGRAIN SURFACE 2-SIDED





**BLACK TEXTURED** 















CITYSCAPESINC.COM

# **ROOFTOP SOLUTIONS**

Covrit® Roof Tops are engineered to excel in any weather. Its innovative design seamlessly allows rain, snow, and wind to pass through, ensuring the integrity of your rooftop and access to your dumpster enclosures. Crafted from robust ABS and extruded aluminum, it withstands the harshest weather elements while maintaining its visual allure.

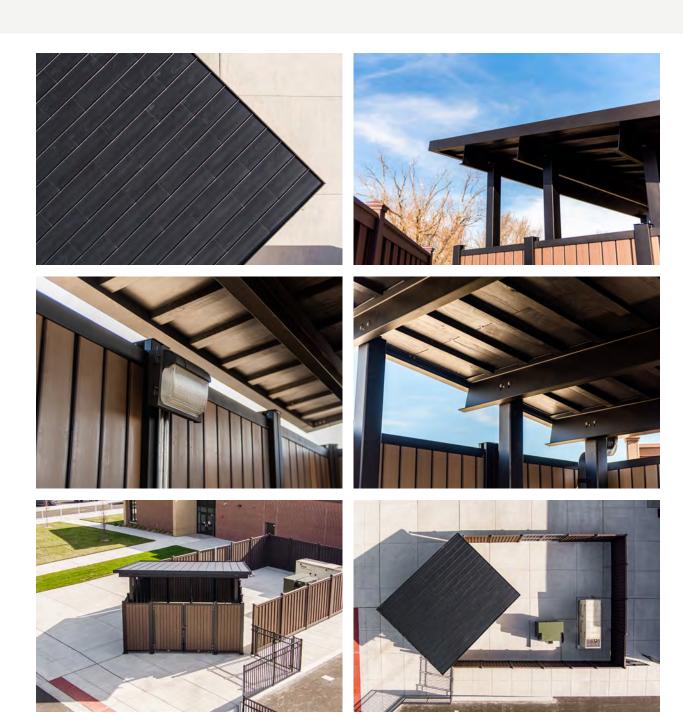

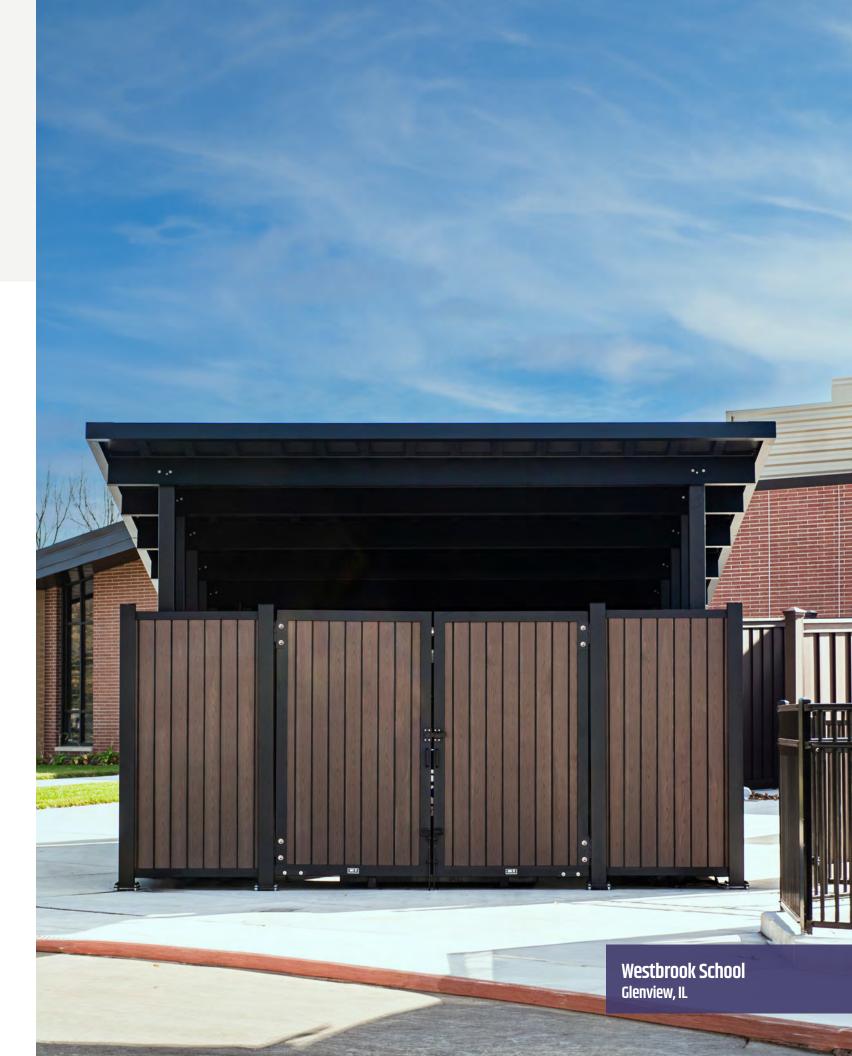

CITYSCAPESINC.COM 1

# ELEGANT. DURABLE. DISTINCTIVE.



ToughGate<sup>™</sup> by CityScapes<sup>®</sup> offers expertly crafted gates and doors built to your specifications, budget and job site demands. We use only professional grade materials for years of maintenance free operation.

For stunning good looks, amazing longevity, and extraordinary first impressions, choose ToughGate<sup>™</sup>.

- MAINTENANCE FREE MATERIALS
- SHIPPED PRE-ASSEMBLED FOR FAST INSTALLATION
- WIDE VARIETY OF DESIGN OPTIONS





ToughGate's<sup>™</sup> innovative design makes field assembly fast and easy. All of our gates are shipped pre-assembled directly to your project site, accompanied by all required installation hardware. Our complete installation guides provide a clearly-defined process from start to finish.

Gates are available in heights of up to 14 ft\* and widths of up to 20 ft\*\* to accommodate almost any opening dimension.

- \* Maximum height determined by infill material and style selected.
- \*\* Contact a CityScapes® representative for details on our newest MegaGate options. Certain Height x Width limitations apply.



#### **DOOR HANDLES**

All ToughGate<sup>™</sup> and Covrit<sup>®</sup> handles and hardware are powder coated and color-matched to the coordinating gate frame for superior aesthetics.



#### **MODERN LATCH**

Our color matched, lockable latches are designed for years of maintenance free use.



#### **CUSTOM DESIGNS**

Don't see a style or color that fits our plan? No problem. We can color match many of our gate options or allow you to create a fully custom design. Print your image directly onto the gate or laser cut an intricate design into your gate. Have another idea? Let us know. We love a challenge.

#### **PVC PLANK INFILL SERIES**







Redondo







Weathered



1-INCH PVC PLANK INFILL COLOR OPTIONS

Slate Gray



Coastline

English Walnut



Muir Woods



Sequoia



Ventilated Plankwall



PlankArt™

**Textured Woodgrain Surface On Both Sides** 





Kona





French White Oak



#### **ENGINEERED WOOD INFILL SERIES SPECS**

**ACRYLICAP® ABS INFILL SERIES SPECS** 

- Woodgrain surface 2 sided planks are 1" thick 100% cellular
- Woodgrain surface 1 sided planks are 1" thick composite LLDPE

#### **MILLED PVC INFILL SERIES**



(PVC)



Flagstaff (PVC)

 Acrylicap® uses a thermoformed .187 acrylic-capped ABS for UV protection

#### **ALL GATES**

- DUMPSTER ENCLOSURE GATES
- WEST PATIO FIRST FLOOR EGRESS GATES
- MECHANICAL ENCLOSURE GATES

#### METAL INFILL SERIES



7.2 Rib



Planar



Perforated



Perforated 7.2 Rib

#### **METAL SERIES SPECS**

- Structural material thickness varies depending on infill choice
- Typical 7.2 Rib Metal Panels .040", .050" Precoated aluminum
- Typical Perforated Metal Panels .063" Aluminum, 1/8" holes, 1/4" staggered centers, 23% open area

For current color availability for metal wall styles, contact a CityScapes® representative.

Bahama Shutter



True Louver



**Custom Graphic** 

#### **SLAT WALL INFILL SERIES**



4-Inch Slat Wall (Mission Style)



4-Inch Slat Wall (Madison Style)



6-Inch Slat Wall (Mission Style)



(Madison Style)

#### **SLAT SERIES SPECS**

- · Powder coated aluminum slats
- 1"x 4" .080" Wall thickness
- 1"x 6" .100" Wall thickness
- 6063 T6 Aluminum
- 4000 Series powder coated

For current color availability for slat wall styles, contact a CityScapes® representative.

#### **CRADLE HINGE OPTIONS - New and Retrofitted Installations**

Choose from our fully adjustable hinge options. We recommend installation using our hold-open pipe hinge which offers a convenient and enhanced safety feature to "hold open" your gate; reducing injuries as well as damage to your property. Alternative hinge options to retrofit to your existing post or wall are shown below.

#### **HOLD-OPEN PIPE HINGE**

- Pre-welded steel construction
- · Laser-cut rings nest and work together to provide a 100° holdopen gate position. Gate will automatically close prior to 100°.
- · Adjustment slot in cradle to help level door on pipe.
- · Grease fitting included
- Powder coated to match frame

#### ADJUSTABLE PIPE HINGE

- Pre-welded steel construction
- Adjustment slot in cradle to help level door on pipe.
- Grease fittings included
- · Powder coated to match frame



Bolt hole for permanent hold once gate is adjusted Steel cradle mounting Grease fitting Adjustment slot Set bolt Standard

WEST PATIO FIRST FLOOR **GATES. PANIC BAR EGRESS** HARDWARE (NOT SHOWN)

#### **BARREL HINGE**

#### (retrofit for square post or wall mount)

- Set bolts in post included for setting gate height off grade.
- Pre-welded steel gate frame saddle to barrel hinge. Barrel hinge leaf side requires field welding to structure or can be made to bolt onto structure after engineering review.
- Powder coated to match gate frame
- Steel or Aluminum construction available (Material used is determined by weight)


#### Saddle type hinge mount bracket Adjustment Barrel hinge slots (5/8" pin with bearing) Bolt hole for final hold once gate is adjusted


#### ATE HINGE

#### (retrofit for square post or wall mount)

glide ring

- Set bolts in post included for setting gate height off grade.
- Pre-welded steel gate frame saddle to barrel hinge. Barrel hinge leaf side requires field welding to structure or can be made to bolt onto structure after engineering review.
- Powder coated to match gate frame
- Steel or Aluminum construction available (Material used is determined by weight)

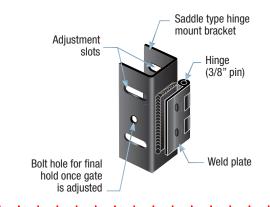


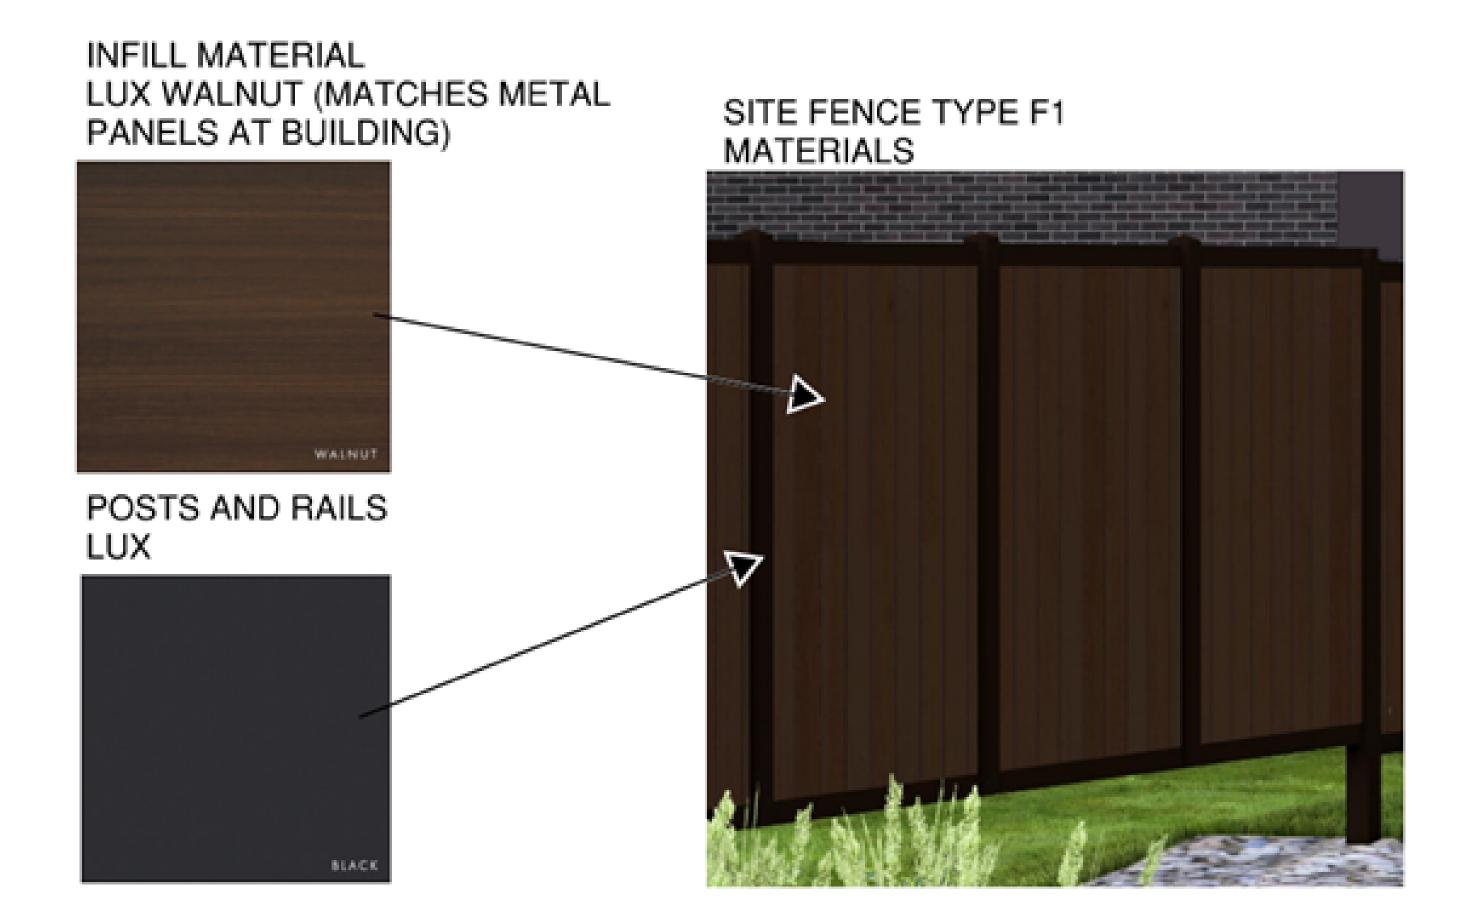


# END POST AVAILABLE IN 10' OR 13' LENGTHS MIDDLE POST AVAILABLE IN 10' OR 13' LENGTHS 7 PAGE: 5.125" 6.625" 1.3125" 1.3125" 1.3125" 1.5" **DATE:** March 27, 2018 Privacy Fence, Version 1 **DESCRIPTION:** 1.3125" 5.375" 6.625" 5.125" 6.625" 1.3125" 1.3125" **DRAWING:** PROJECT: LUX Fence 2.3125" Concept 1.5" 1.5" 1.5"-3.625" ₩ 0.5<sub>"</sub> -1.5" 1.8125" WARM TIMELESS DURABLE luxpanel.ca -1.3125" 1.3125" 5.375" 6.625"

# **DECORATIVE TOP CAP**

AVAILABLE IN 10' OR 13' LENGTHS

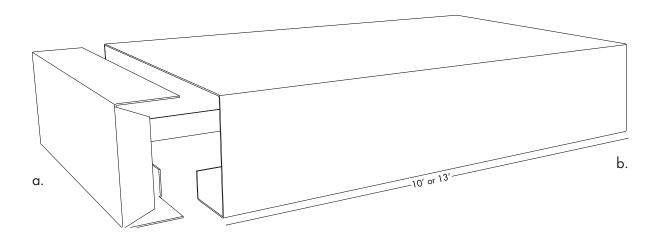


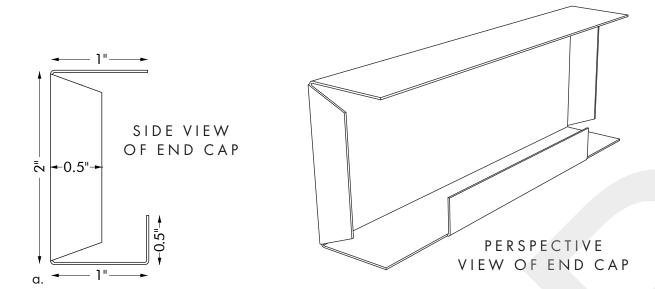




# SIMPLE **WALL MOUNT**

AVAILABLE IN 10' OR 13' LENGTHS

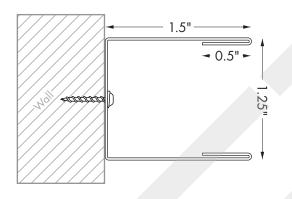


# SPACER TRIM

AVAILABLE IN 10' LENGTHS ONLY



# **DELUXE** WALL MOUNT

AVAILABLE IN 10' OR 13' LENGTHS

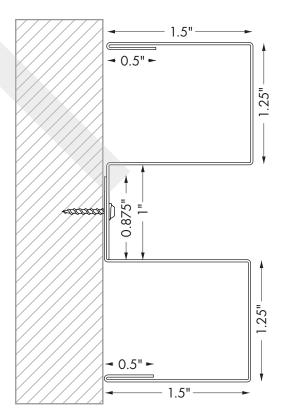

# **DESCRIPTION:**

PROJECT:

LUX Fence

PAGE:

Privacy Fence, Version

**DRAWING:**Concept


5


**DATE:** March 27, 2018





# **SMALL TOP CAP**

AVAILABLE IN 10' OR 13' LENGTHS

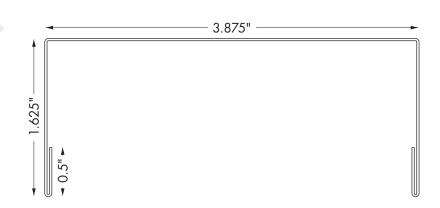

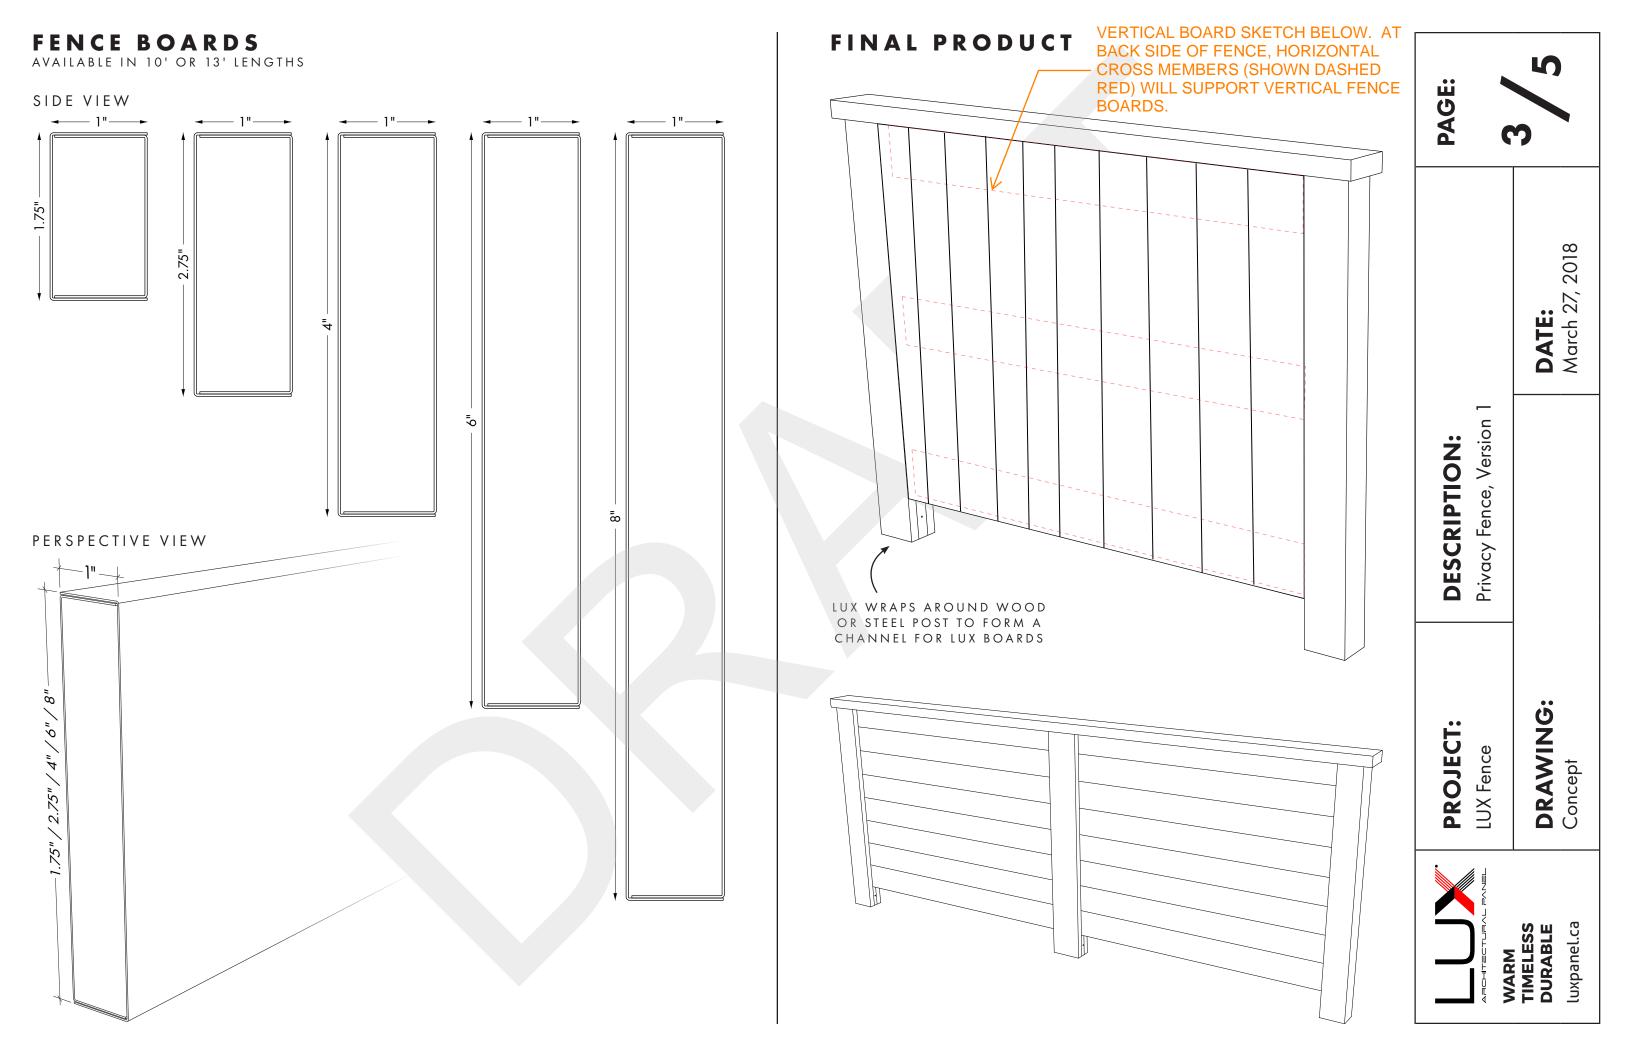

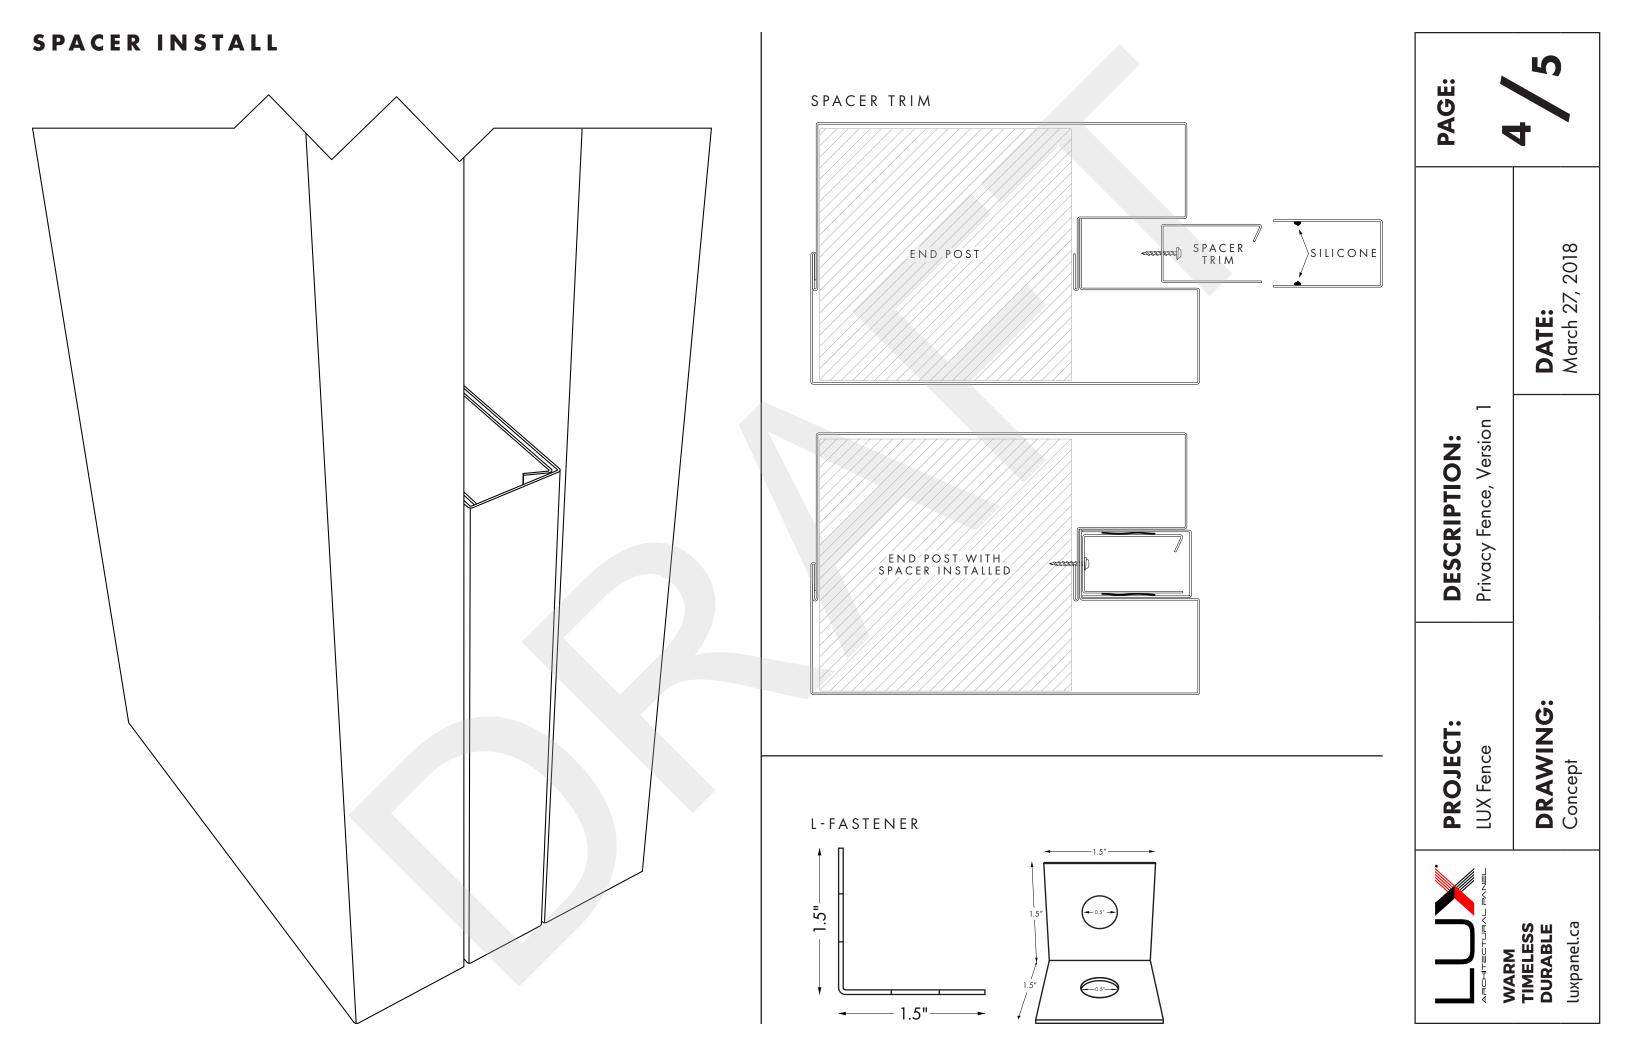

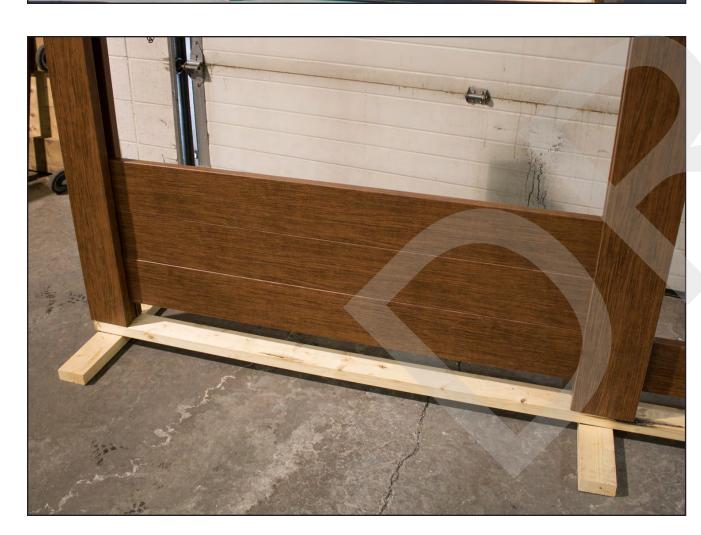











**PROJECT:** 

LUX Fence

WARM TIMELESS DURABLE luxpanel.ca

**DRAWING:**Concept

**DESCRIPTION:** 

Privacy Fence, Version 1

**DATE:** March 27, 2018

1 PAGE:

#### (3) General Requirements.

- (a) All outdoor lighting fixtures installed and thereafter maintained upon private or public residential, commercial, industrial and other nonresidential property shall comply with the following:
  - 1. The maximum allowable light trespass shall be 0.5 horizontal footcandles four (4) feet above the ground. The point of measurement of this offending light shall be at any point at the outer wall of an adjacent building occupied for residential or public use, or at any point greater than 10 feet from the adjacent lot line. This measurement shall not include any ambient, natural light.

IBC: Maximum design footcandles 10 ft from the property line is 0.25 fc. Plans clearly identify the 10 ft line and the max footcandles at that boundary.

2. All fixtures greater than 500 initial lumens (equivalent to 40 watts incandescent or 8 watt LED) shall be full cutoff, or shall be shielded or installed so that there is not a direct line of sight between the light source or its reflection and a point five (5) feet or higher above the ground at the property boundary. The light source shall not be of such intensity so as to cause discomfort or annoyance.

IBC: All fixtures are full cutoff except type OWE and OFA. Fixture schedule clarifies the fixtures that are full cutoff.

With respect to fixture OWE, the delivered lumens are less than 500 (155 delivered lumens) and does not throw enough light to make a significant contribution at nearest property lines, as it is a steplight at a low mounting height (10.5") and includes a louver.

Type OFA is a floodlight on a 24" arm and will be aimed down and back at the building façade to highlight an art installation; the aiming will be locked in place with a set screw and will limit uplight. The floodlight will also be provided with a visor to limit view into the floodlight.

3. Any outdoor lighting fixture installed on a parking lot, parking structure or outdoor merchandizing area shall use either high-pressure sodium, metal halide, fluorescent lamps, or any other lamps that produce thirty (30) or more lumens per watt. The lighting system shall be extinguished or reduced to fifty percent (50%) no later than thirty (30) minutes after the close of business for the day or after the end of normal office hours for the majority of employees.

IBC: All fixtures produce more than 30 lumens per watt. Fixture schedule will be amended to clarify this.

The controls will dim by 50% or more but this is a 24 hour facility that will see steady usage during the entire night. Motion sensors are used to reduce lighting for parking lot when not in use. Plans indicate control intent.

4. All lamp types utilized for search lighting and/or spot lighting for advertising purposes shall not be operated past 11:00 p.m.

IBC: There is no lighting for "advertising" purposes at this time. This requirement does not apply.

- (4) Specific Design Requirements
- (a) Open Parking Facilities
  - (1) Low Activity

IBC: The lighting design is based on meeting the requirements for Open Parking Facilities with "Low" Level of Activity. The design lighting levels indicated in the table below are indicated in the Calculation Summary on Sheet EL002. The Calculation Summary will be adjusted to make compliance more clear.

(b) An outdoor lighting system for illuminating buildings and structures shall have a maximum connected lighting load of five (5) watts per lineal foot. Watts shall mean lamp wattage and ballast consumption. Such lighting shall be shielded or installed so as to illuminate the building, and not the sky.

Façade lighting has been included to highlight a mosaic installation at the southeast corner near the main building entry. The lighting load for this lighting system is less than 5 watts per lineal foot.

(e) The maximum initial illumination level under an outdoor canopy shall not exceed 50 footcandles at any point.

This requirement is being met. Exterior illumination level does not exceed 50 fc at any point.



## **D-Series Size 1** LED Area Luminaire









#### **Specifications**

0.69 ft<sup>2</sup> EPA: (0.06 m<sup>2</sup>) 32.71"


Length: (83.1 cm) 14.26"


Width:


(36.2 cm)7.88" Height H1: (20.0 cm)

2.73" Height H2: (6.9 cm)

34 lbs Weight:









#### Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications with typical energy savings of 65% and expected service life of over 100,000 hours.

## **Ordering Information**

#### **EXAMPLE:** DSX1 LED P7 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX1 LED								
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution		Voltage	Mounting	
DSX1 LED	Porward optics	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare 3 T4M Type IV medium T4LG Type IV low glare 3 TFTM Forward throw medium	T5M Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control <sup>3</sup> A BLC4 Type IV backlight control <sup>3</sup> LCC0 Left corner cutoff <sup>3</sup> RCC0 Right corner cutoff <sup>3</sup>	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V - 480V) <sup>7,8</sup>	Shipped included  SPA Square pole mounting (#8 drilling)  RPA Round pole mounting (#8 drilling)  SPAS Square pole mounting #5 drilling 9  RPA5 Round pole mounting #5 drilling 9  SPA8N Square narrow pole mounting #8 drilling #8 drilling WBA Wall bracket 10	

Control options	
Shipped install	ed
NLTAIR2 PIRHN	nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc. <sup>11, 12, 20, 21</sup>
PIR	High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc 13, 20, 21
PER	NEMA twist-lock receptacle only (controls ordered separate) 14
PER5	Five-pin receptacle only (controls ordered separate) 14,21

PER7	Seven-pin receptacle only (controls ordered separate) 14,21
FA0	Field adjustable output 15,21

FA BL30 Bi-level switched dimming, 30% 16,21 Bi-level switched dimming, 50% 16,21 BL50

0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) 17

DS Dual switching 18, 19, 21

#### Shipped installed

Other options

**SPD20KV** 20KV surge protection

HS Houseside shield (black finish standard) 22 L90 Left rotated optics 1

R90 Right rotated optics 1 CCE Coastal Construction 23

Shipped separately

EGSR

BSDB

External Glare Shield (reversible, field install required, matches housing finish) Bird Spikes (field install required)

DDBXD Dark Bronze DBLXD Black DNAXD Natural Aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum

DWHGXD Textured white

**TBD** 

#### **Ordering Information**

#### **Accessories**

Ordered and shipped separately

DLL127F 1.5 JU Photocell - SSL twist-lock (120-277V) 24 DLL347F 1.5 CUL JU Photocell - SSL twist-lock (347V) 24 DLL480F 1.5 CUL JU Photocell - SSL twist-lock (480V) 24 DSHORT SBK Shorting cap 24

DSX1HS P# House-side shield (enter 1-13 in place of #) DSXRPA (FINISH) Round pole adapter (#8 drilling, specify finish) DSXSPA5 (FINISH) Square pole adapter #5 drilling (specify finish) DSXRPA5 (FINISH) Round pole adapter #5 drilling (specify finish)

DSX1EGS (FINISH) External glare shield

#### NOTES

- Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90. 30K, 40K, and 50K available in 70CRI and 80CRI. 27K and 35K only available with 80CRI. Contact Technical Support for other possible combinations.
- T3LG, T4LG, BLC3, BLC4, LCCO, RCCO not available with option HS. MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

- HVOLT driver operates on any line voltage from 347-480V (50/60 Hz). HVOLT not available with package P1 and P10 when combined with option NLTAIR2 PIRHN or option PIR.
- XVOLT operates with any voltage between 277V and 480V (50/60 Hz). XVOLT not available in packages P1 or P10.

- 7 XVOLT operates with any voltage petween 277 and 100 Med 200 Med 200

- 20 Reference Motion Sensor Default Settings table on page 4 to see functionality.
- 21 Reference Controls Options table on page 4.
  22 HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
- 23 CCE option not available with option BS and EGS. Contact Technical Support for availability
- 24 Requires luminaire to be specified with PER, PER5 or PER7 option. See Controls Table on page 4.

#### **Shield Accessories**




External Glare Shield (EGS)




House Side Shield (HS)

#### **Drilling**

#### HANDHOLE ORIENTATION





#### **Tenon Mounting Slipfitter**

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

		-=		₹_	_T_	**		
Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90	
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D	
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS	
		Minimum Acceptable Outside Pole Dimension						
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"	
RPA	#8	3"	3"	3"	3"	3"	3"	
SPA5	#5	3"	3"	3"	3"		3"	
RPA5	#5	3"	3"	3"	3"	3"	3"	
SPA8N	#8	3"	3"	3"	3"		3"	

#### DSX1 Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type	-		₹.		Y	= #=
DSX1 with SPA	0.69	1.38	1.23	1.54		1.58
DSX1 with SPA5, SPA8N	0.70	1.40	1.30	1.66		1.68
DSX1 with RPA, RPA5	0.70	1.40	1.30	1.66	1.60	1.68
DSX1 with MA	0.83	1.66	1.50	2.09	2.09	2.09



**Exterior Lighting** 

2024-02-05

#### **Photometric Diagrams**

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's homepage.

Isofootcandle plots for the DSX1 LED P9 40K 70CRI. Distances are in units of mounting height (25'). LEGEND 6 5 4 3 2 1 0 1 2 3 4 5 6 0.1 fc 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 0.5 fc 3 2 1 0 -1 -2 -3 -4 -5 -6 3 1 0 -1 -2 -3 -4 -5 -6 1.0 fc T3LG 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 1 2 3 4 5 6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6 6 5 4 3 2 1 0 -1 -2 -3 -4 -5 -6

3 2 1 0 -1 -2 -3 -4 -5



#### **Lumen Ambient Temperature (LAT) Multipliers**

Use these factors to determine relative lumen output for average ambient temperatures from 0-40  $^{\circ}$ C (32-104  $^{\circ}$ F).

Ambie	Lumen Multiplier	
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15℃	50°F	1.02
20°C	68°F	1.01
25°C	77°C	1.00
30°C	86°F	0.99
35°C	95°F	0.98
40°C	104°F	0.97

#### **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor			
0	1.00			
25,000	0.95			
50,000	0.90			
100,000	0.81			

#### **FAO Dimming Settings**

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use maximum published values by package listed on specification sheet (input watts and lumens by optic type).

#### **Electrical Load**

							Curre	nt (A)		
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
	P1	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
	P2	30	700	68	0.56	0.33	0.28	0.24	0.20	0.14
	P3	30	1050	104	0.85	0.49	0.43	0.37	0.29	0.21
	P4	30	1250	125	1.03	0.60	0.52	0.45	0.36	0.26
Forward Optics (Non-Rotated)	P5	30	1400	142	1.15	0.66	0.58	0.50	0.40	0.29
,	P6	40	1250	167	1.38	0.79	0.69	0.60	0.48	0.34
	P7	40	1400	188	1.54	0.89	0.77	0.67	0.53	0.38
	P8	60	1100	216	1.80	1.04	0.90	0.78	0.62	0.45
	P9	60	1400	279	2.31	1.33	1.15	1.00	0.80	0.58
	P10	60	530	101	0.84	0.49	0.42	0.37	0.29	0.21
Rotated Optics	P11	60	700	135	1.12	0.65	0.56	0.49	0.39	0.28
(Requires L90 or R90)	P12	60	1050	206	1.72	0.99	0.86	0.74	0.59	0.43
	P13	60	1400	279	2.30	1.33	1.15	1.00	0.79	0.57

#### **LED Color Temperature / Color Rendering Multipliers**

	70 CRI		80	OCRI	90CRI		
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability	
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)	
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)	
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)	
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)	
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)	

Note: Some LED types are available as per special request. Contact Technical Support for more information.

#### **Motion Sensor Default Settings**

Option	Unoccupied Dimmed Level	High Level (when occupied)	Phototcell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate	
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min	
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min	

#### **Controls Options**

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PER5 or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclypse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the ClAlikity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



2024-02-05

#### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Op	orward Optics																		
							30K					40K					50K		
LED Count	Drive Current (mA)	Performance Package	System Watts	Distribution Type		(30	00K, 70	CRI)			(40	00K, 70	CRI)			(50	00K, 70	CRI)	
	current (min)	ruckuge			Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	Lumens	В	U	G	LPW
				T1S	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162
				T2M	7,203	1	0	3	142	7,507	2	0	3	147	7,653	2	0	3	150
				T3M	7.287	1	0	3	143	7.594	1	0	3	149	7.742	1	0	3	152
				T3LG	6,509	1	0	1	128	6,783	1	0	1	133	6,916	1	0	1	136
				T4M T4LG	7,395	1	0	3	145	7,707	1	0	3	151	7,857	1	0	3	154
				TFTM	6,726 7,446	1	0	3	132 146	7,010 7,760	1	0	3	138 152	7,146 7,912	1	0	3	140 155
30	530	P1	51W	T5M	7,440	3	0	2	149	7,700	3	0	2	156	8,084	3	0	2	159
50	330		J1W	T5W	7,732	3	0	2	152	8,058	4	0	2	158	8,215	4	0	2	161
				T5LG	7,631	3	0	1	150	7,953	3	0	1	156	8,108	3	0	1	159
			г	BLC3	5,300	0	0	2	104	5,524	0	0	2	109	5,631	0	0	2	111
			L .	BLC4	5,474	0	0	3	108	5,705	0	0	3	112	5,816	0	0	3	114
				RCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112
				LCCO	5,348	0	0	2	105	5,573	0	0	2	109	5,682	0	0	2	112
				AFR	7,776	1	0	2	153	8,104	1	0	2	159	8,262	1	0	2	162
			T1S	9,997	1	0	2	147	10,418	1	0	2	154	10,621	1	0	2	157	
			T2M	9,260	2	0	3	137	9,651	2	0	3	142	9,839	2	0	3	145	
				T3M	9,368	2	0	3	138	9,763	2	0	3	144	9,953	2	0	3	147
				T3LG	8,368	1	0	2	123	8,721	1	0	2	129	8,891	1	0	2	131
				T4M	9,507	2	0	3	140	9,909	2	0	3	146	10,102	2	0	3	149
				T4LG	8,647	1	0	2	128	9,012	1	0	2	133	9,187	1	0	2	136
				TFTM	9,573	2	0	3	141	9,977	2	0	3	147	10,172	2	0	3	150
30	700	P2	68W	T5M	9,782	4	0	2	144	10,195	4	0	2	150	10,393	4	0	2	153
				T5W	9,940	4	0	2	147	10,360	4	0	2	153	10,562	4	0	2	156
				T5LG	9,810	3	0	1	145	10,224	3	0	1	151	10,423	3	0	1	154
				BLC3	6,814	0	0	2	101	7,101	0	0	2	105	7,240	0	0	2	107
				BLC4 RCCO	7,038 6,875	0	0	3	104 101	7,334 7,165	0	0	3	108 106	7,477 7,305	1	0	3	110 108
				LCCO	6,875	1	0	2	101	7,165	1	0	2	106	7,305	1	0	2	108
				AFR	9,997	1	0	2	147	10,418	1	0	2	154	10,621	1	0	2	157
				T1S	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147
				T2M	13,055	2	0	3	128	13,605	2	0	3	133	13,871	2	0	3	136
				T3M	13,206	2	0	4	129	13,763	2	0	4	135	14,031	2	0	4	137
				T3LG	11,797	2	0	2	115	12,294	2	0	2	120	12,534	2	0	2	123
				T4M	13,403	2	0	4	131	13,968	2	0	4	137	14,241	2	0	4	139
				T4LG	12,190	2	0	2	119	12,704	2	0	2	124	12,952	2	0	2	127
				TFTM	13,496	2	0	4	132	14,065	2	0	4	138	14,339	2	0	4	140
30	30 1050	P3	102W	T5M	13,790	4	0	2	135	14,371	4	0	2	141	14,652	4	0	2	143
				T5W	14,013	4	0	3	137	14,605	4	0	3	143	14,889	4	0	3	146
				T5LG	13,830	3	0	2	135	14,413	3	0	2	141	14,694	3	0	2	144
				BLC3	9,606	0	0	2	94	10,011	0	0	2	98	10,206	0	0	2	100
				BLC4	9,921	0	0	3	97	10,340	0	0	3	101	10,541	0	0	3	103
				RCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101
			LCCO	9,692	1	0	2	95	10,101	1	0	2	99	10,298	1	0	2	101	
				AFR	14,093	2	0	2	138	14,687	2	0	2	144	14,973	2	0	2	147

#### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Op	orward Optics																			
	D	D (					30K					40K			50K					
LED Count	Drive Current (mA)	Performance Package	System Watts	Distribution Type		(30	00K, 70	CRI)			(40	00K, 70	CRI)			(50	00K, 70	CRI)		
	Current (IIIA)	ruckuyc			Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	
				T1S	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141	
				T2M	15,207	3	0	4	123	15,849	3	0	4	128	16,158	3	0	4	130	
				T3M	15,383	2	0	4	124	16,032	2	0	4	129	16,345	2	0	4	132	
				T3LG	13,742	2	0	2	111	14,321	2	0	2	116	14,600	2	0	2	118	
				T4M	15,613	2	0	4	126	16,272	2	0	4	131	16,589	2	0	4	134	
				T4LG	14,200	2	0	2	115	14,799	2	0	2	119	15,087	2	0	2	122	
				TFTM	15,721	2	0	4	127	16,384	2	0	4	132	16,703	2	0	4	135	
30	1250	P4	124W	T5M	16,063	4	0	2	130	16,741	4	0	2	135	17,067	4	0	2	138	
				T5W	16,324	5	0	3	132	17,013	5	0	3	137	17,344	5	0	3	140	
				T5LG	16,110	3	0	2	130	16,790	4	0	2	135	17,117	4	0	2	138	
				BLC3	11,190	0	0	3	90	11,662	0	0	3	94	11,889	0	0	3	96	
				BLC4 RCCO	11,557 11,291	0	0	3	93 91	12,044 11,767	1	0	3	97 95	12,279 11,996	1	0	3	99 97	
				LCCO	11,291	1	0	3	91	11,767	1	0	3	95	11,996	1	0	3	97	
				AFR	16,416	2	0	3	132	17,109	2	0	3	138	17,442	2	0	3	141	
			T1S	18,052	2	0	3	131	18,814	2	0	3	136	19,180	2	0	3	139		
				T2M	16,723	3	0	4	121	17,428	3	0	4	126	17,768	3	0	4	129	
				T3M	16,917	3	0	4	122	17,420	3	0	4	128	17,700	3	0	4	130	
				T3LG	15,111	2	0	2	109	15,749	2	0	2	114	16,055	2	0	2	116	
				T4M	17,169	3	0	5	124	17,893	3	0	5	130	18,242	3	0	5	132	
			138W	T4LG	15,615	2	0	2	113	16,274	2	0	2	118	16,591	2	0	2	120	
				TFTM	17,288	2	0	4	125	18,017	2	0	5	130	18,368	3	0	5	133	
30	1400	P5		T5M	17,664	5	0	3	128	18,410	5	0	3	133	18,768	5	0	3	136	
				T5W	17,951	5	0	3	130	18,708	5	0	3	135	19,073	5	0	3	138	
				T5LG	17,716	4	0	2	128	18,463	4	0	2	134	18,823	4	0	2	136	
				BLC3	12,305	0	0	3	89	12,824	0	0	3	93	13,074	0	0	3	95	
				BLC4	12,709	0	0	4	92	13,245	0	0	4	96	13,503	0	0	4	98	
				RCCO	12,416	1	0	3	90	12,940	1	0	3	94	13,192	1	0	3	95	
				LCCO	12,416	1	0	3	90	12,940	1	0	3	94	13,192	1	0	3	95	
				AFR	18,052	2	0	3	131	18,814	2	0	3	136	19,180	2	0	3	139	
				T1S	21,031	2	0	3	127	21,918	2	0	3	133	22,345	2	0	3	135	
				T2M	19,482	3	0	4	118	20,303	3	0	4	123	20,699	3	0	4	125	
				T3M	19,708	3	0	5	119	20,539	3	0	5	124	20,939	3	0	5	127	
				T3LG	17,604	2	0	2	107	18,347	2	0	2	111	18,704	2	0	2	113	
				T4M	20,001	3	0	5	121	20,845	3	0	5	126	21,251	3	0	5	129	
				T4LG	18,191	2	0	2	110	18,959	2	0	2	115	19,328	2	0	2	117	
				TFTM	20,140	3	0	5	122	20,989	3	0	5	127	21,398	3	0	5	129	
40	1250	P6	165W	T5M	20,579	5	0	3	125	21,447	5	0	3	130	21,865	5	0	3	132	
				T5W	20,912	5	0	3	127	21,795	5	0	3	132	22,219	5	0	3	134	
				T5LG	20,638	4	0	2	125	21,509	4	0	2	130	21,928	4	0	2	133	
				BLC3	14,335	0	0	3	87	14,940	0	0	3	90	15,231	0	0	3	92	
				BLC4	14,805	0	0	4	90	15,430	0	0	4	93	15,731	0	0	4	95	
				RCCO	14,464	1	0	3	88	15,074	1	0	3	91	15,368	1	0	3	93	
				LCCO	14,464	1	0	3	127	15,074	1	0	3	91	15,368	1	0	-	93	
				AFR	21,031	2	0	3	127	21,918	2	U	3	133	22,345	2	0	3	135	

IBC Engineering Services, Inc.

#### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Op	Forward Optics																			
	D.S.	D. C					30K					40K			50K					
LED Count	Drive Current (mA)	Performance Package	System Watts	Distribution Type		(30	00K, 70	CRI)			(40	00K, 70	CRI)			(50	00K, 70	CRI)		
	Current (IIIA)	rackage			Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	
				T1S	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131	
				T2M	21,066	3	0	4	114	21,955	3	0	4	119	22,383	3	0	4	121	
				T3M	21,311	3	0	5	116	22,210	3	0	5	120	22,642	3	0	5	123	
				T3LG	19,036	2	0	2	103	19,839	2	0	3	108	20,226	2	0	3	110	
				T4M	21,628	3	0	5	117	22,541	3	0	5	122	22,980	3	0	5	125	
				T4LG	19,671	2	0	2	107	20,501	2	0	3	111	20,900	2	0	3	113	
			TFTM	21,778	3	0	5	118	22,697	3	0	5	123	23,139	3	0	5	125		
40	1400	P7	184W	T5M	22,252	5	0	3	121	23,191	5	0	3	126	23,643	5	0	3	128	
				T5W	22,613	5	0	3	123	23,567	5	0	4	128	24,027	5	0	4	130	
				T5LG	22,317	4	0	2	121	23,258	4	0	2	126	23,712	4	0	2	129	
				BLC3 BLC4	15,501	0	0	3	84 87	16,155	0	0	4	88 90	16,470	0	0	4	89	
				RCCO	16,010 15,631	5	0	5	85	16,685	0	0	4	90	17,010	0	0		92	
				LCCO	15,641	1	0	3	85											
				AFR	22,741	2	0	3	123	23,700	2	0	3	129	24,162	3	0	3	131	
			T1S	28,701	3	0	3	133	29,912	3	0	4	139	30,495	3	0	4	141		
				T2M	26,587	3	0	5	123	27,709	3	0	5	128	28,249	3	0	5	131	
				T3M	26,895	3	0	5	125	28,030	3	0	5	130	28,576	3	0	5	132	
				T3LG	24,025	3	0	3	111	25,038	3	0	3	116	25,526	3	0	3	118	
				T4M	27,296	3	0	5	127	28,448	3	0	5	132	29,002	3	0	5	134	
				T4LG	24,826	3	0	3	115	25,873	3	0	3	120	26,378	3	0	3	122	
		P8	216W	TFTM	27,485	3	0	5	127	28,645	3	0	5	133	29,203	3	0	5	135	
60	1100			T5M	28,084	5	0	4	130	29,269	5	0	4	136	29,839	5	0	4	138	
				T5W	28,539	5	0	4	132	29,743	5	0	4	138	30,323	5	0	4	141	
				T5LG	28,165	4	0	2	131	29,354	4	0	2	136	29,926	4	0	2	139	
				BLC3	19,563	0	0	4	91	20,388	0	0	4	94	20,786	0	0	4	96	
				BLC4	20,205	0	0	5	94	21,057	0	0	5	98	21,468	0	0	5	99	
				RCCO	19,740	1	0	4	91	20,572	1	0	4	95	20,973	1	0	4	97	
				LCCO	19,740	1	0	4	91	20,572	1	0	4	95	20,973	1	0	4	97	
				AFR	28,701	3	0	3	133	29,912	3	0	4	139	30,495	3	0	4	141	
				T1S	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134	
				T2M	32,255	3	0	5	116	33,616	3	0	5	121	34,271	3	0	5	124	
				T3M	32,629	3	0	5	118	34,006	3	0	5	123	34,668	3	0	5	125	
				T3LG	29,146	3	0	3	105	30,376	3	0	4	110	30,968	3	0	4	112	
				T4M	33,116	3	0	5	120	34,513	3	0	5	125	35,185	3	0	5	127	
				T4LG	30,119	3	0	3	109	31,389	3	0	4	113	32,001	3	0	4	116	
60	1400	P9	277W	TFTM T5M	33,345	3	0	5	120	34,751	3 5	0	5	125	35,429	3 5	0	5	128	
60	1400	ניז	2//W	T5W	34,071	5	0	4	123 125	35,509	5	0	4	128 130	36,201	5	0	4	131 133	
				TSLG	34,624 34,170	5	0	3	123	36,084 35,612	5	0	3	130	36,788 36,306	5	0	3	133	
				BLC3	23,734	0	0	4	86	24,735	0	0	4	89	25,217	0	0	4	91	
				BLC4	24,513	0	0	5	88	25,547	0	0	5	92	26,045	0	0	5	94	
				RCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92	
				LCCO	23,948	1	0	4	86	24,958	1	0	4	90	25,445	1	0	4	92	
				AFR	34,819	3	0	4	126	36,288	3	0	4	131	36,996	3	0	4	134	
				7411	را نارا د	,		т т	120	30,200			,	131	30,770			_ r	1.77	


#### **Lumen Output**


Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.


	Drive	Performance					30K				40K (4000K, 70 CRI)						50K					
LED Count	Current (mA)	Package	System Watts	Distribution Type	Lumens	(30 B	00K, 70 U	CRI) G	LPW	Lumens	(40 B	00K, 70 U	CRI) G	LPW	Lumens	(50) B	00K, 70	CRI) G	LPV			
				T1S	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	15			
				T2M	14,047	4	0	4	139	14,640	4	0	4	145	14,925	4	0	4	14			
				T3M	14,208	4	0	4	140	14,807	4	0	4	146	15,096	4	0	4	14			
				T3LG	12,693	3	0	3	125	13,229	3	0	3	131	13,487	3	0	3	13			
				T4M	14,420	4	0	4	142	15,028	4	0	4	148	15,321	4	0	4	15			
				T4LG	13,115	3	0	3	129	13,668	3	0	3	135	13,934	3	0	3	13			
60	530	P10	101W	TFTM T5M	14,522 14,836	4	0	2	143 146	15,134 15,462	4	0	2	149 153	15,429 15,763	4	0	2	15			
00	330 F1	FIU	IOTVV	T5W	15,076	4	0	3	149	15,712	5	0	3	155	16,019	5	0	3	15			
				T5LG	14,879	3	0	2	147	15,507	3	0	2	153	15,809	3	0	2	15			
				BLC3	10,335	3	0	3	102	10,771	4	0	4	106	10,981	4	0	4	10			
				BLC4	10,674	4	0	4	105	11,124	4	0	4	110	11,341	4	0	4	11			
				RCCO	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	10			
				LCC0	10,429	1	0	2	103	10,869	1	0	2	107	11,080	1	0	2	10			
				AFR	15,164	3	0	3	150	15,803	3	0	3	156	16,112	3	0	3	15			
				T1S	19,437	4	0	4	144	20,257	4	0	4	150	20,651	4	0	4	15			
				T2M T3M	18,005 18,211	4	0	4	133 135	18,765 18,980	4	0	4	139 141	19,131 19,350	4	0	4	14			
				T3LG	16,270	3	0	3	121	16,957	3	0	3	126	17,287	4	0	4	12			
				T4M	18,483	4	0	4	137	19,263	5	0	5	143	19,638	5	0	5	14			
				T4LG	16,810	3	0	3	125	17,519	3	0	3	130	17,861	3	0	3	13			
60 700	P11	135W	TFTM	18,614	4	0	4	138	19,399	4	0	4	144	19,777	5	0	5	14				
			T5M	19,017	5	0	3	141	19,819	5	0	3	147	20,205	5	0	3	15				
				T5W	19,325	5	0	3	143	20,140	5	0	3	149	20,533	5	0	3	15			
				T5LG	19,072	4	0	2	141	19,876	4	0	2	147	20,264	4	0	2	15			
				BLC3	13,247	4	0	4	98	13,806	4	0	4	102	14,075	4	0	4	10			
				BLC4 RCCO	13,682	4	0	3	101 99	14,259	4	0	3	106	14,537	4	0	3	10			
				LCCO	13,367 13,367	1	0	3	99	13,931 13,931	1	0	3	103 103	14,203 14,203	1	0	3	10			
			AFR	19,437	4	0	4	144	20,257	4	0	4	150	20,651	4	0	4	15				
				T1S	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	14			
				T2M	25,436	5	0	5	124	26,509	5	0	5	129	27,025	5	0	5	13			
				T3M	25,727	5	0	5	125	26,812	5	0	5	130	27,335	5	0	5	13			
				T3LG	22,984	4	0	4	112	23,954	4	0	4	116	24,421	4	0	4	11			
				T4M	26,110	5	0	5	127	27,212	5	0	5	132	27,742	5	0	5	13			
				T4LG	23,747	4	0	4	115	24,749	4	0	4	120	25,231	4	0	4	12			
	4050		20514	TFTM	26,295	5	0	5	128	27,404	5	0	5	133	27,938	5	0	5	13			
60	1050	P12	206W	T5M	26,864	5	0	4	130	27,997	5	0	4	136	28,543	5	0	4	13			
				T5W T5LG	27,299 26,942	5 4	0	2	133 131	28,451 28,078	5 4	0	2	138 136	29,006 28,626	5	0	2	14			
				BLC3	18,714	4	0	4	91	19,504	4	0	4	95	19,884	4	0	4	9			
				BLC4	19,327	5	0	5	94	20,143	5	0	5	98	20,535	5	0	5	10			
				RCCO	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	97			
				LCC0	18,883	1	0	4	92	19,680	1	0	4	96	20,064	1	0	4	9			
				AFR	27,457	4	0	4	133	28,616	4	0	4	139	29,174	4	0	4	14			
				T1S	34,436	5	0	5	125	35,889	5	0	5	130	36,588	5	0	5	13			
				T2M	31,900	5	0	5	116	33,246	5	0	5	121	33,894	5	0	5	12			
				T3M	32,265	5	0	5	117	33,626	5	0	5	122	34,282	5	0	5	12			
				T3LG	28,826	4	0	4	105	30,042	4	0	4	109	30,628	4	0	4	1			
				T4M T4LG	32,746 29,782	5 4	0	5 4	119 108	34,128 31,039	5	0	5	124 113	34,793 31,644	5	0	5	12			
				TFTM	32,978	5	0	5	120	34,369	5	0	5	125	35,039	5	0	5	12			
60	1400	P13	276W	T5M	33,692	5	0	4	122	35,113	5	0	4	127	35,797	5	0	4	13			
				T5W	34,238	5	0	4	124	35,682	5	0	4	129	36,378	5	0	4	13			
				T5LG	33,789	5	0	3	122	35,215	5	0	3	128	35,901	5	0	3	13			
				BLC3	23,471	5	0	5	85	24,461	5	0	5	89	24,937	5	0	5	9			
				BLC4	24,240	5	0	5	88	25,262	5	0	5	92	25,755	5	0	5	9			
				RCCO	23,683	1	0	4	86	24,682	1	0	4	89	25,163	1	0	4	9			
			LCC0	23,683	1	0	4	86	24,682	1	0	4	89	25,163	1	0	4	9				
				AFR	34,436	5	0	5	125	35,889	5	0	5	130	36,588	5	0	5	13			

IBC Engineering Services, Inc.


#### **Dimensions**










DSX1 with RPA, RPA5, SPA5, SPA8N




















City of Madison - Dane County

Men's Homeless Shelter


Exterior Lighting
2024-02-05


#### nLight Control - Sensor Coverage and Settings

### nLight Sensor Coverage Pattern

**NLTAIR2 PIRHN** 





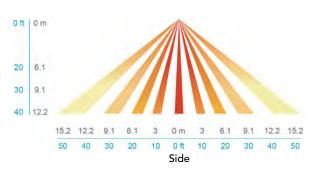

#### **FEATURES & SPECIFICATIONS**

#### INTENDED USE

The sleek design of the D-Series Size 1 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and streetscapes.

#### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED drivers are mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 1.5G. Low EPA (0.69 ft²) for optimized pole wind loading.

#### **FINISH**

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

#### Coastal Construction (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

#### **OPTICS**

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in standard 3000 K, 4000 K and 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 1 has zero uplight and qualifies as a Night-time Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### **ELECTRICAL**

Light engine configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L81/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

#### STANDARD CONTROLS

The DSX1 LED area luminaire has a number of control options. DSX Size 1, comes standard with 0-10V dimming drivers. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. Integrated motion sensor with on-board photocells feature field-adjustable programing and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

#### **nLIGHT AIR CONTROLS**

The DSX1 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaries can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclypse. Additional information about nLight Air can be found here.

#### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

#### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at <a href="https://www.designlights.org/QPL">www.designlights.org/QPL</a> to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



IBC Engineering Services, Inc.



**IES ROAD REPORT** 

PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI BLC3.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] ISF 222045P61

[ISSUEDATE] 11/10/2022

[TESTLAB] SCALED PHOTOMETRY

[MANUFAC] Lithonia Lighting

[LUMCAT] DSX1 LED P1 40K 70CRI BLC3

[LUMINAIRE] D-Series Size 1 Area Luminaire P1 Performance Package 4000K CCT 70 CRI Type 3 Extreme Backlight Control

[DISTRIBUTION] TYPE III, SHORT, BUG RATING: B0 - U0 - G2

[\_TOTALLUMINAIRELUMENS] 5524

[INPUTWATTAGE] 50.9

[LAMPTYPE] LED

[\_MOUNTING] OUTDOOR

[ PHYSICALDIMENSIONS] 1.08, 1.14, 0

[PRODUCTID] a858b133-31c8-4f99-b1cf-5bfde9e80b80

[SERIES] DSX1

[ SERIESID] 596135

#### **CHARACTERISTICS**

IES Classification Type III Longitudinal Classification Short

Lumens Per Lamp N.A. (absolute)
Total Lamp Lumens N.A. (absolute)

Luminaire Lumens 5522

Downward Total Efficiency

Total Luminaire Efficiency

N.A. (absolute)

N.A. (absolute)

Luminaire Efficacy Rating (LER)108Total Luminaire Watts50.9Ballast Factor1.00Upward Waste Light Ratio0.00Maximum Candela5672.312

Maximum Candela Angle 45H 65V Maximum Candela (<90 Degrees Vertical) 5672.312 Maximum Candela Angle (<90 Degrees Vertical) 45H 65V

Maximum Candela At 90 Degrees Vertical 0 (0.0% Luminaire Lumens)

Maximum Candela from 80 to <90 Degrees Vertical 1019.045 (18.5% Luminaire Lumens)

Cutoff Classification (deprecated) N.A. (absolute)


# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX1 LED P1 40K 70CRI BLC3.IES

#### **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100)	Lumens 288.9 2541.6 2592.3 56.5 8.8 14.9 17.5 1.9	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 5.2 46.0 46.9 1.0 0.2 0.3 0.3 0.0 0.0 0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	5522.4	N.A.	100.0

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI BLC3.IES


#### **POLAR GRAPH**

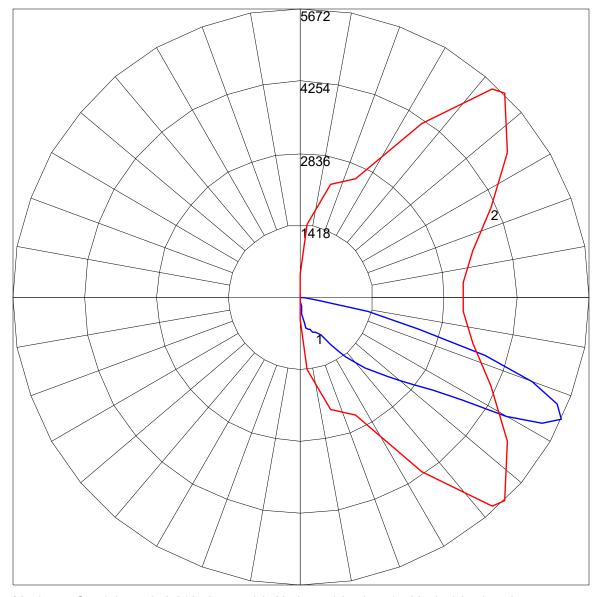

Maximum Candela = 5672.312 Located At Horizontal Angle = 45, Vertical Angle = 65 # 1 - Vertical Plane Through Horizontal Angles (45 - 225) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX1 LED P1 40K 70CRI BLC3.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

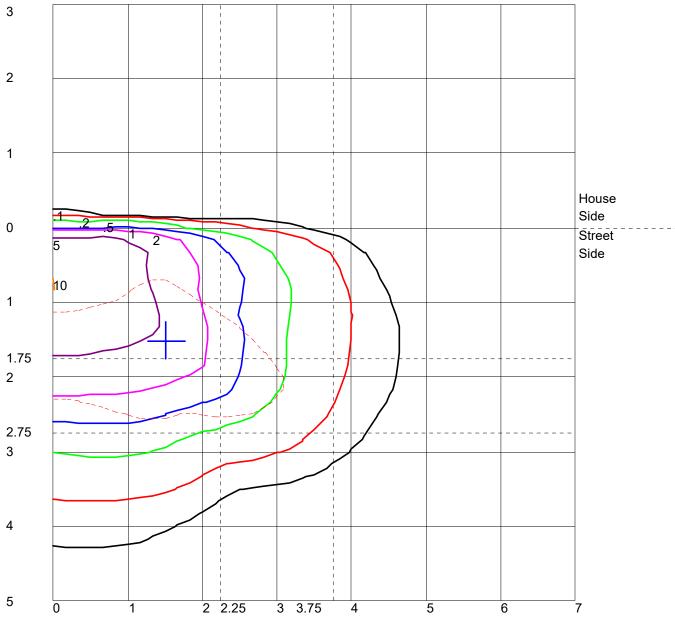


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI BLC3.IES

#### **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

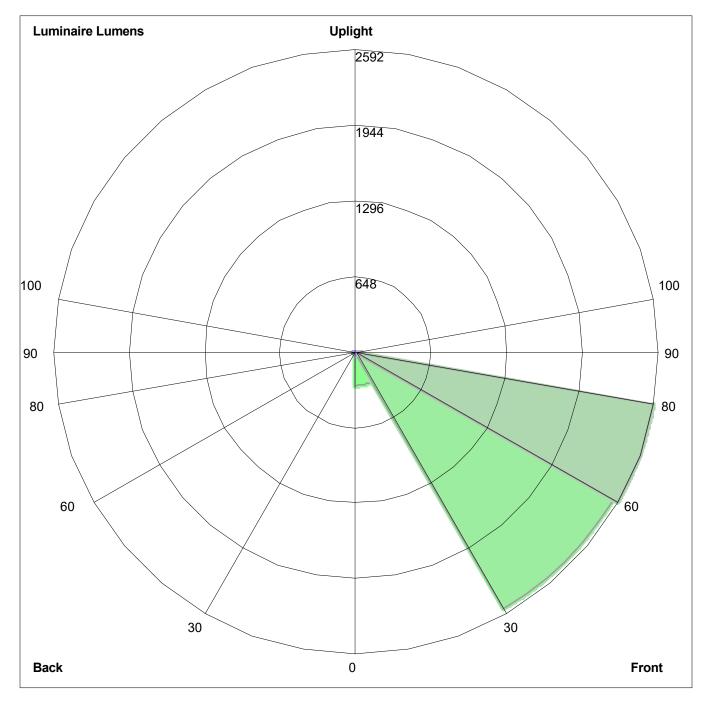

Luminaire Lumens:

Front: Low=288.9, Medium=2541.6, High=2592.3, Very High=56.5

Back: Low=8.8, Medium=14.9, High=17.5, Very High=1.9

Uplight: Low=0.0, High=0.0

BUG Rating: B0-U0-G2



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI T3LG.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] ISF 221262BP61

[ISSUEDATE] 11/10/2022

[TESTLAB] SCALED PHOTOMETRY

[MANUFAC] Lithonia Lighting

[LUMCAT] DSX1 LED P1 40K 70CRI T3LG

[LUMINAIRE] D-Series Size 1 Area Luminaire P1 Performance Package 4000K CCT 70 CRI Type 3 Low G Rating

[DISTRIBUTION] TYPE III, SHORT, BUG RATING: B1 - U0 - G1

[\_TOTALLUMINAIRELUMENS] 6783

[INPUTWATTAGE] 50.9

[\_LAMPTYPE] LED

[MOUNTING] OUTDOOR

[PHYSICALDIMENSIONS] 1.08, 1.14, 0

PRODUCTID] 4f1bb518-c327-436c-af75-ddda3acc8f8c

[SERIES] DSX1

[ SERIESID] 596135

[INPUTWATTAGE] 51

[ TOTALLUMINAIRELUMENS] 6364

[TESTMETHOD] IES LM-79-08

#### **CHARACTERISTICS**

IES ClassificationType IIILongitudinal ClassificationShort

Lumens Per LampN.A. (absolute)Total Lamp LumensN.A. (absolute)

Luminaire Lumens 6784

Downward Total Efficiency N.A. (absolute)
Total Luminaire Efficiency N.A. (absolute)

Total Luminaire Efficiency N.A. (absolu Luminaire Efficacy Rating (LER) 133

Total Luminaire Watts 50.9

Ballast Factor 1.00
Upward Waste Light Ratio 0.00
Maximum Candela 4474.571
Maximum Candela Angle 47.5H 60V

Maximum Candela (<90 Degrees Vertical)

Maximum Candela Angle (<90 Degrees Vertical)

47.5H 60V

Maximum Candela At 90 Degrees Vertical 0 (0.0% Luminaire Lumens)

Maximum Candela from 80 to <90 Degrees Vertical 666.221 (9.8% Luminaire Lumens)

Cutoff Classification (deprecated) N.A. (absolute)


# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX1 LED P1 40K 70CRI T3LG.IES

#### **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90)	Lumens 715.6 3127.9 1743.0 71.2 331.2 548.8 229.9 16.3	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 10.5 46.1 25.7 1.0 4.9 8.1 3.4 0.2
UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	0.0 0.0	N.A. N.A. N.A.	0.2 0.0 0.0
Total	6783.9	N.A.	100.0
BUIG B. ()	D4 110 O4		

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI T3LG.IES


#### **POLAR GRAPH**

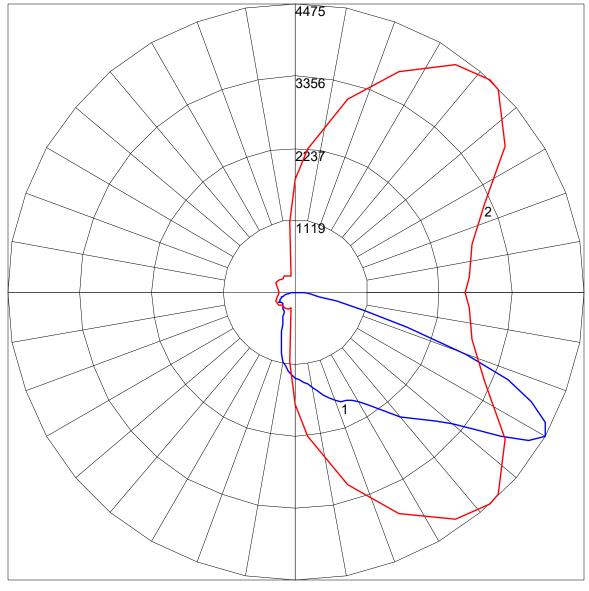

Maximum Candela = 4474.571 Located At Horizontal Angle = 47.5, Vertical Angle = 60 # 1 - Vertical Plane Through Horizontal Angles (47.5 - 227.5) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (60) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX1 LED P1 40K 70CRI T3LG.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

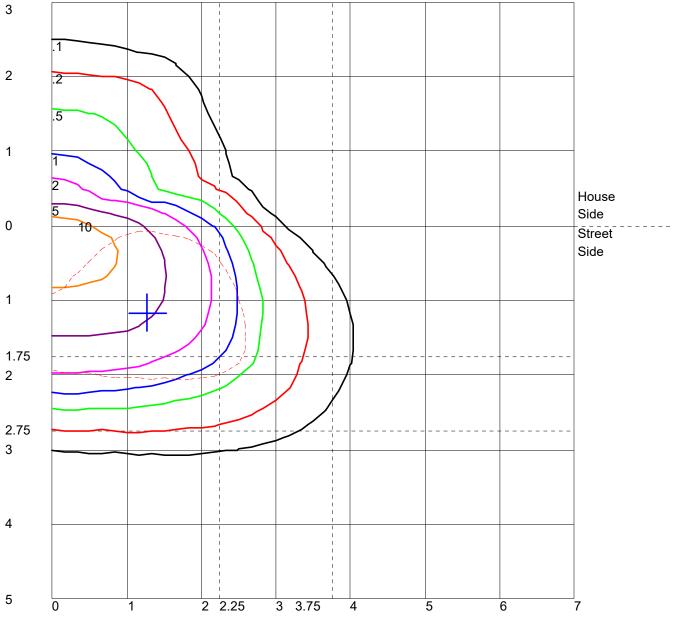


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX1 LED P1 40K 70CRI T3LG.IES

#### **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

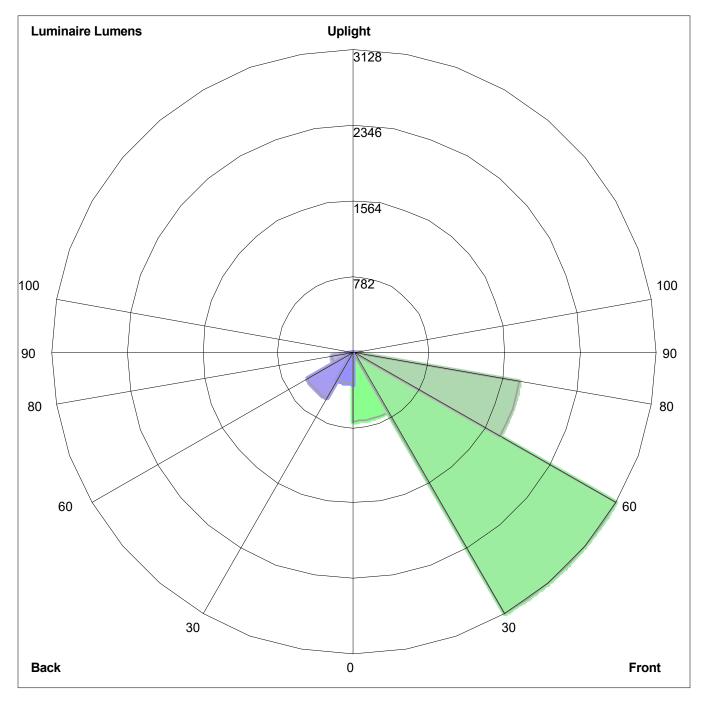

Luminaire Lumens:

Front: Low=715.6, Medium=3127.9, High= 1743.0, Very High=71.2 Back: Low=331.2, Medium=548.8, High=229.9, Very High=16.3

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G1



# **FEATURES**

- · IDA Dark Sky Compliant, No Up-light configuration
- Elegant form factor blended with Performance Optics
- · Integral NEMA 3R Enclosure
- · Dual receptacle power panel
- · PA System capability
- · Bluetooth® enabled RGBW accent







#### **CONTROL TECHNOLOGY**





LOCATION: DATE:

PROJECT: TYPE:

TYPES OBA,OBB CATALOG #:

# Pavilion\*



#### RELATED PRODUCTS

Pavilion Square

Pavilion Round Impact Rated

#### **SPECIFICATIONS**

LIGHTING CONTROLS

#### CONSTRUCTION

#### HOUSING:

- · Castings are low copper aluminum alloy die-cast
- Gaskets are molded silicone to prevent harmful ingress to the lamp and driver compartments
- · IP65 rated

#### SHAFT:

- · Aluminum shaft(s) is .125" thick extruded aluminum 6061 alloy
- · Concrete shaft(s) conforms to current specifications for "Portland Cement." ASTM C150, Type I or II. Aggregates shall meet current requirements of "Specifications for Concrete Aggregates," ASTM C33. Water shall be clean and free from deleterious amounts of silt, oil, acids, alkalies or organic materials. Wire for reinforcement shall conform to ASTM A185. Steel for lugs and plates shall conform to ASTM A36, or A283 grade D
- Concrete shaft(s) is medium sand-blasted with anti-graffiti sealer and material color shall be integral to the concrete mix
- · Concrete shaft(s) is cured to allow for completion of the hydration process, and result in a 28 day compressive strength of not less than 4,500 psi
- Concrete shaft(s) is cast from fiberglass molds used to insure uniform parts. Mold parting lines maybe slightly visible in finished parts

#### **OPTICS**

- · LEDs mount to a metal printed circuit board assembly (MCPCB)
- · Optical lenses are clear injection molded PMMA acrylic
- · U0 configurations have an optically clear flat tempered glass lens, all other configurations have either an optically clear or high transmission diffused acrylic lens

#### INSTALLATION

- · Aluminum shaft configurations will have four 3/8" x 10" x 2" zinc plated L-hook anchor bolts shall to be installed with an included template. Nuts and washers are provided to level and secure the mounting plate to the anchor bolts
- · Aluminum shaft configurations will have a mounting plate and be able to be rotated 20° in either direction during installation for aiming adjustment
- Concrete shaft configurations will have four steel mounting tabs for installation on four 1/2" x 10" + 2" zinc electroplated L-hook anchor bolts. Each anchor bolt is supplied with two nuts, two washers, and a rigid pressed board template
- · Concrete shaft configurations are palletized with adequate hold-downs to prevent load movement in transit
- Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury

#### **ELECTRICAL**

- · Universal voltage, 120 through 277V with a ±10% tolerance. Driver is Underwriters Laboratories listed
- · High voltage configurations, 208-277, 347/480. Driver is Underwriters Laboratories
- "Thermal Shield", secondary side, thermistor provides protection for the sustainable life of LED module and electronic components
- Drivers are greater than a 0.9 power factor, less than 20% harmonic distortion, and be suitable for operation in -40°C to 40°C ambient environments
- Luminaire is capable of operating at 100% brightness in a 40°C environment. Both driver and optical array have integral thermal protection that will dim the luminaire upon detection of temperatures in excess of 85°C

(Specifications continued on page 3)

KEY DATA							
Lumen Range	397–2350						
Wattage Range	14–22						
Efficacy Range (LPW)	29–108						
Reported Life (Hours)	L70/60,000						





		2024-02-
DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

#### **ORDERING GUIDE**

 Example:
 PA7R-FT-NU-1-12L-010-5K7-24A-BLS-UNV-EM

 CATALOG #

#### HOUSING

PA7R										
Model		Тор		Optics	S	Distribu	ition		Light Engine 13	
PA7R	Pavilion 7"	FT	Flat Top	NU	No Up-light	1	Type I		12L-010-AMB <sup>11</sup>	14W, Monochromatic Amber
	Ø Round	CT <sup>1</sup>	Crowned Top	СН	Clear Horizontal Lens	2	Type II		12L-010-3K7	14W (1000 nominal lm), 3000K, 70 CRI
				CL <sup>2</sup>	Clear Vertical Lens	3	Type III	l oba	12L-010-4K7	14W (1000 nominal lm), 4000K, 70 CRI
				DL 2,3	Diffuse Vertical Lens	3HS	Type III + I	ouse side shield	12L-010-5K7	14W (1000 nominal lm), 5000K, 70 CRI
				LV	Louvers	4	Type IV	OBB	12L-020-AMB <sup>11</sup>	22W, Monochromatic Amber
				GC	Grille with clear	5	Type V		12L-020-3K7	22W (2000 nominal lm), 3000K, 70 CRI
					vertical lens				12L-020-4K7	22W (2000 nominal lm), 4000K, 70 CRI
				GD <sup>3</sup>	Grille with diffuse				12L-020-5K7	22W (2000 nominal lm), 5000K, 70 CRI
					vertical lens				Consult factory for	other CCTs (2700K - 6500K) and CRIs (80, 90 CR

Body		Fixture	Finish	Control O	ptions	Voltage		Options	3
24A 42A 42BR-C 42CH-C 42NG-C 42WH-C 42A-ROP <sup>4</sup>	24" OAH, Aluminum 42" OAH, Aluminum 42" OAH, Brown Concrete 42" OAH, Charcoal Concrete 42" OAH, Natural Gray Concrete 42" OAH, White Concrete 42" OAH, Aluminum + Dual Receptacle Outlet Panel and Cover	BLS BLT DBS DBT GTT LGS	Black Gloss Smooth Black Matte Textured Dark Bronze Gloss Smooth Dark Bronze Matte Textured Graphite Matte Textured	MW <sup>6</sup>	Motion sensing (50% dim, 100% output upon detection)  NX Networked Wireless Radio Module NXRM2 and Bluetooth Programming, without Sensor	UNV 120 <sup>7</sup> 277 <sup>7</sup> 347 <sup>7</sup> 480 <sup>7</sup>	120-277V 120V 208-277V 347V 480V	EM <sup>8</sup> LR <sup>9</sup> SF <sup>10</sup> DF <sup>10</sup>	Battery Backup Luminous Accent Single Fuse Double Fuse
42A-ROP-L ⁴	42" OAH, Aluminum + Dual Receptacle Outlet Panel and Locking Cover	LGT PSS	Light Grey Matte Textured Platinum Silver Gloss						
42A-2GEB	42" OAH, Aluminum + Integral Recessed 2 Gang Electrical Box	VGT	Smooth Verde Green Matte						
42A-SG3	42" OAH, Aluminum + Speaker Grille Enclosure for 3" Ø speaker	WHS	Textured White Gloss Smooth						
44A	44" Non-Impact Resistant OAH, Aluminum	WHT Color	White Matte Textured						
44A-ROP	44" Non-Impact Resistant OAH, Aluminum + Dual Receptacle Outlet Panel and Cover		Custom Color						
44A-ROP-L	44" Non-Impact Resistant OAH, Aluminum + Dual Receptacle Outlet Panel and Locking Cover								
44A-2GEB	44" Non-Impact Resistant OAH, Aluminum + Integral Recessed 2 Gang Electrical Box								
44A-SG3	44" Non-Impact Resistant OAH, Aluminum + Speaker Grille Enclosure for 3" Ø speaker								
For Impact Rate	ed 44" OAH Round Pavilion								

- 1 Adds .6 / 15mm to OAH (over all height).
- 2 CL and DL configurations shall be IK04
- 3 Only Available with 1 Type I or 5 Type V distributions only.
- 4 For GFCI/USB limited voltage to 120VAC only.
- 6 24'Ø typical coverage area, not available with CH.
- 7 Dedicated input voltage, required for MW Motions sensing.
- 8 0°C min starting temperature, 90+ minute run time, output equivalent to 12L-010-#K7
- 9 Adds +5 watts and 1" / 254mm to overall height.
- 10 SF for 120, 277 and 347 input voltage, DF for 208, 240 and 480 input voltage.
- 11 Turtle friendly
- 12 Consult factory for custom color, marine and corrosive finish options
- 13 5-step MacAdam Ellipse Binning standard. Consult factory for 3-step MacAdam Ellipse Binning.






# SPECIFICATIONS CONT'D

# DATE: LOCATION: TYPE: PROJECT:

#### CATALOG #:

#### **CONTROLS**

 Standard fixtures dimming range shall be from 10% to 100% and be compatible with 0-10V, user-defined, control devices



 Optional motion sensor shall be capable of detecting motion 360° around the bollard.
 When no motion is detected for the specified time, the sensor wattage to factory preset level, reducing the light level accordingly.
 When motion is detected by the sensor, the bollard shall return to full wattage and full light output. Please contact KIM Lighting if project requirements vary from standard configuration

#### **WIRELESS CONTROLS**

#### **BLUETOOTH®:**

- The Integral module shall enable the adjustment of the Luminous Accent to dim or change color to the desired setting when paired with RGBW Remote App via celluar/tablet device
- The integral module shall be compatible with Bluetood Low Energy (BLE) or Bluetooth® Smart mobile devices operating on iOS8 or Android Gingerbread operating systems or newer
- Mobile App. dimming range from 0% to 100% through the use of RGBW app (available on IOS and Android)
- · Color selection and adjustment
- · Camera function for color matching
- Intensity slider for dimming/ramping up
- · Save and rename up to 10 presets
- Group and rename fixtures
- Fixture is password protected, refer to instructions to set unique password

#### DMX:

- 6 wires: Red (DMX+), Brown (DMX-), Yellow (DMX Ground), Black (Line Voltage), White (common), and Green (Ground)
- Single DMX universe with six slots/addresses of virtual control which are pre-programmed at the factory:
- DMX slot/address 1 = red
- DMX slot/address 2 = green
- DMX slot/address 3 = blue
- DMX slot/address 4 = white
- Fully DMX RDM compatible
- Mobile App specification in additional information section

#### NX

 Luminaires enabled with NX Lighting Controls wireless radios create an intelligent mesh networkwith the interior controls. Groups are dimmed via an astronomical time clock and schedules can be updated at any time with the Bluetooth® commissioning app. Contact factory for more information

#### OPTIONAL BACKUP BATTERY

 Integral battery backup provides emergency path of egress lighting for the required 90 minutes for 0°C ambient environments

#### CAUTION:

 Fixtures must be grounded in accordance with national, state and/or local electrical codes. Failure to do so may result in serious personal injury

#### **CERTIFICATIONS AND LISTINGS**

- Listed to UL1598 and CSA C22.2#250.0-24 for wet locations and 40°C ambient temperatures
- IP65 rated
- IEC 66262 Mechanical Impact Code IK10

- IDA approved, 3000K and warmer CCTs only
- · RoHS compliant

#### WARRANTY

- 5 year warranty
- See HLI Standard Warranty for additional information








The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth® SIG, Inc. and any use of such marks by Kim Lighting is under license. Other trademarks and trade names are those of their respective owners. Apple, the Apple logo, iPad, iPhone, and iPod Touch are trademarks of Apple Inc., registered in the U.S. and other countries. App Store is a service mark of Apple Inc. Google Play is a trademark of Google Inc.





		2024-02
DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

#### **DIMENSIONS**

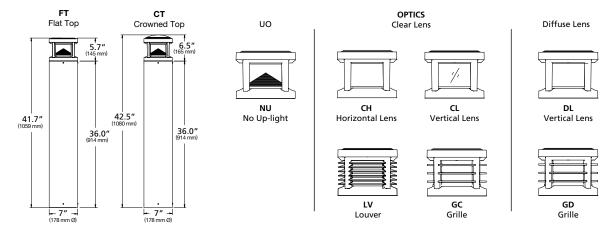

#### **DELIVERED LUMENS**

						3	3000	K 70	CRI		4	1000	K 70	CRI		5	5000	K 70	CRI		
Drive Current	LEDs #	Nominal Watts	Nominal Lumens	Lens Options	Distribution	1	BUG Rating		Inc. /	1	BUG Rating		ting	I /			G Rating		J /		
						Lumen	В	U	G	lm/w	Lumen	В	U	G	lm/w	Lumen	В	U	G	lm/w	
					1	1044	0	0	0	48	1136	0	0	0	52	1164	0	0	0	54	
				2	1199	0	0	0	55	1305	0	0	0	60	1336	0	0	0	62		
			NU U0	3	1128	0	0	1	52	1228	0	0	1	57	1257	0	0	1	58		
					Optics	3HS	953	0	0	0	44	1037	0	0	0	48	1062	0	0	1	49
							4	1362	0	0	0	63	1482	0	0	1	68	1518	0	0	1
				5	1265	1	0	0	58	1377	1	0	0	63	1410	1	0	0	65		
			1	1778	0	3	1	82	1935	0	3	1	89	1981	0	3	1	91			
				CH Clear Horizontal Lens	2	1711	1	3	1	79	1862	1	3	1	86	1906	1	3	1	88	
FF0 A	121	22	2,000		3	1643	1	3	1	76	1788	1	3	1	82	1831	1	3	1	84	
550mA	12L	22			3HS	1443	0	3	1	66	1570	0	3	1	72	1608	0	3	1	74	
					4	1731	0	3	1	80	1884	0	3	1	87	1929	0	3	1	89	
					5	1841	1	3	1	85	2003	1	3	1	92	2051	1	3	1	95	
					1	1852	0	4	1	85	2016	1	4	1	93	2064	1	4	1	95	
					2	1984	1	3	1	91	2159	1	3	1	99	2211	1	3	1	102	
				CL Clear	3	2062	1	3	1	95	2244	1	3	1	103	2298	1	3	1	106	
				Vertical Lens	3HS	1665	0	3	1	77	1811	0	3	1	83	1855	0	3	1	85	
				Lens	4	2055	0	3	1	95	2236	1	3	1	103	2290	1	3	1	106	
			5	2109	1	3	1	97	2295	1	3	1	106	2350	1	3	1	108			

currentlighting.com/kimlighting

			@
KIM	LIGI	AITH	lG"

PA	7	R
ROLL	ΔRΓ	)

	I .	2027 02
DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

# **DELIVERED LUMENS (CONTINUED)**

						3	3000	K 70	CRI		4	1000	K 70	CRI		5000K 70CRI				
Drive Current	LEDs #	Nominal Watts	Nominal Lumens	Lens Options	Distribution Lumen -		BU	BUG Rating		lm/w	Luman	BUG Rating			lm/w	Luman	BUG Rating			lm/w
						В	U	G	IIII/W	Lumen	В	U	G	IIII/W	Lumen	В	U	G	IIII/W	
			DL Diffused	1	1639	1	3	2	76	1783	1	3	2	82	1826	1	3	2	84	
				Vertical Lens	5	1721	1	3	2	79	1873	1	3	2	86	1918	1	3	2	88
					1	746	0	3	1	34	811	1	3	1	37	831	1	3	1	38
					2	814	1	3	1	37	885	1	3	1	41	907	1	3	1	42
				LV	3	838	1	3	1	39	912	1	3	1	42	934	1	3	1	43
			External Louvers	3HS	605	0	3	1	28	658	0	3	1	30	674	0	3	1	31	
			2,000		4	879	0	3	1	41	956	1	3	1	44	979	1	3	1	45
550mA	12L	22			5	888	1	3	1	41	966	1	3	1	45	989	1	3	1	46
SSUMA	IZL	22	2,000	00	1	1038	0	3	1	48	1130	0	3	1	52	1157	0	3	1	53
					2	1021	0	3	1	47	1111	1	3	1	51	1138	1	3	1	52
				GC	3	1024	0	3	1	47	1114	1	3	1	51	1141	1	3	1	53
				Grill with Clear Lens	3HS	854	0	3	1	39	930	0	3	1	43	952	0	3	1	44
					4	1109	0	3	1	51	1207	0	3	1	56	1236	0	3	1	57
					5	1037	1	3	1	48	1128	1	3	1	52	1155	1	3	1	53
				GD	1	1036	0	3	1	48	1127	1	3	2	52	1154	1	3	2	53
				Grill with Diffused Lens	5	953	1	3	1	44	1037	1	3	1	48	1062	1	3	1	49

M	LIC	÷Η	TIN	IG®



DATE:	LOCATION:
TYPE:	PROJECT:
CATALOG #:	

# **DELIVERED LUMENS (CONTINUED)**

	Drive LEDs Nominal Nominal Lens Dist			3	3000	K 70	CRI		4000K 70CRI				5000K 70CRI											
					Distribution	Lumen	BU	G Ra	ting	lm/w	Lumen	BUG Rating	lm/w	Lumen	BUG Rating		ing	lm/w						
				•		Lumen	В	U	G	IIII/W	Lumen	В	U	G	IIII/W	Lumen	В	U	G	IIII/W				
					1	749	0	0	0	54	815	0	0	0	59	835	0	0	0	60				
					2	860	0	0	0	62	936	0	0	0	67	958	0	0	0	69				
				NU U0	3	809	0	0	0	58	881	0	0	0	63	902	0	0	0	65				
				Optics	3HS	684	0	0	0	49	744	0	0	0	53	762	0	0	0	55				
					4	977	0	0	0	70	1063	0	0	0	76	1089	0	0	0	78				
					5	908	1	0	0	65	988	1	0	0	71	1011	1	0	0	73				
					1	1184	0	3	1	85	1288	0	3	1	92	1319	0	3	1	95				
						1239	0	3	1	89	1269	0	3	1	91									
				CH Clear	3	1094	0	3	1	79	1190	0	3	1 85 1219 0	3	1	87							
2504	121	4.4	1000	Horizontal Lens					al 3HS	960	0	3	1	69	1045	0	3	1	75	1070	0	3	1	77
350mA	12L	14	1,000	Lens	4	1152	0	3	1	83	1254	0	3	1	90	1284	284 0 3 1	1	92					
					5	1225	1	3 1 88	1333	1	3	1	96	1365	1	3	1	98						
					1	1146	0	3	1	82	1247	0	3	1	90	1277	0	3	1	92				
					2	1228	0	3	1	88	1336	1	3	1	96	1368	1	3	1	98				
				CL	3	1276	0	3	1	92	1389	1	3	1	100	1422	1	3	1	102				
				Clear Vertical Lens 3HS 1030 0 3 1 74 1121 0 3 1	1	80	1148	0	3	1	82													
					4	1272	0	3	1	91	1384	0	3	1	99	1417	0	3	1	102				
					5	1305	1	3	1	94	1420	1	3	1	102	1454	1	3	1	104				
				DL	1	1086	0	3	1	78	1182	0	3	1	85	1210	0	3	1	87				
				Diffused Vertical Lens	5	1141	1	3	1	82	1241	1	3	1	89	1271	1	3	1	91				





1	2024-02-0
LOCATION:	
PROJECT:	

# **DELIVERED LUMENS (CONTINUED)**

						3	3000	K 70	CRI		4	1000	K 70	CRI		5	5000	K 70	CRI	
Drive Current	LEDs #	Nominal Watts	Nominal Lumens	Lens Options	Distribution	Luman	BUG Rating		lm/w	1	BUG Rating		ting	. ,	Lumen	BUG Rating		lm/w		
				·		Lumen	В	U	G	IIII/W	Lumen	В	U	G	lm/w	Lumen	В	U	G	IIII/W
					1	489	0	3	1	35	533	0	3	1	38	545	0	3	1	39
					2	534	0	3	1	38	581	0	3	1	42	595	0	3	1	43
				LV	3	550	0	3	1	40	599	0	3	1	43	613	0	3	1	44
				External Louvers	3HS	397	0	3	1	29	432	0	3	1	31	442	0	3	1	32
		14			4	577	0	3	1	41	628	0	3	1	45	643	0	3	1	46
					5	583	1	3	1	42	634	1	3	1	46	649	1	3	1	47
				GC	1	843	0	3	1	61	917	0	3	1	66	939	0	3	1	67
350mA	12L		1,000		2	829	0	3	1	60	903	0	3	1	65	924	0	3	1	66
					3	831	0	3	1	60	905	0	3	1	65	926	0	3	1	67
				Grill with Clear Lens	3HS	694	0	3	1	50	50 755 0 3 1 54	773	0	3	1	56				
				4 901 0 3 1 65	980	0	3	1	70	1004	0	3	1	72						
			GD 1 728 0 3 1 52 792 0	3	1	66	938	1	3	1	67									
						1	728	0	3	1	52	792	0	3	1	57	811	0	3	1
			Grill with Diffused Lens	5	782	1	3	1	56	851	1	3	1	61	872	1	3	1	63	



# CATALOG #:

# **PHOTOMETRY**

#### PA7R-CH1-12L-020-4K7


#### LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1935
Watts	22
Efficacy	88.0
IES Type	II
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1132	81.8%
Downward House Side	251	18.1%
Downward Total	1384	71%
Upward Street Side	348	63%
Upward House Side	205	37%
Upward Total	553	29%
Total Flux	1937	100%

#### ISOFOOT CANDLE PLOT



DATE: TYPE: LOCATION:


PROJECT:

#### PA7R-CH2-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1862
Watts	22
Efficacy	85.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

# ISOFOOT CANDLE PLOT



#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1176	78.7%
Downward House Side	319	21.3%
Downward Total	1494	80%
Upward Street Side	220	60%
Upward House Side	149	40%
Upward Total	369	20%
Total Flux	1863	100%

#### PA7R-CH3-12L-020-4K7


# LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1788
Watts	21.76
Efficacy	82.0
IES Type	III
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

# ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	1184	80.3%
Downward House Side	290	19.7%
Downward Total	1474	82%
Upward Street Side	185	59%
Upward House Side	130	41%
Upward Total	315	18%
Total Flux	1789	100%

#### ISOFOOT CANDLE PLOT



TYPE OBA





TYPE:

CATALOG #:

DATE:

LOCATION:

PROJECT:

#### **PHOTOMETRY**

#### PA7R-CH3HS-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1570
Watts	21.64
Efficacy	73.0
IES Type	III
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1187	92.0%
Downward House Side	103	8.0%
Downward Total	1290	82%
Upward Street Side	230	82%
Upward House Side	51	18%
Upward Total	282	18%
Total Flux	1571	100%

#### ISOFOOT CANDLE PLOT



#### PA7R-CH4-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1884
Watts	21.73
Efficacy	87.0
IES Type	IV
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

# ZONAL LUMEN SUMMARY

Zone	Lumens	% Luminaire
Downward Street Side	1316	84.0%
Downward House Side	250	16.0%
Downward Total	1566	83%
Upward Street Side	184	58%
Upward House Side	136	42%
Upward Total	319	17%
Total Flux	1885	100%

#### ISOFOOT CANDLE PLOT



# **TYPE OBB**


#### PA7R-CH5-12L-020-4K7

#### LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	2003
Watts	21.73
Efficacy	92.0
IES Type	VS
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	825	50.0%
Downward House Side	825	50.0%
Downward Total	1650	82%
Upward Street Side	177	50%
Upward House Side	177	50%
Upward Total	354	18%
Total Flux	2004	100%







BOLLARL

#### **PHOTOMETRY**

#### PA7R-CL1-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	2016
Watts	21.7
Efficacy	93.0
IES Type	II
BUG Rating	B1-U4-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1078	77.5%
Downward House Side	312	22.5%
Downward Total	1390	69%
Upward Street Side	373	59%
Upward House Side	254	41%
Upward Total	627	31%
Total Flux	2017	100%

## ISOFOOT CANDLE PLOT



DATE:

CATALOG #:

LOCATION:

PROJECT:

#### PA7R-CL2-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	2159
Watts	21.69
Efficacy	100.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1325	77.5%
Downward House Side	384	22.5%
Downward Total	1709	79%
Upward Street Side	258	57%
Upward House Side	193	43%
Upward Total	451	21%
Total Flux	2160	100%

#### ISOFOOT CANDLE PLOT




#### PA7R-CL3-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	2244
Watts	21.72
Efficacy	103.0
IES Type	III
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1472	80.0%
Downward House Side	367	20.0%
Downward Total	1839	82%
Upward Street Side	231	57%
Upward House Side	175	43%
Upward Total	406	18%
Total Flux	2245	100%







#### PA7R-CL3HS-12L-020-4K7

#### LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1811
Watts	21.7
Efficacy	83.0
IES Type	III
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1361	92.0%
Downward House Side	118	8.0%
Downward Total	1479	82%
Upward Street Side	277	83%
Upward House Side	56	17%
Upward Total	334	18%
Total Flux	1812	100%

#### PA7R-CL4-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	2236
Watts	21.71
Efficacy	103.0
IES Type	IV
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1552	84.9%
Downward House Side	275	15.0%
Downward Total	1827	82%
Upward Street Side	230	56%
Upward House Side	180	44%
Upward Total	410	18%
Total Flux	2237	100%

#### PA7R-CL5-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	2296
Watts	21.75
Efficacy	106.0
IES Type	VS
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**


Zone	Lumens	% Luminaire
Downward Street Side	937	50.0%
Downward House Side	937	50.0%
Downward Total	1874	82%
Upward Street Side	211	50%
Upward House Side	211	50%
Upward Total	422	18%
Total Flux	2296	100%

# DATE:


LOCATION: TYPE: PROJECT:

CATALOG #:


#### ISOFOOT CANDLE PLOT



#### ISOFOOT CANDLE PLOT



# ISOFOOT CANDLE PLOT



currentlighting.com/kimlighting





#### PA7R-DL1-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1783
Watts	21.74
Efficacy	82.0
IES Type	IV
BUG Rating	B1-U3-G2
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	746	66.2%
Downward House Side	381	33.8%
Downward Total	1127	63%
Upward Street Side	408	62%
Upward House Side	248	38%
Upward Total	657	37%
Total Flux	1784	100%

#### PA7R-DL5-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1873
Watts	21.75
Efficacy	86.0
IES Type	VS
BUG Rating	B1-U3-G2
Mounting Height	3.5 ft
Grid Scale	6 ft

# **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	656	50.0%
Downward House Side	656	50.0%
Downward Total	1313	70%
Upward Street Side	281	50%
Upward House Side	281	50%
Upward Total	561	30%
Total Flux	1874	100%

#### PA7R-GC1-12L-020-4K7

## LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1130
Watts	21.73
Efficacy	52.0
IES Type	II
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**


Zone	Lumens	% Luminaire
Downward Street Side	434	67.6%
Downward House Side	208	32.4%
Downward Total	642	57%
Upward Street Side	298	61%
Upward House Side	191	39%
Upward Total	489	43%
Total Flux	1131	100%

#### LOCATION: DATE:


TYPE: PROJECT:


CATALOG #:

#### ISOFOOT CANDLE PLOT



#### ISOFOOT CANDLE PLOT









#### PA7R-GC2-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1111
Watts	21.59
Efficacy	51.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	488	68.3%
Downward House Side	227	31.7%
Downward Total	715	64%
Upward Street Side	238	60%
Upward House Side	159	40%
Upward Total	397	36%
Total Flux	1112	100%

#### PA7R-GC3-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1114
Watts	21.7
Efficacy	51.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	513	69.8%
Downward House Side	221	30.1%
Downward Total	735	66%
Upward Street Side	234	62%
Upward House Side	146	38%
Upward Total	380	34%
Total Flux	1114	100%

#### PA7R-GC3HS-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	930
Watts	21.59
Efficacy	43.0
IES Type	III
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**


Zone	Lumens	% Luminaire
Downward Street Side	533	87.1%
Downward House Side	79	12.8%
Downward Total	612	66%
Upward Street Side	265	83%
Upward House Side	54	17%
Upward Total	319	34%
Total Flux	931	100%

# DATE: LOCATION:


TYPE: PROJECT:


CATALOG #:

#### ISOFOOT CANDLE PLOT



#### ISOFOOT CANDLE PLOT











# DATE: LOCATION: TYPE: PROJECT:

CATALOG #:

## **PHOTOMETRY**

#### PA7R-GC4-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1207
Watts	21.59
Efficacy	56.0
IES Type	IV
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	591	74.2%
Downward House Side	205	25.8%
Downward Total	796	66%
Upward Street Side	267	65%
Upward House Side	146	35%
Upward Total	412	34%
Total Flux	1208	100%

#### ISOFOOT CANDLE PLOT



#### PA7R-GC5-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1128
Watts	21.59
Efficacy	52.0
IES Type	VS
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	382	50.0%
Downward House Side	382	50.0%
Downward Total	764	68%
Upward Street Side	183	50%
Upward House Side	183	50%
Upward Total	365	32%
Total Flux	1129	100%

## ISOFOOT CANDLE PLOT




#### PA7R-GD1-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1127
Watts	21.71
Efficacy	51.9
IES Type	IV
BUG Rating	B1-U3-G2
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	407	62.8%
Downward House Side	241	37.2%
Downward Total	648	57%
Upward Street Side	287	60%
Upward House Side	193	40%
Upward Total	479	43%
Total Flux	1127	100%







BOLLARD

#### **PHOTOMETRY**

## PA7R-GD5-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1037
Watts	21.6
Efficacy	48.0
IES Type	VS
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	309	50.0%
Downward House Side	309	50.0%
Downward Total	618	60%
Upward Street Side	210	50%
Upward House Side	210	50%
Upward Total	420	40%
Total Flux	1038	100%

# ISOFOOT CANDLE PLOT



DATE:

CATALOG #:

LOCATION:

PROJECT:

#### PA7R-LV1-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	811
Watts	21.73
Efficacy	37.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	303	57.7%
Downward House Side	222	42.2%
Downward Total	526	65%
Upward Street Side	160	56%
Upward House Side	126	44%
Upward Total	286	35%
Total Flux	812	100%

#### ISOFOOT CANDLE PLOT




#### PA7R-LV2-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	885
Watts	21.68
Efficacy	41.0
IES Type	II
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	378	61.9%
Downward House Side	233	38.1%
Downward Total	611	69%
Upward Street Side	158	58%
Upward House Side	116	42%
Upward Total	274	31%
Total Flux	885	100%







BOLLARD

## **PHOTOMETRY**

#### PA7R-LV3-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	912
Watts	21.69
Efficacy	42.0
IES Type	III
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	414	63.7%
Downward House Side	233	35.8%
Downward Total	650	71%
Upward Street Side	154	59%
Upward House Side	109	41%
Upward Total	263	29%
Total Flux	913	100%

# ISOFOOT CANDLE PLOT



DATE:

CATALOG #:

LOCATION:

PROJECT:

#### PA7R-LV3HS-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	658
Watts	21.69
Efficacy	30.0
IES Type	III
BUG Rating	B0-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	383	82.5%
Downward House Side	81	17.5%
Downward Total	464	71%
Upward Street Side	155	80%
Upward House Side	39	20%
Upward Total	194	29%
Total Flux	658	100%

#### ISOFOOT CANDLE PLOT




#### PA7R-LV4-12L-020-4K7

## LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	956
Watts	21.69
Efficacy	44.0
IES Type	IV
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	454	67.5%
Downward House Side	219	32.5%
Downward Total	673	70%
Upward Street Side	176	62%
Upward House Side	107	38%
Upward Total	283	30%
Total Flux	956	100%







#### PA7R-LV5-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	966
Watts	21.7
Efficacy	45.0
IES Type	VS
BUG Rating	B1-U3-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	354	50.0%
Downward House Side	354	50.0%
Downward Total	708	73%
Upward Street Side	129	50%
Upward House Side	129	50%
Upward Total	259	27%
Total Flux	967	100%

# PA7R-NU1-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1136
Watts	21.75
Efficacy	52.0
IES Type	I
BUG Rating	B0-U0-G0
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	986	86.7%
Downward House Side	151	13.3%
Downward Total	1137	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	1137	100%

#### PA7R-NU2-12L-020-4K7

#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1305
Watts	21.74
Efficacy	60.0
IES Type	II
BUG Rating	B0-U0-G0
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1073	82.2%
Downward House Side	233	17.8%
Downward Total	1306	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	1306	100%


#### LOCATION: DATE:

PROJECT:


CATALOG #:


TYPE:

#### ISOFOOT CANDLE PLOT



#### **ISOFOOT CANDLE PLOT**









# **PHOTOMETRY** PA7R-NU3-12L-020-4K7


#### LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1228
Watts	21.76
Efficacy	56.0
IES Type	III
BUG Rating	B0-U0-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1035	84.3%
Downward House Side	194	15.8%
Downward Total	1228	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	1228	100%

ISOFOOT CANDLE PLOT



DATE: TYPE:

CATALOG #:

LOCATION:

PROJECT:

#### PA7R-NU3HS-12L-020-4K7


#### **LUMINAIRE DATA**

Description	4000K, 70CRI
Delivered Lumens	1037
Watts	21.74
Efficacy	48.0
IES Type	III
BUG Rating	B0-U0-G0
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	987	95.1%
Downward House Side	51	4.9%
Downward Total	1038	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	1038	100%

#### ISOFOOT CANDLE PLOT



#### PA7R-NU4-12L-020-4K7


## LUMINAIRE DATA

Description	4000K, 70CRI
Delivered Lumens	1482
Watts	21.67
Efficacy	68.0
IES Type	IV
BUG Rating	B0-U0-G1
Mounting Height	3.5 ft
Grid Scale	6 ft

#### **ZONAL LUMEN SUMMARY**

Zone	Lumens	% Luminaire
Downward Street Side	1318	88.9%
Downward House Side	164	11.1%
Downward Total	1483	100%
Upward Street Side	0	0%
Upward House Side	0	0%
Upward Total	0	0%
Total Flux	1483	100%

#### ISOFOOT CANDLE PLOT



currentlighting.com/kimlighting

<b>IKIM</b> LIGHTING	<b>`</b> ®
----------------------	------------





**PHOTOMETRY(CONTINUED)** 

PA7R-NU5-12L-020-4K7


#### **LUMINAIRE DATA**

4000K, 70CRI
1377
21.68
63.0
VS
B1-U0-G0
3.5 ft
6 ft

#### **ZONAL LUMEN SUMMARY**

Lumens	% Luminaire
689	50.0%
689	50.0%
1377	100%
0	0%
0	0%
0	0%
1377	100%
	689 689 1377 0 0

#### DATE: LOCATION: TYPE: PROJECT: CATALOG #:








LOCATION: DATE: TYPE: PROJECT: CATALOG #:


#### TM-30 DATA


#### **COLOR VECTOR GRAPHIC**



#### **TEST SOURCE** Rf 68 99 3947 CCT(K) Duv 0.0004 0.3831 0.3793 CIE R<sub>a</sub>

72

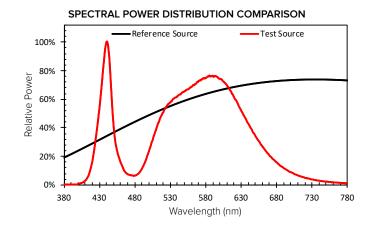

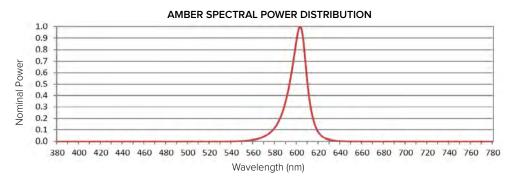

#### **ELECTRICAL DATA**

	Electrical									Dimming								
# LED	System	Drive	Line V	oltage		Amps AC		Min. Max		Dimming	Source current out of 0-10V			te voltage n 0-10V (+)				
	Watts	Current	VAC	Hz	120	208	240	277	347	480	Factor	THD (%)	Range	Min	Max	Min	Max	
10	22	550mA	120 400	F0/C0	0.18	0.11	0.09	0.08	0.06	0.05	>00	0 20	20	10% to	O A	1 A	0)/	10) /
12	14	350mA	120-480	50/60	0.12	0.07	0.06	0.05	0.04	0.03	>0.9	20	100%	0mA	1mA	OV	10V	

TM-21 Lifetime Calculation - Projected Lumen Maintenance (25°C / 77°C) & (40°C / 104°C)						
Hours	0	25,000	36,000	50,000	100,000	Reported L70
Projected Lumen	100%	98%	97%	95%	90%	60khrs

CRI Lumen Multiplier 80 and 90 CRI					
ССТ	80 CRI	90 CRI			
2700K	0.859	0.655			
3000K	0.9119	0.7033			
3500K	0.906	0.732			
4000K	0.8941	0.734			
5000K	0.879	0.7712			
Scailing factor of 5000K 70CRI lumen packages					

PA7R
BOLLARD

DATE:	LOCATION:	
TYPE:	PROJECT:	
CATALOG #:		

#### **ADDITIONAL INFORMATION**

#### LUMINOUS ACCENT:


 The Luminous Accent option adds an additional 1" / 25.4mm to the overall fixture height and may be controlled via wired DMX RDM or Bluetooth® wireless. The Luminous Accent shall be IK08.

#### **RGBW REMOTE APP**

- The RGBW Remote application may be downloaded free of charge from the Apple App Store or Google Play.
- · Color selection and adjustment.
- · Camera function for color matching.
- Intensity slider for dimming/ramping up.
- Save and rename up to 10 presets.
- · Group and rename fixtures.
- Fixture is password protected, refer to instructions to set unique password.

# nt line






#### MOUNTING

#### **ALUMINUM BODY**


 Once attached to base mounting plate, fixture may be rotated 20° in either direction and secured with set screws at base of the bollard body. KIM Lighting logo indicates 'street side' output.

#### Street Side

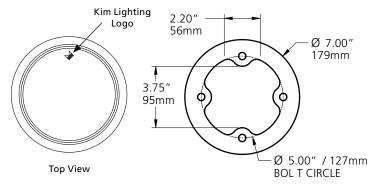

#### **SHIELDING**

HS configurations feature factory installed 180° shield(s) that may also be installed in the field for any
Optic configuration.

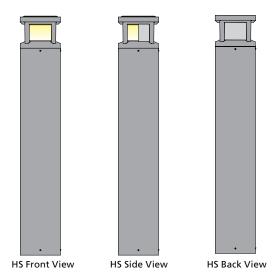


PA	7	R
BOLLA	RD	)


	1	202	
DATE:	LOCATION:		
TYPE:	PROJECT:		
CATALOG #:			

## **ADDITIONAL INFORMATION (CONTINUED)**

#### RECEPTACLE OUTLET PANEL


 The Receptacle outlet panel shall be NEMA 3R rated for wet location(s) while in use and shall be compatible with any single receptacle outlet device with standard mounting holes. Door shall be self-closing. Tamper resistant lock must be specified at time of order. Devices and device wiring by others.





#### INTEGRAL ELECTRICAL BOX


 The integral 2 Gang electrical box shall be 3" deep and have standard mounting holes for installing either a single receptacle outlet device or a pair of single receptacle outlet device. Devices, device wiring, device hardware and bezel by others.

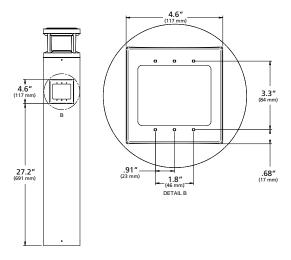

#### **SPEAKER GRILLE ENCLOSURE**

 The speaker grille enclosure shall accommodate a 3"Ø marine grade speaker rated for outdoor use. Grille shall be secured with (4) Torx # screws for accessibility. Mounting provisions as shown. Speaker, mounting bracket/hardware and wiring by others.



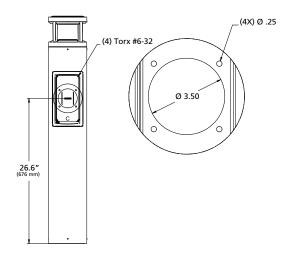



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: PA7R-NU3-12L-010-4K7.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST]

**[TESTLAB] CURRENT** 

[ISSUEDATE] 10/6/2017

[MANUFAC] KIM LIGHTING

[LUMCAT] PA7R-NU3-12L-010-4K7

[LUMINAIRE] PA7R [LAMP] C-70-CRI

[MORE] DATA SHOWN IS ABSOLUTE.

[MORE] PRORATED FROM 5000K.

[ SEARCH SOURCETYPE] LED

SEARCH CRI] 70

SEARCH COLORTEMP] 4000k

SEARCH APPLICATION] Outdoor, Bollard, Amusement, Automotive, Commercial, Dock, Educational, Government,

SEARCH\_MOUNTING] Bollard

[ ABSOLUTELUMENS] 881

#### **CHARACTERISTICS**

**IES Classification** Type III Longitudinal Classification Short

Lumens Per Lamp N.A. (absolute) **Total Lamp Lumens** N.A. (absolute)

Luminaire Lumens 881

**Downward Total Efficiency** N.A. (absolute) Total Luminaire Efficiency N.A. (absolute)

Luminaire Efficacy Rating (LER) 63 **Total Luminaire Watts** 14.08 **Ballast Factor** 1.00 Upward Waste Light Ratio 0.00 Maximum Candela 786 Maximum Candela Angle 60H 65V Maximum Candela (<90 Degrees Vertical) 786 Maximum Candela Angle (<90 Degrees Vertical) 60H 65V

Maximum Candela At 90 Degrees Vertical 0 (0.0% Luminaire Lumens)


Maximum Candela from 80 to <90 Degrees Vertical 96 (10.9% Luminaire Lumens) Cutoff Classification (deprecated)

N.A. (absolute)

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**


FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	Lumens 1.4 383.0 341.0 7.2 1.1 78.0 64.8 4.4 0.0 0.0	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A. N.A	% Luminaire 0.2 43.5 38.7 0.8 0.1 8.9 7.4 0.5 0.0 0.0
Total	880.9	N.A.	100.0
BUG Rating	B0-U0-G0		

#### **POLAR GRAPH**

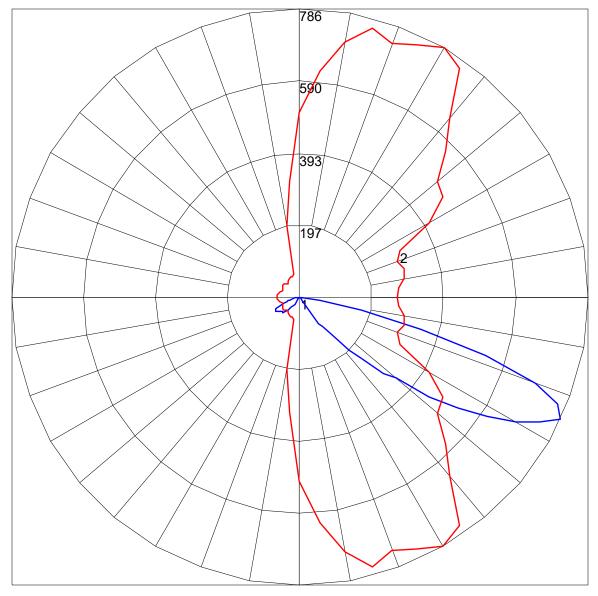

Maximum Candela = 786 Located At Horizontal Angle = 60, Vertical Angle = 65 # 1 - Vertical Plane Through Horizontal Angles (60 - 240) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)


#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

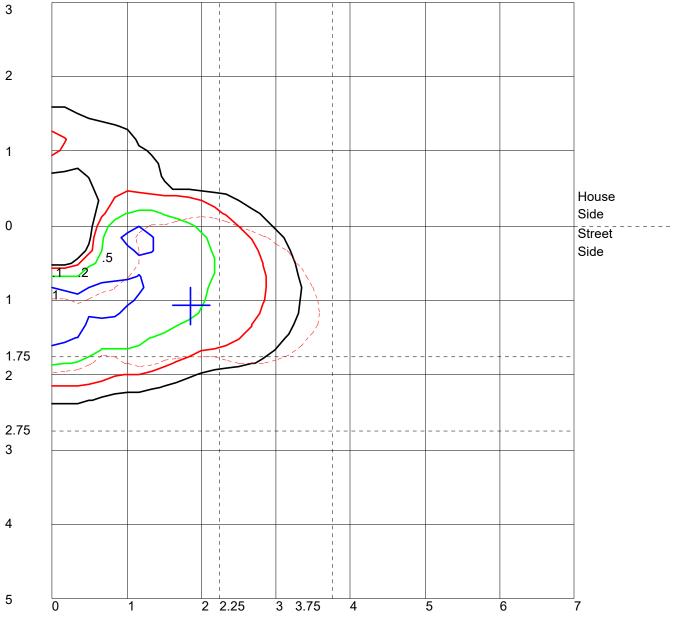

Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

## **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

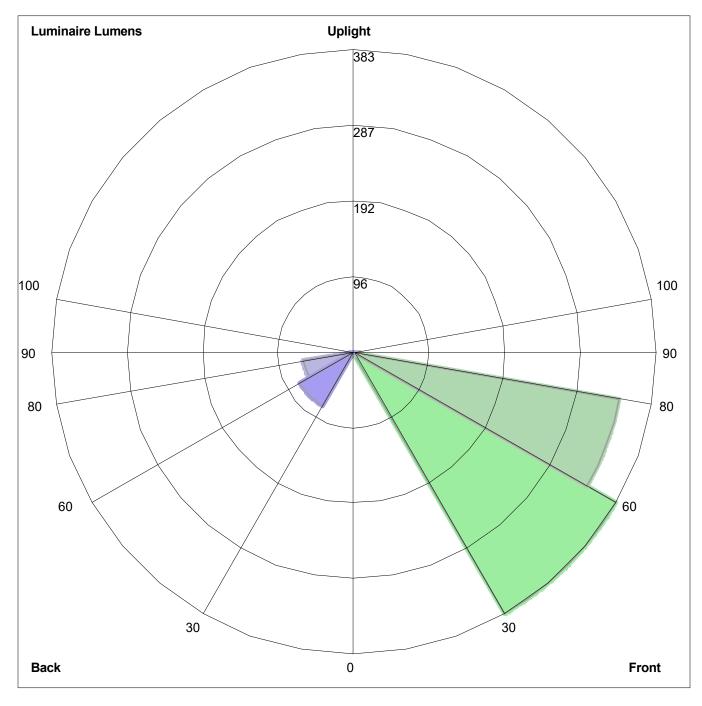

Luminaire Lumens:

Front: Low=1.4, Medium=383.0, High=341.0, Very High=7.2 Back: Low=1.1, Medium=78.0, High=64.8, Very High=4.4

Uplight: Low=0.0, High=0.0

BUG Rating: B0-U0-G0



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: PA7R-NU4-12L-010-4K7.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST]

[TESTLAB] CURRENT [ISSUEDATE] 10/6/2017 [MANUFAC] KIM LIGHTING

[LUMCAT] PA7R-NU4-12L-010-4K7

[LUMINAIRE] PA7R [LAMP] C-70-CRI

[MORE] DATA SHOWN IS ABSOLUTE.

[\_SEARCH\_SOURCETYPE] LED

SEARCH CRI] 70

SEARCH COLORTEMP] 4000k

SEARCH APPLICATION] Outdoor, Bollard, Amusement, Automotive, Commercial, Dock, Educational, Government,

SEARCH\_MOUNTING] Bollard

[ ABSOLUTELUMENS] 1063

#### **CHARACTERISTICS**

**IES Classification** Type IV Longitudinal Classification Very Short N.A. (absolute) Lumens Per Lamp **Total Lamp Lumens** N.A. (absolute) **Luminaire Lumens** 1063

**Downward Total Efficiency** N.A. (absolute) Total Luminaire Efficiency N.A. (absolute) Luminaire Efficacy Rating (LER) 76

**Total Luminaire Watts** 14 **Ballast Factor** 1.00 **Upward Waste Light Ratio** 0.00 Maximum Candela 1489 Maximum Candela Angle 0H 65V Maximum Candela (<90 Degrees Vertical) 1489

Maximum Candela from 80 to <90 Degrees Vertical

Maximum Candela Angle (<90 Degrees Vertical) 0H 65V Maximum Candela At 90 Degrees Vertical 0 (0.0% Luminaire Lumens)

Cutoff Classification (deprecated)

N.A. (absolute)

95 (8.9% Luminaire Lumens)

Page 1


# IES ROAD REPORT

PHOTOMETRIC FILENAME: PA7R-NU4-12L-010-4K7.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**


FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100)	Lumens 1.3 434.8 501.8 7.6 1.3 71.2 41.7 3.5 0.0	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 0.1 40.9 47.2 0.7 0.1 6.7 3.9 0.3 0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	1063.2	N.A.	100.0
DUI 0 D (1)	DO 110 OO		

#### **POLAR GRAPH**

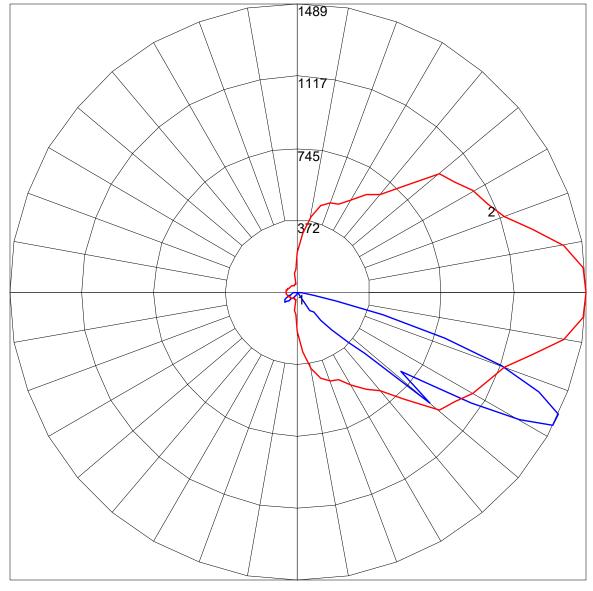

Maximum Candela = 1489 Located At Horizontal Angle = 0, Vertical Angle = 65 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (65) (Through Max. Cd.)


#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

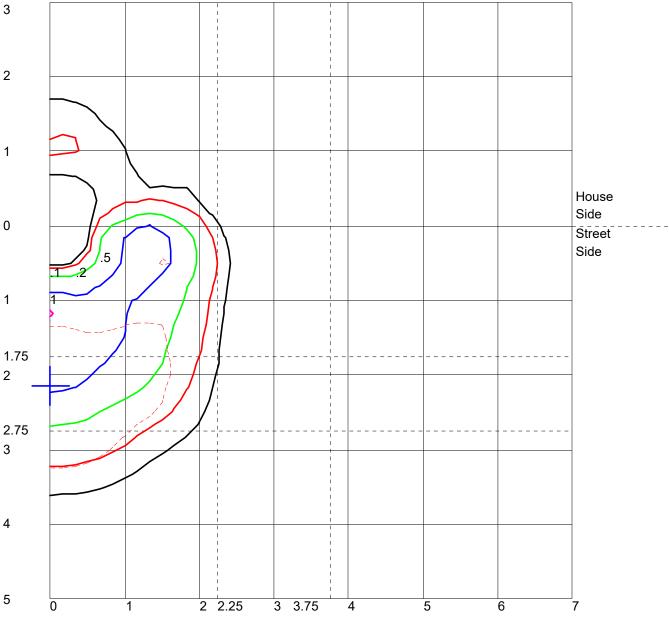

Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

## **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

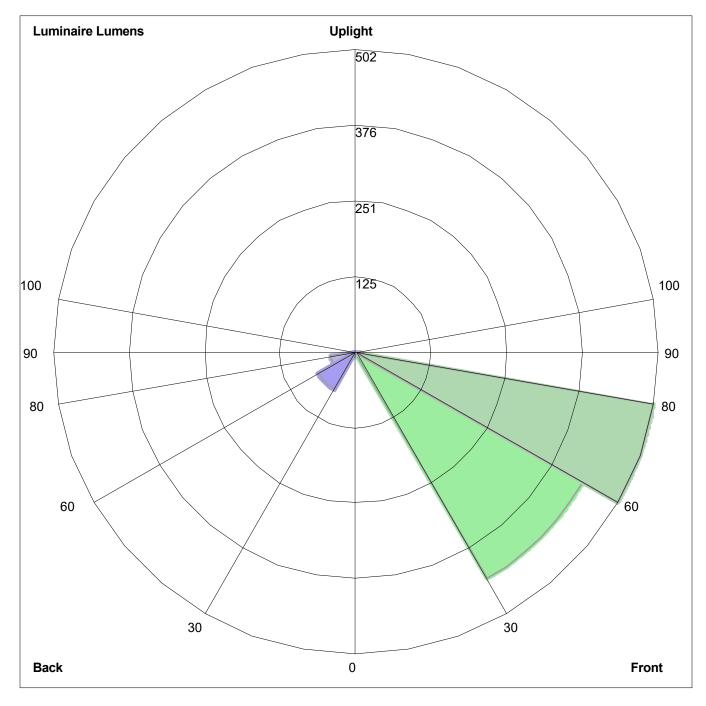

Luminaire Lumens:

Front: Low=1.3, Medium=434.8, High=501.8, Very High=7.6 Back: Low=1.3, Medium=71.2, High=41.7, Very High=3.5

Uplight: Low=0.0, High=0.0

BUG Rating: B0-U0-G0

# **CATSKILL LED (INTEGRAL)**

IP66 RATED

DATE: PROJECT:

CATALOG NUMBER LOGIC:

TYPE:

TYPE ODC



\*Accommodates up to 2 lens/shielding media.

\*\*120V only.

Example: CK - LED - TR - x98 - SP - BZW - 9 - 11 - A - INC - 120

MATERIAL

Aluminum

SERIES

CK - Catskill

SOURCE

LED - Chip on Board (COB) Technology

HOUSING

**LED TYPE** 

TR - Integral Driver

x98 - 13W/2700K/80CRI	x101 - 13W/2700K/90CRI
x99 - 13W/3000K/80CRI	x102 - 13W/3000K/90CRI
x103 - 13W/3500K/80CRI	x104 - 13W/3500K/90CRI

 x103 - 13W/3500K/80CRI
 x104 - 13W/3500K/90CRI

 x100 - 13W/4000K/80CRI
 x121 - 13W/4000K/90CRI

 x122 - 21W/2700K/80CRI
 x126 - 21W/2700K/90CRI

 x123 - 21W/3000K/80CRI
 x127 - 21W/3000K/90CRI

x124 - 21W/3500K/80CRI x128 - 21W/3500K/90CRI x125 - 21W/4000K/80CRI x129 - 21W/4000K/90CRI

**OPTICS** 

FINISH (See page 2 for full-color swatches)

Standard Finishes (BZP, BZW, BLP, BLW, WHP, WHW, SAP, VER)

Premium Finish (ABP, AMG, AQW, BCM, BGE, BPP, CAP, CMG, CRM, HUG, NBP, OCP, RMG, SDS, SMG, TXF, WCP, WIR) \*

0

 $\odot$ 

Also available in RAL Finishes

**LENS TYPE\*** 

9 - Clear (Standard)

12 - Soft Focus 13 - Rectilinear

SHIELDING\*

11 - Honeycomb Baffle

**CAP STYLE** 

A - 45°

B - 90°

C - Flush

D - 45° Less Weephole (Downward Aiming Only)

E - 90° Less Weephole (Downward Aiming Only)

CONTROL

NON - Non Dimming

ELV - Dimming Driver (For use with Electronic Low Voltage Dimmer)\*\*

INC - Dimming Driver (For use with Incandescent Dimmer)\*\*

010 - 0-10V Dimming Driver (Dimming ≤3-100%)

**INPUT VOLTAGE** 

120 - 120 VAC

277 - 277 VAC



B-K LIGHTING

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM


THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.


10/27/2023 SKU-1371 SUB-2822-00


# CATSKILL LED (INTEGRAL)


**IP66 RATED** 

DATE: PROJECT: TYPE:











"A/D" CAP


"B/E" CAP


"C" CAP











#### STANDARD FINISHES



Click Here to view larger, full-color swatches of all available finishes on our website.

#### PREMIUM FINISHES

Cascade Mtn. Rocky Mtn. Granite (RMG) Granite (CMG) Black Chrome Beige (BGE) (BCM) **Antique Brass** Brown Patina Powder (ABP) Powder (BPP) **Antique White** Cream

(AQW)

Sierra Mtn Granite (SMG)

Weathered Copper (WCP)

Sonoran Desert Sandstone (SDS)

**Natural Brass** 

Powder (NBP)

Old Copper (OCP)

Aleutian Mtn

Granite (AMG)

Weathered Iron (WIR)

(TXF) Hunter Green

(HUG)

Textured Forest

Clear Anodized Powder (CAP)

**MADE IN THE USA** 

(CRM)

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

10/27/2023 SKU-1371 SUB-2822-00

CATSKILL LE	IP66 RATED	
DATE:	PROJECT:	TYPE:
Accessories (Configure	separately)	Drivers (Configure separately

# **SPECIFICATIONS**

ELECTRICAL	WATTAGE	13W or 21W LED
	LED	COB technology and modular design with electrical quick disconnects allow for easy field upgrade and maintenance. LM-80 certified. Title 24, JA8 compliant options available. Minimum 50,000 hour rated life at 70% of initial lumens (L70).
	COLOR MANAGEMENT	COB technology delivers natural white light. Exact color point conformity exceeds ANSI C78.377 standard. Module exceeds 80 CRI (RA>80, R9.16). Color point uniformity 2 SDCM color control for 2700K-4000K CCT.
	WIRING	INC/ELV Wiring: 3 Wire,18GA, Stranded, XLPE, 125°C, 300V, UL3265 rated wire 0-10 Wiring: 5 Wire, 16GA, Stranded, TPE, 105°C, 300V, SJTOW, Cable Master, SJTOW-165-BLK-GVCC
	DRIVER	Incandescent/ELV Control Option Driver: Dimming driver for use with standard incandescent or electronic low voltage dimmers (10-100% range), 120VAC only. 0-10 Control Option Driver: Dimming driver for use with standard 0-10V dimmers (\$\leq 3-100\% dim. range), 120-277VAC. With [1] 440mA (13W) / 700mA (21W). 50/60Hz. >0.9 Power Factor, (INC/ELV)10.0A/(0-10) <250mA in-rush current , .20\%THD (nominal at 120VAC full load). Output over-voltage, overcurrent, and short circuit protection with auto recovery. Class 2 power supply; FCC47CFR Part 15 Compliant Class B (120VAC)/Class A (277VAC).
PHYSICAL	MATERIALS	Furnished in copper-free aluminum (6061-T6).
	BODY	Unibody design with enclosed, water-proof wireway and integral heat sink is fully machined from solid billet. Anti-condensation and corrosion vent equalizes fixture pressure and eliminates potential for damage to internal components.
	CAP	Fully machined and accommodates two (2) lens or louver media.
	LENS	Shock-resistant, tempered, 1/8" thick soda lime glass lens is factory adhered to fixture cap and provides hermetically sealed optical compartment.
	INSTALLATION	5" dia., machined canopy with stainless steel universal mounting ring permits mounting to 4" octagonal junction box (by others).
	OPTICS	Interchangeable optics permit changes in the field.
	HARDWARE	Tamper-resistant, stainless steel hardware. 360HD hardware is additionally black oxide treated for corrosion resistance.
	FINISH	StarGuard, our 15-stage chromate-free process, cleans and conversion coats aluminum components prior to application of Class 'A' TGIC polyester powder coating, and is RoHS compliant.
	WARRANTY	5-year limited warranty.
	CERTIFICATION & LISTING	UL tested to IESNA LM-79. UL Listed. Certified to CAN/CSA/ANSI Standards. RoHS compliant components. Suitable for indoor or outdoor use. IP66 Rated. Made in the USA with sustainable processes.
TITLE 24, JA8		
TITLE 24, JA8  cultus  RoHS		
RoHS∜		
MADE IN THE		
USA		

**B-K LIGHTING** 

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

10/27/2023 SKU-1371 SUB-2822-00

# LAMP & DRIVER DATA (page 1 of 2)

DATE: PROJECT: TYPE:

#### **DRIVER ELECTRICAL DATA**

Туре	AC Input Range	Frequency Hz	Power Factor At Full Load (Efficiency)	THD	InRush Current	Operating Current	Operation Ambient Temperature	Dimmer Type	Dimmer Range
Integral	120VAC	50/60	> 0.9	20%	10A	440mA (13W)/700mA (21W)	-30° C ~ 70°C	TRIAC/ELV	1-100%
Integral	105-300VAC	50/60	> 0.9	20%	<250mA	440mA (13W)/700mA (21W)	-30° C ~ 90°C	0-10	≤3-100%

LM79 DATA OPTICAL DATA

BK No.	CCT (Typ.)	CRI (Typ.)	Input Watts (Typ.)	L70 Data	Angle	СВСР	Total Del. Lumens	Muliplier
	2700	80	13	50,000	17	6480	829	0.92
x98	2700	80	13	50,000	45	1773	1041	0.92
	2700	80	13	50,000	55	1478	1180	0.92
	3000	80	13	50,000	17	6796	869	0.96
x99	3000	80	13	50,000	45	1860	1091	0.96
	3000	80	13	50,000	55	1550	1237	0.96
	3500	80	13	50,000	17	6685	855	0.95
x103	3500	80	13	50,000	45	1829	1074	0.95
	3500	80	13	50,000	55	1525	1217	0.95
	4000	80	13	50,000	17	7059	903	1.00
x100	4000	80	13	50,000	45	1931	1134	1.00
	4000	80	13	50,000	55	1610	1285	1.00
	2700	90	13	50,000	17	4486	574	0.69
x101	2700	90	13	50,000	45	1228	720	0.69
	2700	90	13	50,000	53	1023	817	0.69
	3000	90	13	50,000	17	4936	631	0.73
x102	3000	90	13	50,000	45	1350	793	0.73
	3000	90	13	50,000	55	1126	899	0.73
x104	3500	90	13	50,000	17	4775	611	0.71
	3500	90	13	50,000	45	1307	767	0.71
	3500	90	13	50,000	55	1089	869	0.71
x121	4000	90	13	50,000	17	5324	681	0.75
	4000	90	13	50,000	45	1457	855	0.75
	4000	90	13	50,000		1214	969	0.75
	2700	80	21	50,000	17	9040	1208	0.87
x122	2700	80	21	50,000	47	2437	1359	0.87
	2700	80	21	50,000	55	1876	1416	0.87
	3000	80	21	50,000	17	10030	1341	0.96
x123	3000	80	21	50,000	45	2704	1508	0.96
	3000	80	21	50,000	55	2082	1571	0.96
x124	3500	80	21	50,000	17	8496	1136	0.81
	3500	80	21	50,000	45	2290	1277	0.81
	3500	80	21	50,000	55	1763	1331	0.81
	4000	80	21	50,000	17	10431	1394	1.00
x125	4000	80	21	50,000	45	2812	1568	1.00
	4000	80	21	50,000	55	2165	1634	1.00

**B-K LIGHTING** 

MADE IN THE USA

559.438.5800 | INFO@BKLIGHTING.COM | BKLIGHTING.COM

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF B-K LIGHTING, INC. AND ITS RECEIPT OR POSSESSION DOES NOT CONVEY ANY RIGHTS TO REPRODUCE, DISCLOSE ITS CONTENTS, OR TO MANUFACTURE, USE OR SELL ANYTHING IT MAY DESCRIBE. REPRODUCTION, DISCLOSURE OR USE WITHOUT SPECIFIC WRITTEN AUTHORIZATION OF B-K LIGHTING, INC. IS STRICTLY FORBIDDEN.

# LAMP & DRIVER DATA (page 2 of 2)

DATE: PROJECT: TYPE:

LM79 DATA	OPTICAL DATA
-----------	--------------

BK No.	ССТ (Тур.)	CRI (Typ.)	Input Watts (Typ.)	L70 Data	Angle	СВСР	Total Del. Lumens	Muliplier
	2700	90	21	50,000	17	6120	818	0.68
x126	2700	90	21	50,000	45	1650	920	0.68
	2700	90	21	50,000	55	1270	959	0.68
	3000	90	21	50,000	17	7535	1007	0.75
x127	3000	90	21	50,000	45	2031	1133	0.75
	3000	90	21	50,000	55	1564	1180	0.75
	3500	90	21	50,000	17	5406	723	0.64
x128	3500	90	21	50,000	45	1457	813	0.64
	3500	90	21	50,000	55	1225	847	0.64
	4000	90	21	50,000	17	8148	1089	0.78
x129	4000	90	21	50,000	45	2196	1225	0.78
	4000	90	21	50,000	55	1691	1277	0.78

#### **OPTICS**

Optic	Angle
Spot w/ 13 Acc	y 16 x 55
Spot	17°
Flood	45°
Wide Flood	55°

IBC Engineering Services, Inc. Page 57 of 149



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: DE-LED-TR-X100-FL-12439915-12439915.04.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] 12439915.04

[TESTLAB] UL Verification Services Inc.

[ISSUEDATE] 9/13/2018

[MANUFAC] B-K Lighting Inc

[LUMCAT] DE-LED-TR-X100-FL-9-4000K

[LUMINAIRE] White cylindrical metal housing with plastic prismatic ref

[MORE] lector and clear glass lens

[LAMP] One (1) LED with optics below

[BALLAST] ERP EBR015U-0440-36

OTHER] 24.5 C, 120.004 V, 0.107876 A, 12.7427 W, 0.984331 PF, 59.9982

[MORE] Hz

OTHER] This test was performed using the calibrated photodetector met

[MORE] hod of absolute photometry.

#### **CHARACTERISTICS**

IES Classification	Type V
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	1129`
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	89 `
Total Luminaire Watts	12.7427
Ballast Factor	1.00
Upward Waste Light Ratio	0.00
Maximum Candela	1931.3
Maximum Candela Angle	0H 0V
Maximum Candela (<90 Degrees Vertical)	1931.3
Maximum Candela Angle (<90 Degrees Vertical)	0H 0V
Maximum Candela At 90 Degrees Vertical	.1 (0.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	1.6 (0.1% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

Page 1

# IES ROAD REPORT PHOTOMETRIC FILENAME : DE-LED-TR-X100-FL-12439915-12439915.04.IES


# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90)	Lumens 471.4 89.4 3.0 0.6 471.4 89.4 3.0 0.6	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 41.8 7.9 0.3 0.0 41.8 7.9 0.3 0.0
UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	< 0.05 0.0	N.A. N.A.	0.0 0.0
Total	1128.8	N.A.	100.0
BUG Rating	B1-U1-G0		

Page 2

# IES ROAD REPORT PHOTOMETRIC FILENAME : DE-LED-TR-X100-FL-12439915-12439915.04.IES


#### **POLAR GRAPH**

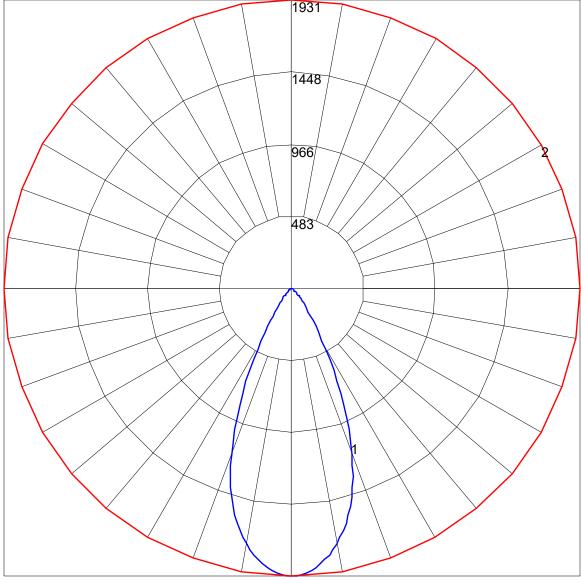

Maximum Candela = 1931.3 Located At Horizontal Angle = 0, Vertical Angle = 0 # 1 - Vertical Plane Through Horizontal Angles (0 - 180) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME : DE-LED-TR-X100-FL-12439915-12439915.04.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

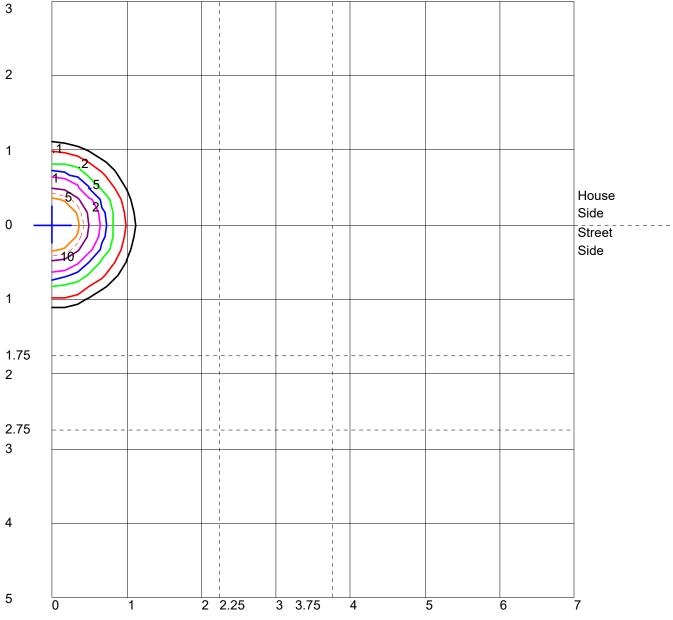


Distance In Units Of Mounting Height
Values Based On 10 Foot Mounting Height
1/2 Maximum Candela Trace Shown As Dashed Curve
(+) = Maximum Candela Point

## **IES ROAD REPORT**

#### PHOTOMETRIC FILENAME: DE-LED-TR-X100-FL-12439915-12439915.04.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

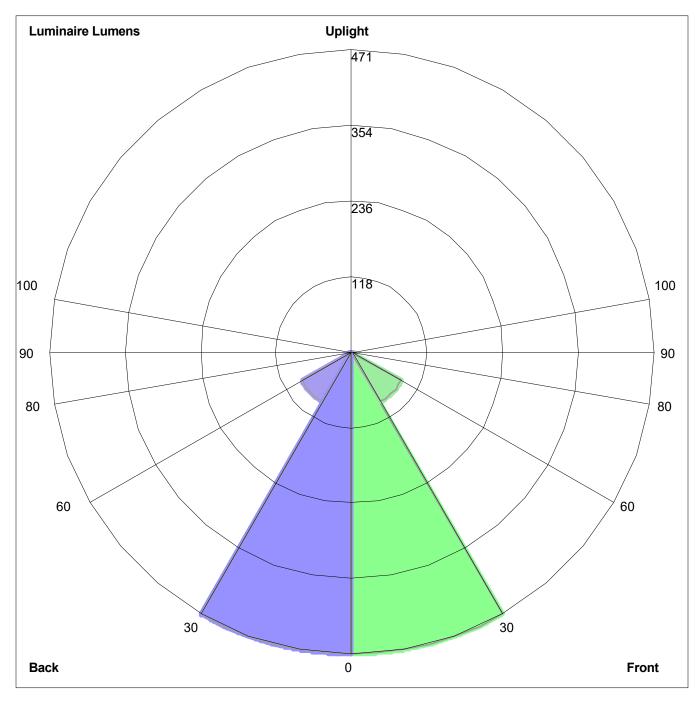

Luminaire Lumens:

Front: Low=471.4, Medium=89.4, High=3.0, Very High=0.6 Back: Low=471.4, Medium=89.4, High=3.0, Very High=0.6

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U1-G0

**Exterior Lighting** 2024-02-05 T 3

PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS

TYPE: PROJECT: CATALOG #: PS3-SO-

**PROFILE** 

OUTPUT 10 W **OPTICS** 13°, 20°, 30°, 40°, 55°

WHITE CCT 2200K, 2700K, 3000K, 3500K, 4000K

STATIC COLORS RED, GREEN, BLUE, AMBER PERFORMANCE UP TO 109.2 LM/W

**VOLTAGE** 120V OR 277V

POWER INTEGRATED POWER SUPPLY

DIMMING 0-10V WEIGHT 3.0 LBS

HOUSING DIE-CAST ALUMINUM LENS TEMPERED GLASS

**FINISH** HIGH DURABILITY POWDER COATING

WARRANTY 5-YEAR LIMITED -30° C TO 50° C OPERATING TEMP LUMEN MAINTENANCE 75,000 HOURS

CERTIFICATION ETL cETL WET LOCATION IP66









#### **TYPE OFA**



#### STANDARD FINISHES













TEXTURED S. STONE

**OPTICS** 














## PERFORMANCE SAMPLE

Go to Performance Data >

4000K 10 W	13°	20°	30°	40°	55°
LUMENS	849	1316	1282	1322	1212
CANDELA	9570	4875	3079	2091	1461
EFFICACY	79.0 LM/W	109.2 LM/W	106.5 LM/W	109.9 LM/W	100.7 LM/W

## **PROFILE**

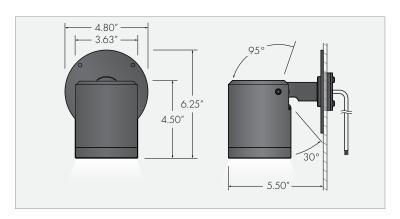

#### **OPTION**







VISOR


SNOOT

INTEGRAL HEX LOUVER

IBC Engineering Services, Inc.

PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS

PROJECT: TYPE: CATALOG #: P\$3-\$0- - - - - -

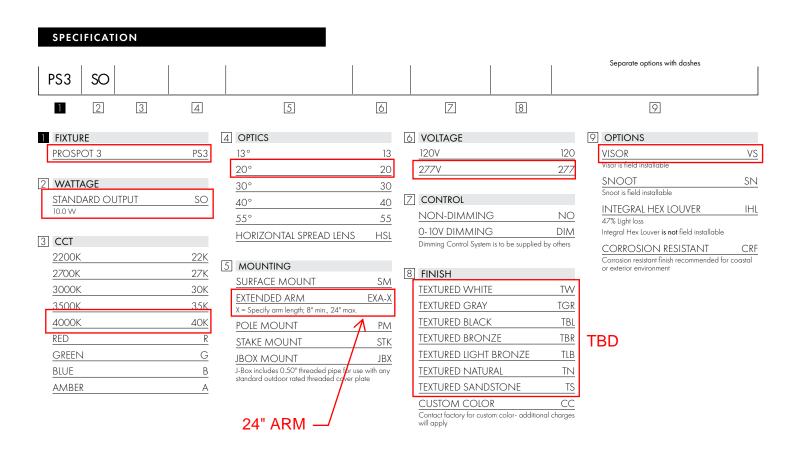

Exterior Lighting 2024-02-05 PROSPOT 3

PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS

PROJECT: TYPE: CATALOG #	#: P\$3-\$O
--------------------------	-------------

## PERFORMANCE

			10 WATTS		
OPTIC	ССТ	DELIVERED LUMENS	TOTAL WATTAGE	LUMINAIRE EFFICACY	PEAK CANDELA
13°					
	4000K	849 LM	12.0 W	79.0 LM/W	9570
20°					
	4000K	1316 LM	12.0 W	109.2 LM/W	4875
30°					
	4000K	1282 LM	12.0 W	106.5 LM/W	3079
40°					
	4000K	1322 LM	12.0 W	109.9 LM/W	2091
55°					
	4000K	1212 LM	12.0 W	100.7 LM/W	1461

## WIRING

# MAXIMUM FIXTURES PER CIRCUIT (CIRCUITS MAY NOT BE LOADED OVER 10 AMPS)

		10 WATTS
FIXTURE	120V	277V
PROSPOT 3	80	200

DMX DIMMING: 32 fixtures per DMX splitter output


Exterior Lighting 2024-02-05 PROSPOT 3


PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS

PROJECT: TYPE: CATALOG #: PS3-SO- - - - - - -


#### DIMENSIONS

#### SURFACE MOUNT (SM)

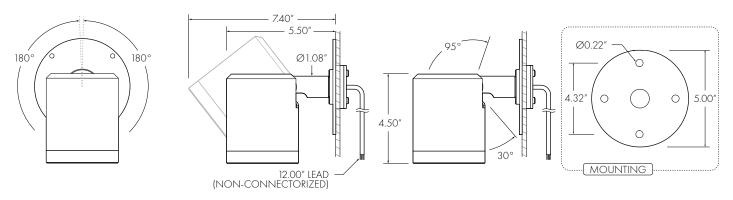

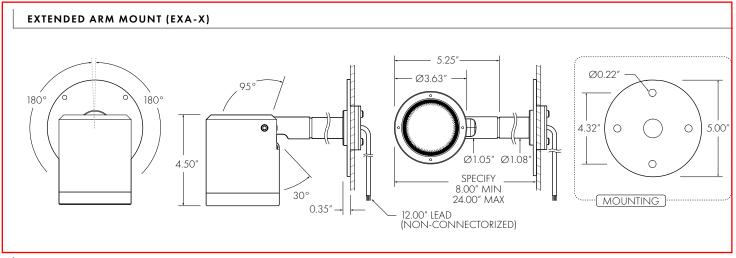

#### POLE MOUNT (PM)

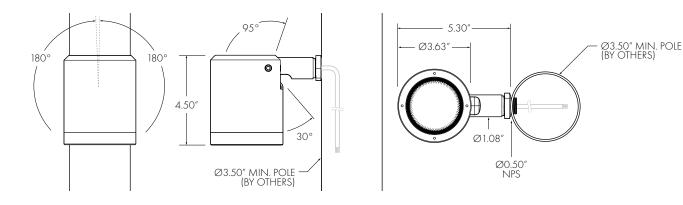


Exterior Lighting 2024-02-05 PROSPOT 3

PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS

PROJECT: TYPE: CATALOG #: PS3-SO- - - - - - -


#### DIMENSIONS


#### STAKE MOUNT (STK)

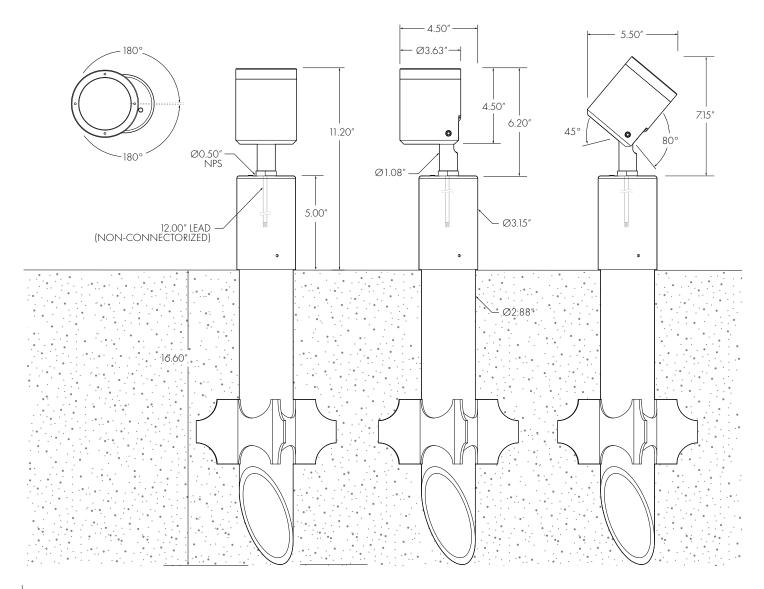


J-BOX MOUNT (JBX)

J-Box supplied by others



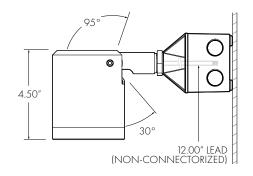




PERFORMANCE PROJECTOR | WHITE LIGHT AND STATIC COLORS


PROJECT: TYPE: CATALOG #: PS3-SO- - - - - -

## **ACCESSORIES**

#### VISOR (VS)

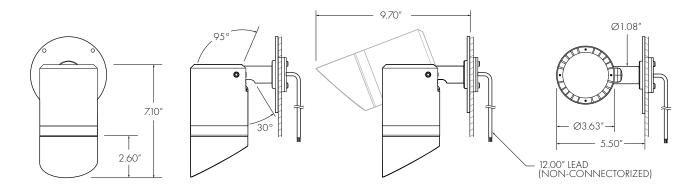

## SNOOT (SN)

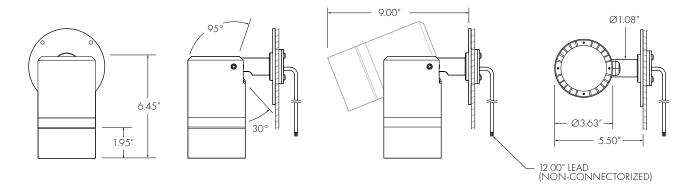



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: PS3-10-20°.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002
[TEST] PS3/10/20°/xx/UNV/NO/TW
[TESTLAB] INSIGHT LIGHTING
[TESTDATE] Mar 29 2022
[ISSUEDATE] 2022-03-31 13:55:46
[NEARFIELD]
[LAMPPOSITION] 0,0
[OTHER] EVERFINE GO-2000B\_V1 SYSTEM
[MANUFAC] Insight Lighting
[LUMCAT] PS3/10/20°/xx/UNV/NO/TW

#### **CHARACTERISTICS**

**IES Classification** Longitudinal Classification Lumens Per Lamp **Total Lamp Lumens Luminaire Lumens Downward Total Efficiency** Total Luminaire Efficiency Luminaire Efficacy Rating (LER) **Total Luminaire Watts Ballast Factor** Upward Waste Light Ratio Maximum Candela Maximum Candela Angle Maximum Candela (<90 Degrees Vertical) Maximum Candela Angle (<90 Degrees Vertical) Maximum Candela At 90 Degrees Vertical Maximum Candela from 80 to <90 Degrees Vertical Cutoff Classification (deprecated)

N.A. (absolute)
N.A. (absolute)
1319
N.A. (absolute)
N.A. (absolute)
110
12.05
1.00
0.01
4874.6
360H 0V
4874.6
360H 0V

Type VS

Very Short

.031 (0.0% Luminaire Lumens) .407 (0.0% Luminaire Lumens)

N.A. (absolute)

Page 1

# **IES ROAD REPORT**


PHOTOMETRIC FILENAME: PS3-10-20°.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	Lumens 531.8 129.7 1.2 0.1 518.6 128.5 1.3 0.1 < 0.05 8.3	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A. N.A	% Luminaire 40.3 9.8 0.1 0.0 39.3 9.7 0.1 0.0 0.0
Total	1319.6	N.A.	100.0
BUG Rating	B2-U1-G0		

# IES ROAD REPORT PHOTOMETRIC FILENAME: PS3-10-20°.IES

#### **COEFFICIENTS OF UTILIZATION**

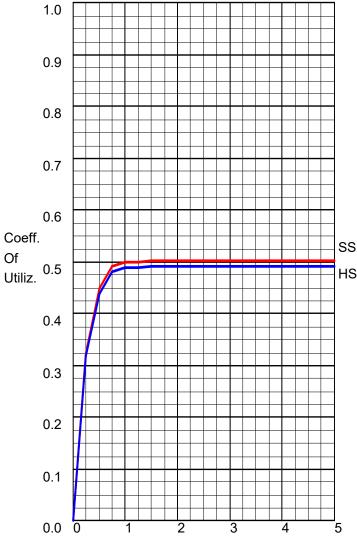


Street Width / Mounting Height

#### **FLUX DISTRIBUTION**

	Lumens	Percent Of Luminaire
Downward Street Side	662.8	50.2
Downward House Side	648.4	49.1
Downward Total	1311.2	99.4
Upward Street Side	4.1	0.3
Upward House Side	4.2	0.3
Upward Total	8.3	0.6
Total Flux	1319.5	100.0

# IES ROAD REPORT PHOTOMETRIC FILENAME: PS3-10-20°.IES


#### **POLAR GRAPH**

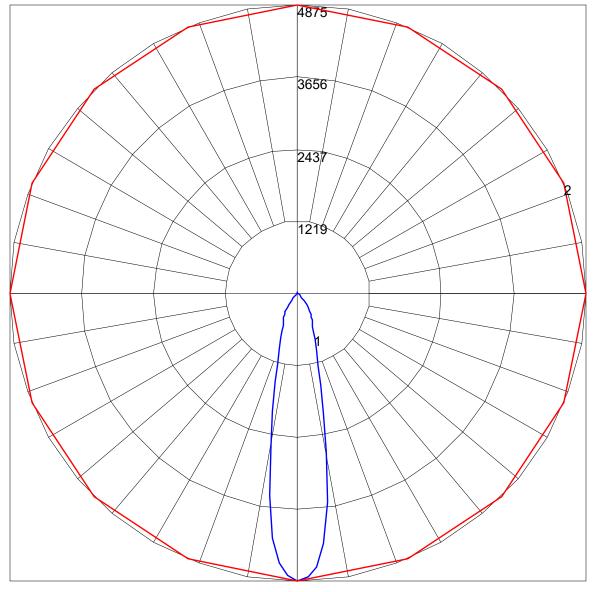


Maximum Candela = 4874.6 Located At Horizontal Angle = 360, Vertical Angle = 0 # 1 - Vertical Plane Through Horizontal Angles (360 - 180) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (0) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: PS3-10-20°.IES

## ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

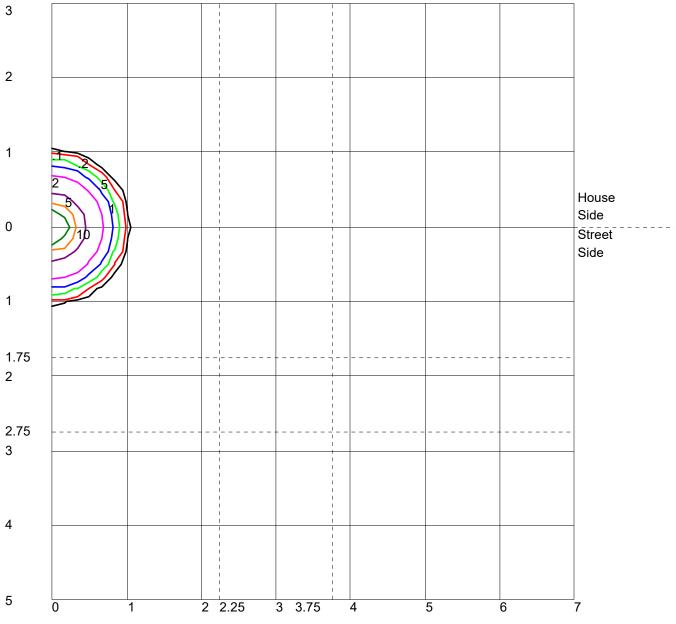

Distance In Units Of Mounting Height
Values Based On 10 Foot Mounting Height

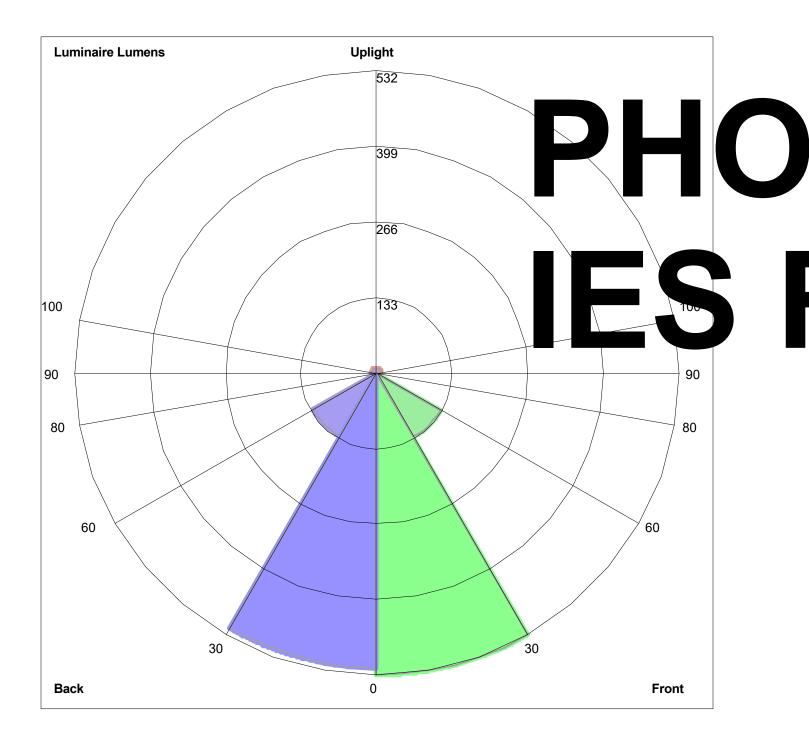

IBC Engineering Services, Inc. Page 74 of 149

PH: 262.505.5124 FX: 262.753.6582

www.klikusa.com sales@klikusa.com



**Project Name:** Location: Specifier: Rep Agency:

Fixture Type:

Product Code: TYPE ORA

# KLIK LEDpod<sup>TM</sup> 40 Patented

#### **Description**

Discrete, seamless point source LED fixture for use in all code-compliant handrail, especially curving ramps and helical stairs as well as long runs on bridges and pedestrian paths. Asymmetric optic allows mounting at rail nadir, eliminating uncomfortable glare

#### **Housing**

Clear anodized aluminum body as standard. Color-match anodized or bronze body as options, consult factory,

Aluminum body has a fine 25-micron finish and is then hard-coat anodized, thus preventing galvanic corrosion. Silicone gasket seals the installation from water ingress and provides added means of electrical isolation to minimize potential for galvanic

#### **Mounting**

Patented attachment method offers unparalleled security and ease of mounting. Requires only a simple drilled hole in railing material, eliminates threading, gluing or exposed fasteners common among other handrail fixtures. All conductors remain internal to railing to provide secure and safe wiring. IK10 Impact rating ensures vandal resistance. Tamperproof anti-theft option available for extreme environments; consult factory.

- Tube Size: Ø 1.5" 1.75", Max. wall .2" Other sizes available upon request
- Cut Out: 25mm
- Weight: 0.16 LBS


## **Electrical/LED Driver**

- Input Voltage: 24 VDC Operating Temp: -40 to 120° F
- Efficiency: 88 lm/W
- Driver: Must use class 2 driver
- - Primary Driver: 110 277 VAC UL Listed Constant Voltage
  - Secondary Driver: 350 700mA Constant Current (provided with fixture)
- Control: DALI, 0-10V, DMX
- DMX control for dimming only, not for individually addressed LEDpod Enclosure: Minimum NEMA2 for indoor, NEMA 3R for outdoor
- Wire connectors provided; factory pre-wire available, consult factory

#### Listings

- ETL listed, UL 1598/CSA 22.2; CE
- IP65 rated All IP rated luminaires tested to AS60529-2004 Degrees of protection provided by enclosures (IP Code)
- IK10 Impact Resistance
- Wet location rated
- International Dark Sky Association Certified (Color temperature must be Amber or less than 3000K)

















Asymmetric

Symmetric











# Product Codes Follow the steps to specify your fixture. Enter Product Code in field at top of page. Example: LP4030KA40

\*Please note, all KLIK fixtures are now

\*Must purchase Driver and Enclosure

through KLIK to hold warranty

dimmable as standard

Rail Size1, 2 Color<sup>3</sup> Fixture Type Distribution Rail Wall Thickness LP LEDpod **40** 1.50" Tube 27K 2700K A Asymmetric **30K** 3000K Symmetric 1513 1.5" x 1/8 Wall Tube -or-1.66" Pipe 35K 3500K 05 Sch 5 Pipe **40K** 4000K **AMB** Amber

1512 1.5" x 11ga Tube (.12 wall)

10 Sch 10 Pipe

40 Sch 40 Pipe 80 Sch 80 Pipe **CUST** Non-stock

**Lens Option** 

Clear lens standard

Add FRS for frosted diffused lens

Add OTK for Optek-film diffused lens

Custom Bezel⁵

Rose Gold Antique Brass Dark Antique Bronze Black Anodized

- 1. Additional sizes are available as special order, contact factory for rail dimensions other than those shown on this sheet.
- 2. Bronze material requires a special clip, contact factory for more information.
- 3. Also available in blue (BLU), green (GRN), red (RED), and custom color temperature (as special order).
- 4. Wall thickness of 0.120" is common to steel & stainless; wall of 0.125" common to aluminum
- 5. Additional charges and lead time apply for this feature.
- 6. Tamper proof option offers additional protection in extreme environments. Additional charges and lead time apply for this feature. To specify; add "TP" to product code.
- 7. To Specify 1.5 Watt; add "0350" to product code; to Specify 2.5 Watt; add "0700" to product code. EX: LP4030KA40.0700

2840 N Brookfield Rd, Suite 3 Brookfield, WI 53045

PH: 262.505.5124 FX: 262.753.6582 www.klikusa.com sales@klikusa.com

143

Project Name:	l	Location:
Specifier:	F	Rep Agency:
Fixture Type:	F	Product Code:

LED Perfo	<u>ormance</u>	Lumer	<u>ıs/Fixtur</u>	e or Po	<u>d</u>			Optic	s			Reflector				
LED: Cre	ee XT-E	STANDAR	_					Beam	Angle			Symmetrical	Asymmetrical			
	00, 3000, 4000 (others available) -85	2W/POD Ti 3000K	POD Transparent         1.5W/POD Transparent*         2.5V           DK         145         3000K         107         300           DK         154         4000K         114         400	2.5W/POD 3000K	Transparent*	LOR	defined	by opti	cs	76	74					
Life: 80°	% at 50k hrs and 85° C	4000K	154	SPECIAL ORDER   1.5W/POD Transparent*   2.5   3000K   107   30   3000K   114   40   40   6   5000K   130   50	4000K	193	lm	W	mA	٧	Lumens out	out @ 4000K				
Binning: 3 M Warranty: 5 Y	MacAdam Steps ∕ear Warrantv	5000K	176	5000K	130	5000K	220	120	1.4	350	3	92	89			
,	,			*(	Contact factory for 1	.5W and 2.5W		162	1.9	500	3	124	120			

Vire Size         10 AWG         12 AWG         14 AWG         16 AWG					Primary Driver	Primary Driver Secondary LED Driver					
24 VDC 100W Driver	Approxima	te Distance From	Driver to First LEI	D at 3 <b>2</b> Fixtures	110 - 277 Primary Voltage	700mA	24"	30			
Wire Size	10 AWG	12 AWG	om Driver to First LED at 32 Fixtures  110 - 277 Primary Remotely Mounte Dimming Control 10" x 1.5" x 2"	Remotely Mounted Dimming Control	500mA	24"	37				
Distance	525'	328'	nm Driver to First LED at 32 Fixtures  14 AWG 16 AWG  213' 131'		10" x 1.5" x 2"	350mA	24"	50			
0-11					*Paced on 16 AMC between	1 EDnode					

Calculations based on 2' centers between pods. Increased spacing reduces number of pods per circuit.

193 | 2.5 | 700 |

3

147

#### Required Accessories

City of Madison - Dane County

Men's Homeless Shelter


LP096WPRITRNDIM Class 2 IP67 driver, 110-277VAC to 24VDC constant voltage, 0-10 Dim

LP100WPRITRNDIM Class 2 Driver, Dimming, Input voltage = 120-277 VAC, Output voltage = 24 VDC, 5 year warranty

LPNEMA2ENCL NEMA2 INDOOR enclosure for LP100WPRITRNDIM, 12" x 3.3" x 2" LPNEMA3RENCLJR NEMA 3R Drip Proof Enclosure, 4 x 4 x 12 (IP32 Equivalent) NEMA4 Watertight Enclosure, 6 x 4 x 12 (IP66 Equivalent); NEMA4X LPNEMA4ENCLJR Available NEMA 6P Submersible Enclosure 15" x 8" x 6" (IP67 Equivalent) LPNEMA6PENCL

Additional driver & enclosure con igurations available. Please note the KLIK UL Listing requires purchase of a remote driver and enclosure.

## KLIK LEDpod™ Footcandle Chart (Represents output of ONE LEDpod)

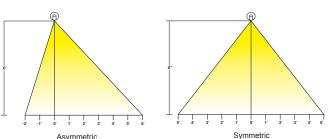

X = Rail Height (34" Tall Handrail or 42" Tall Guardrail

Optic Height: 34" - 2" (Handrail Diameter) = 32" (2.66') 42" - 2" (Handrail Diameter) = 40" (3.33')


	Asymmetric	Oymmetrio										
			2'	1'	0	1'	2'	3'	4'	5'	6'	7'
	KLIK LEDpod™ 50 350mA Asymmetric	34" Tall Handrail	0.39	0.97	4.22	5.22	3.68	2.64	1.25	0.56	0.23	0.07
Watt	KLIK LEDPOG ···· 30 330IIIA ASYIIIIIetric	42" Tall Handrail	0.36	0.86	2.69	3.36	2.78	2.06	1.47	0.80	0.42	0.22
1.5 \	KLIK I EDwad IM EO 250 m A Summatria	34" Tall Handrail	2.79	5.32	6.18	5.32	2.79	0.86	0.15	0.05	0.02	0.01
	KLIK LEDpod™ 50 350mA Symmetric	42" Tall Handrail	2.19	3.70	3.95	3.70	2.19	1.34	0.37	0.09	0.04	0.02
	KLIK I EDwad IM EO EOOw A A cum matric	34" Tall Handrail	0.53	1.31	5.70	7.06	4.97	3.56	1.68	0.76	0.31	0.09
2 Watt	KLIK LEDpod <sup>™</sup> 50 500mA Asymmetric	42" Tall Handrail	0.48	1.17	3.64	4.54	3.75	2.79	1.99	1.08	0.57	0.29
2	KLIK LEDpod™ 50 500mA Symmetric	34" Tall Handrail	3.77	7.19	8.35	7.19	3.77	1.16	0.20	0.06	0.02	0.01
	KLIK LEDPOG ···· 30 300MA Symmetric	42" Tall Handrail	2.96	5.00	5.33	5.00	2.96	1.81	0.49	0.13	0.05	0.02
	KLIK LEDpod™ 50 700mA Asymmetric	34" Tall Handrail	0.66	1.64	7.13	8.83	6.21	4.45	2.10	0.95	0.39	0.12
Watt	KLIK LEDPOU 30 / OUTINA ASYMMETRIC	42" Tall Handrail	0.Î €	FÈΪ	ΙĚĺ	ÍÈJ	ΙĒΊ	HÈÍ	ŒÌÌ	FĚ€	€ËF	€ÌĤÎ
2.5	KLUK LED - ITM 50 700 - A O	34" Tall Handrail	ΙĔΕ	ÌÀJÁ	F€ÌÁ	ÌÈJ	ΙĖ̈́F	FÈÍ	€ÌĠÍ	€ÈH	€ÈÊÎ	€ÈEH
	KLIK LEDpod™ 50 700mA Symmetric	42" Tall Handrail	HË€	ÎÈEÍ	ÎĒÎ	ÎÈEÍ	HÈÏ€	ŒÔ	€ÈF	€ÈÎ	€ÈÊÎ	0.02

PH: 262.505.5124 FX: 262.753.6582 www.klikusa.com sales@klikusa.com

City of Madison - Dane County Men's Homeless Shelter

Project Name:	Location:
Specifier:	Rep Agency:
Fixture Type:	Product Code:


#### **Installation Instructions** Additional instructions may apply, consult factory.

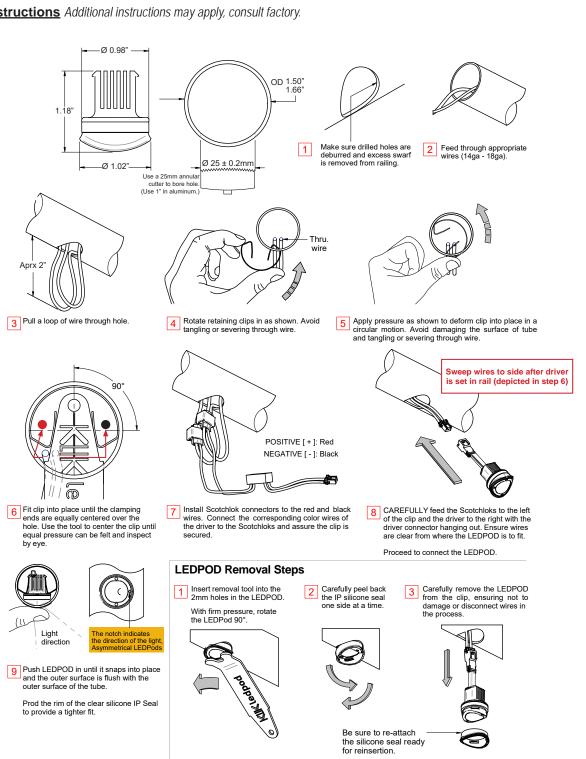

2840 N Brookfield Rd, Suite 3 Brookfield, WI 53045 PH: 262.505.5124 FX: 262.753.6582 www.klikusa.com sales@klikusa.com

City of Madison -	Dane County
Men's Homeless	Shelter
	III A
1 👈	.11

Project Name:	Location:
Specifier:	Rep Agency:
Fixture Type:	Product Code:

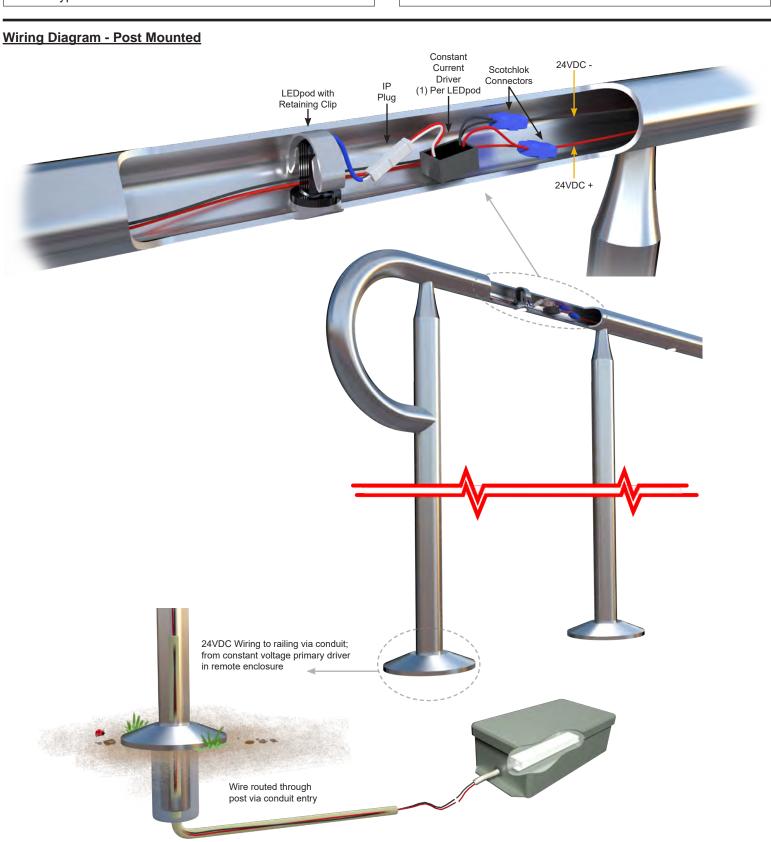


2840 N Brookfield Rd, Suite 3 Brookfield, WI 53045 PH: 262.505.5124 FX: 262.753.6582 www.klikusa.com sales@klikusa.com

City of Mad	dison -	- Da	ane C	County
Men's Hom	eless	Şŀ	elter	
		Ш		IIC A
		П		USA
l		L I I		

Project Name:	Location:
Specifier:	Rep Agency:
Fixture Type:	Product Code:

# Wiring Diagram - Wall Mounted

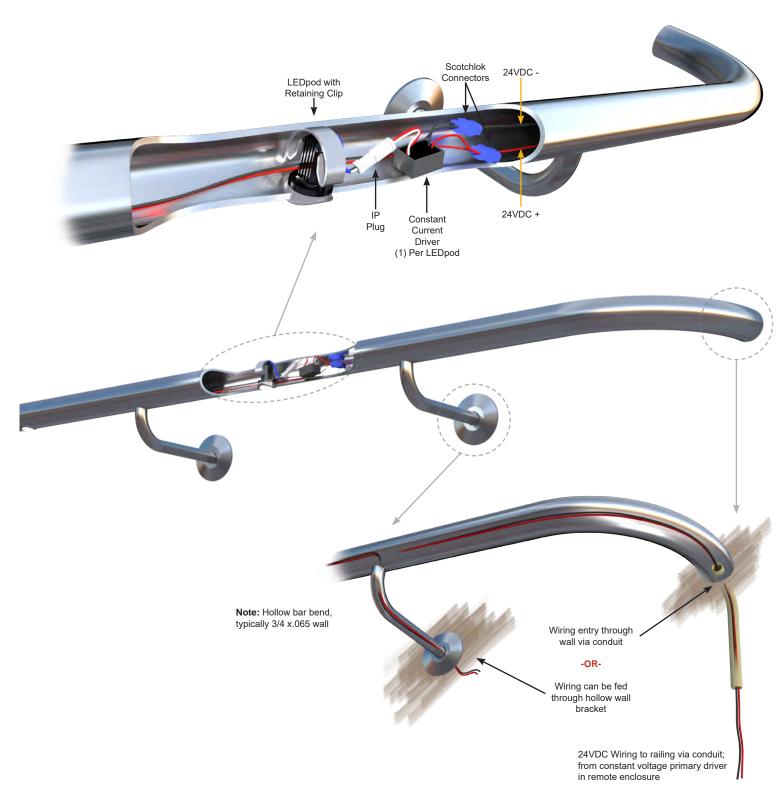

City of Madison - Dane County Men's Homeless Shelter



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: LPOD40-DIR-PCLENS-ASYMREFW-LPOD-500MA-4000K-0.025M-451795-A.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] GO-00102

[TESTLAB] KLIKTEK Laboratory

[TESTDATE] 2019-11-26

[ISSUEDATE] 2019-11-26

[MANUFAC] KLIKSYSTEMS

[LUMCAT] LPOD40

[LUMINAIRE] LPOD40-Dir-PCLens-AsymRefW-LPOD-500mA-4000K-0.025m-451795-A

[LAMPCAT] LED Cree XP-L

[LAMP] LPOD-500mA-4000K

[BALLAST] 500mA Constant Current

[BALLASTCAT] Constant Current

[DISTRIBUTION] Asymmetrical

[MORE] Unspecified

[OTHER] Unspecified

FILE NO1 451795

[ revision] A

[ direction] Direct

[\_direct\_diffuser] Polycarbonate Lens

[ indirect diffuser] N/A

[ reflector] White Asym Reflector

[ tested system] LEDpod 40

[ photometric rotated from original] 0

[\_LOR\_Up] 0

[ LOR Down] 68

[ LOR Total] 68

SYSTEM] LEDpod 40

[\_luminaire\_width\_(m)] 0.025

[\_luminaire\_height\_(m)] 0.029

[\_diffuser\_width\_(m)] 0.02

[ luminaire weight (kg)] 0.074

SEARCH APPLICATION] OUTDOOR, ARCHITECTURAL, COMMERCIAL, AREA, ATRIUM, CANOPY, FACADE, GOVERNME

SEARCH\_MOUNTING] HANDRAIL, TUBE, PIPE, STAIR, PLATFORM, STRUCTURE

[ SEARCH SOURCETYPE] LEDPOD

[ SEARCH CRI] 80

TOLERANCE] LED Lumens and System Watts can vary by plus or minus 10 percent due to Industry standard LED binning vari

Page 80 of 149

**Exterior Lighting** 

2024-02-05

## **IES ROAD REPORT**

#### PHOTOMETRIC FILENAME: LPOD40-DIR-PCLENS-ASYMREFW-LPOD-500MA-4000K-0.025M-451795-A.IES

#### **CHARACTERISTICS**

IES ClassificationType IILongitudinal ClassificationVery ShortLumens Per Lamp234 (1 lamp)

234 **Total Lamp Lumens** 158 **Luminaire Lumens Downward Total Efficiency** 68 % 68 % Total Luminaire Efficiency Luminaire Efficacy Rating (LER) 79 Total Luminaire Watts 2 **Ballast Factor** 1.00 Maximum Candela 120.095 Maximum Candela Angle 10H 45V Maximum Candela (<90 Degrees Vertical) 120.095 Maximum Candela Angle (<90 Degrees Vertical) 10H 45V


Maximum Candela At 90 Degrees Vertical .025 (0.0% Lamp Lumens)
Maximum Candela from 80 to <90 Degrees Vertical .879 (0.4% Lamp Lumens)

Cutoff Classification (deprecated) Cutoff

## **IES ROAD REPORT**

## PHOTOMETRIC FILENAME: LPOD40-DIR-PCLENS-ASYMREFW-LPOD-500MA-4000K-0.025M-451795-A.IES

#### **POLAR GRAPH**

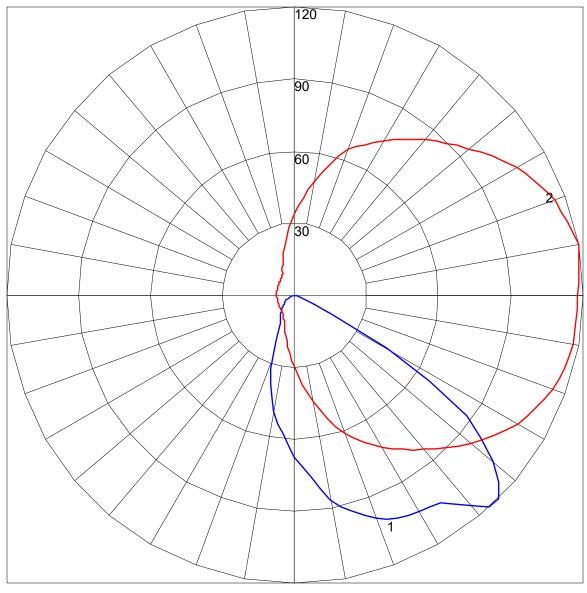


Maximum Candela = 120.095 Located At Horizontal Angle = 10, Vertical Angle = 45 # 1 - Vertical Plane Through Horizontal Angles (10 - 190) (Through Max. Cd.)

# 2 - Horizontal Cone Through Vertical Angle (45) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: LPOD40-DIR-PCLENS-ASYMREFW-LPOD-500MA-4000K-0.025M-451795-A.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

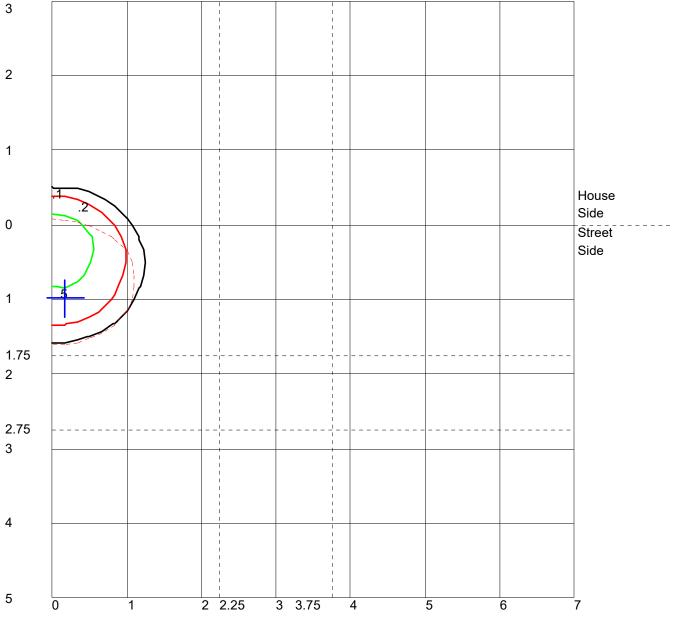

Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point



# WDGE2 LED

Architectural Wall Sconce Visual Comfort Optic











# **Specifications**


 Depth (D1):
 7 "


 Depth (D2):
 1.5 "

 Height:
 9 "

 Width:
 11.5 "

 Weight:
 (without options)





# Catalog Number Notes Type TYPE OWA

Hit the Tab key or mouse over the page to see all interactive element

#### Introduction

The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WDGE family provides additional energy savings and code compliance.

WDGE2 delivers up to 6,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.

# WDGE LED Family Overview

Luminaire	Ontice	Standard EM, 0°C	Cold EM, -20°C	Concor	Approximate Lumens (4000K, 80CRI)											
Luiiiiiaire	Optics	Standard EM, V C	COIG EIVI, -20 C	 Seli201	P0	P1	P2	Р3	P4	P5	P6					
WDGE1 LED	Visual Comfort	4W			750	1,200	2,000									
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight		1,200	2,000	3,000	4,500	6,000						
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200	-						
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight		7,500	8,500	10,000	12,000							
WDGE4 LED	Precision Refractive			Standalone / nLight		12,000	16,000	18,000	20,000	22,000	25,000					

# **Ordering Information**

#### **EXAMPLE: WDGE2 LED P3 40K 80CRI VF MVOLT SRM DDBXD**

Series	Package	Color Temperature CRI	RI Distribution	Voltage Mounting
WDGE2 LED	P11 P2V P2SW P2SW P3SW P3SW Door with small window (SW) is required to accommodate sensors. See page 2 for more details.	1 1	90CRI VF Visual comfort forward throw VW Visual comfort wide	MVOLT 347³ SRM Surface mounting bracket 480³ ICW Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) <sup>7</sup> Washer bracket (dry/damp locations only) <sup>7</sup> Shipped separately AWS 3/8inch Architectural wall spacer PBBW Surface-mounted back box (top, right conduit entry). Use when the is no junction box available.

Options				Finish	
E4WH	Emergency battery backup, Certified in CA Title 20 MAEDBS	Standalone S	ensors/Controls (only available with P1SW, P2SW & P3SW)	DDBXD	Dark bronze
E10WH	(4W, 0°C min) Emergency battery backup, Certified in CA Title 20 MAEDBS	PIR	Bi-level (100/35%) motion sensor for 8-15′ mounting heights. Intended for use on switched circuits with external dusk to dawn switching.	DBLXD DNAXD	Black Natural aluminum
E20WC	(10W, 5°C min) Emergency battery backup, Certified in CA Title 20 MAEDBS	PIRH	Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switching	DWHXD	White
PE <sup>4</sup>	(18W, -20°C min) Photocell, Button Type	PIR1FC3V	Bi-level (100/35%) motion sensor for 8–15' mounting heights with photocell pre- programmed for dusk to dawn operation.	DSSXD DDBTXD	Sandstone Textured dark bronze
DS <sup>5</sup>	Dual switching (comes with 2 drivers and 2 light engines; see page 3 for details)	PIRH1FC3V	Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre- programmed for dusk to dawn operation.	DBLBXD DNATXD	Textured black Textured natural aluminum
DMG <sup>6</sup>	0-10V dimming wires pulled outside fixture (for use with an external control, ordered separately)		Networked Sensors/Controls (only available with P1SW, P2SW & P3SW)		Textured white
BCE	Bottom conduit entry for back box (PBBW). Total of 4 entry points.	NLTAIR2 PIR NLTAIR2 PIRH			Textured sandstone
BAA	Buy America(n) Act Compliant	See page 4 for out o	See page 4 for out of box functionality		TBD



COMMERCIAL OUTDOOR


One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

#### Accessories

WDGEAWS DDBXD WDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE2PBBW DDBXD U WDGE2 surface-mounted back box (specify finish)

#### NOTES

- 1 P1-P5 not available with sensors/controls. Sensors/controls only available with P1SW, P2SW and P3SW.
- 2 50K not available in 90CRI
- 3 347V and 480V not available with E4WH, E10WH, E20WC or DS.
- 4 PE not available in 480V or with sensors/controls
- 5 DS option not available with E4WH, E10WH, E20WC or sensors/controls.
- 6 DMG option not available with sensors/controls
- 7 Not qualified for DLC. Not available with emergency battery backup or sensors/controls

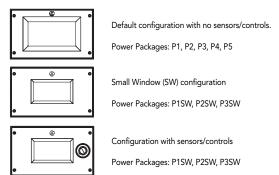

#### **Performance Data**

#### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance	System	Diet Tons	27	K (2700K	30K (3000K, 80 CRI)				35K (3500K, 80 CRI)				40K (4000K, 80 CRI)					50K (5000K, 80 CRI)									
Package	Watts	Dist. Type	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G
P1/P1SW	10W	VF	1,166	119	0	0	0	1,209	123	0	0	0	1,251	128	0	0	0	1,256	128	0	0	0	1,254	128	0	0	0
PI/PISW	TOVV	VW	1,197	122	0	0	0	1,241	126	0	0	0	1,284	131	0	0	0	1,289	131	0	0	0	1,286	131	0	0	0
D2 / D2CW/	15\W	VF	1,878	129	1	0	0	1,947	134	1	0	0	2,015	139	1	0	0	2,023	139	1	0	0	2,019	139	1	0	0
P2 / P2SW 15W	VW	1,927	133	1	0	0	1,997	137	1	0	0	2,067	142	1	0	0	2,075	143	1	0	0	2,071	143	1	0	0	
P3 / P3SW	23W	VF	2,908	129	1	0	0	3,015	134	1	0	0	3,119	138	1	0	0	3,132	139	1	0	0	3,126	139	1	0	0
13/13300	2344	VW	2,983	132	1	0	0	3,093	137	1	0	0	3,200	142	1	0	0	3,213	143	1	0	0	3,206	142	1	0	0
P4	35W	VF	4,096	117	1	0	1	4,247	121	1	0	1	4,394	126	1	0	1	4,412	126	1	0	1	4,403	126	1	0	1
Г4	33,00	VW	4,202	120	1	0	0	4,357	125	1	0	1	4,508	129	1	0	1	4,526	129	1	0	1	4,517	129	1	0	1
P5	48W	VF	5,567	115	1	0	1	5,772	119	1	0	1	5,972	123	1	0	1	5,996	124	1	0	1	5,984	124	1	0	1
1.3	40 VV	VW	5,711	118	1	0	1	5,921	122	1	0	1	6,127	126	1	0	1	6,151	127	1	0	1	6,139	127	1	0	1

#### **Electrical Load**

Performance	System Watts	Current (A)					
Package	System watts	120V	208V	240V	277V	347V	480V
P1 / P1SW	10W	0.082	0.049	0.043	0.038		
	13W					0.046	0.033
P2 / P2SW	15W	0.132	0.081	0.072	0.064		
	18W					0.056	0.041
P3 / P3SW	23W	0.195	0.114	0.100	0.088		
	26W					0.079	0.058
P4	35W	0.302	0.175	0.152	0.134		
	38W					0.115	0.086
P5	48W	0.434	0.241	0.211	0.184		
	52W					0.157	0.119

COMMERCIAL OUTDOOR

#### **Lumen Multiplier for 90CRI**

Multiplier
0.845
0.867
0.845
0.885
0.898

#### Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Dist. Type	Lumens
E4WH	VF	646
	VW	647
5401411	VF	1,658
E10WH	VW	1,701
E20WC	VF	2,840
	VW	2,913

# **Lumen Ambient Temperature (LAT) Multipliers**

Use these factors to determine relative lumen output for average ambient temperatures from 0-40  $^{\circ}$  C (32-104  $^{\circ}$  F).

Amb	Lumen Multiplier	
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

#### **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a  $25^{\circ}\text{C}$  ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

City of Madison - Dane County

Men's Homeless Shelter

Exterior Lighting
2024-02-05

#### **Photometric Diagrams**

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.




# **Emergency Egress Options**

# **Emergency Battery Backup**

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC - section 700.16, NFPA 101 Life Safety Code Section 7.9

The examples below show illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E10WH or E20WC and VF distribution.

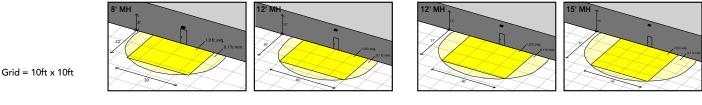

WDGE2 LED xx 40K 80CRI VF MVOLT E10WH


WDGE2 LED xx 40K 80CRI VF MVOLT E20WC

#### **Dual Switching (DS) Option**

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark. This option is typically used with a back generator or inverter providing emergency power.

Applicable codes: NFPA 70/NEC - section 700.16, NFPA 101 Life Safety Code Section 7.9

COMMERCIAL OUTDOOR




#### **Control / Sensor Options**


#### Motion/Ambient Sensor (PIR\_, PIRH\_)

Motion/Ambeint sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.


#### **Networked Control (NLTAIR2)**


nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY $^{\text{TM}}$  Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.

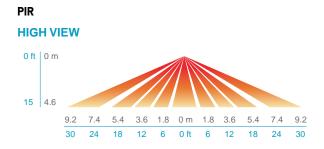



#### **PIRH**





Option	Dim Level	High Level (when triggered	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

COMMERCIAL OUTDOOR

#### **Mounting, Options & Accessories**



NLTAIR2 PIR - nLight AIR Motion/Ambient Sensor

D = 7"

H = 11"

W = 11.5"



AWS - 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"



PBBW – Surface-Mounted Back Box Use when there is no junction box available.

D = 1.75"

H = 9"

W = 11.5"

#### **FEATURES & SPECIFICATIONS**

#### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

#### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

## FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

#### OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### **ELECTRICAL**

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

COMMERCIAL OUTDOOR

#### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

#### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

#### BUY AMERICAN

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to <a href="https://www.acuitybrands.com/buy-american">www.acuitybrands.com/buy-american</a> for additional information.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <a href="https://www.acuitybrands.com/support/warranty/terms-and-conditions">www.acuitybrands.com/support/warranty/terms-and-conditions</a>

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WDGE2 LED Rev. 03/01/22



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: WDGE2 LED P2SW 40K 80CRI VW.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002 [TEST] ISF 20152P16

[ISSUEDATE] 11/5/2019

[TESTLAB] ACUITY BRANDS LIGHTING, DECATUR LAB

[MANUFAC] Lithonia Lighting

[LUMCAT] WDGE2 LED P2SW 40K 80CRI VW

[LUMINAIRE] WDGE2 LED WITH P2SW - PERFORMANCE PACKAGE, 4000K, 80CRI, VISUAL COMFORT WIDE OPTIC

[DISTRIBUTION] TYPE II, VERY SHORT, BUG RATING: B1 - U0 - G0

[\_TOTALLUMINAIRELUMENS] 2073

[ INPUTWATTAGE] 14.78

MOUNTING] WALL MOUNT

PHYSICALDIMENSIONS] 0.95833, 0.5833, 0.75

PRODUCTID] adf3b178-15e1-471e-bce0-7b95a82f5026

SERIESI WDGE2

[ SERIESID] 993532

#### **CHARACTERISTICS**

**IES Classification** Type II Longitudinal Classification Very Short Lumens Per Lamp N.A. (absolute) **Total Lamp Lumens** N.A. (absolute) **Luminaire Lumens** 2074 **Downward Total Efficiency** N.A. (absolute) Total Luminaire Efficiency

Luminaire Efficacy Rating (LER) **Total Luminaire Watts** 

**Ballast Factor** 

**Upward Waste Light Ratio** Maximum Candela Maximum Candela Angle

Maximum Candela (<90 Degrees Vertical) Maximum Candela Angle (<90 Degrees Vertical)

Maximum Candela At 90 Degrees Vertical

Maximum Candela from 80 to <90 Degrees Vertical

Cutoff Classification (deprecated)

N.A. (absolute) 140

14.78 1.00 0.00 1530.377 2.5H 35V 1530.377 2.5H 35V

0 (0.0% Luminaire Lumens) 57.896 (2.8% Luminaire Lumens)

N.A. (absolute)

Page 89 of 149


# IES ROAD REPORT PHOTOMETRIC FILENAME : WDGE2 LED P2SW 40K 80CRI VW.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100)	Lumens 388.1 1093.0 239.4 4.6 145.7 148.4 49.2 5.8 0.0	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 18.7 52.7 11.5 0.2 7.0 7.2 2.4 0.3 0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	2074.2	N.A.	100.0
BUG Rating	B1-U0-G0		

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P2SW 40K 80CRI VW.IES


#### **POLAR GRAPH**

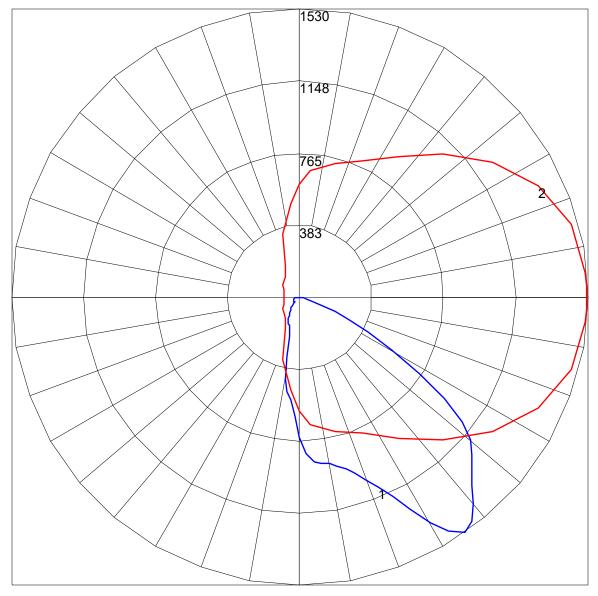

Maximum Candela = 1530.377 Located At Horizontal Angle = 2.5, Vertical Angle = 35 # 1 - Vertical Plane Through Horizontal Angles (2.5 - 182.5) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (35) (Through Max. Cd.)

## IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P2SW 40K 80CRI VW.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

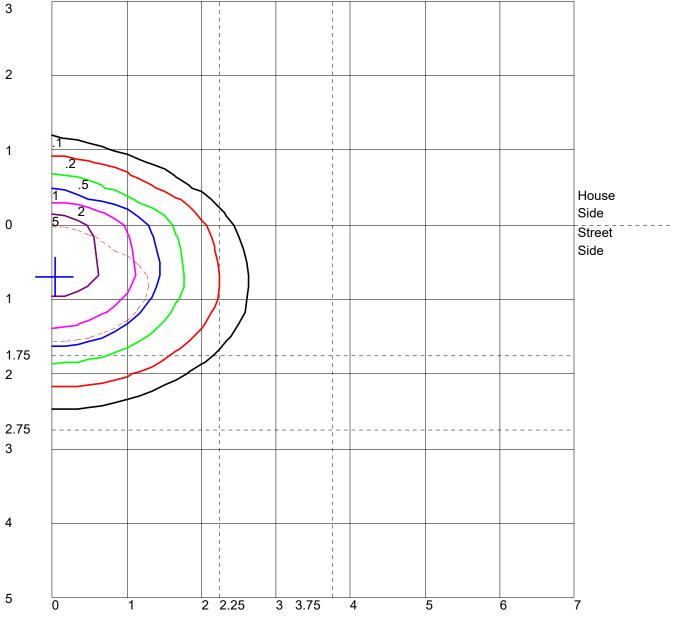


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P2SW 40K 80CRI VW.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

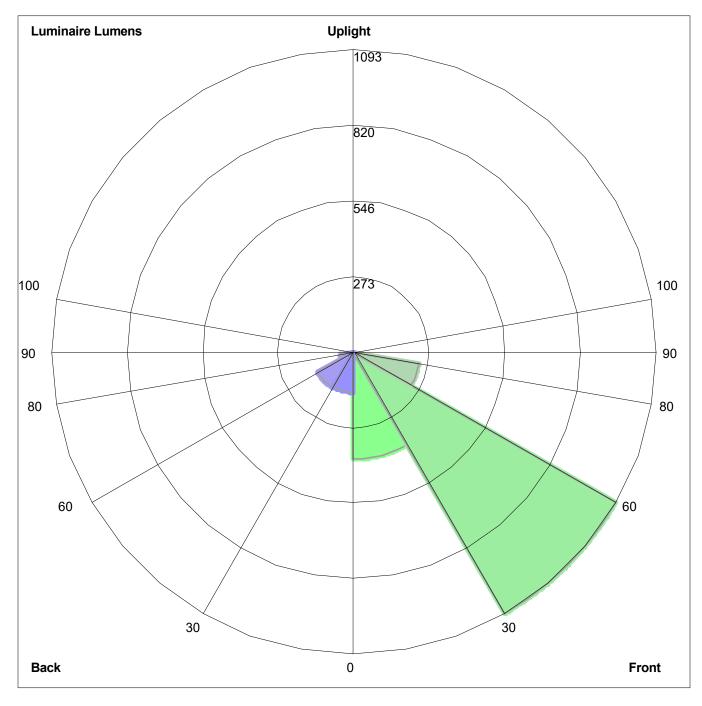

Luminaire Lumens:

Front: Low=388.1, Medium= 1093.0, High=239.4, Very High=4.6 Back: Low=145.7, Medium=148.4, High=49.2, Very High=5.8

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G0



# **D-Series Size 0** LED Area Luminaire











Hit the Tab key or mouse over the page to see all interactive element

# **Specifications**

**EPA:**  $0.44 \text{ ft}^2 \\ (0.04 \text{ m}^2)$ 


**Length:** 26.18" (66.5 cm)

Width: 14.06" (35.7 cm)


Height H1: 2.26" (5.7 cm)

Height H2: 7.46" (18.9 cm)

Weight: 23 lbs (10.4 kg)







# Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

# **Ordering Information**

# **EXAMPLE:** DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED						
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting
DSX0 LED	Porward optics P1 P5 P2 P6 P3 P7 P4 Rotated optics P101 P121 P111 P131	(this section 70CRI only) 30K 3000K 40K 4000K 50K 5000K (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short  T2M Type II medium T3M Type III medium T3LG Type III low glare 3 T4M Type IV medium T4LG Type IV low glare 2 TFTM Forward throw medium  T6LG Type IV low glare 3 TFTM Forward throw medium  T6LG Type IV low glare 3 TFTM Forward throw medium  T7SM Type V medium T5LG Type V low glare T5W Type V wide BLC3 Type III backlight control 3 Type IV backlight control 3 CCCO Left corner cutoff 3 TCCO Right corner cutoff 3	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup>	Shipped included  SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole)  RPA Round pole mounting (#8 drilling, 3" min. RND pole)  SPAS Square pole mounting (#5 drilling. 3" min. SQ pole)  RPAS Round pole mounting (#5 drilling. 3" min. RND pole)  SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole)  WBA Wall bracket 10  MAST arm adapter (mounts on 2.3/8" OD horizontal tenon)

#### Control options

PER

#### Shipped installed

NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient

sensor enabled at 2fc. 11, 12, 18, 19

PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc <sup>13, 18, 19</sup>

NEMA twist-lock receptacle only (controls ordered separate) 14

PER5 Five-pin receptacle only (controls ordered separate) 14, 19

PER7 Seven-pin receptacle only (controls ordered separate) 14, 19

FAO Field adjustable output 15, 19

BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>

BL50 Bi-level switched dimming, 50% <sup>16, 19</sup>
DMG 0-10v dimming wires pulled outside

0–10v dimming wires pulled outside fixture (for use with an external control, ordered separately) 17

## Shipped installed

Other options

### **HS** Houseside shield (black finish standard) <sup>20</sup>

L90 Left rotated optics <sup>1</sup>
R90 Right rotated optics <sup>1</sup>

CCE Coastal Construction 21

HA 50°C ambient operation 22

#### Shipped separately

EGSR External Glare Shield (reversible, field install required, matches housing finish)

BSDB Bird Spikes (field install required)

#### inish (required)

DDBXD Dark Bronze
DBLXD Black

DNAXD Natural Aluminum
DWHXD White

DDBTXD Textured dark bronze
DBLBXD Textured black
DNATXD Textured natural aluminum

DWHGXD Textured white

TBD



# **Ordering Information**

#### Accessories

Ordered and shipped separately

DLL127F 1.5 JU Photocell - SSL twist-lock (120-277V) <sup>23</sup> DLL347F 1.5 CUL JU Photocell - SSL twist-lock (347V) 23 DLL480F 1.5 CUL JU Photocell - SSL twist-lock (480V) 23

DSHORT SBK Shorting cap 23

House-side shield (enter package number P1-7, DSX0HS P#

P10-13 in place of #)

DSXRPA (FINISH) Round pole adapter (#8 drilling, specify finish) DSXRPA5 (FINISH) Round pole adapter #5 drilling (specify finish) Square pole adapter #5 drilling (specify finish) DSXSPA5 (FINISH) DSX0EGSR (FINISH) External glare shield (specify finish) DSXOBSDB (FINISH) Bird spike deterrent bracket (specify finish)

#### NOTES

NOTES

Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.

30K, 40K, and 50K available in 70CRl and 80CRl. 27K and 35K only available with 80CRl. Contact Technical Support for other possible combinations.

31G, 74LG, BLC3, BLC4, LCCO, RCCO not available with option H5.

4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).

6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.

7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).

8 XVOLT not available in packages P1, P2 or P10.

9 SPAS and RPAS for use with #5 drilling only (Not for use with #8 drilling).

10 WBA cannot be combined with Type 5 distributions plus photocell (PER).

11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.

12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PERS, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using XVOLT.

14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.

15 FAO not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

18 Reference Motion Sensor Default Settings table on page 4 to see functionality.

DIMG not available with NLIAIR PIRKIN, PIR, PERS, PERS, PERS, BLSO and PAO.
Reference Motion Sensor Default Settings table on page 4 to see functionality.
Reference Controls Options table on page 4.
Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
CCE option not available with option BS and EGSR. Contact Technical Support for availability.
Option HA not available with performance packages P6, P7, P12 and P13.
Requires luminaire to be specified with PER, PERS or PER7 option. See Controls Table on page 4.

## **Shield Accessories**



External Glare Shield (EGSR)




House Side Shield (HS)

# **Drilling**

#### HANDHOLE ORIENTATION

(from top of pole)

Handhole



# **Tenon Mounting Slipfitter**

Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

		-		₹	_T_	Y	-1-				
Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90				
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D				
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS				
		Minimum Acceptable Outside Pole Dimension									
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"				
RPA	#8	3"	3"	3"	3"	3"	3"				
SPA5	#5	3"	3"	3"	3"		3"				
RPA5	#5	3"	3"	3"	3"	3"	3"				
SPA8N	#8	3"	3"	3"	3"		3"				

#### **DSX0** Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type	-		L.	= -	Y	
DSX0 with SPA	0.44	0.88	0.96	1.18		1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26		1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93



IBC Engineering Services, Inc.


**Exterior Lighting** 2024-02-05


# **Photometric Diagrams**


To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's homepage.


Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').











































## **Performance Data**

# Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambie	ent	Lumen Multiplier
0°C	32°F	1.04
5°C	41°F	1.04
10°C	50°F	1.03
15℃	50°F	1.02
20°C	68°F	1.01
25°C	77°C	1.00
30°C	86°F	0.99
35℃	95°F	0.98
40°C	104°F	0.97

# **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor
0	1.00
25,000	0.94
50,000	0.89
100,000	0.80

## **FAO Dimming Settings**

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

#### **Electrical Load**

Liectrical	LUau						Curre	nt (A)		
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
Forward Optics (Non-Rotated)	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
Rotated Optics	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
(Requires L90 or R90)	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

# **LED Color Temperature / Color Rendering Multipliers**

	70 CRI		80	OCRI	90CRI		
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability	
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)	
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)	
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)	
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)	
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)	

Note: Some LED types are available as per special request. Contact Technical Support for more information.

# **Motion Sensor Default Settings**

Option	Unoccupied Dimmed Level	High Level (when occupied)	Phototcell Operation	Dwell Time	Ramp-up Time	Dimming Fade Rate
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min

## **Controls Options**

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PER5 or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Edypse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the ClAlRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



# **Performance Data**

# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward 0	ptics																			
Performance			Drive				30K					40K					50K			
Package	System Watts	LED Count	Current (mA)	Distribution Type	1	_	00K, 70	CRI) G	LDW	I.uus sus	(40) B	00K, 70		LDW	I.uus sus	_	00K, 70	_	LDW	
				T1S	Lumens 4,906	1	0	1	148	Lumens 5,113	1	0	<b>G</b>	154	Lumens 5,213	B 1	0	<b>G</b>	LPW 157	
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145	
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147	
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131	
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149	
				T4LG TFTM	4,244 4,698	1	0	2	128 141	4,423 4,896	1	0	2	133 147	4,509 4,992	1	0	2	136 150	
P1	33W	20	530	T5M	4,801	3	0	1	145	5,003	3	0	1	151	5,101	3	0	1	154	
				T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156	
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154	
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107	
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111	
				RCCO LCCO	3,374 3,374	0	0	1	102 102	3,517 3,517	0	0	1	106 106	3,585 3,585	0	0	1	108 108	
				AFR	4,906	1	0	1	148	5,113	1	0	1	154	5,213	1	0	1	157	
				T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149	
				T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138	
				T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140	
				T3LG	5,297	1	0	1	117	5,521	1	0	1	122	5,628	1	0	1	125	
				T4M T4LG	6,018 5,474	1	0	3	133 121	6,272 5,705	1	0	3	139 126	6,395 5,816	1	0	3	142 129	
				TFTM	6,060	1	0	3	134	6,316	1	0	3	140	6,439	1	0	3	143	
P2	45W	20	20	700	T5M	6,192	3	0	1	137	6,453	3	0	2	143	6,579	3	0	2	146
				T5W	6,293	3	0	2	139	6,558	3	0	2	145	6,686	3	0	2	148	
				T5LG	6,210	2	0	1	138	6,472	3	0	1	143	6,598	3	0	1	146	
				BLC3	4,313	0	0	2	96	4,495	0	0	2	100	4,583	0	0	2	102	
				BLC4 RCCO	4,455 4,352	0	0	2	99 96	4,643 4,536	0	0	2	103 100	4,733 4,624	0	0	2	105 102	
				LCCO	4,352	0	0	2	96	4,536	0	0	2	100	4,624	0	0	2	102	
				AFR	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149	
				T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139	
				T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129	
				T3M T3LG	8,439 7,539	1	0	3	122 109	8,795 7,857	1	0	3	128 114	8,967 8,010	1	0	3	130 116	
				T4M	8,565	2	0	3	124	8,926	2	0	3	129	9,100	2	0	3	132	
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120	
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133	
P3	69W	20	1050	T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136	
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138	
				T5LG BLC3	8,838 6,139	3	0	2	128 89	9,211 6,398	3	0	2	134 93	9,390 6,522	3	0	2	136 95	
				BLC4	6,340	0	0	3	92	6,607	0	0	3	96	6,736	0	0	3	98	
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95	
				LCC0	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95	
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139	
				T1S T2M	11,396	1	0	3	122	11,877	1	0	3	128	12,109	2	0	3	130	
				T3M	10,557 10,680	2	0	3	113 115	11,003 11,130	2	0	3	118 120	11,217 11,347	2	0	3	121 122	
				T3LG	9,540	1	0	2	103	9,942	1	0	2	107	10,136	1	0	2	109	
				T4M	10,839	2	0	3	117	11,296	2	0	3	121	11,516	2	0	4	124	
				T4LG	9,858	1	0	2	106	10,274	1	0	2	110	10,474	1	0	2	113	
	A			TFTM	10,914	2	0	3	117	11,374	2	0	3	122	11,596	2	0	3	125	
P4	93W	20	1400	T5M	11,152	4	0	2	120	11,622	4	0	2	125	11,849	4	0	2	127	
				T5W T5LG	11,332 11,184	3	0	3 1	122 120	11,811 11,656	3	0	3	127 125	12,041 11,883	3	0	3	129 128	
				BLC3	7,768	0	0	2	83	8,096	0	0	2	87	8,254	0	0	2	89	
				BLC4	8,023	0	0	3	86	8,362	0	0	3	90	8,524	0	0	3	92	
				RCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90	
				LCC0	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90	
				AFR	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130	



City of Madison - Dane County Men's Homeless Shelter

# **Performance Data**

# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Performance   Package	Forward Op	tics																		
								30K					40K					50K		
TIS 12,360 2 0 0 0 1577 1,1952 2 0 0 2 1143 13,514 2 0 0 2 146  TAM 11,468 2 0 0 3 127 11,952 2 0 0 3 133 127 11,1952 2 0 3 3 133 11,155 2 0 0 2 146  TAM 11,468 2 0 0 3 129 11,991 2 0 0 3 133 127 11,105 2 0 2 120 11,101 2 0 0 2 120  TAM 11,191 1 1,195 2 0 0 4 136 12,350 2 0 2 142 11,101 2 0 0 2 120  TAM 11,191 1 1,195 2 0 0 4 136 12,350 2 0 2 142 11,101 2 0 0 2 120  TAM 11,191 1 1,195 2 0 0 4 136 12,350 2 0 2 140 12,350 14 12,356 2 0 0 4 139  TAM 11,191 1 1,195 2 0 0 4 136 12,350 2 0 4 136 12,350 2 0 2 120  TAM 11,191 1 1,195 2 0 0 4 136 12,350 2 0 4 139 12,356 2 0 1 2 139 12,356 2 0 1 2 139 12		System Watts	LED Count		Distribution Type		(30	00K, 70	CRI)			(40	00K, 70	CRI)			(50	00K, 70	CRI)	
TZM	ruchuge			current (m/)		Lumens		U		LPW	Lumens	В	U		LPW	Lumens		U	G	LPW
Table   Tabl						_		0		-		_	_					_		
PS 90W 40 700   TSM   13,14   2   0   4   131   12,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   4   139   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   0   2   144   13,15   2   14   14   14   14   14   14   14								0					0							
P5 99W 40 700								_		_					_	_		_		
P5 99W 40 700											_	_	_	_		_		_		
PS 99W 40 700								-					-					-		
P5 99W 40 700								_										-	_	
TSW			40	700				_		_	1			_		1		_		-
TSIG	rs	90W	40	700				-												_
BIG3								_												
BLC4   8,715   0   0   0   3   97   9,083   0   0   0   3   1011   9,260   0   0   0   3   103								_						_						_
RCO																				
ILCO												_							_	
P6 137W 40 1050 T5M 17,447 5 0 3 187 12,902 2 0 0 2 1143 13,154 2 0 2 146 175 175 175 175 175 175 175 175 175 175						_		_			_	_	_	_		_				
P6 137W 40 1050   TSM   17,645   2   0   0   3   128   18,285   2   0   3   133   16,642   2   0   3   126						_		-					-					_		
P6   137W   40   1050   1050   1050   15M   1,000								_				_	_					_	_	_
P6   137W   40   1050   15M   16,442   2   0   4   120   17,135   3   0   4   125   17,469   3   0   4   128   17,469   17,469   17,469   18,4687   2   0   2   107   15,306   2   0   2   112   15,665   2   0   0   2   114   14M   16,687   2   0   4   122   17,391   3   0   5   127   17,730   3   0   5   129   174LG   15,177   2   0   2   111   15,817   2   0   2   115   16,125   2   0   2   118   17,825   2   0   5   139   18,414   5   0   3   133   18,241   5   0   3   133   18,241   5   0   3   133   15,166   17,168   17,168   4   0   2   125   17,893   5   0   3   131   18,241   5   0   3   135   15,166   17,181   4   0   2   126   17,944   4   0   2   131   18,294   4   0   2   134   18,164								_					_					_		
P6 137W 40 1050 1050 1050 1050 1050 1050 1050 1								-				_	-					-		
P6 137W 40 1050											-	_				-		-		
P6 137W 40 1050										-		_								
P6    137W												_						0		
TSW 17,447 5 0 3 127 18,183 5 0 3 133 18,537 5 0 3 135 151G 17,218 4 0 2 126 17,944 4 0 2 131 18,294 4 0 2 134 18,235 18,631 19,599 0 0 0 3 87 12,464 0 0 0 3 91 12,707 0 0 3 93 18 18,642 2 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 0 0 4 94 13,124 0 0 0 4 96 12,873 0 12,873 0 12,873 0 12,873 1 1 0 3 94 12,873 1 1 0 3 94 12,873 1 1 0 3 94 12,873 1 1 0 1 13 94 12,873 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1								0	4			2	0					0		130
P7 171W 40 1300   T5LG   17,218	P6	137W	40	1050	T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
BLC3					T5W	17,447	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
BLC4					T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
P7 171W 40 1300   RCCO   12,067   1   0   3   88   12,576   1   0   3   92   12,821   1   0   3   94					BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
LCCO								-											_	
P7 171W 40 1300 1300 1300 1300 150 120 120 120 120 120 120 120 120 120 12								-				_		_		-	_			
P7 171W 40 1300 1300 1300 150 20,806 2 0 3 122 21,683 2 0 3 127 22,106 2 0 3 129 172 173								-				_								
P7 171W 40 1300 1300 1300 1300 14 113 20,086 3 0 4 118 20,478 3 0 4 120 1300 175W 20,689 5 0 3 121 21,561 5 0 3 126 21,982 5 0 3 129 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 2 120 21,279 4 0 0 2 125 21,694 4 0 2 127 151G 20,418 4 0 0 0 3 83 14,780 0 0 3 87 15,068 0 0 3 88 14,780 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 3 87 15,068 0 0 3 88 14,780 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0 0																				
P7 171W 40 1300 19,497 3 0 5 114 20,319 3 0 5 119 20,715 3 0 5 121 T3LG 17,416 2 0 2 102 18,151 2 0 2 106 18,504 2 0 2 108 T4M 19,787 3 0 5 116 20,622 3 0 5 121 21,024 3 0 5 123 T4LG 17,797 2 0 2 105 18,756 2 0 2 110 19,121 2 0 2 113 T5W 20,689 5 0 3 119 21,217 5 0 3 124 21,631 5 0 3 127 T5W 20,689 5 0 3 121 21,561 5 0 3 126 21,982 5 0 3 129 T5LG 20,418 4 0 2 12,027 4 0 2 125 21,694 4 0 2 127 BLG 14,182 0 0 3 83 14,780 0 0 3 87 15,068 0 0 3 88 BLC4 14,647 0 0 4 86 15,265 0 0 4 89 15,562 0 0 4 1 0 3 89 LCCO 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89 LCCO 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89						_		_	_	_	_		_	_		_		_	_	
P7 171W 40 1300 1301 1302 131G 17,416 2 0 2 102 18,151 2 0 2 106 18,504 2 0 2 108 141G 17,997 2 0 2 105 18,756 2 0 2 110 19,121 2 0 2 112 17,100 3 0 5 124 17,100 19,121 10 19,1								-				-	-					-		-
P7 171W 40 1300 141G 17,997 2 0 2 105 18,756 2 0 2 110 19,121 2 0 2 112 171W 40 1300 150 17,997 2 0 2 105 18,756 2 0 2 110 19,121 2 0 2 112 171W 19,924 3 0 5 117 20,765 3 0 5 122 21,170 3 0 5 124 17 18 19,924 18 19,9								_			_	_	_						_	
P7 171W 40 1300 1300 1300 1300 15 1300 18,756 2 0 2 110 19,121 2 0 2 112 151M 19,924 3 0 5 117 20,765 3 0 5 122 21,170 3 0 5 124 151M 19,924 3 0 5 117 20,765 3 0 5 122 21,170 3 0 5 124 151M 19,924 15 15 15 15 15 15 15 15 15 15 15 15 15								_			_		-							
P7 171W 40 1300   TFTM																				
P7 171W 40 1300 T5M 20,359 5 0 3 119 21,217 5 0 3 124 21,631 5 0 3 127 T5W 20,689 5 0 3 121 21,561 5 0 3 126 21,982 5 0 3 129 T5IG 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 BIG3 14,182 0 0 3 83 14,780 0 0 3 87 15,068 0 0 3 88 BIG4 14,647 0 0 4 86 15,265 0 0 4 89 15,562 0 0 4 91 RCCO 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89 LCCO 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89												_						_		
T5W 20,689 5 0 3 121 21,561 5 0 3 126 21,982 5 0 3 129 T5LG 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127 BLC3 14,182 0 0 3 83 14,780 0 0 3 87 15,068 0 0 3 88 BLC4 14,647 0 0 4 86 15,265 0 0 4 89 15,562 0 0 4 91 RCC0 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89 LCC0 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89	<b>D</b> 7	171W	40	1300						_		_								
T5LG 20,418 4 0 2 120 21,279 4 0 2 125 21,694 4 0 2 127  BLC3 14,182 0 0 3 83 14,780 0 0 3 87 15,068 0 0 3 88  BLC4 14,647 0 0 4 86 15,265 0 0 4 89 15,562 0 0 4 91  RCC0 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89  LCC0 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89	F,	171W	40	40 1300														_		
BLC3     14,182     0     0     3     83     14,780     0     0     3     87     15,068     0     0     3     88       BLC4     14,647     0     0     4     86     15,265     0     0     4     89     15,562     0     0     4     91       RCC0     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89       LCC0     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89																				
BLC4     14,647     0     0     4     86     15,265     0     0     4     89     15,562     0     0     4     91       RCC0     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89       LCC0     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89								_		_	_		_							
RCCO     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89       LCCO     14,309     1     0     3     84     14,913     1     0     3     87     15,204     1     0     3     89								-				_	-				-	-		
LCCO 14,309 1 0 3 84 14,913 1 0 3 87 15,204 1 0 3 89							_	-				_					-	-		-
								_				_	_					_		
ן אור בע,סטטן בין אור בע,סטטן בין טון אור בע,סטטן בין טון אור בען בע,סטטן בין אור בען אור בען בע,סטטן בין אור ב					AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129



**Exterior Lighting** 

2024-02-05

# **Performance Data**


# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Opt	Rotated Optics																			
Performance			Drive				30K					40K			50K					
Package	System Watts	LED Count	Current (mA)	Distribution Type			00K, 70		LOW			00K, 70	_	1.004			00K, 70	_	LDW	
				T1S	7,399	B 3	0	<b>G</b>	LPW 145	7,711	<b>B</b>	0	G 3	151	7,862	3	0	3	154	
				T2M	6,854	3	0	3	135	7,144	3	0	3	140	7,283	3	0	3	143	
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145	
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129	
				T4M T4LG	7,036	2	0	2	138	7,333	3	0	2	144 131	7,476	3	0	2	147 134	
				TFTM	6,399 7,086	3	0	3	126 139	6,669 7,385	3	0	3	145	6,799 7,529	3	0	3	148	
P10	51W	30	530	T5M	7,239	3	0	2	142	7,545	3	0	2	148	7,692	3	0	2	151	
				T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154	
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152	
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105	
				BLC4 RCCO	5,208 5,089	3	0	2	102 100	5,428 5,303	3	0	3	107 104	5,534 5,407	3	0	3	109 106	
				LCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106	
				AFR	7,399	3	0	3	145	7,711	3	0	3	151	7,862	3	0	3	154	
				T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146	
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135	
				T3M T3LG	8,768 7,833	3	0	3	129 115	9,138 8,164	3	0	3	134 120	9,316 8,323	3	0	3	137 122	
				T4M	8,899	3	0	3	131	9,274	3	0	3	136	9,455	3	0	3	139	
				T4LG	8,093	3	0	3	119	8,435	3	0	3	124	8,599	3	0	3	126	
				TFTM	8,962	3	0	3	132	9,340	3	0	3	137	9,522	3	0	3	140	
P11	68W	30	700	T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143	
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145	
				T5LG BLC3	9,182 6,378	3	0	3	135 94	9,569 6,647	3	0	3	141 98	9,756 6,777	3	0	3	143 100	
				BLC4	6,587	3	0	3	97	6,865	3	0	3	101	6,999	3	0	3	103	
				RCCO	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101	
				LCC0	6,436	0	0	2	95	6,707	0	0	2	99	6,838	0	0	2	101	
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146	
					T1S T2M	13,247 12,271	3	0	3	128 119	13,806 12,789	3	0	3	134 124	14,075	3	0	3	136
				T3M	12,412	4	0	4	120	12,769	4	0	4	124	13,038 13,187	4	0	4	126 128	
				T3LG	11,089	3	0	3	107	11,556	3	0	3	112	11,782	3	0	3	114	
				T4M	12,597	4	0	4	122	13,128	4	0	4	127	13,384	4	0	4	129	
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118	
D43	40314	20	1050	TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130	
P12	103W	30	1050	T5M T5W	12,960 13,170	4	0	3	125 127	13,507 13,726	4	0	3	131 133	13,770 13,994	4	0	3	133 135	
				T5LG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134	
				BLC3	9,029	3	0	3	87	9,409	3	0	3	91	9,593	3	0	3	93	
				BLC4	9,324	4	0	4	90	9,718	4	0	4	94	9,907	4	0	4	96	
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94	
				LCCO AFR	9,110 13,247	3	0	3	88 128	9,494 13,806	3	0	3	92 134	9,680 14,075	3	0	3	94 136	
				T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130	
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120	
				T3M	14,714	4	0	4	114	15,335	4	0	4	119	15,634	4	0	4	121	
				T3LG	13,145	3	0	3	102	13,700	3	0	3	106	13,967	3	0	3	108	
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123	
				T4LG TFTM	13,582 15,039	3	0	3	105 117	14,155 15,673	3	0	3	110 122	14,431 15,979	3	0	3	112 124	
P13	129W	30	1300	T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127	
-				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129	
				T5LG	15,409	3	0	2	120	16,059	3	0	2	125	16,372	4	0	2	127	
				BLC3	10,703	4	0	4	83	11,155	4	0	4	87	11,372	4	0	4	88	
				BLC4	11,054	4	0	4	86	11,520	4	0	4	89	11,745	4	0	4	91	
				RCCO LCCO	10,800 10,800	1	0	2	84 84	11,256 11,255	1	0	2	87 87	11,475 11,475	1	0	3	89 89	
			AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130		
					,					,					,					




## **Dimensions**

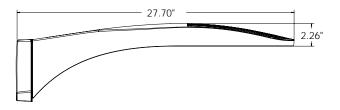



7.80" -14.06"


DSXO with RPA, RPA5, SPA5, SPA8N mount


Weight: 25 lbs

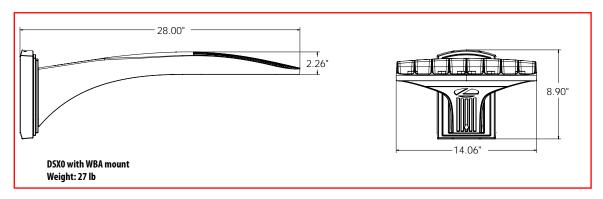


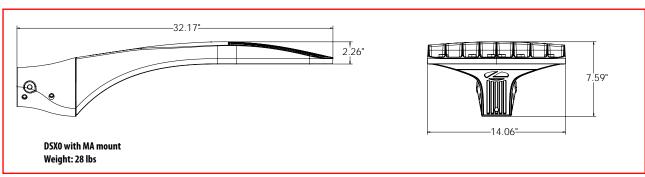












City of Madison - Dane County

Men's Homeless Shelter


Exterior Lighting
2024-02-05


# nLight Control - Sensor Coverage and Settings

# nLight Sensor Coverage Pattern

**NLTAIR2 PIRHN** 





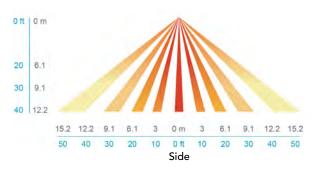

#### **FEATURES & SPECIFICATIONS**

#### **INTENDED USE**

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

#### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

#### **FINISH**

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

#### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

#### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

#### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programing and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

#### **nLIGHT AIR CONTROLS**

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaries can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclypse. Additional information about nLight Air can be found here.

#### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

#### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at <a href="https://www.designlights.org/QPL">www.designlights.org/QPL</a> to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

IBC Engineering Services, Inc.



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI T2M HS.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] ISF 222160P5

[ISSUEDATE] 11/10/2022

[TESTLAB] SCALED PHOTOMETRY

[MANUFAC] Lithonia Lighting

[LUMCAT] DSX0 LED P1 40K 70CRI T2M HS

[LUMINAIRE] D-Series Size 0 Area Luminaire P1 Performance Package 4000K CCT 70 CRI Type 2 Medium Houseside Shield

[DISTRIBUTION] TYPE III, MEDIUM, BUG RATING: B1 - U0 - G2

[\_TOTALLUMINAIRELUMENS] 4110

[ INPUTWATTAGE] 33.21

[ LAMPTYPE] LED

**MOUNTING] OUTDOOR** 

PHYSICALDIMENSIONS | 0.79, 1.14, 0

PRODUCTID] 27890dd3-482f-452e-a8f7-67a77ad901aa

SERIES] DSX0

[ SERIESID] 596134

# **CHARACTERISTICS**

**IES Classification** Type III Longitudinal Classification Medium Lumens Per Lamp N.A. (absolute) **Total Lamp Lumens** N.A. (absolute) Luminaire Lumens 4109 **Downward Total Efficiency** Total Luminaire Efficiency N.A. (absolute) Luminaire Efficacy Rating (LER)

**Total Luminaire Watts** 

**Ballast Factor** 

Upward Waste Light Ratio Maximum Candela Maximum Candela Angle

Maximum Candela (<90 Degrees Vertical) Maximum Candela Angle (<90 Degrees Vertical) Maximum Candela At 90 Degrees Vertical

Maximum Candela from 80 to <90 Degrees Vertical

Cutoff Classification (deprecated)

N.A. (absolute)

124 33.21 1.00 0.00 3618.681 70H 72.5V 3618.681 70H 72.5V

0 (0.0% Luminaire Lumens)

2206.582 (53.7% Luminaire Lumens)

N.A. (absolute)

Page 103 of 149


# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX0 LED P1 40K 70CRI T2M HS.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

	Lumens	% Lamp	% Luminaire
FL - Front-Low (0-30)	212.7	N.A.	5.2
FM - Front-Medium (30-60)	1380.9	N.A.	33.6
FH - Front-High (60-80)	1840.9	N.A.	44.8
FVH - Front-Very High (80-90)	122.9	N.A.	3.0
BL - Back-Low (0-30)	123.5	N.A.	3.0
BM - Back-Medium (30-60)	255.6	N.A.	6.2
BH - Back-High (60-80)	166.8	N.A.	4.1
BVH - Back-Very High (80-90)	5.8	N.A.	0.1
UL - Uplight-Low (90-100)	0.0	N.A.	0.0
UH - Uplight-High (100-180)	0.0	N.A.	0.0
Total	4109.1	N.A.	100.0
BUG Rating	B1-U0-G2		

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI T2M HS.IES


#### **POLAR GRAPH**

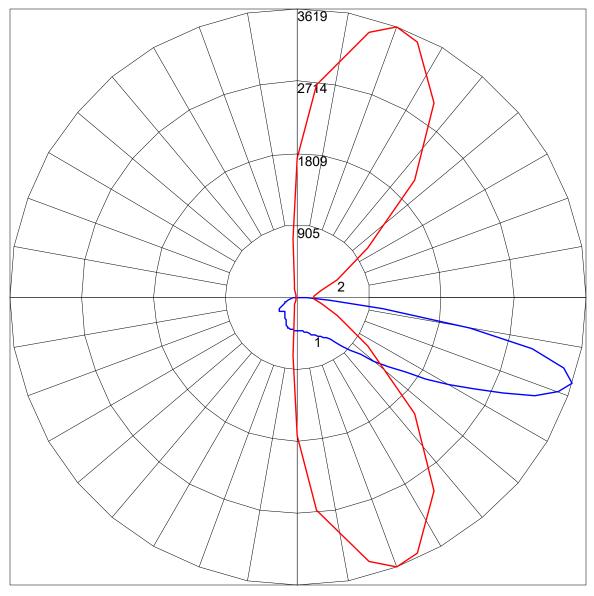

Maximum Candela = 3618.681 Located At Horizontal Angle = 70, Vertical Angle = 72.5 # 1 - Vertical Plane Through Horizontal Angles (70 - 250) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (72.5) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI T2M HS.IES


### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

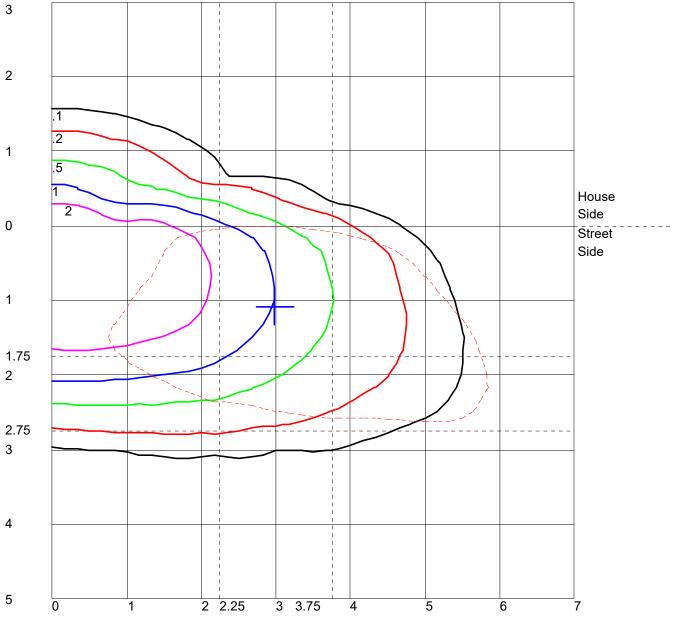

Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI T2M HS.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

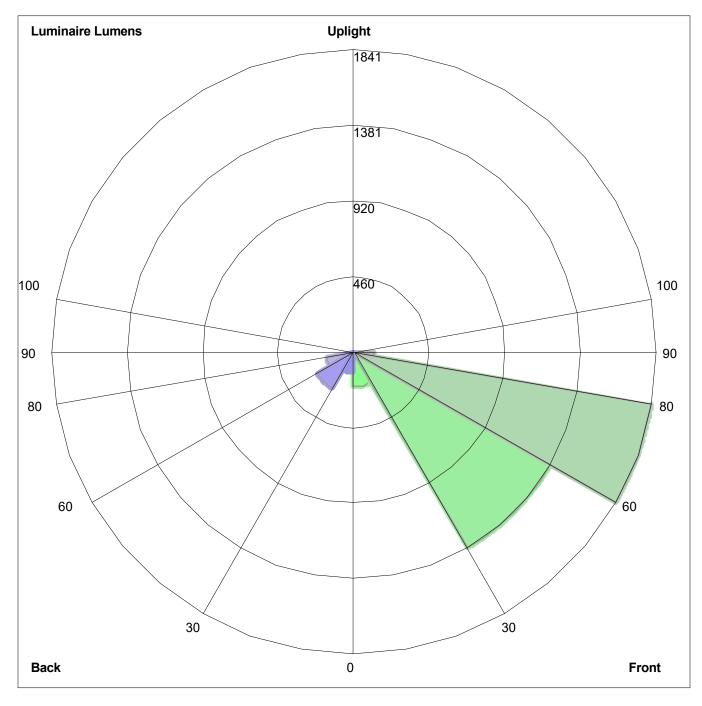

Luminaire Lumens:

Front: Low=212.7, Medium=1380.9, High=1840.9, Very High=122.9 Back: Low=123.5, Medium=255.6, High=166.8, Very High=5.8

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G2



# Catalog Number Notes Туре TYPE OWC

#### Introduction


The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WDGE family provides additional energy savings and code compliance.

WDGE3 has been designed to deliver up to 12,000 lumens through a precision refractive lens with wide distribution, perfect for augmenting the lighting from pole mounted luminaires.

# **Specifications**

Depth (D1): Depth (D2): 1.5" Height: 9" Width: 18" Weight: 19.5 lbs (without options)





# **WDGE LED Family Overview**

Luminaire	Ctandard EM 0°C	Cold EM, -20°C	Sensor	Lumens (4000K)									
Lummaire	Standard EM, 0°C	Cold EWI, -20 C		P1	P2	P3	P4	P5	P6				
WDGE1 LED	4W	-		1,200	2,000								
WDGE2 LED	10W	18W	Standalone / nLight	1,200	2,000	3,000	4,500	6,000					
WDGE3 LED	15W	18W	Standalone / nLight	7,500	8,500	10,000	12,000						
WDGE4 LED			Standalone / nLight	12,000	16,000	18,000	20,000	22,000	25,000				

# **Ordering Information**

# **EXAMPLE: WDGE3 LED P3 40K 70CRI R3 MVOLT SRM DDBXD**

Series Packa	age	Color Temperature	CRI	Distrib	oution	Voltage	Mounting				
WDGE3 LED P1 P2 P3 P4	]	30K 3000K 40K 4000K 50K 5000K	70CRI 80CRI	R2 R3 R4 RFT	Type 2 Type 3 Type 4 Forward Throw	MVOLT 347 <sup>1</sup> 480 <sup>1</sup>	Shipped included  SRM Surface mounting bracket  ICW Indirect Canopy/Ceiling Washer bracket (dry/ damp locations only) <sup>4</sup>		<b>Shippe</b> AWS PBBW	d separately  3/8inch Architectural wall spacer  Surface-mounted back box (top, left, right conduit entry). Use when there is no junction box available.	

Options				Finish	
E15WH	Emergency battery backup, Certified in CA	Standalone S	ensors/Controls	DDBXD	Dark bronze
	Title 20 MAEDBS (15W, 5°C min)	PIR	Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched	DBLXD	Black
E20WC	Emergency battery backup, Certified in CA		circuits with external dusk to dawn switching.	DNAXD	Natural aluminum
	Title 20 MAEDBS (18W, -20°C min)	PIRH	Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched	DWHXD	White
PE <sup>2</sup>	Photocell, Button Type		circuits with external dusk to dawn switching	DSSXD	Sandstone
DMG <sup>3</sup>	0-10V dimming wires pulled outside fixture (for use with an external control.	PIR1FC3V	Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-programmed for dusk to dawn operation.	DDBTXD	Textured dark bronze
	ordered separately)	PIRH1FC3V	Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre-programmed	DBLBXD	Textured black
BCE	Bottom conduit entry for back box		for dusk to dawn operation.	DNATXD	Textured natural aluminum
	(PBBW). Total of 4 entry points.	Networked Se	ensors/Controls	DWHGXD	Textured white
SPD10KV	10kV Surge pack	NLTAIR2 PIR	nLightAIR Wireless enabled bi-level motion/ambient sensor for 8-15' mounting heights.	DSSTXD	Textured sandstone
BAA	Buy America(n) Act Compliant	NLTAIR2 PIRH	nLightAIR Wireless enabled bi-level motion/ambient sensor for 15-30' mounting heights.		
		of box functionality		TBD	

#### **Accessories**

WDGFAWS DDRXD WDGE 3/8inch Architectural Wall Spacer (specify finish) WDGE3PBBW DDBXD U WDGE3 surface-mounted back box (specify finish)

#### NOTES

- 347V and 480V not available with E15WH and E20WC.
- PE not available in 480V and with sensors/controls
- DMG option not available with sensors/controls.
- Not qualified for DLC. Not available with emergency battery backup or sensors/controls



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com COMMERCIAL OUTDOOR © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

#### **Performance Data**

### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance	Custom Watte	Diet Type	30K (3000K, 70 CRI)				40K (4000K, 70 CRI)					50	K (5000K	( (5000K, 70 CRI)			
Package	System Watts	Dist. Type	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G	Lumens	LPW	В	U	G
		R2	7,037	136	1	0	1	7,649	148	2	0	1	7,649	148	2	0	1
P1	52W	R3	6,922	134	1	0	2	7,524	145	1	0	2	7,524	145	1	0	2
rı	3200	R4	7,133	138	1	0	2	7,753	150	1	0	2	7,753	150	1	0	2
		RFT	6,985	135	1	0	2	7,592	147	1	0	2	7,592	147	1	0	2
		R2	7,968	135	2	0	1	8,661	147	2	0	1	8,661	147	2	0	1
P2	59W	R3	7,838	133	1	0	2	8,519	144	1	0	2	8,519	144	1	0	2
Γ2	35₩	R4	8,077	137	1	0	2	8,779	149	1	0	2	8,779	149	1	0	2
		RFT	7,909	134	1	0	2	8,597	146	2	0	2	8,597	146	2	0	2
		R2	9,404	132	2	0	1	10,221	143	2	0	1	10,221	143	2	0	1
P3	71W	R3	9,250	130	2	0	2	10,054	141	2	0	2	10,054	141	2	0	2
rs	/ IVV	R4	9,532	134	2	0	2	10,361	145	2	0	2	10,361	145	2	0	2
		RFT	9,334	131	2	0	2	10,146	142	2	0	2	10,146	142	2	0	2
		R2	11,380	129	2	0	1	12,369	140	2	0	1	12,369	140	2	0	1
P4	88W	R3	11,194	127	2	0	2	12,167	138	2	0	2	12,167	138	2	0	2
r4	OOVV	R4	11,535	131	2	0	2	12,538	142	2	0	2	12,538	142	2	0	2
		RFT	11,295	128	2	0	2	12,277	139	2	0	2	12,277	139	2	0	2

#### **Electrical Load**

Performance	System Watts	Current (A)										
Package	System watts	120V	208V	240V	277V	347V	480V					
P1	52W	0.437	0.246	0.213	0.186	0.150	0.110					
P2	59W	0.498	0.287	0.251	0.220	0.175	0.126					
P3	71W	0.598	0.344	0.300	0.262	0.210	0.152					
P4	88W	0.727	0.424	0.373	0.333	0.260	0.190					

# Lumen Output in Emergency Mode (4000K, 70 CRI)

Option	Dist. Type	Lumens
	R2	3,185
E15WH	R3	3,133
EIDWII	R4	3,229
	RFT	3,162
	R2	3,669
F20WC	R3	3,609
EZUWC	R4	3,719
	RFT	3,642

# **Lumen Multiplier for 80CRI**

**Exterior Lighting** 

2024-02-05

ССТ	Multiplier
30K	0.891
40K	0.906
50K	0.906

#### **Lumen Ambient Temperature (LAT) Multipliers**

Use these factors to determine relative lumen output for average ambient temperatures from 0-40  $^{\circ}$  C (32-104  $^{\circ}$  F).

Amk	ient	Lumen Multiplier
0°C	32°F	1.05
10°C	50°F	1.03
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.97

COMMERCIAL OUTDOOR

#### **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a  $25^{\circ}\text{C}$  ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.98	>0.97	>0.92


City of Madison - Dane County

Men's Homeless Shelter

Exterior Lighting
2024-02-05

## **Photometric Diagrams**

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.

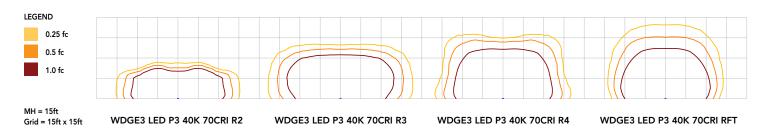

# **Emergency Egress Options**


# **Emergency Battery Backup**

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain, minimum of 60% of the light output at the end of 90minutes.


Applicable codes: NFPA 70/NEC - section 700.16, NFPA 101 Life Safety Code Section 7.9


The examples below show illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E15WH or E20WC and R4 distribution.


Grid = 10ft x 10ft



COMMERCIAL OUTDOOR







WDGE3 LED xx 40K 70CRI R4 MVOLT E15WH

WDGE3 LED xx 40K 70CRI R4 MVOLT E20WC

City of Madison - Dane County

Men's Homeless Shelter

Exterior Lighting
2024-02-05


## **Control / Sensor Options**


## Motion/Ambient Sensor (PIR\_, PIRH\_)

Motion/Ambeint sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.


#### **Networked Control (NLTAIR2)**


nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY<sup>TM</sup> Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.

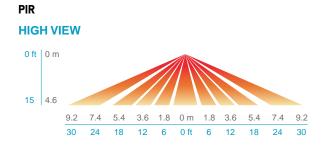



## **PIRH**





#### **Motion/Ambient Sensor Default Settings**

Option	Dim Level	High Level (when triggered	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

COMMERCIAL OUTDOOR

## **Mounting, Options & Accessories**



NLTAIR2 PIR - nLight AIR Motion/Ambient Sensor

D = 8"

H = 11"

W = 18"



AWS - 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"



PBBW – Surface-Mounted Back Box Use when there is no junction box available.

D = 1.75"

H = 9"

W = 18"

#### **FEATURES & SPECIFICATIONS**

#### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

#### CONSTRUCTION

The single-piece die-cast aluminum housing to optimize thermal transfer from the light engine and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP65 rating for the luminaire.

#### FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

#### OPTICS

Individually formed acrylic lenses are engineered for superior application efficiency which maximizes the light in the areas where it is most needed. Light engines are available in 3000 K, 4000 K or 5000 K configurations. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L92/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

COMMERCIAL OUTDOOR

#### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

#### LISTINGS

CSA certified to U.S. and Canadian standards. Light engines are IP66 rated; luminaire is IP65 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at <a href="https://www.designlights.org/QPL">www.designlights.org/QPL</a> to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature and SRM mounting only.

#### **BUY AMERICAN**

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to <a href="https://www.acuitybrands.com/buy-american">www.acuitybrands.com/buy-american</a> for additional information.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at:

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WDGE3 LED Rev. 03/01/22



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: WDGE3 LED P1 70CRI RFT 40K (1).IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002 [TEST] ISF 193586P2

[ISSUEDATE] 11/5/2019

[TESTLAB] ACUITY BRANDS LIGHTING, DECATUR LAB

[MANUFAC] Lithonia Lighting

[LUMCAT] WDGE3 LED P1 70CRI RFT 40K

[LUMINAIRE] WDGE3 LED WITH P1 - PERFORMANCE PACKAGE, 4000K, 70CRI, FORWARD THROW OPTIC

[DISTRIBUTION] TYPE IV, SHORT, BUG RATING: B1 - U0 - G2

[\_TOTALLUMINAIRELUMENS] 7592

[INPUTWATTAGE] 51.1717

[\_MOUNTING] WALL MOUNT

[\_PHYSICALDIMENSIONS] 1.5, 0.667, 0.75

[PRODUCTID] aa2e93a0-9b33-4a0a-81c5-a052bc0b7aba

**[\_SERIES] WDGE3** 

[SERIESID] 993533

#### **CHARACTERISTICS**

IES Classification

Longitudinal Classification

Lumens Per Lamp Total Lamp Lumens Luminaire Lumens

Downward Total Efficiency
Total Luminaire Efficiency

Luminaire Efficacy Rating (LER)

**Total Luminaire Watts** 

**Ballast Factor** 

Upward Waste Light Ratio Maximum Candela Maximum Candela Angle

Maximum Candela (<90 Degrees Vertical)
Maximum Candela Angle (<90 Degrees Vertical)

Maximum Candela At 90 Degrees Vertical

Maximum Candela from 80 to <90 Degrees Vertical

Cutoff Classification (deprecated)

Type IV Short

N.A. (absolute) N.A. (absolute)

7592

N.A. (absolute) N.A. (absolute)

148 <sup>`</sup> 51.1717

1.00 0.00 3659.3 27.5H 67.5V

3659.3 27.5H 67.5V

0 (0.0% Luminaire Lumens)

812.512 (10.7% Luminaire Lumens)

N.A. (absolute)


# IES ROAD REPORT PHOTOMETRIC FILENAME : WDGE3 LED P1 70CRI RFT 40K (1).IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

Lumens	% Lamp	% Luminaire
751.9	N.A.	9.9
2838.4	N.A.	37.4
2279.1	N.A.	30.0
46.1	N.A.	0.6
380.2	N.A.	5.0
904.9	N.A.	11.9
365.9	N.A.	4.8
25.4	N.A.	0.3
0.0	N.A.	0.0
0.0	N.A.	0.0
7504.0	NI A	400.0
7591.9	N.A.	100.0
B1-U0-G2		
	751.9 2838.4 2279.1 46.1 380.2 904.9 365.9 25.4 0.0 0.0	751.9 N.A. 2838.4 N.A. 2279.1 N.A. 46.1 N.A. 380.2 N.A. 904.9 N.A. 365.9 N.A. 25.4 N.A. 0.0 N.A. 7591.9 N.A.

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE3 LED P1 70CRI RFT 40K (1).IES


#### **POLAR GRAPH**

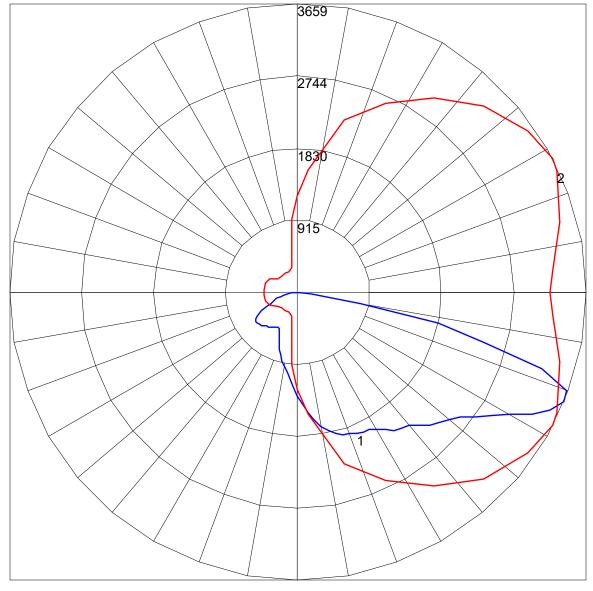

Maximum Candela = 3659.3 Located At Horizontal Angle = 27.5, Vertical Angle = 67.5 # 1 - Vertical Plane Through Horizontal Angles (27.5 - 207.5) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (67.5) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE3 LED P1 70CRI RFT 40K (1).IES

# ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

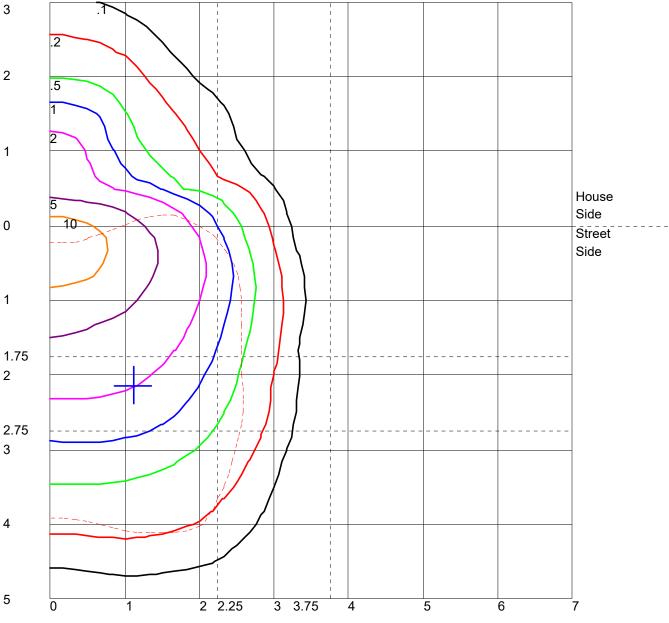


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE3 LED P1 70CRI RFT 40K (1).IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

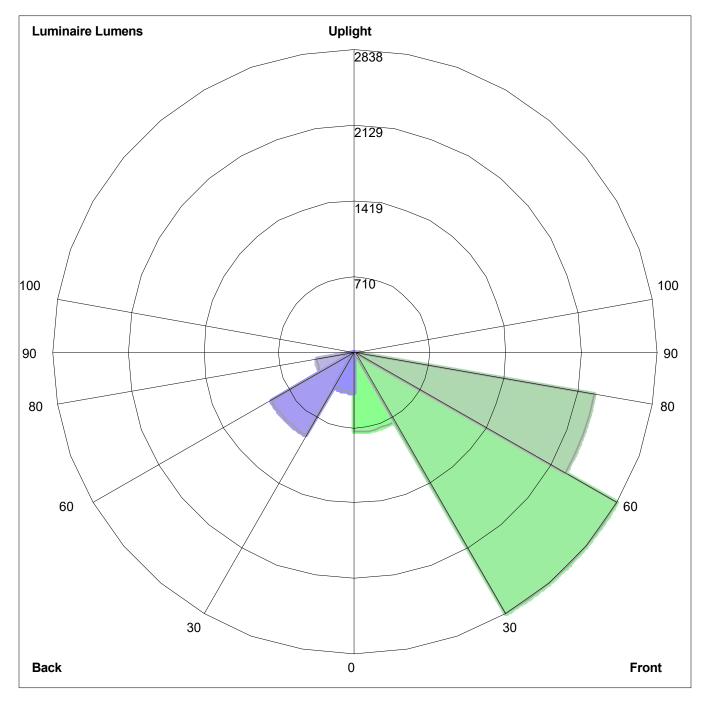

Luminaire Lumens:

Front: Low=751.9, Medium=2838.4, High=2279.1, Very High=46.1 Back: Low=380.2, Medium=904.9, High=365.9, Very High=25.4

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G2



# **D-Series Size 0**LED Area Luminaire











Hit the Tab key or mouse over the page to see all interactive element

# **Specifications**

**EPA:**  $0.44 \text{ ft}^2$   $(0.04 \text{ m}^2)$ 


**Length:** 26.18" (66.5 cm)

Width: 14.06" (35.7 cm)


Height H1: 2.26" (5.7 cm)

Height H2: 7.46" (18.9 cm)

**Weight:** 23 lbs (10.4 kg)







# Introduction

The modern styling of the D-Series features a highly refined aesthetic that blends seamlessly with its environment. The D-Series offers the benefits of the latest in LED technology into a high performance, high efficacy, long-life luminaire.

The photometric performance results in sites with excellent uniformity, greater pole spacing and lower power density. D-Series outstanding photometry aids in reducing the number of poles required in area lighting applications, with typical energy savings of 70% and expected service life of over 100,000 hours.

# **Ordering Information**

# **EXAMPLE:** DSX0 LED P6 40K 70CRI T3M MVOLT SPA NLTAIR2 PIRHN DDBXD

DSX0 LED						
Series	LEDs	Color temperature <sup>2</sup>	Color Rendering Index <sup>2</sup>	Distribution	Voltage	Mounting
DSXO LED	P1	(this section 70CRI only) 30K 3000K  40K 4000K  50K 5000K  (this section 80CRI only, extended lead times apply) 27K 2700K 30K 3000K 35K 3500K 40K 4000K 50K 5000K	70CRI 70CRI 70CRI 80CRI 80CRI 80CRI 80CRI 80CRI 80CRI	AFR Automotive front row T1S Type I short T2M Type II medium T3M Type III medium T3LG Type III low glare 3 T4M Type IV medium T4LG Type IV low glare 3 TFTM Forward throw medium  T5M Type V medium T5M Type V med	MVOLT (120V-277V) <sup>4</sup> HVOLT (347V-480V) <sup>5,6</sup> XVOLT (277V-480V) <sup>7,8</sup>	Shipped included  SPA Square pole mounting (#8 drilling, 3.5" min. SQ pole)  RPA Round pole mounting (#8 drilling, 3" min. RND pole)  SPA5 Square pole mounting (#5 drilling, 3" min. SQ pole) <sup>9</sup> RPA5 Round pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#5 drilling, 3" min. RND pole) <sup>9</sup> SPA8N Square narrow pole mounting (#8 drilling, 3" min. SQ pole)  WBA Wall bracket 100  MA Mast arm adapter (mounts on 2 3/8" OD horizontal tenon)

#### Control options

PER

#### Shipped installed

NLTAIR2 PIRHN nLight AIR gen 2 enabled with bi-level motion / ambient sensor, 8-40' mounting height, ambient

sensor enabled at 2fc. 11, 12, 18, 19

PIR High/low, motion/ambient sensor, 8-40' mounting height, ambient sensor enabled at 2fc <sup>13, 18, 19</sup>

NEMA twist-lock receptacle only (controls ordered

separate) 14

PER5 Five-pin receptacle only (controls ordered separate) 14, 19

PER7 Seven-pin receptacle only (controls ordered separate) <sup>14, 19</sup>
FAO Field adjustable output <sup>15, 19</sup>
BL30 Bi-level switched dimming, 30% <sup>16, 19</sup>

BL50 Bi-level switched dimming, 50% 16, 19

DMG

0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) <sup>17</sup>

# Shipped installed

Other options

HS Houseside shield (black finish standard) 20

L90 Left rotated optics <sup>1</sup>R90 Right rotated optics <sup>1</sup>

CCE Coastal Construction<sup>21</sup>
HA 50°C ambient operation<sup>22</sup>

#### Shipped separately

**EGSR** External Glare Shield (reversible, field install required, matches housing finish)

BSDB Bird Spikes (field install required)

#### inish (required

DDBXD Dark Bronze
DBLXD Black

DNAXD Natural Aluminum
DWHXD White

DDBTXD Textured dark bronze
DBLBXD Textured black

DNATXD Textured natural aluminumDWHGXD Textured white

TBD



# **Ordering Information**

#### Accessories

Ordered and shipped separately

DLL127F 1.5 JU Photocell - SSL twist-lock (120-277V) <sup>23</sup> DLL347F 1.5 CUL JU Photocell - SSL twist-lock (347V) 23 DLL480F 1.5 CUL JU Photocell - SSL twist-lock (480V) 23 DSHORT SBK

Shorting cap 23

House-side shield (enter package number P1-7, DSX0HS P#

P10-13 in place of #)

DSXRPA (FINISH) Round pole adapter (#8 drilling, specify finish) DSXRPA5 (FINISH) Round pole adapter #5 drilling (specify finish) Square pole adapter #5 drilling (specify finish) DSXSPA5 (FINISH) DSX0EGSR (FINISH) External glare shield (specify finish) DSXOBSDB (FINISH) Bird spike deterrent bracket (specify finish)

#### NOTES

NOTES

Rotated optics available with packages P10, P11, P12 and P13. Must be combined with option L90 or R90.

30K, 40K, and 50K available in 70CRl and 80CRl. 27K and 35K only available with 80CRl. Contact Technical Support for other possible combinations.

31G, 74LG, BLC3, BLC4, LCCO, RCCO not available with option H5.

4 MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).

5 HVOLT driver operates on any line voltage from 347-480V (50/60 Hz).

6 HVOLT not available with package P1, P2 and P10 when combined with option NLTAIR2 PIRHN or option PIR.

7 XVOLT operates with any voltage between 277V and 480V (50/60 Hz).

8 XVOLT not available in packages P1, P2 or P10.

9 SPAS and RPAS for use with #5 drilling only (Not for use with #8 drilling).

10 WBA cannot be combined with Type 5 distributions plus photocell (PER).

11 NLTAIR2 and PIRHN must be ordered together. For more information on nLight Air 2.

12 NLTAIR2 PIRHN not available with other controls including PIR, PER, PERS, PER7, FAO, BL30, BL50 and DMG. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2 PIRHN not available with P1, P2 and P10 using HVOLT. NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with NLTAIR2, PER, PER5, PER7, FAO BL30, BL50 and DMG. PIR not available with P1, P2 and P10 using XVOLT.

14 PER/PER5/PER7 not available with NLTAIR2, PIR, BL30, BL50. Photocell ordered and shipped as a separate line item from Acuity Brands Controls. See accessories. Shorting Cap included.

15 FAO not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

16 BL30 and BL50 are not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

17 DMG not available with NLTAIR2 PIRHN, PIR, PER, PER5, PER7, FAO and DMG.

18 Reference Motion Sensor Default Settings table on page 4 to see functionality.

DIMG not available with NLIAIR PIRKIN, PIR, PERS, PERS, PERS, BLSO and PAO.
Reference Motion Sensor Default Settings table on page 4 to see functionality.
Reference Controls Options table on page 4.
Option HS not available with T3LG, T4LG, BLC3, BLC4, LCCO and RCCO distribution. Also available as a separate accessory; see Accessories information.
CCE option not available with option BS and EGSR. Contact Technical Support for availability.
Option HA not available with performance packages P6, P7, P12 and P13.
Requires luminaire to be specified with PER, PERS or PER7 option. See Controls Table on page 4.

#### **Shield Accessories**



External Glare Shield (EGSR)




House Side Shield (HS)

# **Drilling**

#### HANDHOLE ORIENTATION

(from top of pole)



1.325

2.650"

0.563 0.400" (2 PLCS)

# **Tenon Mounting Slipfitter**

		-					
Tenon O.D.	Mounting	Single Unit	2 @ 180	2 @ 90	3 @ 90	3 @120	4 @ 90
2-3/8"	RPA	AS3-5 190	AS3-5 280	AS3-5 290	AS3-5 390	AS3-5 320	AS3-5 490
2-7/8"	RPA	AST25-190	AST25-280	AST25-290	AST25-390	AST25-320	AST25-490
4"	RPA	AST35-190	AST35-280	AST35-290	AST35-390	AST35-320	AST35-490

		-		₹	<u>.</u>	Y	
Mounting Option	Drilling Template	Single	2 @ 180	2 @ 90	3 @ 90	3 @ 120	4 @ 90
Head Location		Side B	Side B & D	Side B & C	Side B, C & D	Round Pole Only	Side A, B, C & D
Drill Nomenclature	#8	DM19AS	DM28AS	DM29AS	DM39AS	DM32AS	DM49AS
			M	linimum Acceptable	Outside Pole Dimer	sion	
SPA	#8	3.5"	3.5"	3.5"	3.5"		3.5"
RPA	#8	3"	3"	3"	3"	3"	3"
SPA5	#5	3"	3"	3"	3"		3"
RPA5	#5	3"	3"	3"	3"	3"	3"
SPA8N	#8	3"	3"	3"	3"		3"

#### **DSX0** Area Luminaire - EPA

\*Includes luminaire and integral mounting arm. Other tenons, arms, brackets or other accessories are not included in this EPA data.

Fixture Quantity & Mounting Configuration	Single DM19	2 @ 180 DM28	2 @ 90 DM29	3 @ 90 DM39	3 @ 120 DM32	4 @ 90 DM49
Mounting Type			₹.	-T-	Y	
DSX0 with SPA	0.44	0.88	0.96	1.18		1.16
DSX0 with SPA5, SPA8N	0.51	1.02	1.06	1.26		1.29
DSX0 with RPA, RPA5	0.51	1.02	1.06	1.26	1.24	1.29
DSX0 with MA	0.64	1.28	1.24	1.67	1.70	1.93



IBC Engineering Services, Inc.


**Exterior Lighting** 2024-02-05


# **Photometric Diagrams**


To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's homepage.


Isofootcandle plots for the DSX0 LED P7 40K 70CRI. Distances are in units of mounting height (20').











































## **Performance Data**

# **Lumen Ambient Temperature (LAT) Multipliers**

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambio	Ambient			
0°C	32°F	1.04		
5°C	41°F	1.04		
10°C	50°F	1.03		
15℃	50°F	1.02		
20°C	68°F	1.01		
25°C	77°C	1.00		
30°C	86°F	0.99		
35°C	95°F	0.98		
40°C	104°F	0.97		

# **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	Lumen Maintenance Factor		
0	1.00		
25,000	0.94		
50,000	0.89		
100,000	0.80		

## **FAO Dimming Settings**

FAO Position	% Wattage	% Lumen Output
8	100%	100%
7	93%	95%
6	80%	85%
5	66%	73%
4	54%	61%
3	41%	49%
2	29%	36%
1	15%	20%

\*Note: Calculated values are based on original performance package data. When calculating new values for given FAO position, use published values for each package based on input watts and lumens by optic type.

# **Electrical Load**

Electrical	LOAG						Curre	nt (A)		
	Performance Package	LED Count	Drive Current (mA)	Wattage	120V	208V	240V	277V	347V	480V
	P1	20	530	34	0.28	0.16	0.14	0.12	0.10	0.07
	P2	20	700	45	0.38	0.22	0.19	0.16	0.13	0.09
	P3	20	1050	69	0.57	0.33	0.29	0.25	0.20	0.14
Forward Optics (Non-Rotated)	P4	20	1400	94	0.78	0.45	0.39	0.34	0.27	0.19
	P5	40	700	89	0.75	0.43	0.38	0.33	0.26	0.19
	P6	40	1050	136	1.14	0.66	0.57	0.49	0.39	0.29
	P7	40	1300	170	1.42	0.82	0.71	0.62	0.49	0.36
	P10	30	530	51	0.42	0.24	0.21	0.18	0.15	0.11
Rotated Optics	P11	30	700	67	0.57	0.33	0.28	0.25	0.20	0.14
(Requires L90 or R90)	P12	30	1050	103	0.86	0.50	0.43	0.37	0.30	0.22
	P13	30	1300	129	1.07	0.62	0.54	0.46	0.37	0.27

# **LED Color Temperature / Color Rendering Multipliers**

	70 CRI		80	OCRI	90CRI		
	Lumen Multiplier	Availability	Lumen Multiplier	Availability	Lumen Multiplier	Availability	
5000K	102%	Standard	92%	Extended lead-time	71%	(see note)	
4000K	100%	Standard	92%	Extended lead-time	67%	(see note)	
3500K	100%	(see note)	90%	Extended lead-time	63%	(see note)	
3000K	96%	Standard	87%	Extended lead-time	61%	(see note)	
2700K	94%	(see note)	85%	Extended lead-time	57%	(see note)	

Note: Some LED types are available as per special request. Contact Technical Support for more information.

# **Motion Sensor Default Settings**

Option	Unoccupied Dimmed Level	High Level (when occupied)			Ramp-up Time	Dimming Fade Rate	
PIR	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min	
NLTAIR2 PIRHN	30%	100%	Enabled @ 2FC	7.5 min	3 sec	5 min	

# **Controls Options**

Nomenclature	Description	Functionality	Primary control device	Notes
FAO	Field adjustable output device installed inside the luminaire; wired to the driver dimming leads.	Allows the luminaire to be manually dimmed, effectively trimming the light output.	FAO device	Cannot be used with other controls options that need the 0-10V leads
DS (not available on DSX0)	Drivers wired independently for 50/50 luminaire operation	The luminaire is wired to two separate circuits, allowing for 50/50 operation.	Independently wired drivers	Requires two separately switched circuits. Consider nLight AIR as a more cost effective alternative.
PERS or PER7	Twist-lock photocell receptacle	Compatible with standard twist-lock photocells for dusk to dawn operation, or advanced control nodes that provide 0-10V dimming signals.	Twist-lock photocells such as DLL Elite or advanced control nodes such as ROAM.	Pins 4 & 5 to dimming leads on driver, Pins 6 & 7 are capped inside luminaire. Cannot be used with other controls options that need the 0-10V leads.
PIR	Motion sensor with integral photocell. Sensor suitable for 8' to 40' mounting height.	Luminaires dim when no occupancy is detected.	Acuity Controls rSBG	Cannot be used with other controls options that need the 0-10V leads.
NLTAIR2 PIRHN	nLight AIR enabled luminaire for motion sensing, photocell and wireless communication.	Motion and ambient light sensing with group response. Scheduled dimming with motion sensor over-ride when wirelessly connected to the nLight Eclypse.	nLight Air rSBG	nLight AIR sensors can be programmed and commissioned from the ground using the CIAIRity Pro app. Cannot be used with other controls options that need the 0-10V leads.
BL30 or BL50	Integrated bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output	BLC device provides input to 0-10V dimming leads on all drivers providing either 100% or dimmed (30% or 50%) control by a secondary circuit	BLC UVOLT1	BLC device is powered off the 0-10V dimming leads, thus can be used with any input voltage from 120 to 480V



# **Performance Data**

# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Optics																					
Performance			Drive		30K										50K						
Package	System Watts	LED Count	Current (mA)	Distribution Type			00K, 70	_			_	00K, 70	_			_	00K, 70	_			
				T1S	Lumens 4,906	1	0	<b>G</b>	LPW 148	Lumens 5,113	1 1	0	<b>G</b>	154	Lumens 5,213	B 1	0	<b>G</b>	LPW 157		
				T2M	4,545	1	0	2	137	4,736	1	0	2	143	4,829	1	0	2	145		
				T3M	4,597	1	0	2	138	4,791	1	0	2	144	4,885	1	0	2	147		
				T3LG	4,107	1	0	1	124	4,280	1	0	1	129	4,363	1	0	1	131		
				T4M	4,666	1	0	2	141	4,863	1	0	2	146	4,957	1	0	2	149		
				T4LG TFTM	4,244	1	0	1	128	4,423 4,896	1	0	2	133 147	4,509	1	0	2	136		
P1	33W	20	530	T5M	4,698 4,801	3	0	1	141 145	5,003	3	0	1	151	4,992 5,101	3	0	1	150 154		
	3311	20	330	T5W	4,878	3	0	1	147	5,084	3	0	2	153	5,183	3	0	2	156		
				T5LG	4,814	2	0	1	145	5,018	2	0	1	151	5,115	2	0	1	154		
				BLC3	3,344	0	0	1	101	3,485	0	0	1	105	3,553	0	0	1	107		
				BLC4	3,454	0	0	2	104	3,599	0	0	2	108	3,670	0	0	2	111		
				RCCO	3,374	0	0	1	102	3,517	0	0	1	106	3,585	0	0	1	108		
				LCCO AFR	3,374 4,906	1	0	1	102 148	3,517 5,113	1	0	1	106 154	3,585 5,213	1	0	1	108 157		
				T1S	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149		
				T2M	5,862	1	0	2	130	6,109	1	0	2	135	6,228	1	0	2	138		
				T3M	5,930	1	0	3	131	6,180	1	0	3	137	6,301	1	0	3	140		
				T3LG	5,297	1	0	1	117	5,521	1	0	1	122	5,628	1	0	1	125		
		20	700	T4M	6,018	1	0	3	133	6,272	1	0	3	139	6,395	1	0	3	142		
	45W			T4LG TFTM	5,474 6,060	1	0	3	121 134	5,705 6,316	1	0	3	126 140	5,816 6,439	1	0	3	129 143		
P2				T5M	6,192	3	0	1	137	6,453	3	0	2	143	6,579	3	0	2	146		
				T5W	6,293	3	0	2	139	6,558	3	0	2	145	6,686	3	0	2	148		
				T5LG	6,210	2	0	1	138	6,472	3	0	1	143	6,598	3	0	1	146		
				BLC3	4,313	0	0	2	96	4,495	0	0	2	100	4,583	0	0	2	102		
				BLC4	4,455	0	0	2	99	4,643	0	0	2	103 100	4,733	0	0	2	105		
				RCCO LCCO	4,352 4,352	0	0	2	96 96	4,536 4,536	0	0	2	100	4,624 4,624	0	0	2	102 102		
				AFR	6,328	1	0	1	140	6,595	1	0	1	146	6,724	1	0	1	149		
			1050	T1S	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139		
				T2M	8,343	2	0	3	121	8,694	2	0	3	126	8,864	2	0	3	129		
				T3M	8,439	2	0	3	122	8,795	2	0	3	128	8,967	2	0	3	130		
				T3LG T4M	7,539 8,565	2	0	3	109 124	7,857 8,926	2	0	3	114 129	8,010 9,100	2	0	3	116 132		
				T4LG	7,790	1	0	2	113	8,119	1	0	2	118	8,277	1	0	2	120		
				TFTM	8,624	1	0	3	125	8,988	1	0	3	130	9,163	2	0	3	133		
P3	69W	20		T5M	8,812	3	0	2	128	9,184	4	0	2	133	9,363	4	0	2	136		
				T5W	8,955	4	0	2	130	9,333	4	0	2	135	9,515	4	0	2	138		
				T5LG	8,838	3	0	1	128	9,211	3	0	1	134	9,390	3	0	1	136		
				BLC3 BLC4	6,139 6,340	0	0	3	89 92	6,398 6,607	0	0	3	93 96	6,522 6,736	0	0	3	95 98		
				RCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95		
				LCCO	6,194	1	0	2	90	6,455	1	0	2	94	6,581	1	0	2	95		
				AFR	9,006	1	0	2	131	9,386	1	0	2	136	9,569	1	0	2	139		
				T1S	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130		
				T2M	10,557	2	0	3	113	11,003	2	0	3	118	11,217	2	0	3	121		
				T3M T3LG	10,680 9,540	2 1	0	3	115 103	11,130 9,942	2	0	3	120 107	11,347 10,136	2	0	3	122 109		
			1400	T4M	10,839	2	0	3	117	11,296	2	0	3	121	11,516	2	0	4	124		
	93W			T4LG	9,858	1	0	2	106	10,274	1	0	2	110	10,474	1	0	2	113		
				TFTM	10,914	2	0	3	117	11,374	2	0	3	122	11,596	2	0	3	125		
P4		20		T5M	11,152	4	0	2	120	11,622	4	0	2	125	11,849	4	0	2	127		
				T5W	11,332	4	0	3	122	11,811	4	0	3	127	12,041	4	0	3	129		
				T5LG RIC3	11,184	3	0	1	120	11,656	3	0	2	125	11,883	3	0	2	128		
				BLC3 BLC4	7,768 8,023	0	0	3	83 86	8,096 8,362	0	0	3	87 90	8,254 8,524	0	0	3	89 92		
				RCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90		
				LCCO	7,838	1	0	2	84	8,169	1	0	2	88	8,328	1	0	2	90		
				AFR	11,396	1	0	2	122	11,877	1	0	2	128	12,109	2	0	2	130		



City of Madison - Dane County Men's Homeless Shelter

# **Performance Data**

# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Forward Op	Forward Optics																		
D. C.			0.1				30K					50K							
Performance Package	E System Watts LED Count		Drive Current (mA)	Distribution Type	(3000K, 70 CRI)				(4000K, 70 CRI)					(5000K, 70 CRI)					
ruchuge			Current (mr.)		Lumens	В	U	G	LPW	Lumens	В	U	G	LPW	Lumens	В	U	G	LPW
				T1S	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
				T2M	11,468	2	0	3	127	11,952	2	0	3	133	12,185	2	0	3	135
				T3M	11,601	2	0	3	129	12,091	2	0	3	134	12,326	2	0	4	137
				T3LG	10,363	2	0	2	115	10,800	2	0	2	120	11,011	2	0	2	122
				T4M	11,774	2	0	4	131	12,271	2	0	4	136	12,510	2	0	4	139
				T4LG	10,709	1	0	2	119	11,160	2	0	2	124	11,378	2	0	2	126
				TFTM	11,856	2	0	3	132	12,356	2	0	4	137	12,596	2	0	4	140
P5	90W	40	700	T5M	12,114	4	0	2	134	12,625	4	0	2	140	12,871	4	0	2	143
				T5W	12,310	4	0	3	137	12,830	4	0	3	142	13,080	4	0	3	145
				T5LG	12,149	3	0	2	135	12,662	3	0	2	141	12,908	3	0	2	143
				BLC3	8,438	0	0	2	94	8,794	0	0	2	98	8,966	0	0	2	99
				BLC4	8,715	0	0	3	97	9,083	0	0	3	101	9,260	0	0	3	103
				RCCO	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				LCC0	8,515	1	0	2	94	8,874	1	0	2	98	9,047	1	0	2	100
				AFR	12,380	2	0	2	137	12,902	2	0	2	143	13,154	2	0	2	146
		<b>137W</b> 40		T1S T2M	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
			1050	T3M	16,253 16,442	3	0	4	119 120	16,939 17,135	3	0	4	124 125	17,269 17,469	3	0	4	126 128
				T3LG		2		2	107	15,306	2	0	2	112		2	0	2	114
				T4M	14,687		0				3		5		15,605		0	5	
				T4LG	16,687 15,177	2	0	2	122 111	17,391 15,817	2	0	2	127 115	17,730 16,125	2	0	2	129 118
				TFTM	16,802	2	0	4	123	17,511	2	0	4	128	17,852	2	0	5	130
P6	137W			T5M	17,168	4	0	2	125	17,893	5	0	3	131	18,241	5	0	3	133
10				T5W	17,100	5	0	3	127	18,183	5	0	3	133	18,537	5	0	3	135
				T5LG	17,218	4	0	2	126	17,944	4	0	2	131	18,294	4	0	2	134
				BLC3	11,959	0	0	3	87	12,464	0	0	3	91	12,707	0	0	3	93
				BLC4	12,352	0	0	4	90	12,873	0	0	4	94	13,124	0	0	4	96
				RCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				LCCO	12,067	1	0	3	88	12,576	1	0	3	92	12,821	1	0	3	94
				AFR	17,545	2	0	3	128	18,285	2	0	3	133	18,642	2	0	3	136
				T1S	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129
				T2M	19,273	3	0	4	113	20,086	3	0	4	118	20,478	3	0	4	120
				T3M	19,497	3	0	5	114	20,319	3	0	5	119	20,715	3	0	5	121
				T3LG	17,416	2	0	2	102	18,151	2	0	2	106	18,504	2	0	2	108
				T4M	19,787	3	0	5	116	20,622	3	0	5	121	21,024	3	0	5	123
				T4LG	17,997	2	0	2	105	18,756	2	0	2	110	19,121	2	0	2	112
				TFTM	19,924	3	0	5	117	20,765	3	0	5	122	21,170	3	0	5	124
P7	171W	40	1300	T5M	20,359	5	0	3	119	21,217	5	0	3	124	21,631	5	0	3	127
				T5W	20,689	5	0	3	121	21,561	5	0	3	126	21,982	5	0	3	129
				T5LG	20,418	4	0	2	120	21,279	4	0	2	125	21,694	4	0	2	127
				BLC3	14,182	0	0	3	83	14,780	0	0	3	87	15,068	0	0	3	88
				BLC4	14,647	0	0	4	86	15,265	0	0	4	89	15,562	0	0	4	91
				RCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				LCCO	14,309	1	0	3	84	14,913	1	0	3	87	15,204	1	0	3	89
				AFR	20,806	2	0	3	122	21,683	2	0	3	127	22,106	2	0	3	129



Exterior Lighting 2024-02-05

# **Performance Data**


# **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of configurations shown within the tolerances described within LM-79. Contact factory for performance data on any configurations not shown here.

Rotated Optics																			
Performance			Drivo				30K			ļ		50K							
Package	System Watts	LED Count	Drive Current (mA)	Distribution Type			00K, 70	_			_	00K, 70	_				00K, 70	_	
				T1S	7,399	B 3	0	G 3	LPW 145	7,711	<b>B</b>	0	<b>G</b>	151	7,862	B 3	0	G 3	LPW 154
				T2M	6,854	3	0	3	135	7,711	3	0	3	140	7,802	3	0	3	143
				T3M	6,933	3	0	3	136	7,225	3	0	3	142	7,366	3	0	3	145
				T3LG	6,194	2	0	2	122	6,455	2	0	2	127	6,581	2	0	2	129
				T4M	7,036	3	0	3	138	7,333	3	0	3	144	7,476	3	0	3	147
				T4LG	6,399	2	0	2	126	6,669	2	0	2	131	6,799	2	0	2	134
P10	51W	30	530	TFTM T5M	7,086 7,239	3	0	3	139 142	7,385 7,545	3	0	3	145 148	7,529 7,692	3	0	3	148 151
110	J.W	30	330	T5W	7,357	3	0	2	145	7,667	3	0	2	151	7,816	4	0	2	154
				T5LG	7,260	3	0	1	143	7,567	3	0	1	149	7,714	3	0	1	152
				BLC3	5,043	3	0	3	99	5,256	3	0	3	103	5,358	3	0	3	105
				BLC4	5,208	3	0	3	102	5,428	3	0	3	107	5,534	3	0	3	109
				RCCO	5,089	0	0	2	100	5,303	0	0	2	104	5,407	0	0	2	106
				LCCO AFR	5,089 7,399	3	0	3	100 145	5,303 7,711	3	0	3	104 151	5,407 7,862	3	0	3	106 154
				T1S	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T2M	8,669	3	0	3	127	9,034	3	0	3	133	9,211	3	0	3	135
				T3M	8,768	3	0	3	129	9,138	3	0	3	134	9,316	3	0	3	137
				T3LG	7,833	3	0	3	115	8,164	3	0	3	120	8,323	3	0	3	122
		30	700	T4M T4LG	8,899 8,093	3	0	3	131 119	9,274	3	0	3	136 124	9,455	3	0	3	139
	68W			TFTM	8,962	3	0	3	132	8,435 9,340	3	0	3	137	8,599 9,522	3	0	3	126 140
P11				T5M	9,156	4	0	2	135	9,542	4	0	2	140	9,728	4	0	2	143
				T5W	9,304	4	0	2	137	9,696	4	0	2	143	9,885	4	0	2	145
				T5LG	9,182	3	0	1	135	9,569	3	0	1	141	9,756	3	0	1	143
				BLC3	6,378	3	0	3	94	6,647	3	0	3	98	6,777	3	0	3	100
				BLC4 RCCO	6,587 6,436	3	0	3	97 95	6,865	3	0	3	101 99	6,999	3	0	3	103
				LCCO	6,436	0	0	2	95	6,707 6,707	0	0	2	99	6,838	0	0	2	101 101
				AFR	9,358	3	0	3	138	9,753	3	0	3	143	9,943	3	0	3	146
				T1S	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T2M	12,271	4	0	4	119	12,789	4	0	4	124	13,038	4	0	4	126
				T3M	12,412	4	0	4	120	12,935	4	0	4	125	13,187	4	0	4	128
				T3LG T4M	11,089 12,597	3	0	3	107 122	11,556 13,128	3	0	3	112 127	11,782 13,384	3	0	3	114 129
				T4LG	11,457	3	0	3	111	11,940	3	0	3	116	12,173	3	0	3	118
				TFTM	12,686	4	0	4	123	13,221	4	0	4	128	13,479	4	0	4	130
P12	103W	<b>03W</b> 30	1050	T5M	12,960	4	0	2	125	13,507	4	0	2	131	13,770	4	0	2	133
				T5W	13,170	4	0	3	127	13,726	4	0	3	133	13,994	4	0	3	135
				TSLG	12,998	3	0	2	126	13,546	3	0	2	131	13,810	3	0	2	134
				BLC3 BLC4	9,029 9,324	3	0	3	87 90	9,409 9,718	3	0	3	91 94	9,593 9,907	3	0	3	93 96
				RCCO	9,110	1	0	2	88	9,495	1	0	2	92	9,680	1	0	2	94
				LCCO	9,110	1	0	2	88	9,494	1	0	2	92	9,680	1	0	2	94
				AFR	13,247	3	0	3	128	13,806	3	0	3	134	14,075	3	0	3	136
				T1S	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130
				T2M	14,547	4	0	4	113	15,161	4	0	4	118	15,457	4	0	4	120
				T3M T3LG	14,714 13,145	3	0	3	114 102	15,335 13,700	3	0	3	119 106	15,634 13,967	3	0	3	121 108
				T4M	14,933	4	0	4	116	15,563	4	0	4	121	15,867	4	0	4	123
				T4LG	13,582	3	0	3	105	14,155	3	0	3	110	14,431	3	0	3	112
				TFTM	15,039	4	0	4	117	15,673	4	0	4	122	15,979	4	0	4	124
P13	129W	30	1300	T5M	15,364	4	0	2	119	16,013	4	0	2	124	16,325	4	0	2	127
				T5W	15,613	5	0	3	121	16,272	5	0	3	126	16,589	5	0	3	129
				T5LG BLC3	15,409 10,703	3	0	4	120 83	16,059 11,155	3	0	2	125 87	16,372 11,372	4	0	4	127 88
				BLC4	11,054	4	0	4	86	11,133	4	0	4	89	11,745	4	0	4	91
				RCCO	10,800	1	0	2	84	11,256	1	0	2	87	11,475	1	0	3	89
				LCC0	10,800	1	0	2	84	11,255	1	0	2	87	11,475	1	0	3	89
				AFR	15,704	3	0	3	122	16,366	3	0	3	127	16,685	4	0	4	130





## **Dimensions**

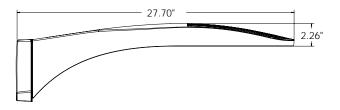


7.80"


DSXO with RPA, RPA5, SPA5, SPA8N mount Weight: 25 lbs

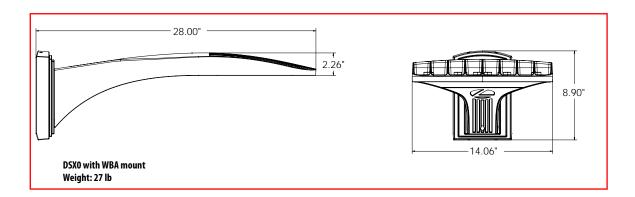


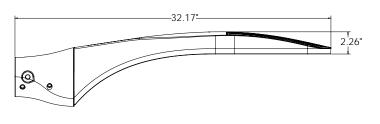






DSX0 with MA mount Weight: 28 lbs











City of Madison - Dane County

Men's Homeless Shelter


Exterior Lighting
2024-02-05


# nLight Control - Sensor Coverage and Settings

# nLight Sensor Coverage Pattern

**NLTAIR2 PIRHN** 





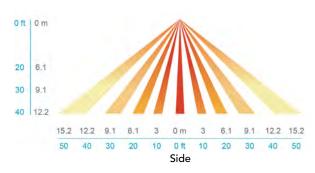

#### **FEATURES & SPECIFICATIONS**

#### **INTENDED USE**

The sleek design of the D-Series Size 0 reflects the embedded high performance LED technology. It is ideal for many commercial and municipal applications, such as parking lots, plazas, campuses, and pedestrian areas.

#### CONSTRUCTION

Single-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance and future light engine upgrades. The LED driver is mounted in direct contact with the casting to promote low operating temperature and long life. Housing driver compartment is completely sealed against moisture and environmental contaminants (IP66). Vibration rated per ANSI C136.31 for 3G. Low EPA (0.44 ft²) for optimized pole wind loading.

#### **FINISH**

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in both textured and non-textured finishes.

#### COASTAL CONSTRUCTION (CCE)

Optional corrosion resistant construction is engineered with added corrosion protection in materials and/or pre-treatment of base material under super durable paint. Provides additional corrosion protection for applications near coastal areas. Finish is salt spray tested to over 5,000 hours per ASTM B117 with scribe rating of 10. Additional lead-times may apply.

#### OPTICS

Precision-molded proprietary silicone lenses are engineered for superior area lighting distribution, uniformity, and pole spacing. Light engines are available in 3000 K, 4000 K or 5000 K (70 CRI) configurations. 80CRI configurations are also available. The D-Series Size 0 has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### ELECTRICAL

Light engine(s) configurations consist of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L80/100,000 hours at 25°C). Class 1 electronic drivers are designed to have a power factor >90%, THD <20%, and an expected life of 100,000 hours with <1% failure rate. Easily serviceable 10kV surge protection device meets a minimum Category C Low operation (per ANSI/IEEE C62.41.2).

#### STANDARD CONTROLS

The DSX0 LED area luminaire has a number of control options. DSX Size 0, comes standard with 0-10V dimming driver. Dusk to dawn controls can be utilized via optional NEMA twist-lock photocell receptacles. PIR integrated motion sensor with on-board photocell feature field-adjustable programing and are suitable for mounting heights up to 40 feet. Control option BL features a bi-level device that allows a second control circuit to switch all light engines to either 30% or 50% light output.

#### **nLIGHT AIR CONTROLS**

The DSX0 LED area luminaire is also available with nLight® AIR for the ultimate in wireless control. This powerful controls platform provides out-of-the-box basic motion sensing and photocontrol functionality and is suitable for mounting heights up to 40 feet. Once commissioned using a smartphone and the easy-to-use CLAIRITY app, nLight AIR equipped luminaries can be grouped, resulting in motion sensor and photocell group response without the need for additional equipment. Scheduled dimming with motion sensor over-ride can be achieved when used with the nLight Eclypse. Additional information about nLight Air can be found here.

#### INSTALLATION

Integral mounting arm allows for fast mounting using Lithonia standard #8 drilling and accommodates pole drilling's from 2.41 to 3.12" on center. The standard "SPA" option for square poles and the "RPA" option for round poles use the #8 drilling. For #5 pole drillings, use SPA5 or RPA5. Additional mountings are available including a wall bracket (WBA) and mast arm (MA) option that allows luminaire attachment to a 2 3/8" horizontal mast arm.

### LISTINGS

UL listed to meet U.S. and Canadian standards. UL Listed for wet locations. Light engines are IP66 rated; luminaire is IP66 rated. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at <a href="https://www.designlights.org/QPL">www.designlights.org/QPL</a> to confirm which versions are qualified.

International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 3000K color temperature only.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.

IBC Engineering Services, Inc.



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI TFTM.IES

### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002

[TEST] ISF 221269AP5

[ISSUEDATE] 11/10/2022

[TESTLAB] SCALED PHOTOMETRY

[MANUFAC] Lithonia Lighting

[LUMCAT] DSX0 LED P1 40K 70CRI TFTM

[LUMINAIRE] D-Series Size 0 Area Luminaire P1 Performance Package 4000K CCT 70 CRI Forward Throw

[DISTRIBUTION] TYPE IV, SHORT, BUG RATING: B1 - U0 - G2

[\_TOTALLUMINAIRELUMENS] 4896

[ INPUTWATTAGE] 33.21

[ LAMPTYPE] LED

**MOUNTING] OUTDOOR** 

PHYSICALDIMENSIONS | 0.79, 1.14, 0

PRODUCTID] 27409f60-042d-413d-9108-2b4c7b4cea1c

SERIES] DSX0

SERIESID] 596134

[ NOTE] LM-80 DATA AVAILABLE FROM MANUFACTURER FOR SOLID STATE SOURCE

#### **CHARACTERISTICS**

**IES Classification** Type IV Longitudinal Classification Short

Lumens Per Lamp N.A. (absolute) N.A. (absolute) **Total Lamp Lumens** 

Luminaire Lumens 4896

**Downward Total Efficiency** N.A. (absolute)

Total Luminaire Efficiency N.A. (absolute)

Luminaire Efficacy Rating (LER) 147

**Total Luminaire Watts** 33.21 **Ballast Factor** 1.00

Upward Waste Light Ratio 0.00 Maximum Candela 4411.407

Maximum Candela Angle 32.5H 75V Maximum Candela (<90 Degrees Vertical) 4411.407 Maximum Candela Angle (<90 Degrees Vertical) 32.5H 75V

Maximum Candela At 90 Degrees Vertical 0 (0.0% Luminaire Lumens)

Maximum Candela from 80 to <90 Degrees Vertical 2917.769 (59.6% Luminaire Lumens)

Cutoff Classification (deprecated) N.A. (absolute)


# IES ROAD REPORT PHOTOMETRIC FILENAME : DSX0 LED P1 40K 70CRI TFTM.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90)	Lumens 256.4 1276.0 2220.7 207.3 202.3 431.0 267.7 34.5	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A.	% Luminaire 5.2 26.1 45.4 4.2 4.1 8.8 5.5 0.7
BVH - Back-Very High (80-90) UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	34.5 0.0 0.0	N.A. N.A. N.A.	0.7 0.0 0.0
Total	4895.9	N.A.	100.0
DUO DU	D4 110 00		

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI TFTM.IES


#### **POLAR GRAPH**

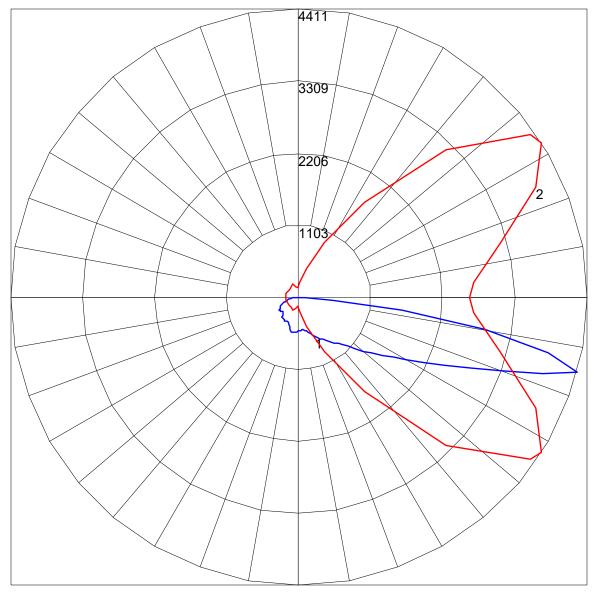

Maximum Candela = 4411.407 Located At Horizontal Angle = 32.5, Vertical Angle = 75 # 1 - Vertical Plane Through Horizontal Angles (32.5 - 212.5) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (75) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI TFTM.IES

### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

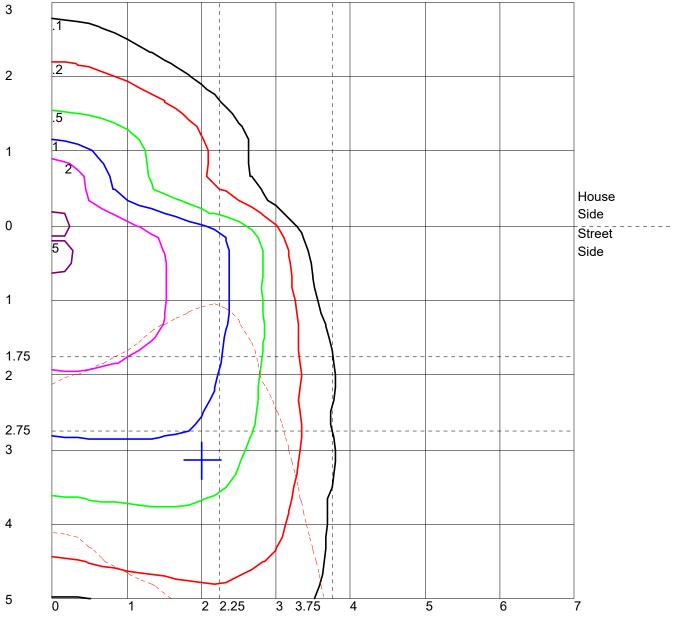


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

# IES ROAD REPORT PHOTOMETRIC FILENAME: DSX0 LED P1 40K 70CRI TFTM.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

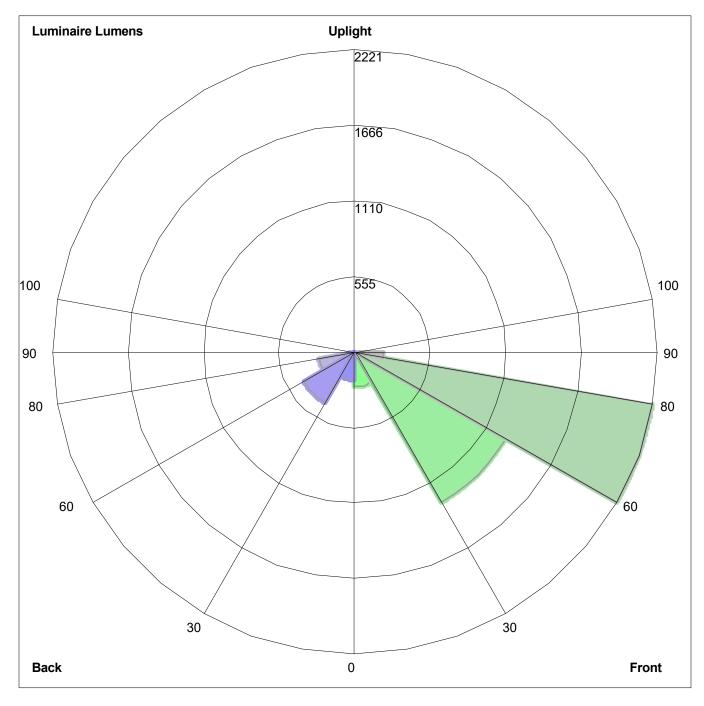

Luminaire Lumens:

Front: Low=256.4, Medium= 1276.0, High=2220.7, Very High=207.3 Back: Low=202.3, Medium=431.0, High=267.7, Very High=34.5

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G2


# Legend 2 Recessed

# TYPE OWE







Aluminum Finish



13.5w LED 247/517 Lumens IP65 • Suitable For Wet Locations IK07 • Impact Resistant (Vandal Resistant) Weight 4.1 lbs





#### Construction

Aluminum Casting Less than 0.1% copper content – Marine Grade 6060 extruded & LM6 Aluminum High Pressure die casting provides excellent mechanical strength , clean detailed product lines and excellent heat dissipation.

#### Pre paint

8 step degrease and phosphate process that includes deoxidizing and etching as well as a zinc and nickel phosphate process before product painting.

#### Memory Retentive -Silicon Gasket

Provided with special injection molded "fit for purpose" long life high temperature memory retentive silicon gaskets.

Maintains the gaskets exact profile and seal over years of use and compression.

#### Thermal management

LM6 Aluminum is used for its excellent mechanical strength and thermal dissipation properties in low and high ambient temperatures. The superior thermal heat sink design by Ligman used in conjunction with the driver, controls thermals below critical temperature range to ensure maximum luminous flux output, as well as providing long LED service life and ensuring less than 10% lumen depreciation at 50,000

# BUG Rating B0 - U1 - G0

<u>Surge Suppression</u> Standard 10kv surge suppressor provided with all fixtures.

#### Finishing

All Ligman products go through an extensive finishing process that includes fettling to improve paint adherence.

UV Stabilized 4.9Mil thick powder coat paint and baked at 200 Deg C. This process ensures that Ligman products can withstand harsh environments. Rated for use in natatoriums.

#### Inspired by Nature Finishes

The Inspired by nature Finishing is a unique system of decorative powder coating. Our metal decoration process can easily transform the appearance of metal or aluminum product into a wood grain finish.

This patented technology enables the simulation of wood grain, and even marble or granite finish through the use of decorative powder coating.

The wood grain finish is so realistic that it's almost undistinguishable from real wood, even from a close visual inspection. The system of coating permeates the entire thickness of the coat and as a result, the coating cannot be removed by normal rubbing, chipping, or scratching.

The Coating Process

After pre-treatment the prepared parts are powder coated with a specially formulated polyurethane powder. This powder provides protection against wear, abrasion, impact and corrosion and acts as the relief base color for the finalized metal decoration.

The component is then wrapped with a sheet of non-porous film with the selected decoration pattern printed on it using special high temperature inks.

This printed film transfer is vacuum-sealed to the surface for a complete thermo print and then transferred into a customized oven. The oven transforms the ink into different forms within the paint layer before it becomes solid. Finally, the film is removed, and a vivid timber look on aluminum remains.

Wood grain coating can create beautiful wood-looking products There are over 300 combinations of designs use. Wood grains can be made with different

Our powder coatings are certified for indoor and outdoor applications and are backed by a comprehensive warranty. These coatings rise to the highest conceivable standard of performance excellence and design innovation.

- Added Benetits

  Resistance to salt-acid room, accelerated aging

  Boiling water, lime and condensed water resistant

  Anti-Graffiti, Anti-Slip, Anti-Microbial, Anti-Scratch

  Super durable (UV restant)
- TGIC free (non-toxic)

#### **Hardware**

Provided Hardware is Marine grade 316 Stainless steel.

#### **Anti Seize Screw Holes**

Tapped holes are infused with a special anti seize compound designed to prevent seizure of threaded connections, due to electrolysis from heat, corrosive atmospheres and moisture.

#### High Impact Acrylic Lens

Manufactured with Ultra High Impact, Naturally UV Stabilized Injection Molded Acrylic.

#### Optics & LED

Precise optic design provides exceptional light control and precise distribution of light. i FD CRI > 80

#### Lumen - Maintenance Life

L80 /B10 at 50,000 hours (This means that at least 90% of the LED still achieve 80% of their original flux)

### Rectangular time-honoured wall recessed accent range. Efficient, flexible and tough family in the classic brick-light proportions.

A range of vandal resistant rectangular wall recessed luminaires. Suitable for indoor or outdoor applications in residential, shopping and pedestrian areas as a decorative guide light. Available in a variety of frame and LED light source options, including turtle friendly amber LED.

The Legend 1 and 2 is available with powdercoated aluminum or stainless steel frames. This luminaire is provided with a powdercoated high pressure die-cast aluminum back box and can be pre shipped to the jobsite for concrete pour or masonry applications.

As an option, this luminaire can be provided with a special wall clamp bracket that provides a clamping option when installing in drywall or wood panel walls.

Available in amber and white 2700K, 3000K, 3500K and 4000K. Consult factory for additional colors. The Legend steplight range can be provided with colored lenses to provide a decorative architectural touch to the building, please see options.

All Ligman fixtures can be manufactured using a special pre-treatment and coating process that ensures the fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 5 year warranty. For this natatorium rated process please specify NAT in options. fixture can be installed in natatoriums as well as environments with high concentrations of chlorine or salt and still maintain the 5 year warranty. For this natatorium rated process please specify NAT in options.

#### Additional Options (Consult Factory For Pricing)






**SMB** Surface Mount Box

DWC Dry Wall Clamp



# Legend 2 Recessed



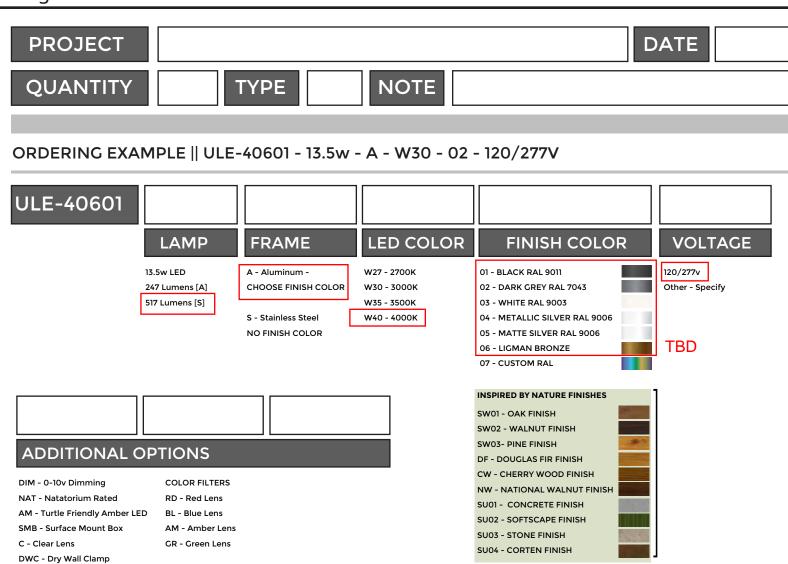

# **More Custom Finishes Available Upon Request** Consult factory for pricing and lead times Oak Cherry Beech Carbon

Walnut Chestnut Bamboo

Mahogany

Pine



Steel



# Men's Homeless Shelter Legend Product Family







Legend 1

- ULE-40591-13.5w-1401lm
- ULE-40721-11.5w-405lm





- Legend 2
- ULE-40601-13.5w-247lm [Aluminum] • ULE-40601-13.5w-517lm [Stainless Steel]
- ULE-40722-11.5w-60lm







- ULE-40611-13.5w-420lm [Aluminum]
- ULE-40611-13.5w-957lm [Stainless Steel]



• ULE-40621-13.5w-1151lm



Legend 9

• ULE-40671-13.5w-380lm



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: LE-40601-S-W40 REV.2.IES

### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002
[TEST] LIGMAN
[TESTLAB] Ligman Lighting Photometric Laboratory
[ISSUEDATE] 13/08/2015 10:49:17
[MANUFAC] LIGMAN
[LUMCAT] LE-40601-S-W40 Rev.2
[LUMINAIRE] Legend 2 recessed step light LED
[LAMP] 3x1 COB LED 4000K
[\_ABSOLUTELUMENS] 155
[MORE] 0.3781,0.3747 4051K Ra84
[\_EEC] A++

#### **CHARACTERISTICS**

IES Classification	Type IV
Longitudinal Classification	Very Short
Lumens Per Lamp	N.A. (absolute)
Total Lamp Lumens	N.A. (absolute)
Luminaire Lumens	155
Downward Total Efficiency	N.A. (absolute)
Total Luminaire Efficiency	N.A. (absolute)
Luminaire Efficacy Rating (LER)	14
Total Luminaire Watts	11.5
Ballast Factor	1.00
Upward Waste Light Ratio	0.15
Maximum Candela	88.7
Maximum Candela Angle	360H 57.5V
Maximum Candela (<90 Degrees Vertical)	88.7
Maximum Candela Angle (<90 Degrees Vertical)	360H 57.5V
Maximum Candela At 90 Degrees Vertical	51.2 (33.0% Luminaire Lumens)
Maximum Candela from 80 to <90 Degrees Vertical	66.2 (42.7% Luminaire Lumens)
Cutoff Classification (deprecated)	N.A. (absolute)

Page 1

# **IES ROAD REPORT**


PHOTOMETRIC FILENAME: LE-40601-S-W40 REV.2.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

FL - Front-Low (0-30) FM - Front-Medium (30-60) FH - Front-High (60-80) FVH - Front-Very High (80-90) BL - Back-Low (0-30) BM - Back-Medium (30-60) BH - Back-High (60-80) BVH - Back-Very High (80-90) UL - Uplight-Low (90-100) UH - Uplight-High (100-180)	Lumens 5.0 54.3 53.0 19.8 < 0.05 0.1 0.1 12.2 10.7	% Lamp N.A. N.A. N.A. N.A. N.A. N.A. N.A. N.A	% Luminaire 3.2 35.0 34.2 12.8 0.0 0.1 0.1 0.0 7.9 6.9
Total	155.3	N.A.	100.0

# IES ROAD REPORT PHOTOMETRIC FILENAME: LE-40601-S-W40 REV.2.IES


#### **POLAR GRAPH**

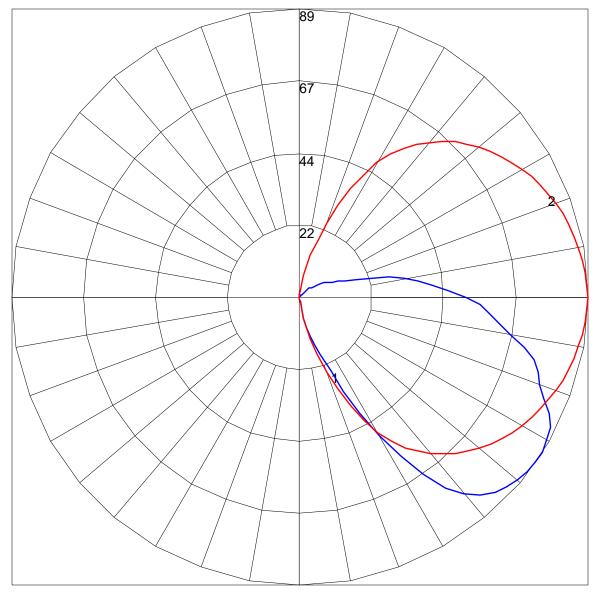

Maximum Candela = 88.7 Located At Horizontal Angle = 360, Vertical Angle = 57.5 # 1 - Vertical Plane Through Horizontal Angles (360 - 180) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (57.5) (Through Max. Cd.)

# IES ROAD REPORT PHOTOMETRIC FILENAME: LE-40601-S-W40 REV.2.IES


# ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

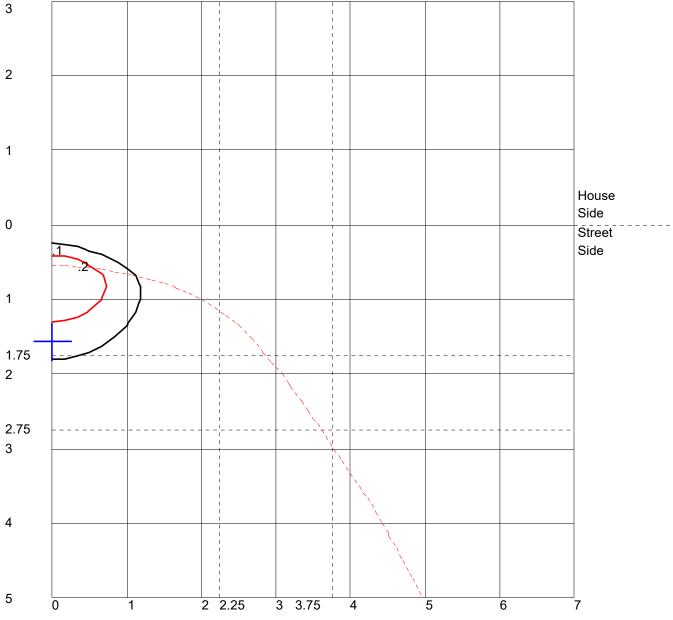

Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

# IES ROAD REPORT PHOTOMETRIC FILENAME: LE-40601-S-W40 REV.2.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

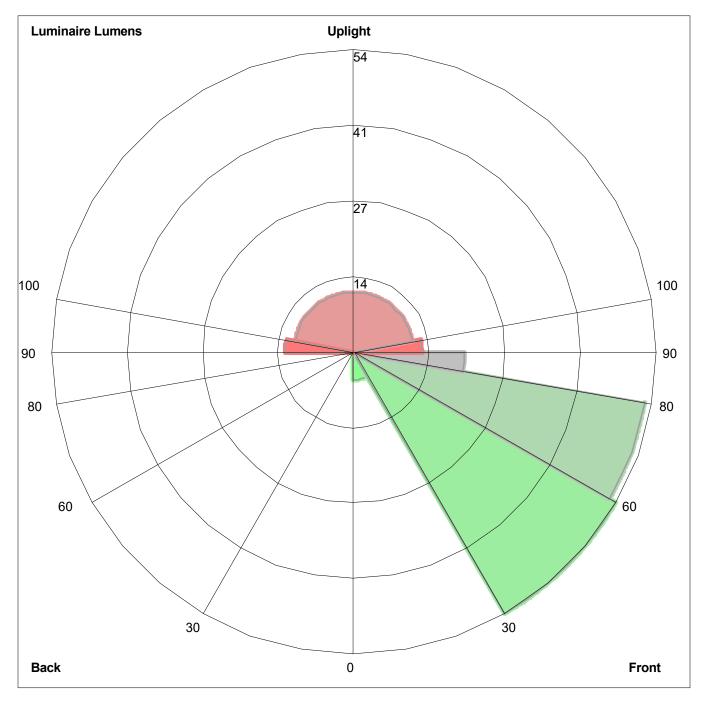

Luminaire Lumens:

Front: Low=5.0, Medium=54.3, High=53.0, Very High=19.8 Back: Low=0.0, Medium=0.1, High=0.1, Very High=0.1

Uplight: Low=12.2, High=10.7

BUG Rating: B0-U2-G1



# WDGE2 LED

Architectural Wall Sconce Visual Comfort Optic











# **Specifications**

 Depth (D1):
 7 "


 Depth (D2):
 1.5 "


 Height:
 9 "

 Width:
 11.5 "

 Weight:
 (without options)

 13.5 lbs







Hit the Tab key or mouse over the page to see all interactive element

#### Introduction

The WDGE LED family is designed to meet specifier's every wall-mounted lighting need in a widely accepted shape that blends with any architecture. The clean rectilinear design comes in four sizes with lumen packages ranging from 1,200 to 25,000 lumens, providing a true site-wide solution. Embedded with nLight® AIR wireless controls, the WDGE family provides additional energy savings and code compliance.

WDGE2 delivers up to 6,000 lumens with a soft, non-pixelated light source, creating a visually comfortable environment. When combined with multiple integrated emergency battery backup options, including an 18W cold temperature option, the WDGE2 becomes the ideal wall-mounted lighting solution for pedestrian scale applications in any environment.

# **WDGE LED Family Overview**

Luminaina	Optics	Standard EM, 0°C	Cold EM, -20°C	Sensor -	Approximate Lumens (4000K, 80CRI)									
Luminaire					P0	P1	P2	Р3	P4	P5	P6			
WDGE1 LED	Visual Comfort	4W			750	1,200	2,000							
WDGE2 LED	Visual Comfort	10W	18W	Standalone / nLight		1,200	2,000	3,000	4,500	6,000				
WDGE2 LED	Precision Refractive	10W	18W	Standalone / nLight	700	1,200	2,000	3,200	4,200					
WDGE3 LED	Precision Refractive	15W	18W	Standalone / nLight		7,500	8,500	10,000	12,000					
WDGE4 LED	Precision Refractive			Standalone / nLight	-	12,000	16,000	18,000	20,000	22,000	25,000			

# **Ordering Information**

#### **EXAMPLE: WDGE2 LED P3 40K 80CRI VF MVOLT SRM DDBXD**

Series	Package		Color Temperature		CRI	Distribution		Voltage	Mount	Mounting					
WDGE2 LED	P1 <sup>1</sup> P2 <sup>1</sup> P3 <sup>1</sup> P4 <sup>1</sup> P5 <sup>1</sup>	P1SW P2SW Door with small window (SW) is required to accommodate sensors. See page 2 for more details.	27K 30K 35K 40K 50K <sup>2</sup>	2700K 3000K 3500K 4000K 5000K	80CRI 90CRI	VF VW	Visual comfort forward throw Visual comfort wide	MVOLT 347 <sup>3</sup> 480 <sup>3</sup>	Shipp SRM ICW	ed included  Surface mounting bracket Indirect Canopy/Ceiling Washer bracket (dry/damp locations only) <sup>7</sup>	Shippe AWS PBBW	d separately  3/8inch Architectural wall spacer S urface-mounted back box (top, left, right conduit entry). Use when there is no junction box available.			

<b>Options</b>				Finish	
E4WH E10WH	Emergency battery backup, Certified in CA Title 20 MAEDBS (4W, 0°C min) Emergency battery backup, Certified in CA Title 20 MAEDBS	<b>Standalone S</b> o PIR	ensors/Controls (only available with P1SW, P2SW & P3SW) Bi-level (100/35%) motion sensor for 8-15' mounting heights. Intended for use on switched circuits with external dusk to dawn switching.	DDBXD DBLXD DNAXD	Dark bronze Black Natural aluminum
E20WC	(10W, 5°C min)  Emergency battery backup, Certified in CA Title 20 MAEDBS (18W, -20°C min)	PIRH PIR1FC3V	Bi-level (100/35%) motion sensor for 15-30' mounting heights. Intended for use on switched circuits with external dusk to dawn switching Bi-level (100/35%) motion sensor for 8-15' mounting heights with photocell pre-	DWHXD DSSXD DDBTXD	White Sandstone Textured dark bronze
PE <sup>4</sup> DS <sup>5</sup>	Photocell, Button Type  Dual switching (comes with 2 drivers and 2 light engines; see page 3 for details)	PIRH1FC3V	programmed for dusk to dawn operation. Bi-level (100/35%) motion sensor for 15-30' mounting heights with photocell pre- programmed for dusk to dawn operation.	DBLBXD DNATXD	Textured black Textured natural aluminum
DMG <sup>6</sup> BCE BAA	0–10V dimming wires pulled outside fixture (for use with an external control, ordered separately)  Bottom conduit entry for back box (PBBW). Total of 4 entry points.  Buy America(n) Act Compliant	Networked Se NLTAIR2 PIR NLTAIR2 PIRH See page 4 for out of	ensors/Controls (only available with P1SW, P2SW & P3SW)  nLightAIR Wireless enabled bi-level motion/ambient sensor for 8–15' mounting heights.  nLightAIR Wireless enabled bi-level motion/ambient sensor for 15–30' mounting heights.  of box functionality	DWHGXD DSSTXD	Textured white Textured sandstone



COMMERCIAL OUTDOOR

One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.


#### Accessories

WDGEAWS DDBXD WDGE 3/8inch Architectural Wall Spacer (specify finish)
WDGE2PBBW DDBXD U WDGE2 surface-mounted back box (specify finish)

#### NOTES

- 1 P1-P5 not available with sensors/controls. Sensors/controls only available with P1SW, P2SW and P3SW.
- 2 50K not available in 90CRI
- 3 347V and 480V not available with E4WH, E10WH, E20WC or DS.
- 4 PE not available in 480V or with sensors/controls
- 5 DS option not available with E4WH, E10WH, E20WC or sensors/controls.
- 6 DMG option not available with sensors/controls
- 7 Not qualified for DLC. Not available with emergency battery backup or






Power Packages: P1, P2, P3, P4, P5



Small Window (SW) configuration

Power Packages: P1SW, P2SW, P3SW



Configuration with sensors/controls

Power Packages: P1SW, P2SW, P3SW

# **Performance Data**

#### **Lumen Output**

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

Performance System Diet Type		Dict Type	27	K (2700K	, 80 C	RI)		30	K (3000K	, 80 C	RI)		35	K (3500K	, 80 C	RI)		40	40K (4000K, 80 CRI) 50K (5000K, 80 C				RI)				
Package	Watts	Dist. Type	Lumens	LPW	В	U		Lumens	LPW	В	U		Lumens	LPW	В	U	G	Lumens	LPW	В	U	G	Lumens	LPW			
D1 / D1CW	1014	VF	1,166	119	0	0	0	1,209	123	0	0	0	1,251	128	0	0	0	1,256	128	0	0	0	1,254	128	0	0	0
P1 / P1SW	10W	VW	1,197	122	0	0	0	1,241	126	0	0	0	1,284	131	0	0	0	1,289	131	0	0	0	1,286	131	0	0	0
D2 / D2CW/	15W	VF	1,878	129	1	0	0	1,947	134	1	0	0	2,015	139	1	0	0	2,023	139	1	0	0	2,019	139	1	0	0
P2 / P2SW	15 W	VW	1,927	133	1	0	0	1,997	137	1	0	0	2,067	142	1	0	0	2,075	143	1	0	0	2,071	143	1	0	0
D2 / D2CW/	2211/	VF	2,908	129	1	0	0	3,015	134	1	0	0	3,119	138	1	0	0	3,132	139	1	0	0	3,126	139	1	0	0
P3 / P3SW	23W	VW	2,983	132	1	0	0	3,093	137	1	0	0	3,200	142	1	0	0	3,213	143	1	0	0	3,206	142	1	0	0
D4	25111	VF	4,096	117	1	0	1	4,247	121	1	0	1	4,394	126	1	0	1	4,412	126	1	0	1	4,403	126	1	0	1
P4	35W	VW	4,202	120	1	0	0	4,357	125	1	0	1	4,508	129	1	0	1	4,526	129	1	0	1	4,517	129	1	0	1
Dr	4014	VF	5,567	115	1	0	1	5,772	119	1	0	1	5,972	123	1	0	1	5,996	124	1	0	1	5,984	124	1	0	1
P5 48W	VW	5,711	118	1	0	1	5,921	122	1	0	1	6,127	126	1	0	1	6,151	127	1	0	1	6,139	127	1	0	1	

#### **Electrical Load**

Performance	System Watts			Curre	nt (A)		
Package	System watts	120V	208V	240V	277V	347V	480V
P1 / P1SW	10W	0.082	0.049	0.043	0.038		
PI/PISW	13W					0.046	0.033
P2 / P2SW	15W	0.132	0.081	0.072	0.064		
PZ / PZ3W	18W					0.056	0.041
P3 / P3SW	23W	0.195	0.114	0.100	0.088		
P3 / P35W	26W					0.079	0.058
P4	35W	0.302	0.175	0.152	0.134		
r4	38W					0.115	0.086
P5	48W	0.434	0.241	0.211	0.184		
rɔ	52W					0.157	0.119

COMMERCIAL OUTDOOR

### **Lumen Multiplier for 90CRI**

Multiplier
0.845
0.867
0.845
0.885
0.898

### Lumen Output in Emergency Mode (4000K, 80 CRI)

Option	Dist. Type	Lumens
FANAIL	VF	646
E4WH	VW	647
F1014/11	VF	1,658
E10WH	VW	1,701
F2014/C	VF	2,840
E20WC	VW	2,913

# **Lumen Ambient Temperature (LAT) Multipliers**

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Amb	pient	Lumen Multiplier
0°C	32°F	1.03
10°C	50°F	1.02
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.98

#### **Projected LED Lumen Maintenance**

Data references the extrapolated performance projections for the platforms noted in a  $25^{\circ}\text{C}$  ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	>0.96	>0.95	>0.91



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

City of Madison - Dane County

Men's Homeless Shelter

Exterior Lighting
2024-02-05

#### **Photometric Diagrams**

To see complete photometric reports or download .ies files for this product, visit the Lithonia Lighting WDGE LED homepage. Tested in accordance with IESNA LM-79 and LM-80 standards.




# **Emergency Egress Options**

# **Emergency Battery Backup**

The emergency battery backup is integral to the luminaire — no external housing required! This design provides reliable emergency operation while maintaining the aesthetics of the product. All emergency battery backup configurations include an independent secondary driver with an integral relay to immediately detect loss of normal power and automatically energize the luminaire. The emergency battery will power the luminaire for a minimum duration of 90 minutes (maximum duration of three hours) from the time normal power is lost and maintain a minimum of 60% of the light output at the end of 90minutes.

Applicable codes: NFPA 70/NEC - section 700.16, NFPA 101 Life Safety Code Section 7.9

The examples below show illuminance of 1 fc average and 0.1 fc minimum in emergency mode with E10WH or E20WC and VF distribution.

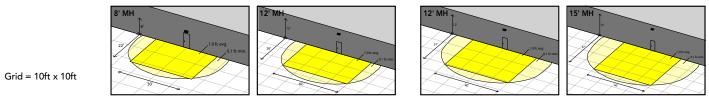

WDGE2 LED xx 40K 80CRI VF MVOLT E10WH


WDGE2 LED xx 40K 80CRI VF MVOLT E20WC

## **Dual Switching (DS) Option**

The dual switching option offers operational redundancy that certain codes require. With this option the luminaire comes integrated with two drivers and two light engines. These work completely independent to each other so that a failure of any individual component does not cause the whole luminaire to go dark. This option is typically used with a back generator or inverter providing emergency power.

Applicable codes: NFPA 70/NEC - section 700.16, NFPA 101 Life Safety Code Section 7.9

COMMERCIAL OUTDOOR






### **Control / Sensor Options**


### Motion/Ambient Sensor (PIR\_, PIRH\_)

Motion/Ambeint sensor (Sensor Switch MSOD) is integrated into the the luminaire. The sensor provides both Motion and Daylight based dimming of the luminaire. For motion detection, the sensor utilizes 100% Digital Passive Infrared (PIR) technology that is tuned for walking size motion while preventing false tripping from the environment. The integrated photocell enables additional energy savings during daytime periods when there is sufficient daylight. Optimize sensor coverage by either selecting PIR or PIRH option. PIR option comes with a sensor lens that is optimized to provide maximum coverage for mounting heights between 8-15ft, while PIRH is optimized for 15-40ft mounting height.


#### **Networked Control (NLTAIR2)**


nLight® AIR is a wireless lighting controls platform that allows for seamless integration of both indoor and outdoor luminaires. Five-tier security architecture, 900 MHz wireless communication and app (CLAIRITY $^{\text{TM}}$  Pro) based configurability combined together make nLight® AIR a secure, reliable and easy to use platform.

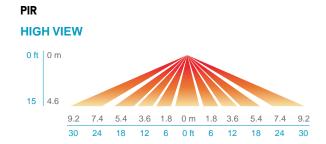



#### **PIRH**





Option	Dim Level	High Level (when triggered	Photocell Operation	Motion Time Delay	Ramp-down Time	Ramp-up Time
PIR or PIRH	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
PIR1FC3V, PIRH1FC3V	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 1fc	5 min	5 min	Motion - 3 sec Photocell - 45 sec
NLTAIR2 PIR, NLTAIR2 PIRH (out of box)	Motion - 3V (37% of full output) Photocell - 0V (turned off)	10V (100% output)	Enabled @ 5fc	7.5 min	5 min	Motion - 3 sec Photocell - 45 sec

COMMERCIAL OUTDOOR

### **Mounting, Options & Accessories**



NLTAIR2 PIR - nLight AIR Motion/Ambient Sensor

D = 7"

H = 11"

W = 11.5"



AWS - 3/8inch Architectural Wall Spacer

D = 0.38"

H = 4.4"

W = 7.5"



PBBW – Surface-Mounted Back Box Use when there is no junction box available.

D = 1.75"

H = 9"

W = 11.5"

#### **FEATURES & SPECIFICATIONS**

#### INTENDED USE

Common architectural look, with clean rectilinear shape, of the WDGE LED was designed to blend with any type of construction, whether it be tilt-up, frame or brick. Applications include commercial offices, warehouses, hospitals, schools, malls, restaurants, and other commercial buildings.

#### CONSTRUCTION

The single-piece die-cast aluminum housing integrates secondary heat sinks to optimize thermal transfer from the internal light engine heat sinks and promote long life. The driver is mounted in direct contact with the casting for a low operating temperature and long life. The die-cast door frame is fully gasketed with a one-piece solid silicone gasket to keep out moisture and dust, providing an IP66 rating for the luminaire.

# FINISH

Exterior painted parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum, sandstone and white. Available in textured and non-textured finishes.

#### OPTICS

Well crafted reflector optics allow the light engine to be recessed within the luminaire, providing visual comfort, superior distribution, uniformity, and spacing in wall-mount applications. The WDGE LED has zero uplight and qualifies as a Nighttime Friendly™ product, meaning it is consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

#### ELECTRICAL

Light engine consists of high-efficacy LEDs mounted to metal-core circuit boards to maximize heat dissipation and promote long life (up to L91/100,000 hours at 25°C). The electronic driver has a power factor of >90%, THD <20%. Luminaire comes with built in 6kV surge protection, which meets a minimum Category C low exposure (per ANSI/IEEE C62.41.2). Fixture ships standard with 0-10v dimmable driver.

COMMERCIAL OUTDOOR

#### INSTALLATION

A universal mounting plate with integral mounting support arms allows the fixture to hinge down for easy access while making wiring connections. The 3/8" Architectural Wall Spacer (AWS) can be used to create a floating appearance or to accommodate small imperfections in the wall surface. The ICW option can be used to mount the luminaire inverted for indirect lighting in dry and damp locations. Design can withstand up to a 1.5 G vibration load rating per ANSI C136.31.

#### LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP66 rated. PIR options are rated for wet location. Rated for -40°C minimum ambient. DesignLights Consortium® (DLC) Premium qualified product and DLC qualified product. Not all versions of this product may be DLC Premium qualified or DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified. International Dark-Sky Association (IDA) Fixture Seal of Approval (FSA) is available for all products on this page utilizing 2700K and 3000K color temperature only and SRM mounting only.

### BUY AMERICAN

Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to <a href="https://www.acuitybrands.com/buy-american">www.acuitybrands.com/buy-american</a> for additional information.

#### WARRANTY

5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: <a href="https://www.acuitybrands.com/support/warranty/terms-and-conditions">www.acuitybrands.com/support/warranty/terms-and-conditions</a>

**Note:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



One Lithonia Way • Conyers, Georgia 30012 • Phone: 1-800-705-SERV (7378) • www.lithonia.com © 2019-2022 Acuity Brands Lighting, Inc. All rights reserved.

WDGE2 LED Rev. 03/01/22



#### **IES ROAD REPORT**

PHOTOMETRIC FILENAME: WDGE2 LED P3 40K 80CRI VW.IES

#### **DESCRIPTIVE INFORMATION (From Photometric File)**

IESNA:LM-63-2002 [TEST] ISF 20154P25

[ISSUEDATE] 11/5/2019

[TESTLAB] ACUITY BRANDS LIGHTING, DECATUR LAB

[MANUFAC] Lithonia Lighting

[LUMCAT] WDGE2 LED P3 40K 80CRI VW

[LUMINAIRE] WDGE2 LED WITH P3 - PERFORMANCE PACKAGE, 4000K, 80CRI, VISUAL COMFORT WIDE OPTIC

[DISTRIBUTION] TYPE III, VERY SHORT, BUG RATING: B1 - U0 - G0

[TOTALLUMINAIRELUMENS] 3213

[INPUTWATTAGE] 22.55

[\_MOUNTING] WALL MOUNT

[\_PHYSICALDIMENSIONS] 0.95833, 0.5833, 0.75

[PRODUCTID] 59428784-cd5e-4b28-a855-8f72f9163b66

[SERIES] WDGE2

[SERIESID] 993532

#### **CHARACTERISTICS**

IES ClassificationType IIILongitudinal ClassificationVery ShortLumens Per LampN.A. (absolute)Total Lamp LumensN.A. (absolute)Luminaire Lumens3214Downward Total EfficiencyN.A. (absolute)

Total Luminaire Efficiency

Luminaire Efficacy Rating (LER)

N.A. (absolute)

143

Total Luminaire Watts

Ballast Factor

Upward Waste Light Ratio Maximum Candela Maximum Candela Angle

Maximum Candela (<90 Degrees Vertical)
Maximum Candela Angle (<90 Degrees Vertical)
Maximum Candela At 90 Degrees Vertical

Maximum Candela from 80 to <90 Degrees Vertical

Cutoff Classification (deprecated)

22.55 1.00 0.00 2449.088 2.5H 45V 2449.088

2.5H 45V

0 (0.0% Luminaire Lumens) 96.932 (3.0% Luminaire Lumens)

N.A. (absolute)


# IES ROAD REPORT PHOTOMETRIC FILENAME : WDGE2 LED P3 40K 80CRI VW.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS)**

6.8 253.1 218.0 47.8 2.6 0.0	N.A. N.A. N.A. N.A. N.A. N.A. N.A.	15.2 0.2 7.9 6.8 1.5 0.1 0.0 0.0
3213.9	N.A.	100.0
	6.8 253.1 218.0 47.8 2.6 0.0	253.1 N.A. 218.0 N.A. 47.8 N.A. 2.6 N.A. 0.0 N.A. 0.0 N.A. 3213.9 N.A.

# IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P3 40K 80CRI VW.IES


#### **POLAR GRAPH**

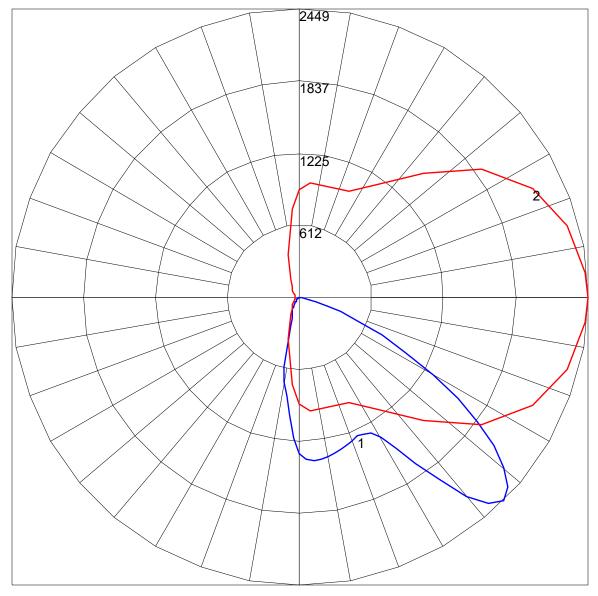

Maximum Candela = 2449.088 Located At Horizontal Angle = 2.5, Vertical Angle = 45 # 1 - Vertical Plane Through Horizontal Angles (2.5 - 182.5) (Through Max. Cd.) # 2 - Horizontal Cone Through Vertical Angle (45) (Through Max. Cd.)

### IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P3 40K 80CRI VW.IES

#### ISOFOOTCANDLE LINES OF HORIZONTAL ILLUMINANCE

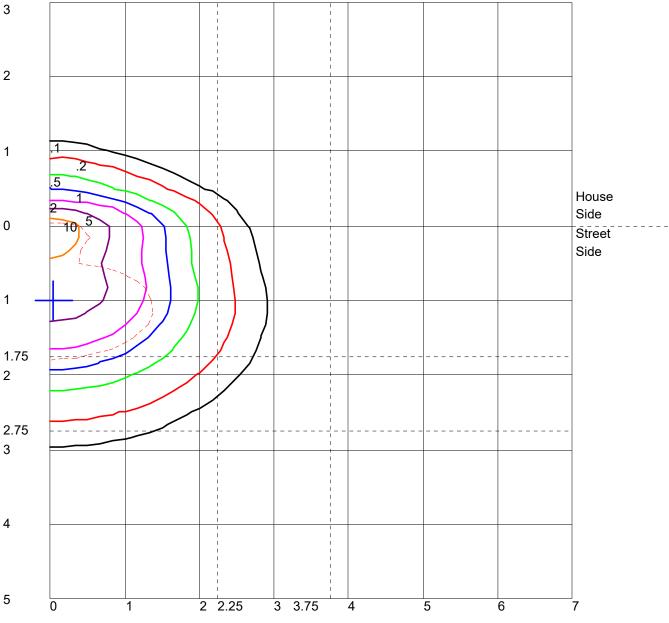


Distance In Units Of Mounting Height Values Based On 10 Foot Mounting Height 1/2 Maximum Candela Trace Shown As Dashed Curve

(+) = Maximum Candela Point

### IES ROAD REPORT PHOTOMETRIC FILENAME: WDGE2 LED P3 40K 80CRI VW.IES

# **LUMINAIRE CLASSIFICATION SYSTEM (LCS) GRAPH**

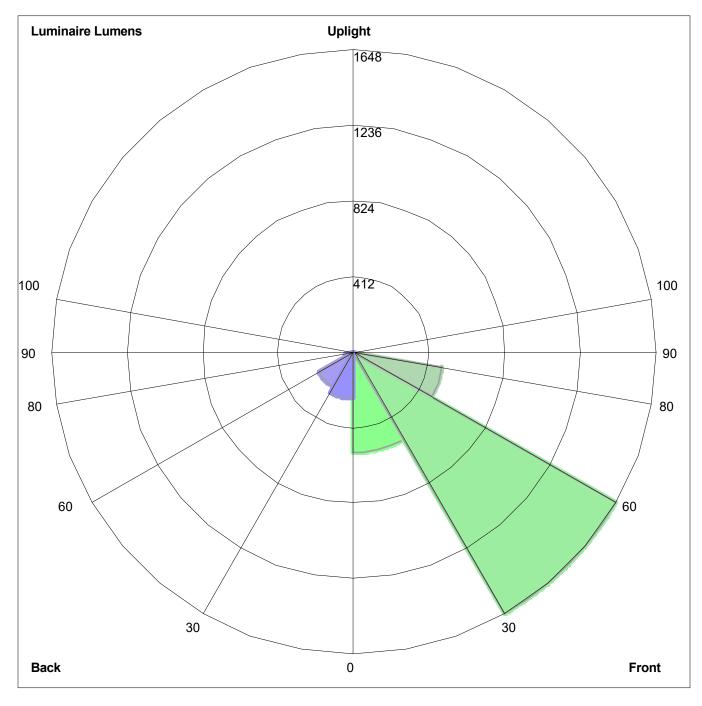

Luminaire Lumens:

Front: Low=548.7, Medium= 1648.0, High=488.9, Very High=6.8 Back: Low=253.1, Medium=218.0, High=47.8, Very High=2.6

Uplight: Low=0.0, High=0.0

BUG Rating: B1-U0-G0