APPLICATION FOR URBAN DESIGN COMMISSION REVIEW AND APPROVAL

AGENDA ITEM#	
Project #	

DATE SUBMITTED: 9/25/07 UDC MEETING DATE: 10/03/07	Action Requested Informational Presentation Initial Approval and/or Recommendation Final Approval and/or Recommendation
PROJECT ADDRESS: 719 Jupiter Drive, Madiso	n WI
ALDERMANIC DISTRICT: 3 - Lauren Cnare	
OWNER/DEVELOPER (Partners and/or Principals) Mr. Scott Frank	ARCHITECT/DESIGNER/OR AGENT: Eppstein Uhen Architect, Inc.
Alternative Continuum of Care	333 E. Chicago
7806 Betsy Lane, Verona, WI 53593	Milwaukee, WI 53202
CONTACT PERSON: Stuart LaRose, AIA E	Eppstein Uhen Architects, Inc.
Address: 333 E. Chicago	
Milwaukee, WI 53202	
Phone: (414) 291-8172	<u> </u>
Fax: (414) 211-7754	<u> </u>
E-mail address: stuartl@eua.com	
well as a fee) School, Public Building or Space (Fee may be re	Urban Design District * (A public hearing is required as equired) g of a Retail, Hotel or Motel Building Exceeding 40,000
(See Section B for:) New Construction or Exterior Remodeling in C4	District (Fee required)
(See Section C for:) R.P.S.M. Parking Variance (Fee required)	
(See Section D for:) Comprehensive Design Review* (Fee required) Street Graphics Variance* (Fee required)	
Other	
*Public Hearing Required (Submission Deadline 3 Weel	ks in Advance of Meeting Date)

Where fees are required (as noted above) they apply with the first submittal for either initial or final approval of a project.

URBAN DESIGN COMMISSION APPROVAL PROCESS

INTRODUCTION

The City of Madison's Urban Design Commission (UDC) has been created to:

- Encourage and promote high quality in the design of new buildings, developments, remodeling, and additions so as to maintain and improve the established standards of property values within the City.
- Foster civic pride in the beauty and nobler assets of the City, and in all other ways possible assure a functionally efficient and visually attractive City in the future.

The process outlined here is intended to:

- Facilitate the preparation of meeting agendas.
- Provide information on projects to UDC members in advance of the meeting at which they will consider a project.
- Provide a record of the plans approved for a given project.

TYPES OF APPROVALS

<u>Informational Presentation</u>. Applicants are often encouraged to make an Informational Presentation to the UDC prior to seeking any approvals in order to obtain an initial reaction and direction before undertaking detailed design. Applicants should provide details on any concept, site and building plans, and other relevant information on which the Urban Design Commission can provide feedback.

<u>Initial Approval and/or Recommendation</u>. Applicant may obtain initial approval and/or recommendation of a project by presenting preliminary design information/detail.

<u>Final Approval and/or Recommendation</u>. Applicant may obtain final approval and/or recommendation of a project by presenting final project details. Recommendations/concerns expressed in the initial approval must be addressed at this time.

PRESENTATIONS TO THE COMMISSION

When presenting projects to the Urban Design Commission, applicants should fill out a registration slip provided in the meeting room and present it to the Secretary. The applicant is encouraged to consider the use of various graphic presentation material including a locator map, photographs, renderings/model, scale drawings of the proposal in context with adjacent buildings/uses/signs, etc., as may be deemed appropriate to describe the project. Graphics should be mounted on rigid boards so that they may be easily displayed.

Primarily, the Commission is interested in the appearance and design quality of projects. Emphasis should be given to the site plan, landscape plan, lighting plan, building elevations, exterior building materials, color scheme, and graphics.

Presentations should generally be limited to 5-10 minutes. The Commission will withhold questions until the end of the presentation.

<u>APPLICATION REQUIREMENTS</u>

Submission requirements for all types of applications for Urban Design Commission approval are as outlined in the following sections A-D. In addition, Electronic Application Submittal is required by all applicants consisting of a copy of the completed application from, descriptive materials, and plans as individual Adobe Acrobat PDF files complied either on a non-returnable CD-ROM to be included with their application materials, or in an e-mail sent to UDCApplications@cityofmadison.com The transmittal shall

include the name of the project, address, and applicant. Applicants unable to provide the materials electronically should contact the Secretary of the Urban Design Commission at 267-8740 for assistance.

An application is required for <u>each</u> Urban Design Commission appearance. For projects also requiring Plan Commission approval, applicants must have submitted an accepted application for Plan Commission consideration prior to obtaining any formal action (initial or final approval) from the UDC. Applicants are strongly encouraged to meet with UDC staff prior to preparing an application. Please call (608) 266-4635 to arrange an appointment.

NOTICE REGARDING LOBBYING ORDINANCE: If you are seeking approval of a development that has over 40,000 square feet of non-residential space, or a residential development of over 10 dwelling units, or if you are seeking assistance from the City with a value of \$10,000 (including grants, loans, TIF, or similar assistance), then you likely are subject to Madison's lobbying ordinance (Sec. 2.40, MGO). You are required to register and report your lobbying. Please consult the City's Clerk's Office for more information. Failure to comply with the lobbying ordinance may result in fines.

All application fees shall be included with the application. Make check payable to City Treasurer, Madison, Wisconsin.

SECTION A

SUBMISSION REQUIREMENTS FOR:

- PUD's,* PCD's, PRD's
- New Construction or Major Exterior Remodeling in Urban Design District** (\$300 Application Fee)
- Minor Exterior Remodeling in Urban Design District (\$150 Application Fee)
- School, Public Building, or Space (Application Fee may be required)
- New Construction or Addition to or Remodeling of a Retail, Hotel, or Motel Building Exceeding 40,000 Sq .Ft.
- Planned Commercial Site
- * NOTE: Applications for Planned Unit Development Districts in Downtown Design Zones are required to address the provisions of Section 28.07(6) of the Zoning Code including the "Exterior and Interior Design Criteria for Planned Unit Development Districts in Downtown Design Zones."
- ** Public Hearing Required

1. Informational Presentation

Applications to make an Informational Presentation of a project to the UDC should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Brief Narrative Description of the Project
- c. Any and all relevant plans and information on which feedback by the Urban Design Commission is requested.

2. <u>Initial Approval and/or Recommendation</u>

Applications to make an Initial Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Site Plan showing location of existing and proposed buildings
- c. Landscaping Plan
- d. Building Elevations
- e. Contextual site information including photographs and layout of adjacent buildings/structures
- f. PUD text and letter of intent

3. Final Approval and/or Recommendation

Applications to obtain Final Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Site Plan showing location of existing and proposed buildings
- c. Grading Plan
- d. Landscape Plan
- e. Building Elevations, colored with shadow lines required
- f. Proposed Signage
- g. Lighting Plan/Details/Photometrics
- h. Utility/HVAC equipment location and screening details
- i. PUD text and letter of intent

The applicant shall bring to the UDC meeting, samples of the exterior building materials and color scheme to be used on the project; in addition to providing a list of exterior building materials and colors as an attachment and/or detail to the building elevations.

SECTION B

SUBMISSION REQUIREMENTS FOR:

- New Construction or Major Exterior Remodeling in C4 District (No application fee required covered by Plan Commission application)
- Minor Exterior Remodeling in C4 District (\$150 Application Fee)

1. Informational Presentation

Applications to make an Informational Presentation of a project to the UDC should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Brief Narrative Description of the Project
- c. Any and all relevant plans and information on which feedback by the Urban Design Commission is requested.

2. <u>Initial Approval and/or Recommendation</u>

Applications to make an Initial Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Building Elevations including adjacent buildings
- c. Photographs of existing buildings as well as adjacent buildings.

3. Final Approval and/or Recommendation

Applications to obtain Final Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Building Elevations including adjacent buildings
- c. Photographs of existing buildings as well as adjacent buildings.
- d. Proposed Signage

The applicant shall bring to the UDC meeting, samples of the exterior building materials and color scheme to be used on the project; in addition to providing a list of exterior building materials and colors as an attachment and/or detail to the building elevations.

SECTION C

SUBMISSION REQUIREMENTS FOR:

RPSM Parking Variance (\$300 Application Fee)

1. Informational Presentation

Applications to make an Informational Presentation of a project to the UDC should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Brief Summary of the Parking Variance Request
- c. Any and all relevant plans and information on which feedback by the Urban Design Commission is requested.

2. <u>Initial Approval and/or Recommendation</u>

Applications to make an Initial Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Summary of the Parking Variance Request
- c. Site Plan
- d. Landscape Plan

3. Final Approval and/or Recommendation

Applications to obtain Final Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Summary of the Parking Variance Request
- c. Site Plan
- d. Landscape Plan
- e. Parking Lot Lighting Plan/Details/Photometrics

SECTION D

SUBMISSION REQUIREMENTS FOR:

- Comprehensive Design Review (\$200 Application Fee)
- Street Graphics Variance (\$200 Application Fee)

NOTE: Public Hearing Required

1. Informational Presentation

Applications to make an Informational Presentation of a project to the UDC should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. Brief Narrative Description of the Project
- c. Any and all relevant plans and information on which feedback by the Urban Design Commission is requested.

2. <u>Initial Approval and/or Recommendation</u>

Applications to make an Initial Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. A written explanation of the variance requested comparing the Sign Code allowance to the proposed signage.
- c. Site Plan (show location of all existing and proposed buildings, and all existing and proposed street graphics, specifying which existing graphics, if any, are to be removed)
- d. Scale drawing of each proposed graphic, including awning graphics
- e. Photographs of site

3. Final Approval and/or Recommendation

Applications to obtain Final Approval and/or Recommendation of a project should be accompanied by an electronic pdf submission **AND 14 collated sets** of all materials (11" x 17" max.), including the following **required** items:

- a. Locator Map
- b. A written explanation of the variance requested comparing the Sign Code allowance to the proposed signage.
- c. Site Plan (show location of all existing and proposed buildings, and all existing and proposed street graphics, specifying which existing graphics, if any, are to be removed)
- d. Scale drawing of each proposed graphic, including awning graphics
- e. Description and/or samples of materials and colors for each proposed sign
- f. Photographs of site
- g. If any graphics similar to proposed graphics are in use elsewhere, photographs of the similar graphics

STREET GRAPHICS VARIANCE AND/OR COMPREHENSIVE DESIGN REVIEW

Section 31.04 of the Madison General Ordinance provides for the City's Urban Design Commission, after a public hearing to:

• Approve a street graphic up to twenty-five percent (25%) larger or higher than the maximum square footage or height otherwise allowed or reduce the yard or setback required if a variance:

Is necessary for a street graphic located on the site of an establishment to be identifiable and legible from the nearest roadway at prevailing speeds; and


Will result in a street graphic more in scale with the building and site and in a superior overall design.

- Permit street graphics which will front on roads which according to the official map or capital
 improvement program indicate a change in size of that road or a change of zoning in the future as if the
 change were currently in effect;
- Permit the use of an above-roof graphic on a given zoning lot in a commercial district provided that the
 graphics on adjacent properties reduce the effectiveness of other types of conforming street graphics or
 were topographic relationships between structures and right-of-ways would deem their use appropriate;
- Permit the use of an above-roof graphic when the architecture of the building does not provide a reasonable signable area;
- Permit the use of wall graphics on building facades not adjacent to off-street parking areas where, due to variation of building setbacks, a signable area exists, provided the area of the graphic shall not exceed the area of the wall graphic permitted on the front of the building;
- Approve a comprehensive design plan for either an existing or new building should the integration of street graphics into an overall building design be prohibited solely by the restrictions of this ordinance, with the objective of the comprehensive design review being recognition of exceptional effort to create visual harmony between street graphics, the building and the building site; and
- Permit an above-canopy graphic that crosses architectural detail to be erected closer than five (5) feet to the nearest face of a building.

LUMINAIRE SCHEDULE									
Symbol	Label	Qty	Catalog Number	Description	Lamp	File	Lumens	LLF	Watts
	А	4	AS2 250M SR4W	ARCHITECTURAL ARM- MOUNTED CUTOFF LUMINAIRE WITH SR4W REFLECTOR.	ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.	Ltl10415.ies	20500	0.72	297
	В	5	AS2 250M SR4SC	ARCHITECTURAL ARM- MOUNTED CUTOFF LUMINAIRE WITH SR4SC REFLECTOR.	ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.	Ltl10399.ies	20500	0.72	297

LUMINA	IRE LOCA	TIONS								
			Location						Aim	
No.	Label	Х	Υ	Z	MH	Orientation	Tilt	Х	Υ	Z
1	А	935.1	-76.3	22.0	22.0	179.4	0.0	935.1	-77.7	0.0
2	А	847.7	-77.2	22.0	22.0	179.4	0.0	847.7	-78.6	0.0
3	А	750.8	-77.2	22.0	22.0	179.4	0.0	750.9	-78.6	0.0
4	А	663.9	-76.3	22.0	22.0	179.4	0.0	663.9	-77.7	0.0
5	В	601.5	74.7	22.0	22.0	90.8	0.0	602.9	74.7	0.0
6	В	654.2	-143.8	22.0	22.0	-89.2	0.0	652.8	-143.7	0.0
7	В	930.3	-144.2	22.0	22.0	88.4	0.0	931.7	-144.2	0.0
8	В	610.4	1.3	22.0	22.0	90.8	0.0	611.8	1.2	0.0
9	В	601.5	-75.0	22.0	22.0	90.8	0.0	602.9	-75.0	0.0

STATISTICS						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Calc Zone #1	+	1.8 fc	4.1 fc	0.4 fc	10.3:1	4.5:1

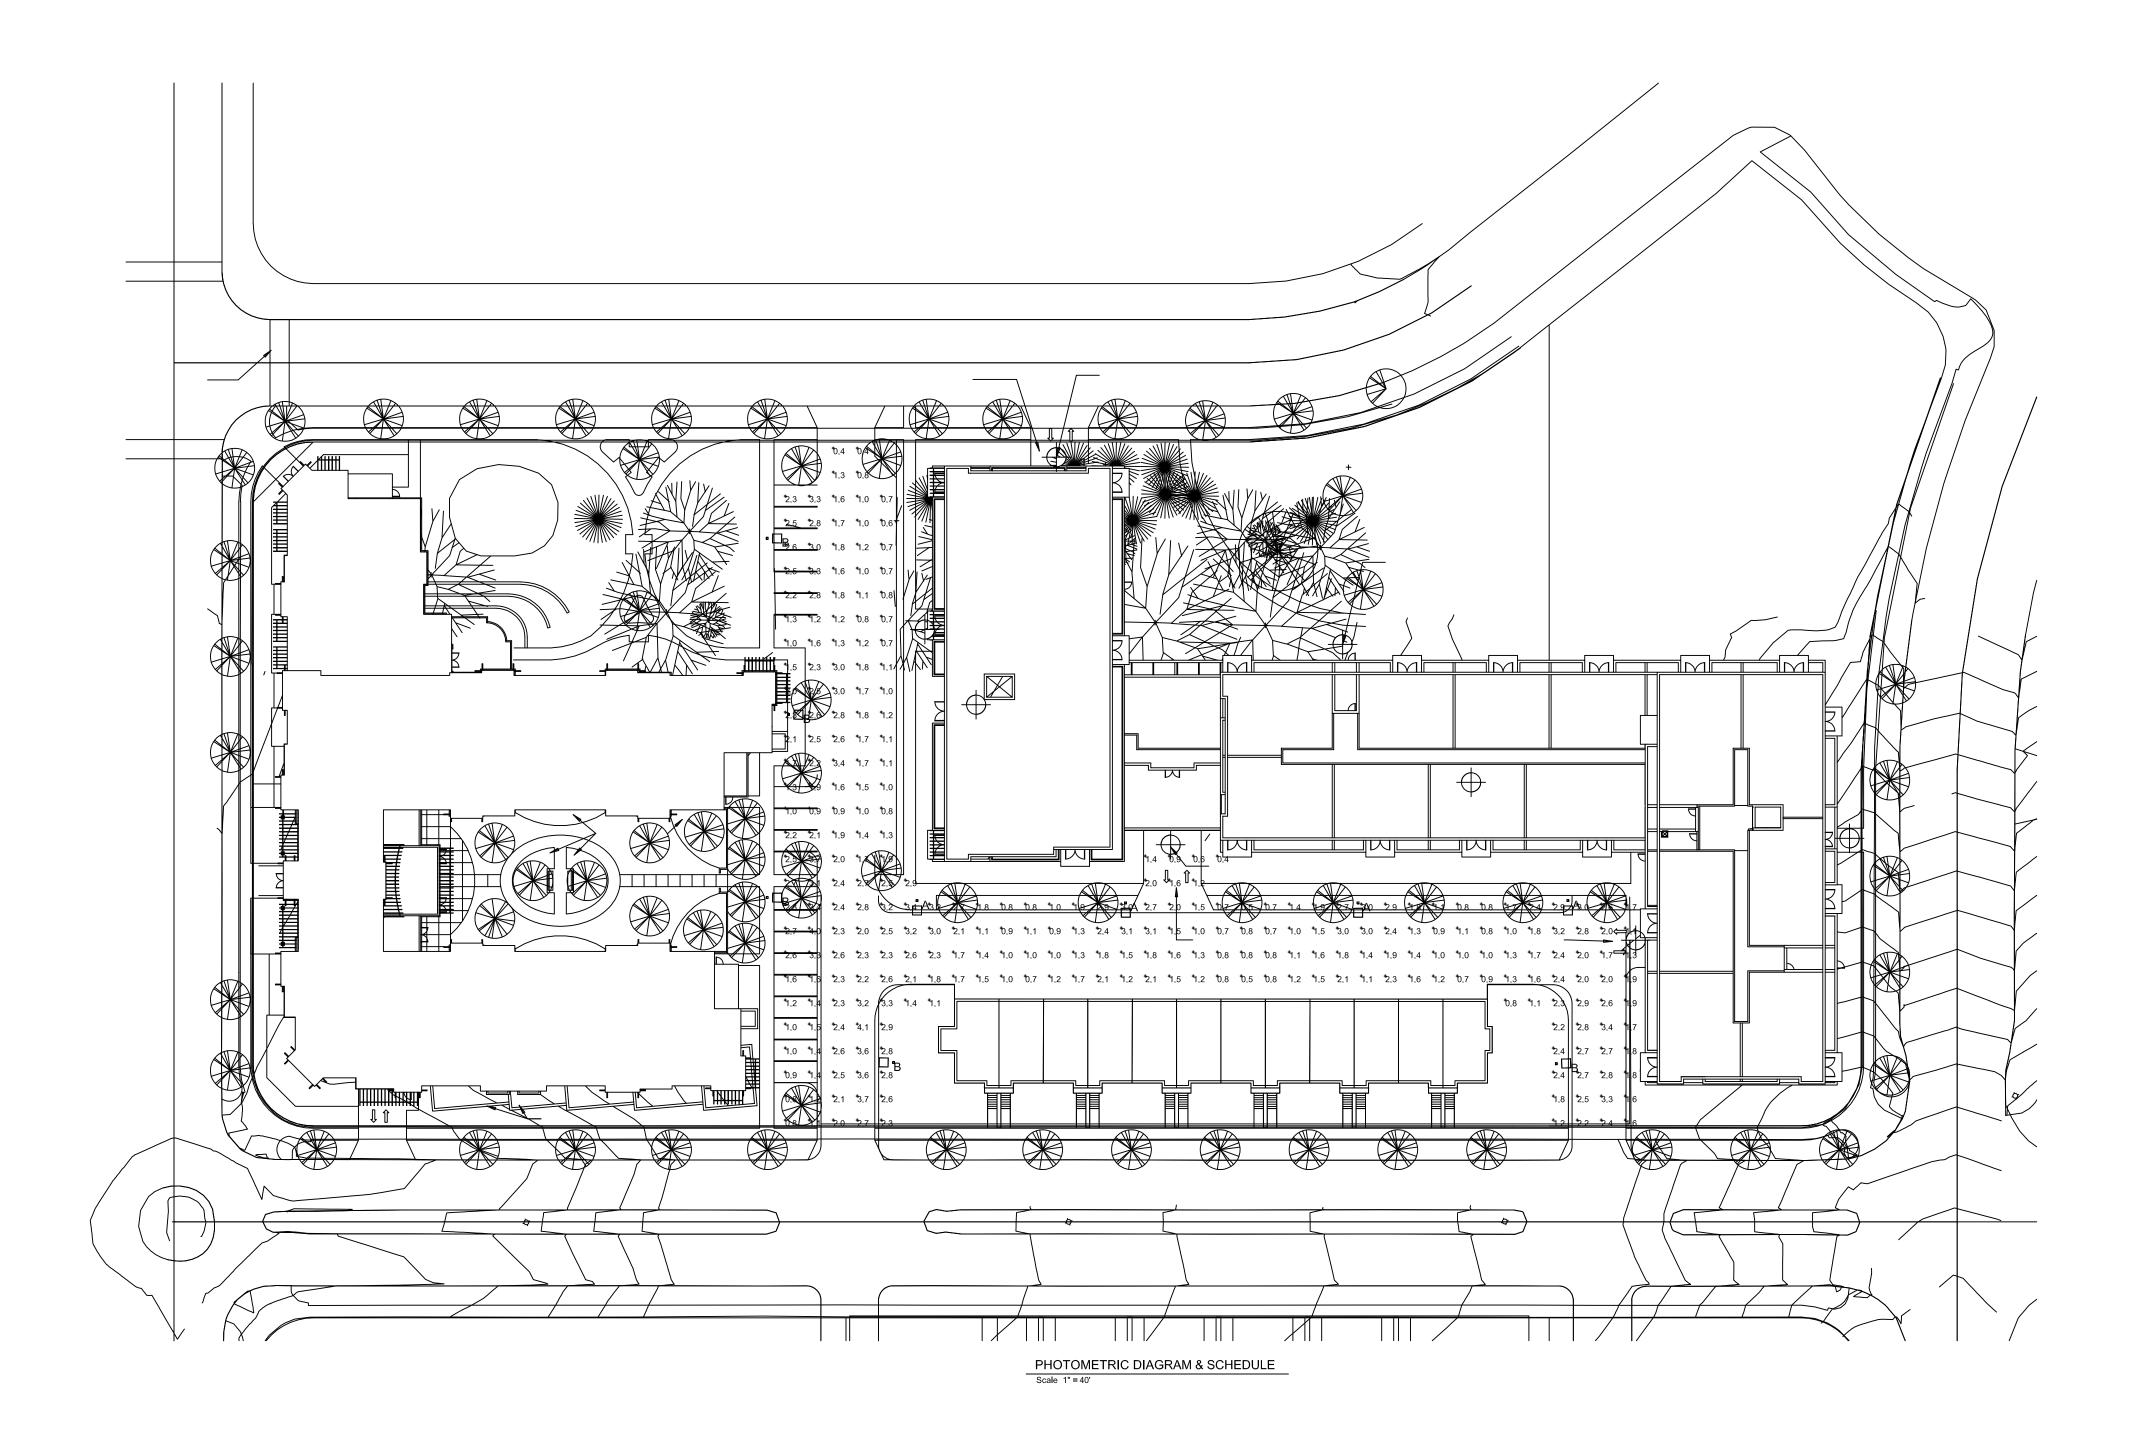



eppstein uhen : architects

milwaukee 3 3 3 East Chicago Street Milwaukee, Wisconsin 53202 tel 414 271 5350 fax 414 271 7794 2 2 2 West Washington Ave, Suite 650 Madison, Wisconsin 5 3 7 0 3 tel 608 442 5350 fax 608 442 6680

PROJECT INFORMATION

OAK PARK PLACE II -ASSISTED LIVING

GRANDVIEW COMMONS 719 JUPITER DRIVE c MADISON, WI

ISSUANCE AND REVISIONS

UDC SUBMITTAL

REVISIONS
DATE DE

SHEET INFORMATION

PROJECT MANAGER

PROJECT NUMBER

EXTERIOR VIEWS

106389-04

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

© Eppstein Uhen Architects, Inc.





2 3D - Courtyard Looking Southeast




3D -Courtyard Looking West









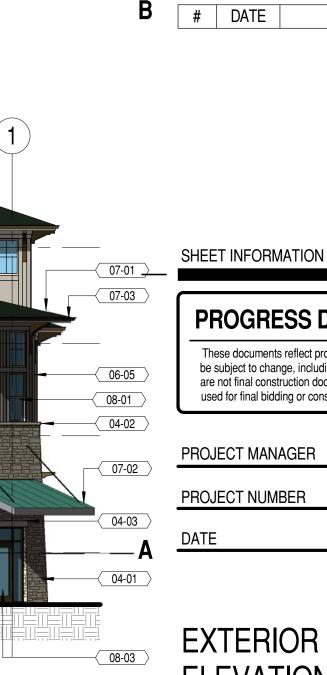

_____(23-01__) (BEYOND) 06-04 07-01 06-02 06-05 06-02 06-01 06-06 04-02 04-05 08-01 04-01 711111 GROUND FLOOR ENTRY AT HALLEY 94' - 3" 05-01 NORTH - HALLEY WAY

3/32" = 1'-0"

REVISIONS

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes

DESCRIPTION

2 2 2 West Washington Ave, Suite 650 Madison, Wisconsin 5 3 7 0 3 tel 608 442 5350 fax 608 442 6680

PROJECT INFORMATION

ASSISTED LIVING

719 JUPITER DRIVE

ISSUANCE AND REVISIONS


UDC SUBMITTAL


106389-04 PROJECT NUMBER 09-26-07

EXTERIOR ELEVATIONS

© Eppstein Uhen Architects, Inc.

A200

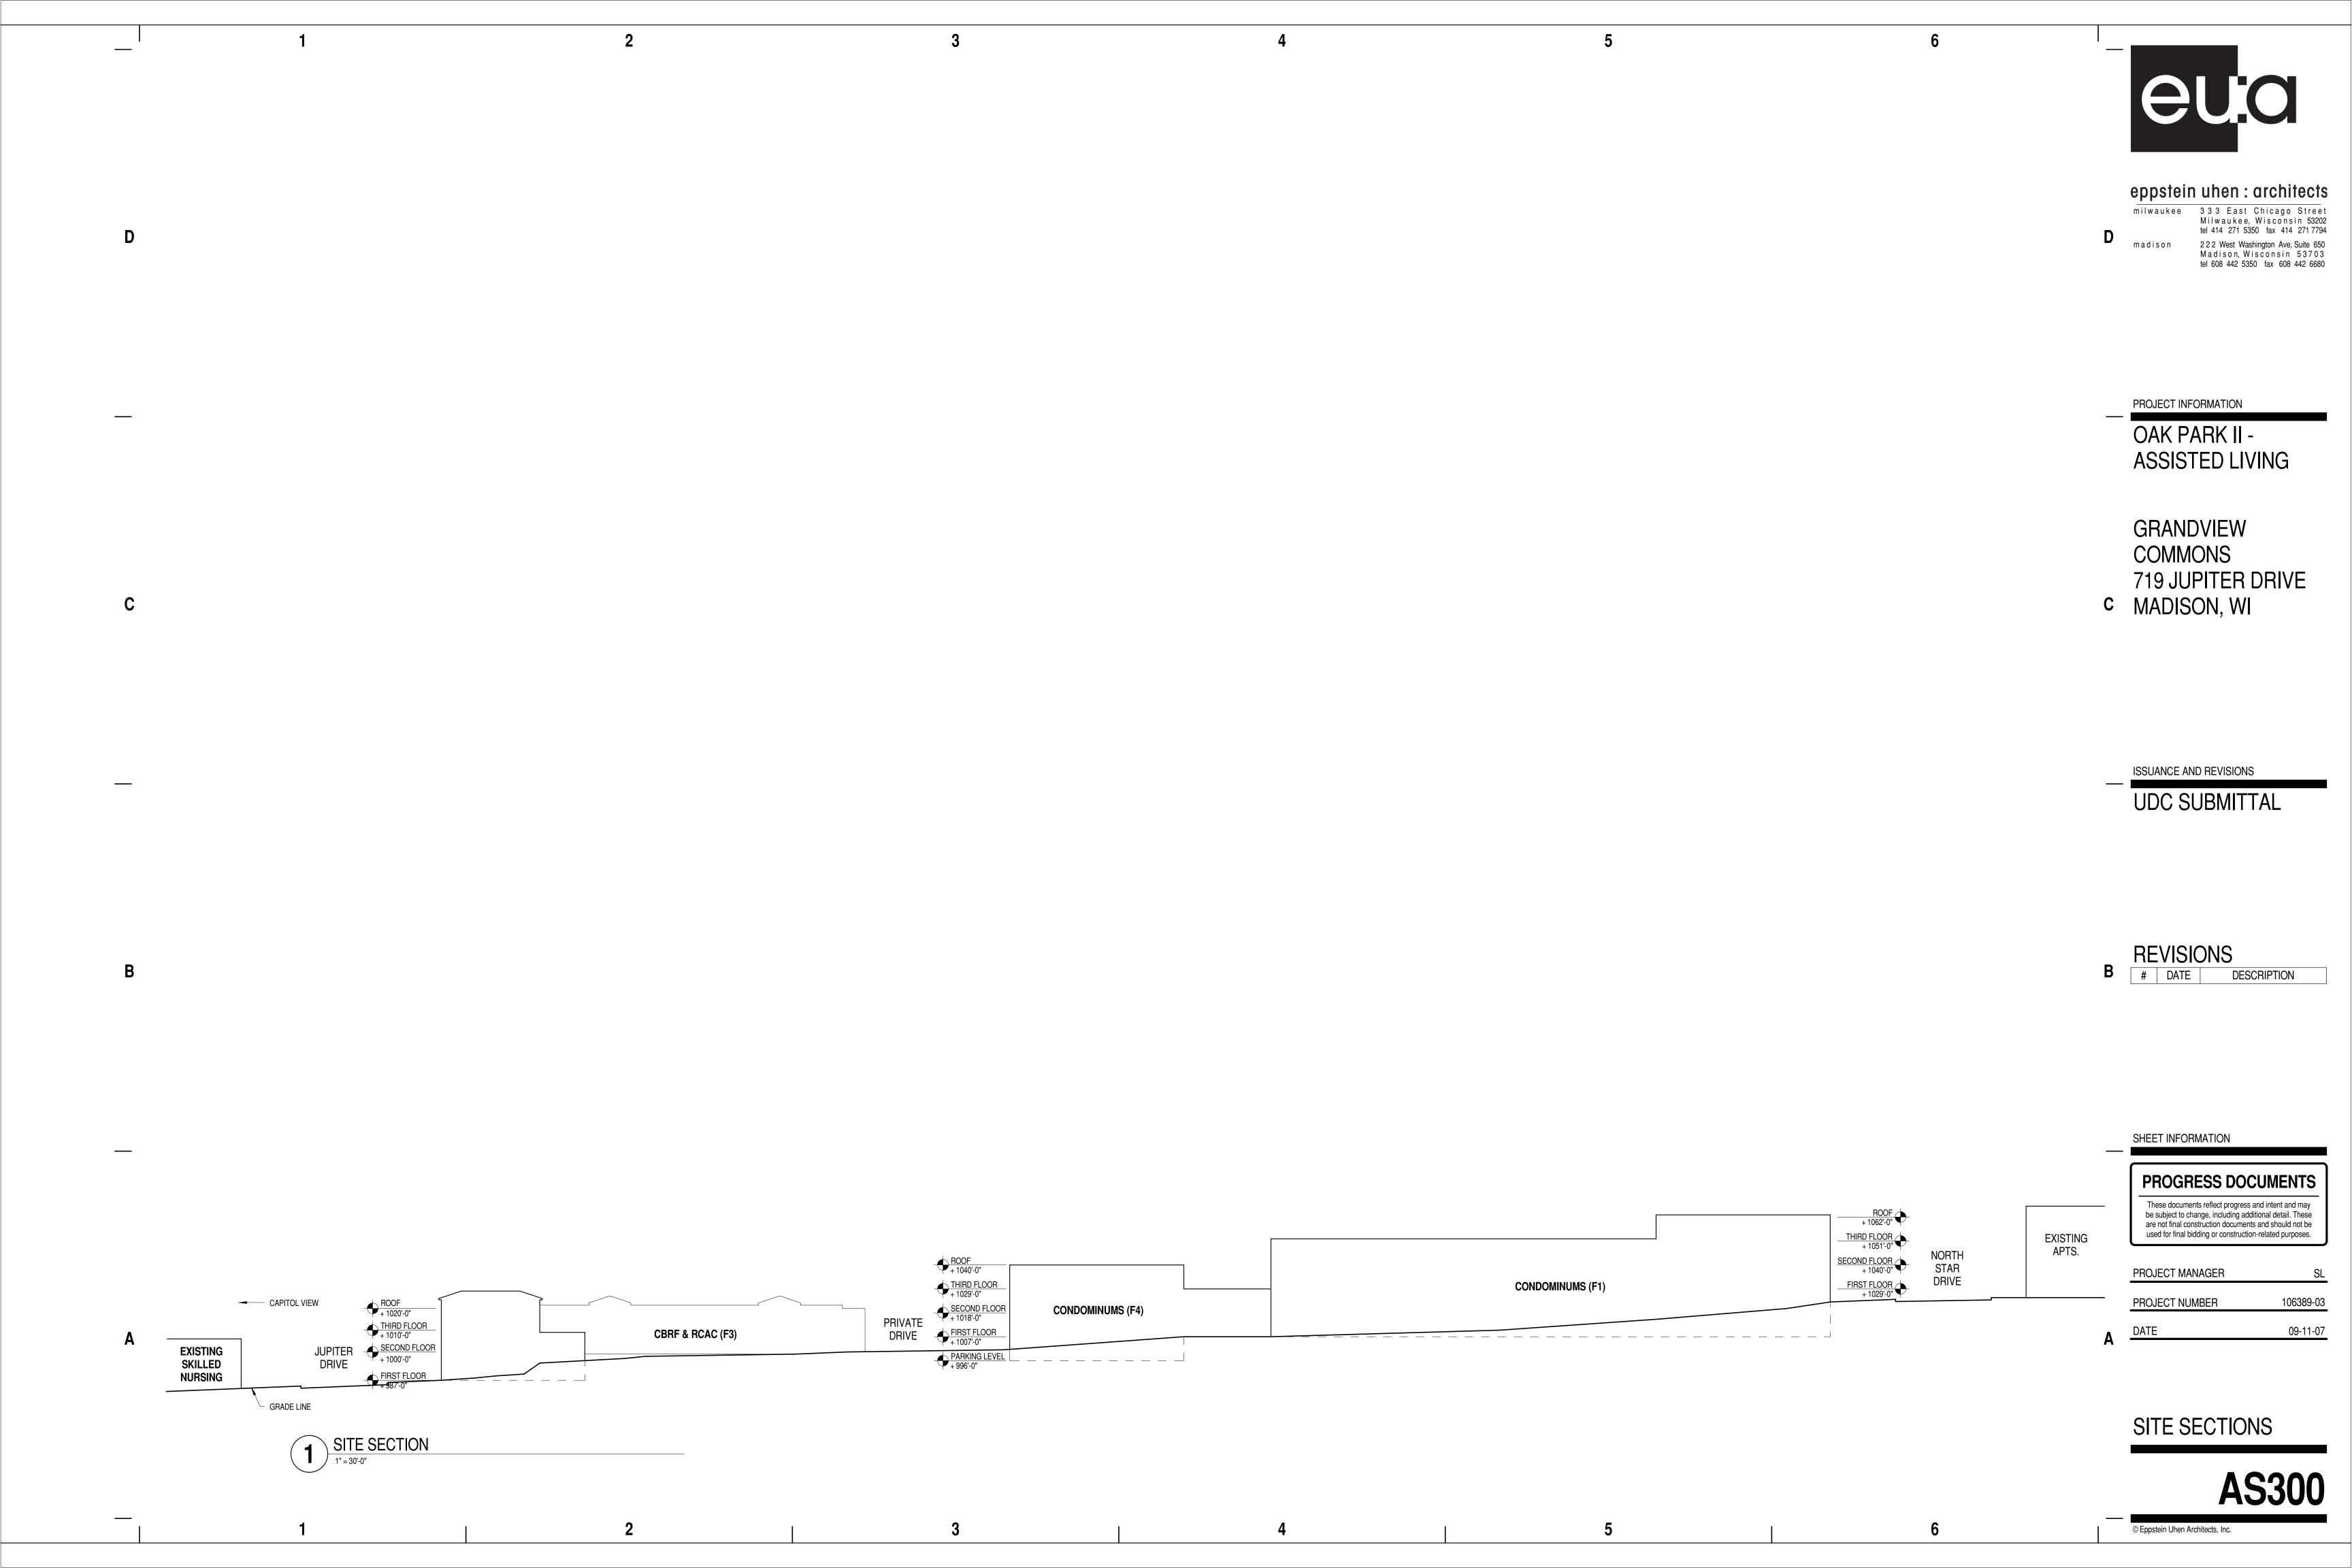

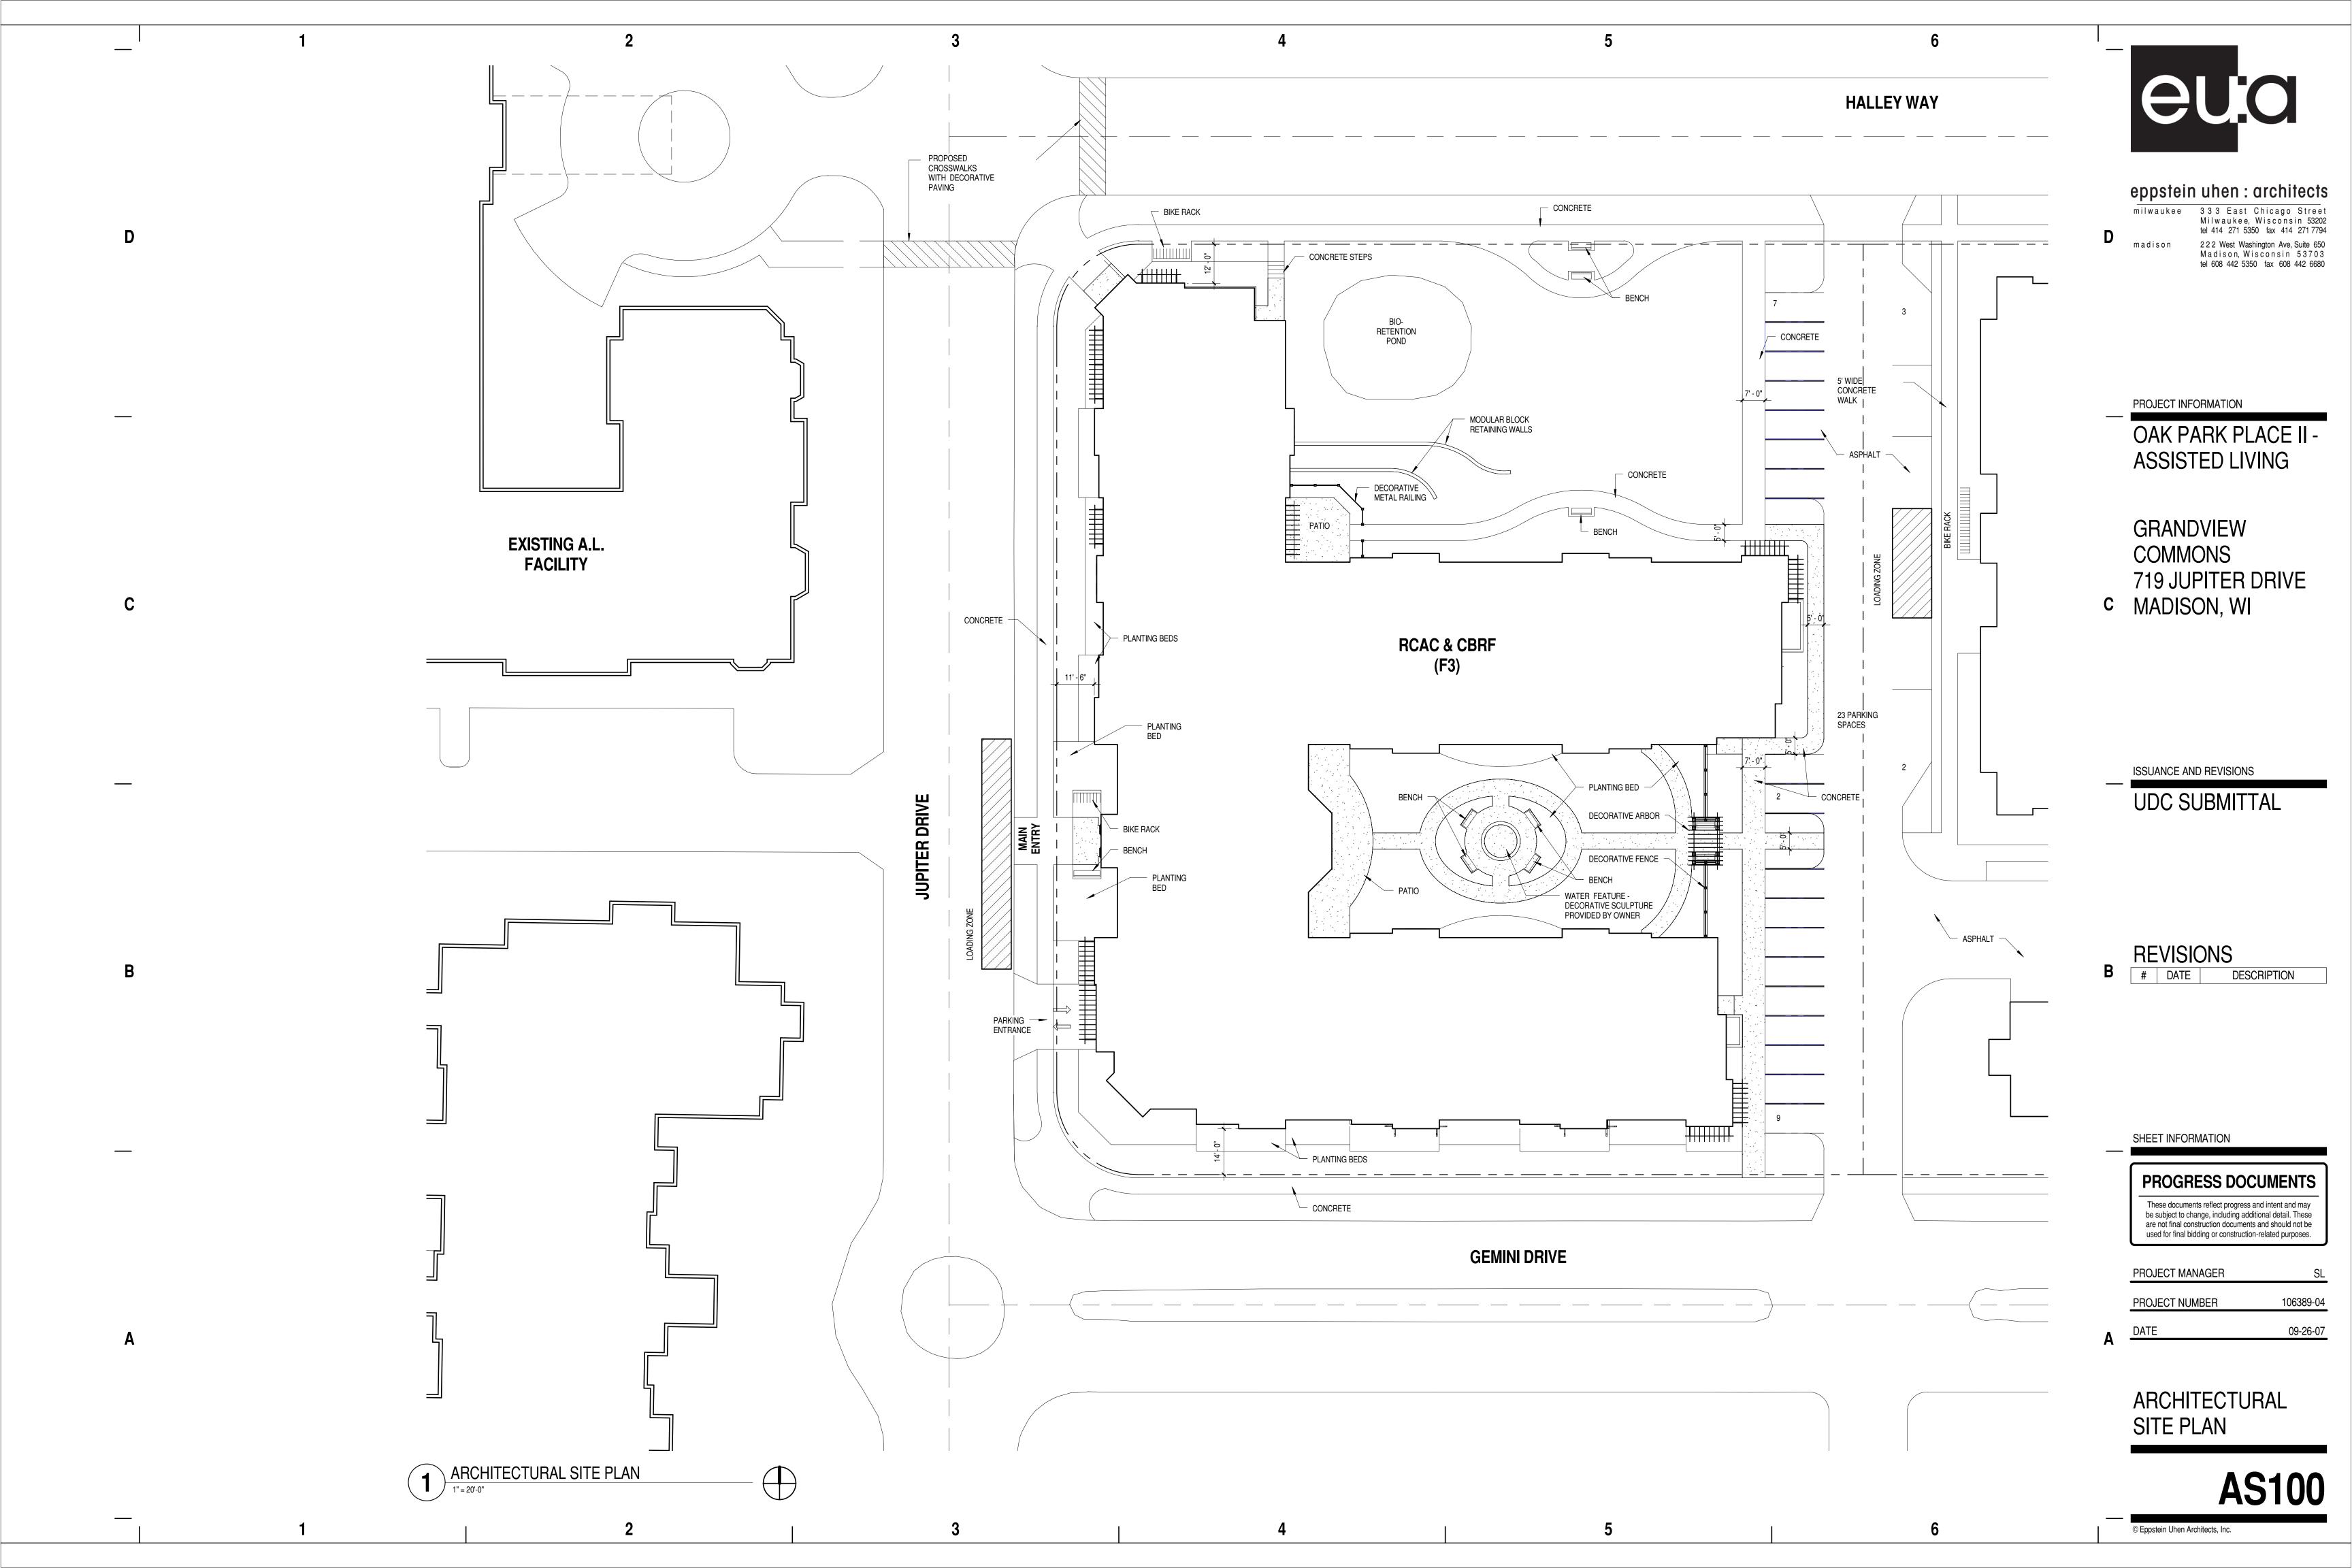

- All plant beas to be edged with black vinyl edging.
- 2. Plant beds to be mulched with #2 washed stone and weed barrier.
- 3. Trees planted in lawn areas to recieve a 6' diameter shredded hardwood mulch ring.
- 4. Contractor is responsible for verifing all plant quantities. Plan shall preside over the plant list.

Plant List A


		Plant List A		
Quantity	Planting Size	Scientific Name	Common Name	
1	2" BB	Açer 'Sienna Glen'	Sienna Glen	
4	6-7' BB	Amelanchier x grandifora 'Autumn Brilliance'	Autumn Brilliance Juneberry	
6	4' pot	Asclepius tuberosa	Butterfly Weed	
6	4' pot	Astilbe thunbergii 'Straussenfeder'	Astilbe Straussenfeder	
9	24"	Berberis thunbergii 'Crimson Pygmy'	Crimson Pygmy Barberry	
9	#2	Buxus sempervirens 'Green Velvet'	Green Velvet Boxwood	
3	2" BB	Celtis occidentalis	Common hackberry	
3	3 Gal	Clethra alnifolia 'Hummingbird'	Hummingbird Summersweet	
3	18'	Cornus alba 'Baihalo'	Ivory Halo Dogwood	
9	3'	Cornus sericea 'Isanti'	Isanti Dogwood	
ΙΤ	15"	Cornus sericea 'Kelsey'	Kelsey Dogwood	
6	#2	Cotoneaster 'Tom Thumb'	Tom Thumb Cotoneaster	
14	12-15"	Daphne x burkwoodii 'Carol Mackie'	Carol Mackie Daphne	
9	24"	Diervilla lonicera 'Butterfly Wings'	Diervilla 'Butterfly Wings'	
12	5-Gal	Fothergilla gardenii	Fothergilla 'Mt. Airy'	
5	2' BB	Gleditsia triancanthos 'Skycole'	Skyline Honeylocust	
5	4' pot	Hemerocallis 'Stella D'oro'	Stella D'oro Daylily	
8	4" pot	Heuchera micrantha 'Palace Purple'	Heuchera Palace Purple	
14	#I Grade	Hydrangea arborescens 'Annabelle'	Annabelle Hydrangea	
3	#I Grade	Hydrangea macrophylla 'Endless Summer'	Endless Summer	
15	2-3'	Hydrangea paniculata 'Grandiflora'	PG Hydrangea	
15	*2	Hypericum frondosum 'Sunburst'	Hypericum 'Sunburst'	
2	6-7' BB	Malus 'Prairie Fire' Clump Form	Clump Form Crabapple	
6	6-7' BB	Malus 'Prairie Fire'	Prairie Fire Crabapple	
3	3-4'	Physocarpus opulifolius 'Diablo'	Diablo Ninebark	
2	2' BB	Quercus bicolor	Swamp White Oak	
з =	*2	Rhododendron PJM	PJM Rhododendron	
8	2 Gal	Rosa 'Blushing Knockout'	Blushing Knockout Rose	
6	2 gal	Rosa 'Fuschia Mediland'	Fuschia Meidiland Rose	
5	2 gal	Rosa 'Knockout'	Knockout Rose	
14	2 gal	Rosa 'Scarlet Mediland'	Scarlet Meidiland Rose	
5	2 Gal	Rosa 'Sea Foam'	Sea Foam Rose	
5	4' pot	Rudbeckia hirta 'Goldstrum'	Goldstrum Black-Eyed-Susan	
10	4' pot	Salvia superba 'Caradonna'	Salvia Caradonna	
8	4' Pot	Sedum spectabile 'Autumn Joy'	Autumn Joy Sedum	
6	12-15"	Spirea japonica 'Little Princess'	Little Princess Spirea	
6	15-18"	Spiraea bumalda 'Neon Flash'	Spirea Neon Flash	
26	2-3'	Syringa patula 'Miss Kim'	Miss Kim Lilac	
4	2' BB	Syringa reticulata 'Ivory Silk'	Ivory Silk Japanese Tree Lilac	
45	15"	Taxus media 'Taunton'	Taunton Yew	
3	3-4'	Viburnum dentatum 'Autumn Jazz'	Autumn Jazz Viburnum	
5	18'	Viburnum opulus compactum	Compact Cranberry Viburnum	
6	24"	Viburnum x juddii	Judd Viburnum	



Java Red Weigela

Weigela florida 'Java Red'

NUMER OF POINTS REQUIRED:			88.4
ELEMENT	POINT VALUE	QUANTITY	POINTS ACHIEVED
Canopy Tree (2"-2.5" caliper)	35	6	210
Deciduous Shrub	2		0
Evergreen Shrub	3		0
Decorative Wall or Fence (per 10 L.F.)	5		0
Earth Berm (per 10 L.F.)			0
Ave. Height 30"	5		0
Ave. Height 15"	2		0
Evergreen Trees (3 foot height min.)	15		0
Canopy Tree or Small Tree (1.5"-2" caliper)	15		0
		TOTAL:	210

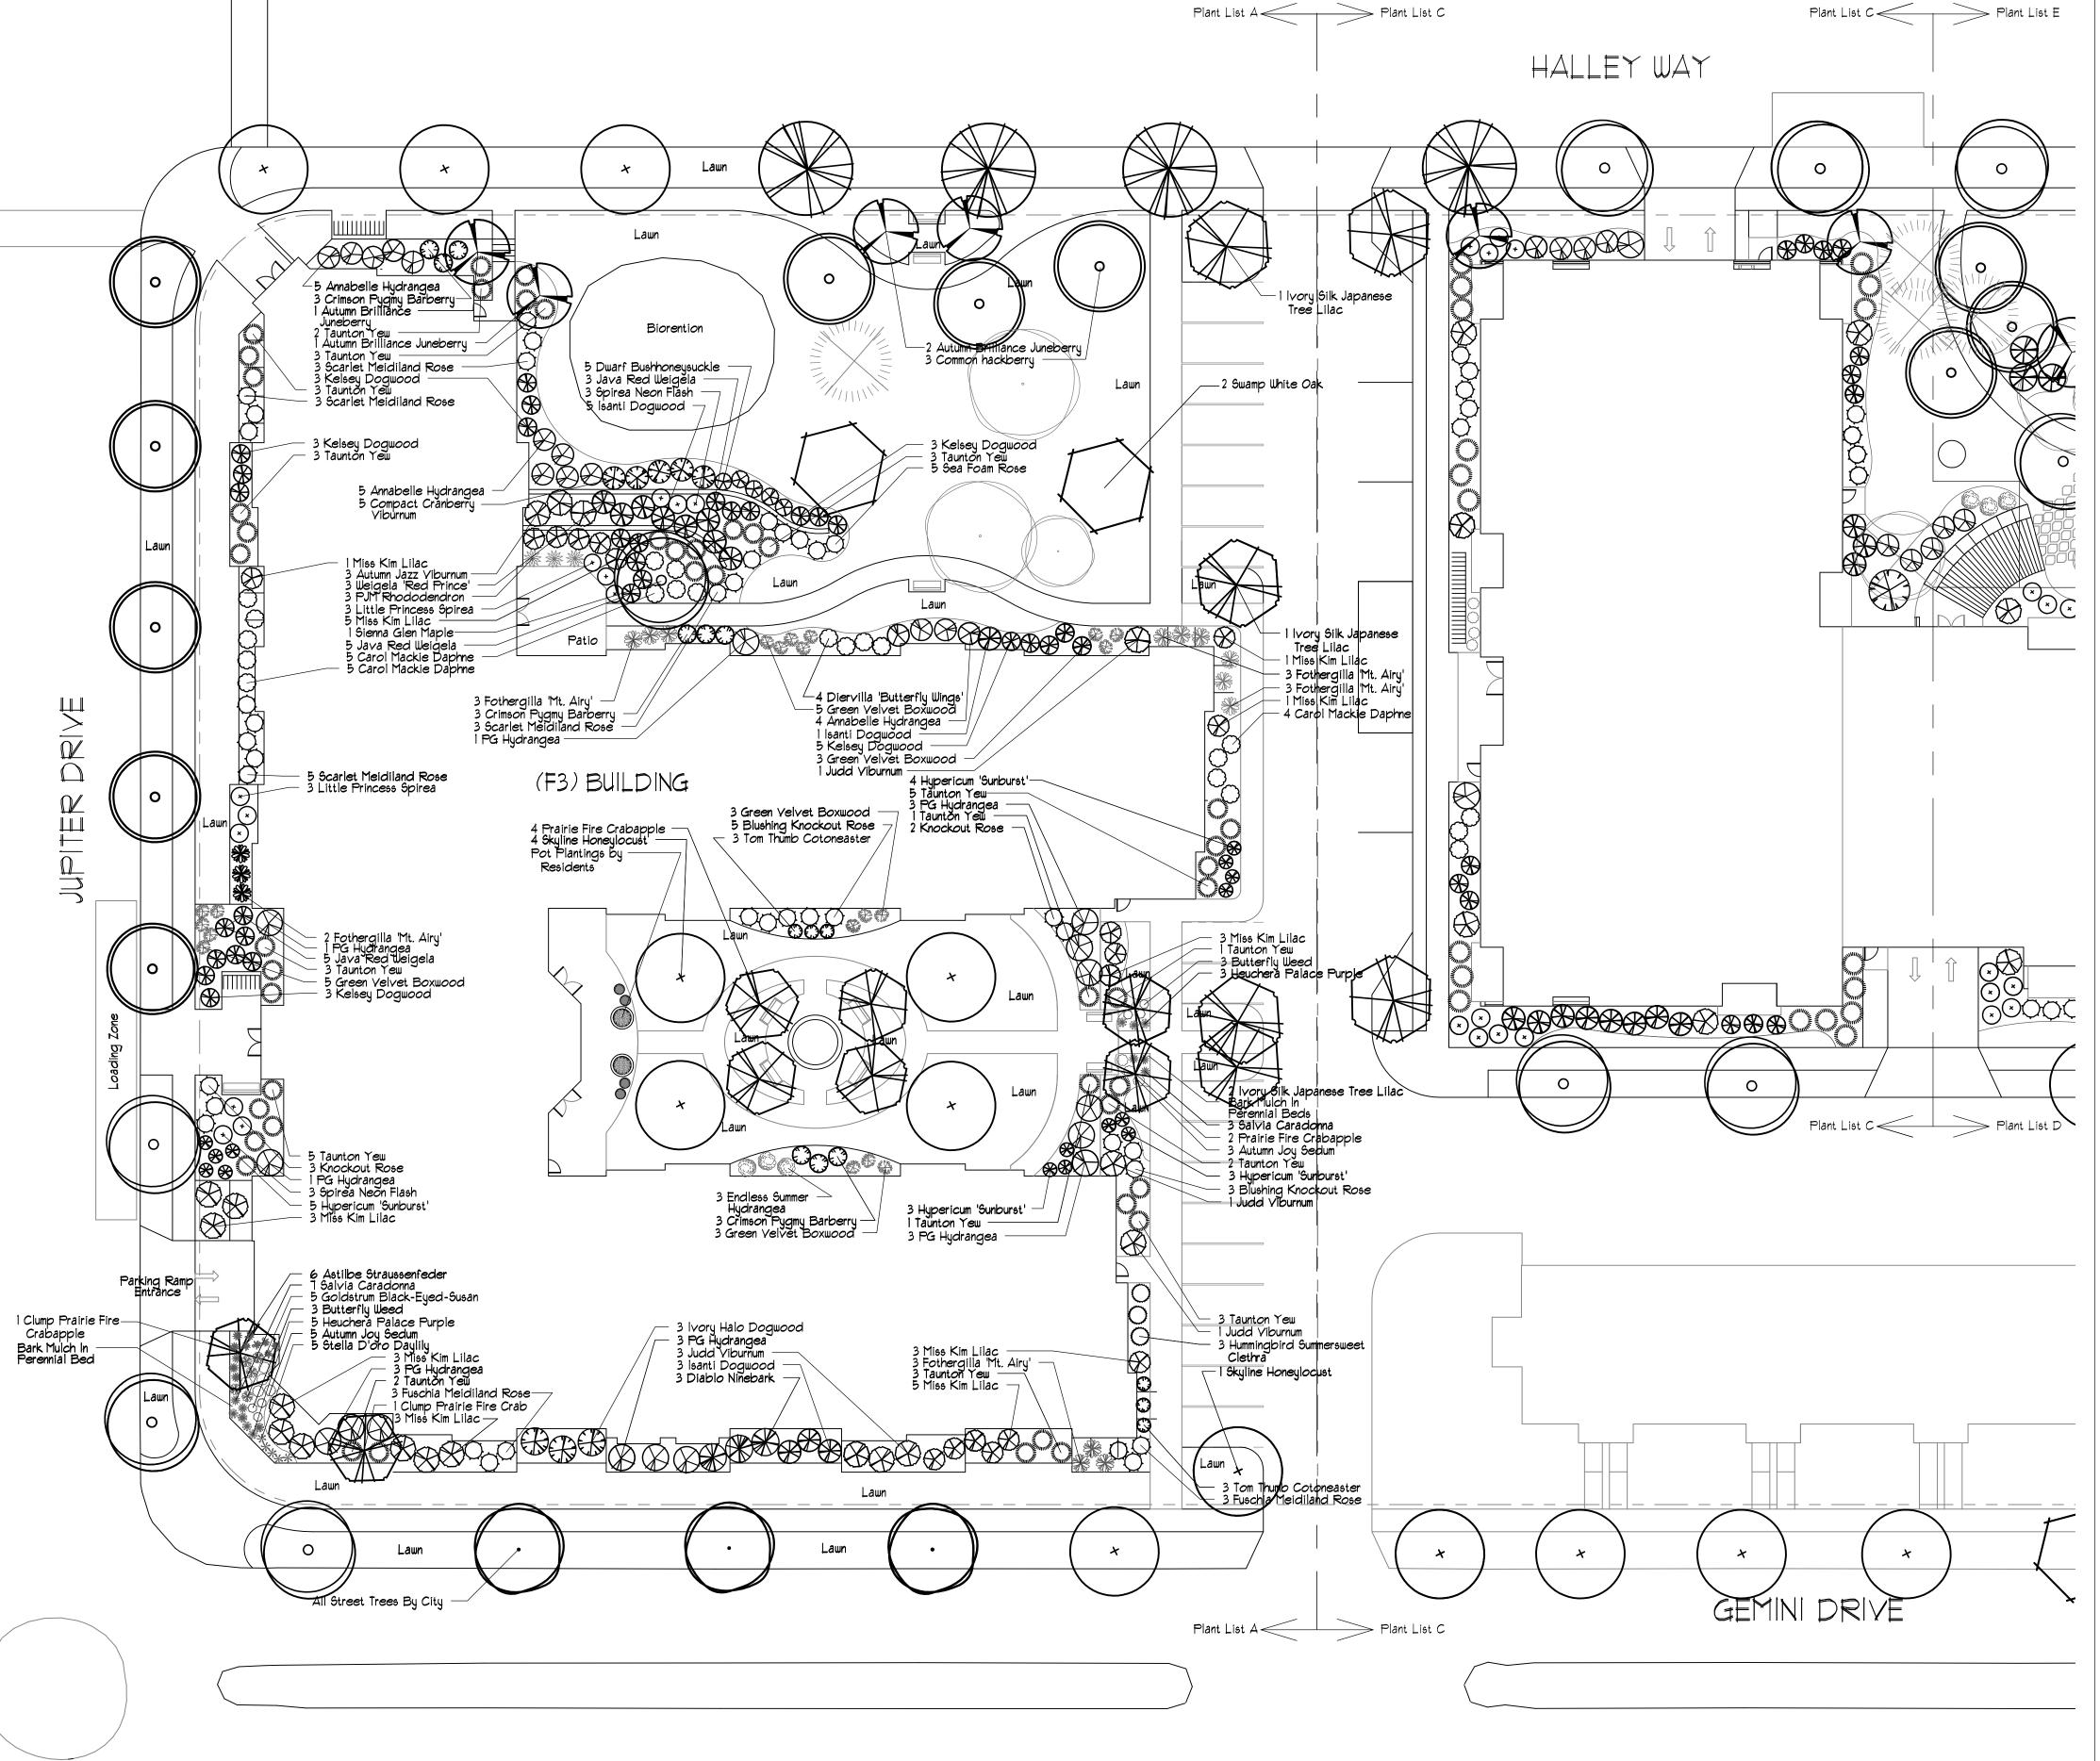



Plant List C Plant List E

LANDSCAPE PLAN F3 BUILDING UDC SUBMITTAL

OAK PARK II ASSISTED LIVING APARTMENTS

MADISON, WISCONSIN


SCALE

1"=20'-0"

DATEDESIGN REVISION

7.25.07 9.05.07 7.30.07 9.11.07 8.14.07

L-101 EUAOAKPARK

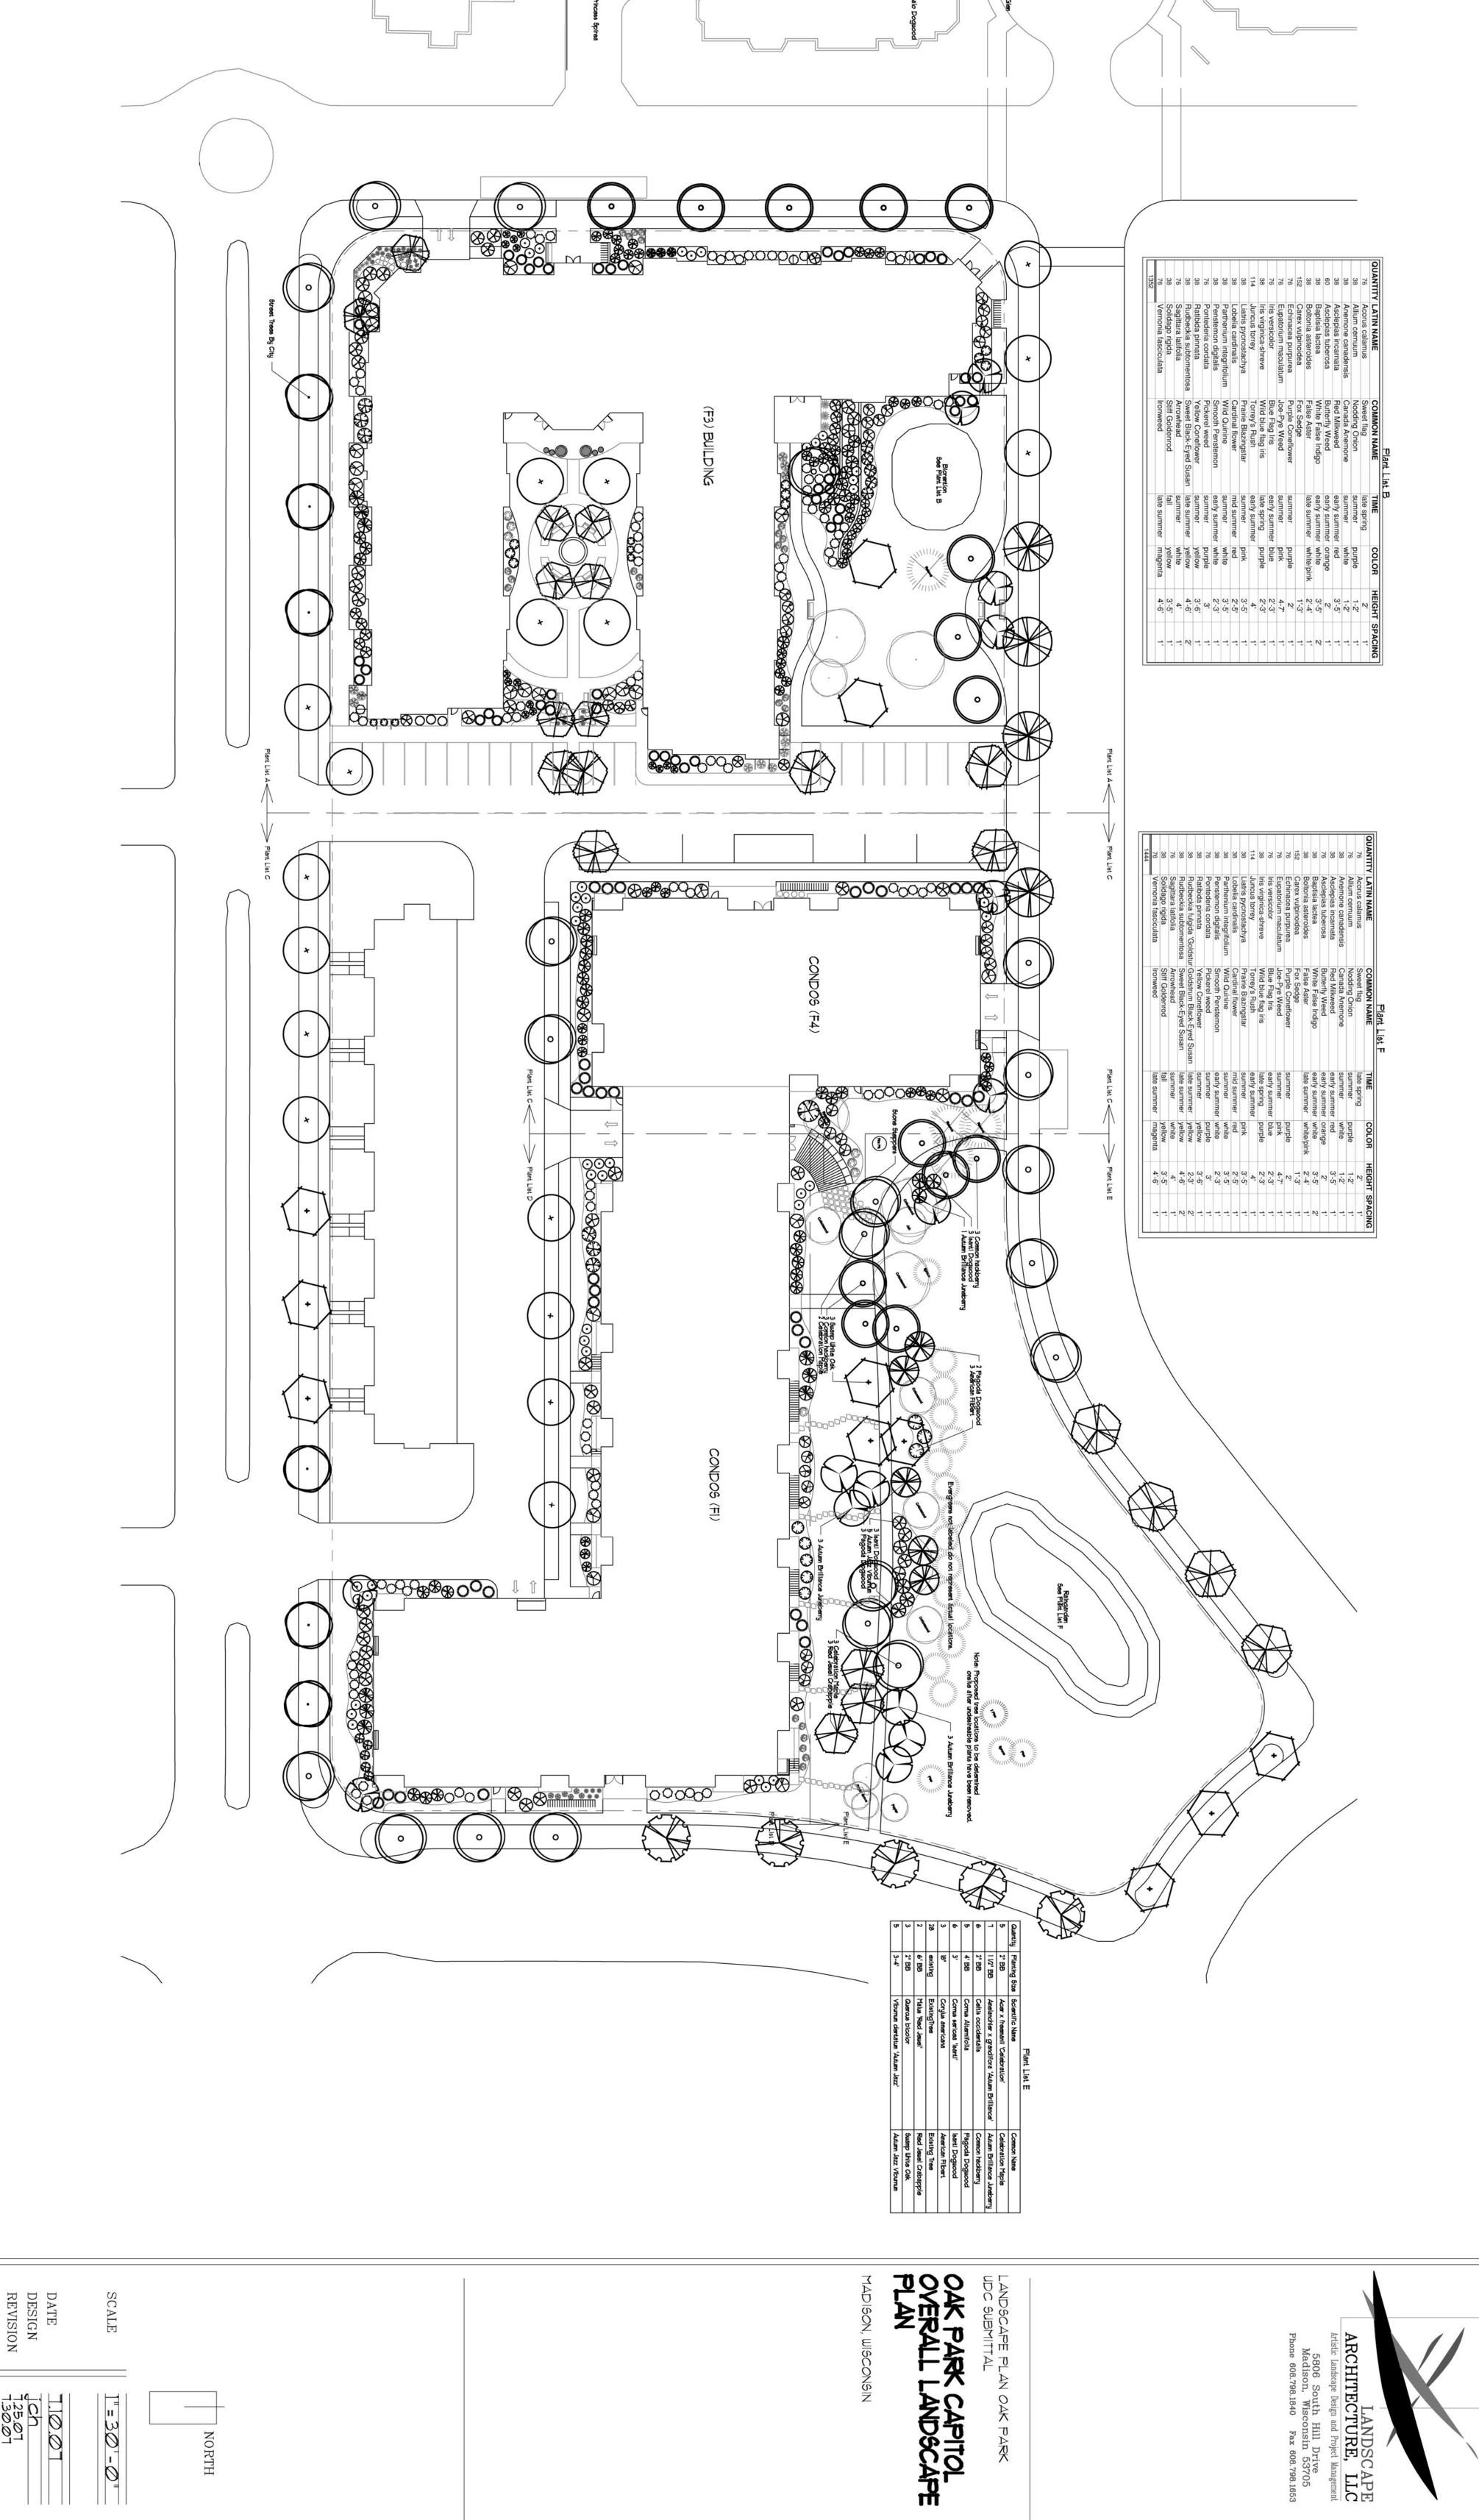


EUAOAKPARK L-100


125.01 130.01 9.14.01 9.1.01

NORTH

LANDSCAPE PLAN OAK PARK UDC SUBMITTAL

LANDSCAPE ARCHITECTURE, LLC 5806 South Hill Drive Madison, Wisconsin 53705 one 608.798.1840 Fax 608.798.1653

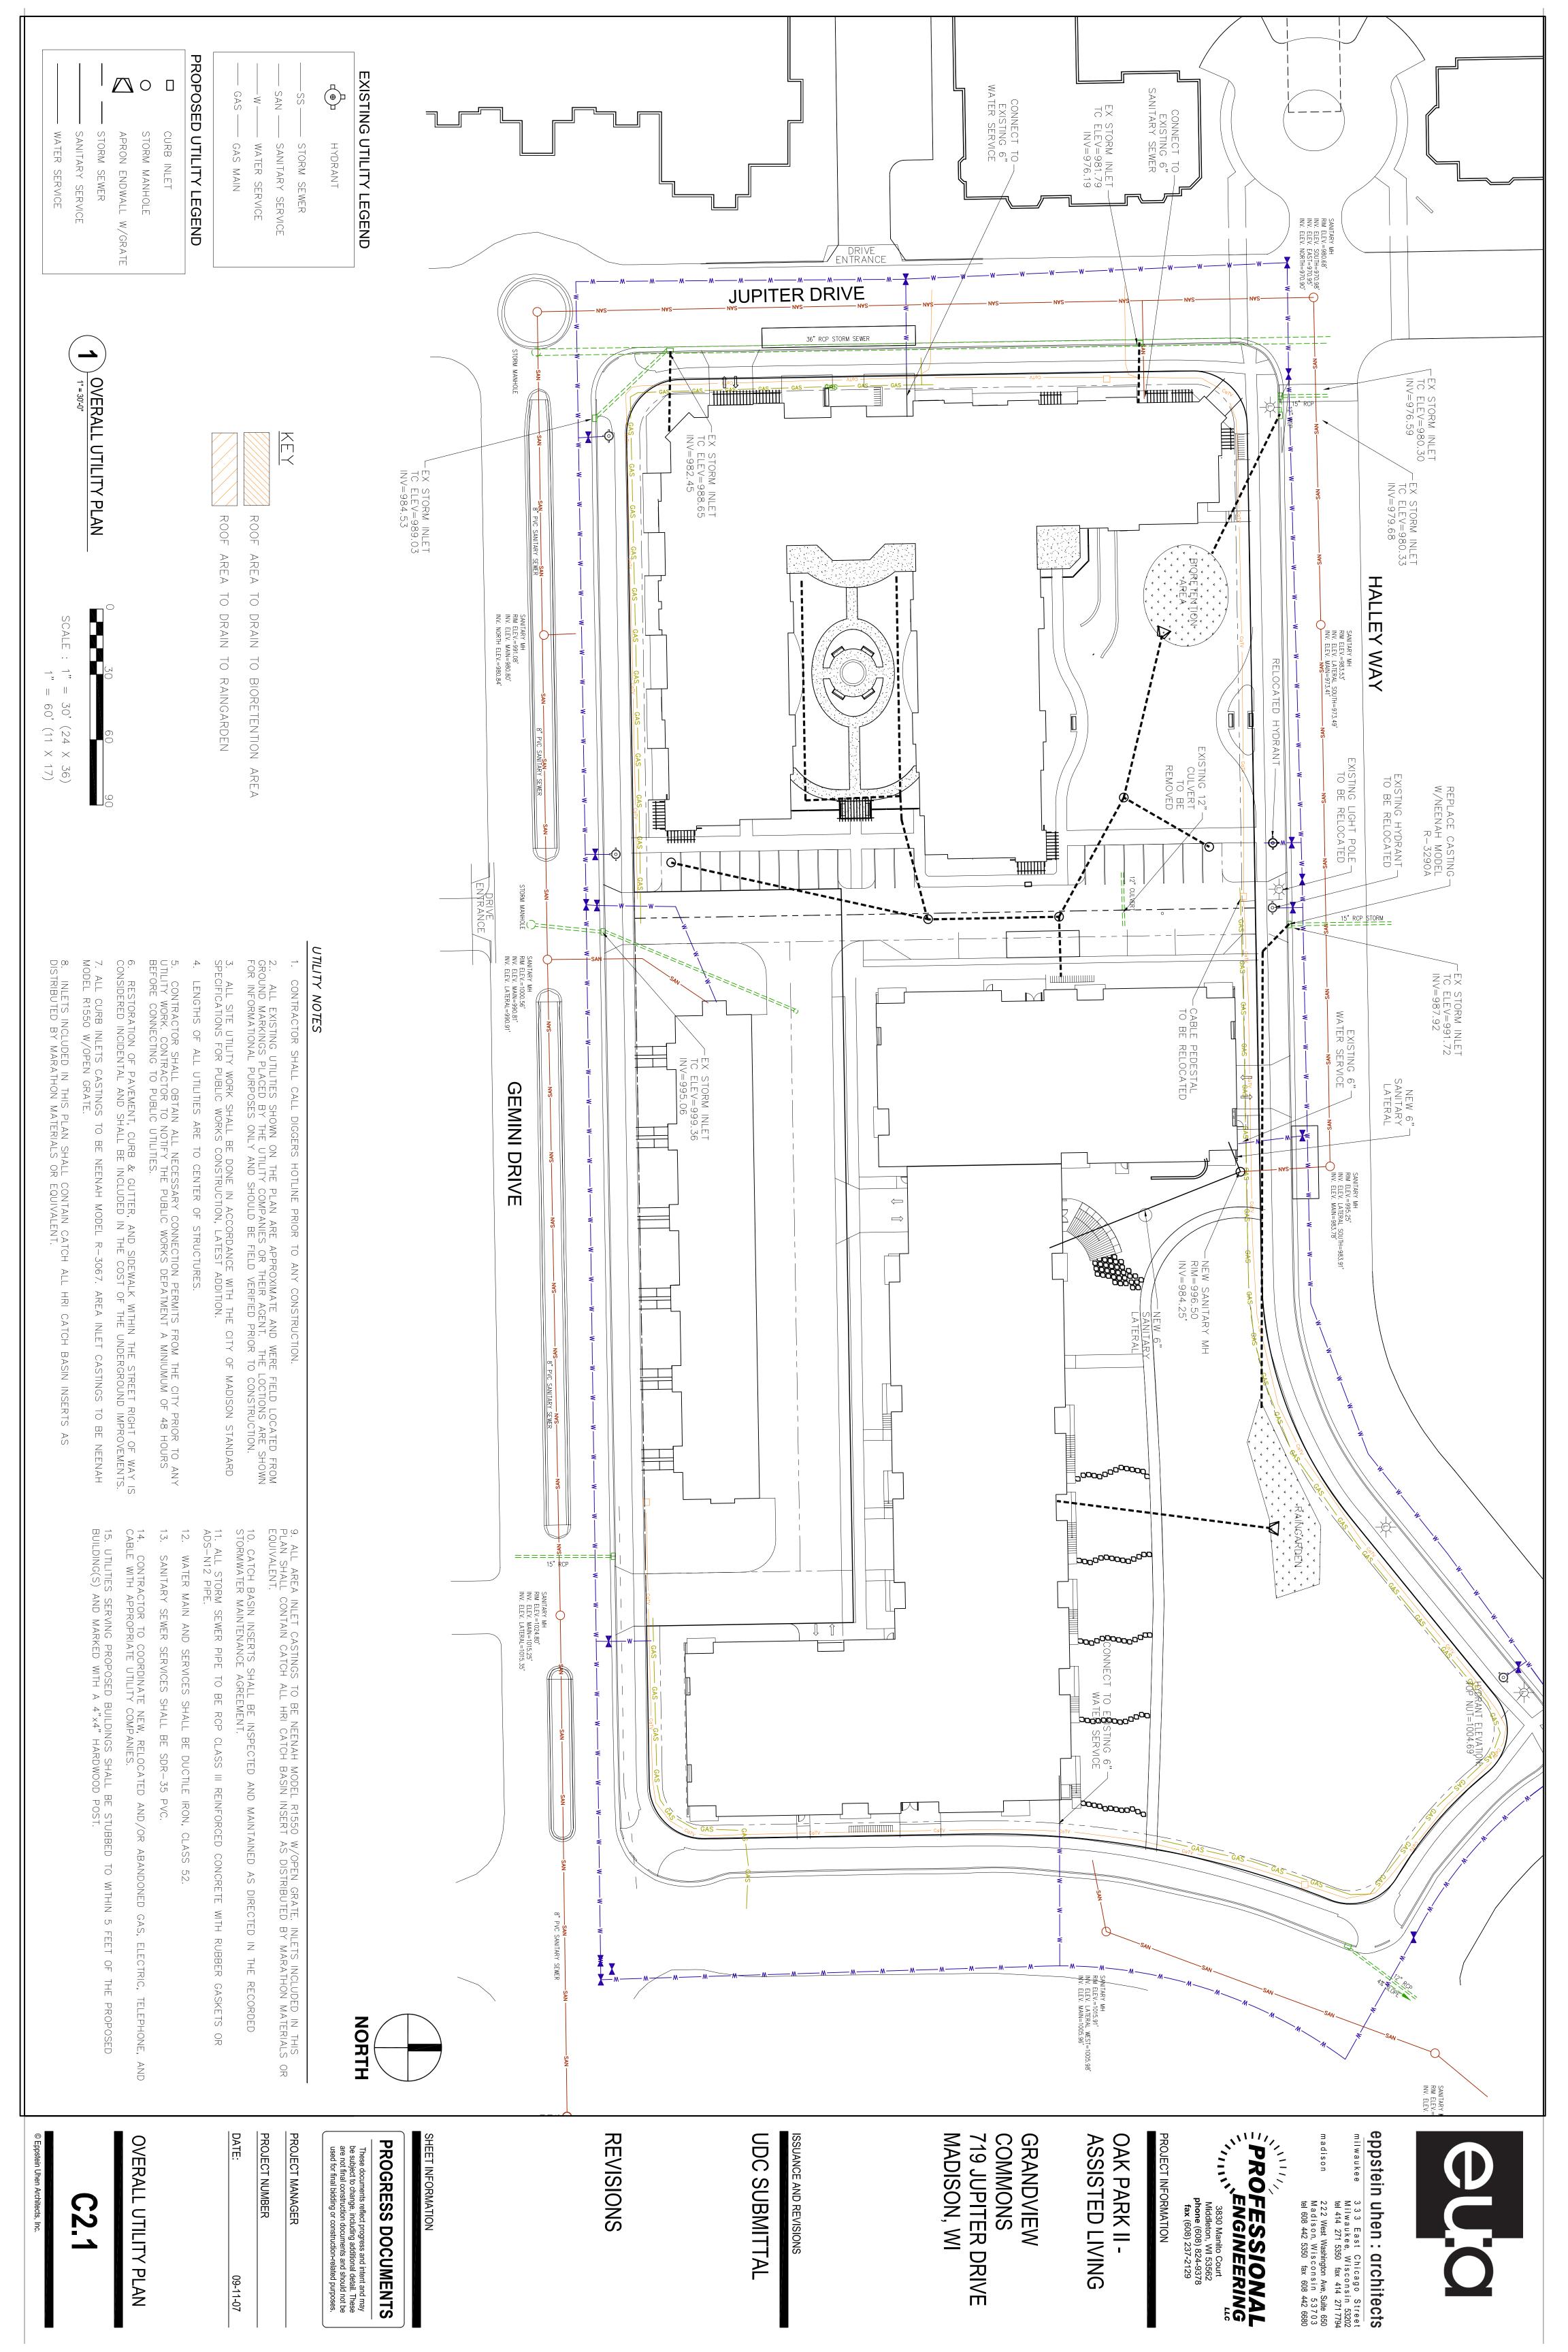

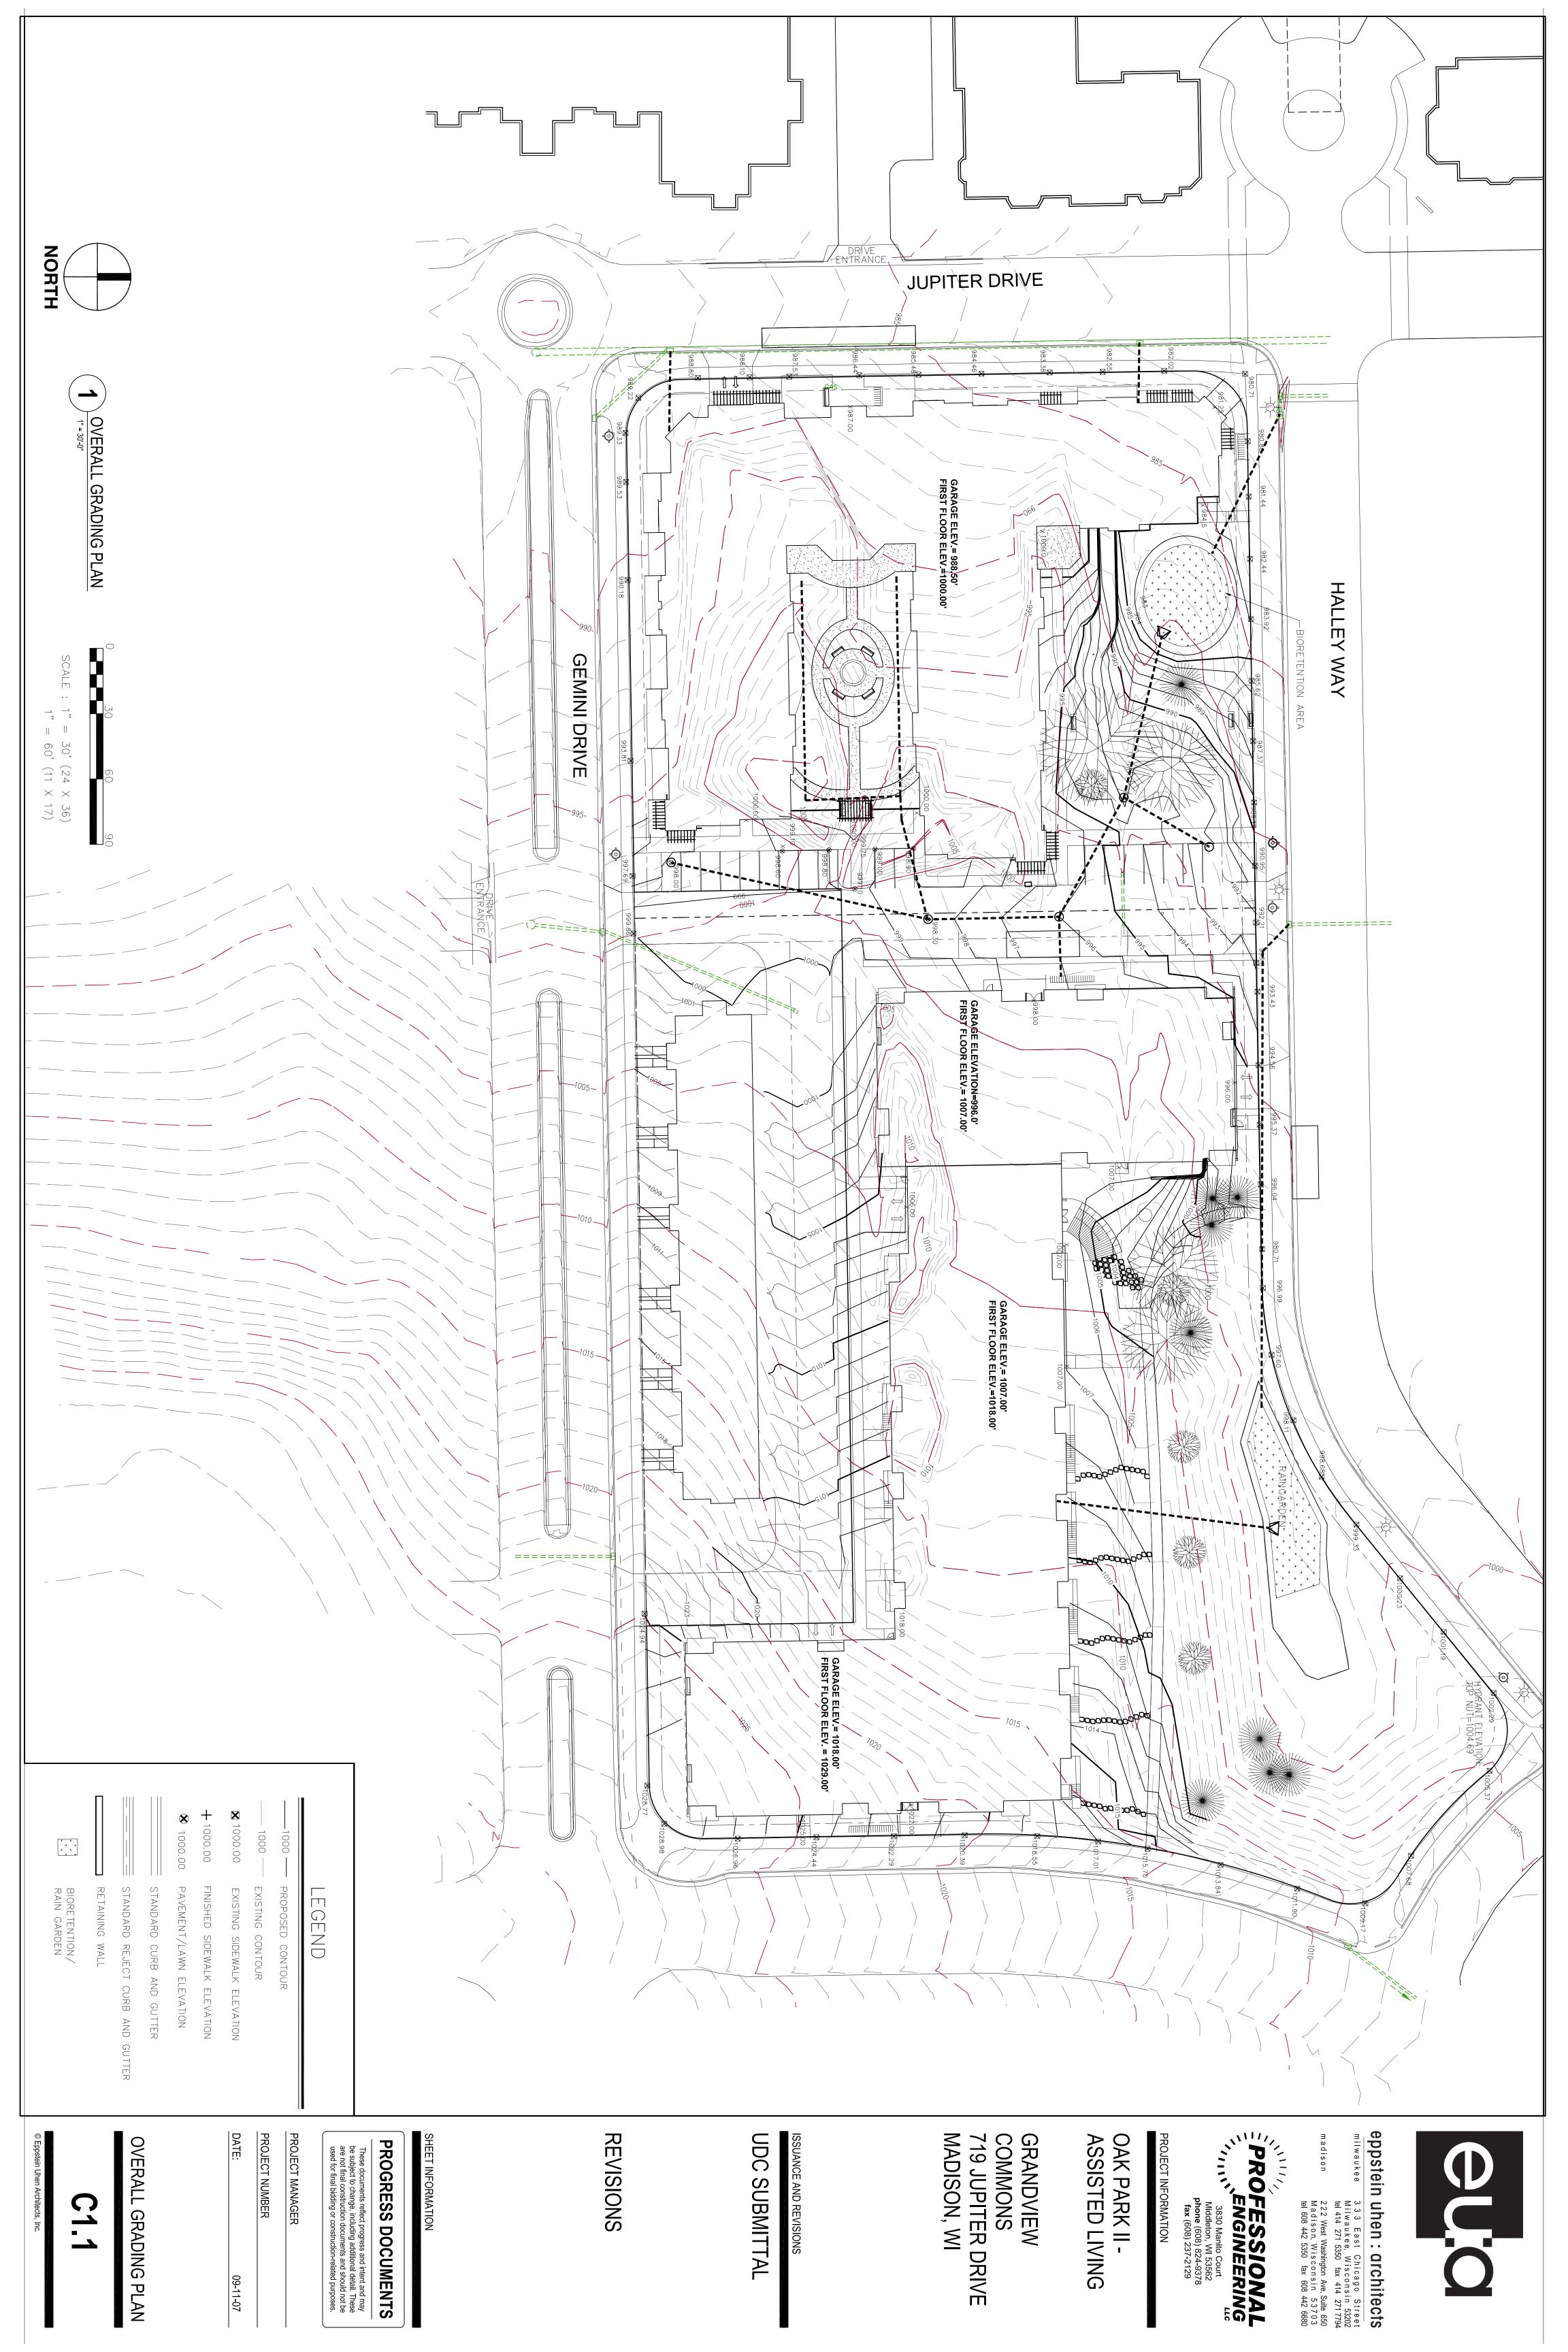











Illustrative Plan

Single Family (Alley Loaded)

Garden Homes (45'x80') Cottage Homes (37'x95') Village Homes (45'x95') Village Homes II (59'x90')

Courtyard Homes

Single Family (Front Loaded)

(75'x95')

(59'x85') Ridge View Homes Manor Homes (69'x100') (95'x130') Estate Homes

Multi-Family

Twin Homes

Condo/Apartments Neighborhood Center Residential Neighborhood Center Mixed Use Parks & Open Space


Stormwater Management

Madison, Wisconsin







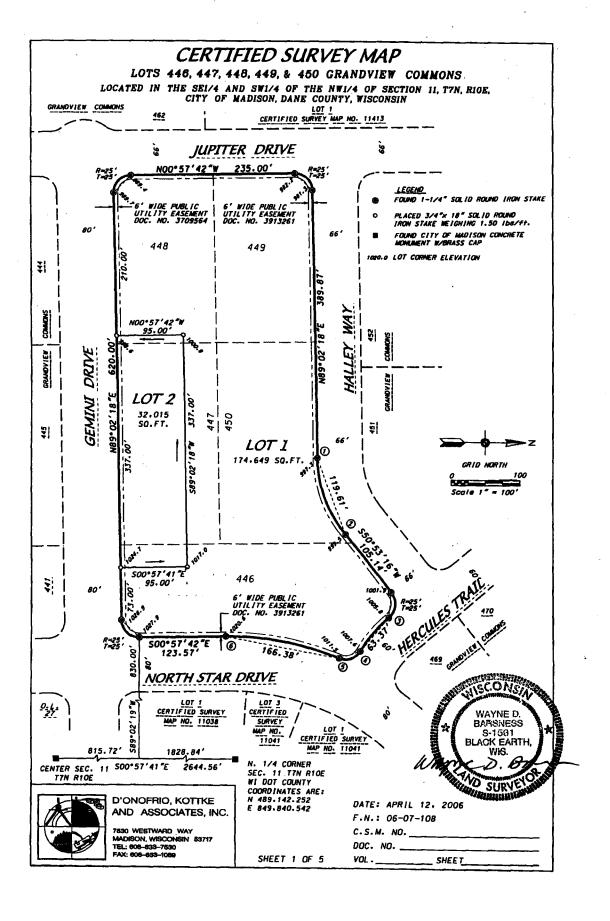

CERTIFIED SURVEY MAP

LEGAL DESCRIPTION

Lots 446, 447, 448, 449, and 450, Grandview Commons, recorded in Volume 58–005A of Plats on Pages 19–33 as Document Number 3583911, Dane County Registry, located in the SE1/4 and the SW1/4 of the NW1/4 of Section 11, TTN, R10E, City of Madison, Dane County, Wisconsin, Containing 206,664 square feet. (4.74 acres).

CURVE DATA

CURVE NUMBER	RADIUS (FEET)	CHORD (FEET)	ARC (FEET)	CHORD BEAR I NG	CENTRAL ANGLE	TANGENT BEARING
1-2	183.00	119.61	121.85	N69*57'47 " E	038*09'02"	7 670406/44#5
3-4 4-5	180.00 25.00	63.37 32.56	63.70 35.46	S49*15'03"E S18*45'06"E	020°16′38″ 081°16′32″	3-S39°06'44"E 4-S59°23'22"E 5-S21°53'10"W
5-6	420.00	166.38	167.48	51.0°27'44"W	022*50'52"	9-321-33 10 W

SURVEYOR'S CERTIFICATE

I. Wayne D. Barsness. Registered Land Surveyor S-1561, do hereby certify that this Certified Survey Map is in full compliance with Chapter 236.34 of the Wisconsin Statutes and the Subdivision Regulations of the City of Madison. Dane County, Wisconsin, and under the direction of the Owners listed below. I have surveyed, divided and mapped the land described herein and that the map is a correctly dimensioned representation in accordance with the information furnished.

Dated this 12TH day of APRIL . 2006.

Wayne D. Barness. Registered Land Surveyor 5-1561





D'ONOFRIO, KOTTKE AND ASSOCIATES, INC.

7530 WESTWARD WAY MADISON, WISCONSIN 59717 TEL: 608-833-7530 FAX: 608-833-1089 DATE: APRIL 12. 2006 F.N.: 06-07-108

C.S.M. NO._

DOC. NO. _

VOL._

____ SHEET_

SHEET 2 OF 5

ZONING TEXT GDP/SIP

Oak Park II 719 North Jupiter Drive Madison, Wisconsin

Legal Description: The lands subject to this planned unit development shall include those described in Exhibit A, attached hereto.

A. **Statement of Purpose:** This zoning district is established to allow for the construction of older adult campus including assisted living, CBRF and condominiums.

B. Permitted Uses:

- 1. Those that are stated as permitted uses in R-6 zoning district including parking, condominiums, assisted living, and memory care.
- 2. Uses accessory to permitted uses as listed above
- 3. Other uses listed here.
- C. Lot Area: As stated in Exhibit A, attached hereto
- D. Floor Area Ratio:
 - 1. Maximum floor are ratio as shown on attached plans
 - 2. Maximum building height shall be as shown on approved plans
- E. Yard Requirements: Yard areas will be provided as shown on approved plans
- F. **Landscaping**: Site landscaping will be provided as shown on the approved plans
- G. **Accessory Off-Street Parking & Loading**: Accessory off-street parking and loading will be provided as shown on approved plans
- H. Lighting: Site lighting will be provided as shown on approved plans
- I. **Signage:** Signage will be allowed as per Chapter 31 sign code
- J. **Family Definition:** The family definition of this PUD-SIP shall coincide with the definition given in Chapter 28.03 (2) of the Madison General Ordinances. Similar to R-6 zoning district
- K. Alterations and Revisions: No alteration or revision of this planned unit development shall be permitted unless approved by the City Plan Commission, however, the Zoning Administrator may issue permits for minor alterations or additions which are approved by the Director of Planning and Development and the alderperson of the district and are compatible with the concept approved by the City Plan Commission.

OAK PARK II - Assisted Living Letter of Intent

To: The City of Madison Plan Commission

Oak Park II – Assisted Living, located in Grandview Commons is a community based residential facility (CBRF) and a residential care apartment complex (RCAC). The density of 58 living units is consistent with the GDP for the F3 property. The proposal conforms to both the Grandview Commons overall development plan & the Town Center plan. We have met with the ARC committee at Veridian over the past couple of months and they have given their approval of the design. This proposal calls for one building: a three story, fifty-eight (58) unit CBRF and RCAC. The goal of the project is to offer an architecturally pleasing and quality constructed housing alternative for aging seniors in the Madison area.

- 1. The name of the project: Oak Park II Assisted Living
- 2. Construction schedule: Fall 2007
- 3. Description of existing conditions: Vacant infill lots in multi-family area of Grandview Commons
- 4. Owner: Jupiter Drive Investors, LLC Contact: Scott Frank
- 5. Contractor: To be determined
- 6. Architect: Eppstein Uhen Architects, Inc. Contact: Stuart LaRose, AIA
- 7. Landscape Architect: Landscape Architecture Contact: Joe Hanauer
- 8. Civil Engineer: Professional Engineering Contact: Roxanne Johnson
- 9. Owner Representative: Scott Frank, Oak Park
- 10. Marketing Coordinator: Martha Jones, Oak Park
- 11. Uses of Building: CBRF unit ranging in size from 290 SF to 530 SF and RCAC units ranging in size from 420 SF to 920 SF. The project will be completed in one phase. Covered parking for 29 cars will be provided for staff and service vehicles. Common amenities include a club room with outdoor patio and garden space, fitness room, secure storage and a conference area.
- 12. Total gross square footage (F3 building only): 87,211 SF
- 13. Square footage (acreage) of the site: 1.54 acres 67,146 SF
- 14. Total number of dwelling units = 58 (CBRF=24 units & RCAC=34 units)
- 15. Number of bedrooms per unit = Studio, one, and two bedroom units
- 16. Trash Removal: The facility management shall provide trash removal for the residents. A private trash hauler will be contacted to pick up trash on a recurring basis.
- 17. Snow removal and maintenance for project: Snow removal and maintenance is provided by the facility management.



FEATURES & SPECIFICATIONS

INTENDED USE — Streets, walkways, parking lots and surrounding areas.

CONSTRUCTION - Rugged, die-cast, single-piece aluminum housing with nominal wall thickness of 1/8". Die-cast door frame has impact-resistant, tempered, glass lens (3/16" thick). Door frame is fully gasketed with onepiece tubular silicone and has tool-less entry and resealing. US. Patent No. D447,590. Canada Patent No. 94324.

FINISH - Standard finish is dark bronze (DDB) polyester powder finish, with other architectural colors available.

OPTICAL SYSTEM — Anodized segmented reflectors for superior uniformity and control. Reflectors attach with tool-less fasteners and are rotatable and interchangeable. Five full cutoff distributions available: Type II (roadway), Type III (asymmetric), Type IV (forward throw), Type IV (wide, forward throw) and Type V (symmetric square).

ELECTRICAL SYSTEM — Ballast is constant-wattage autotransformer ballast standard. 200W, 320W and 350W require Super CWA Pulse Start ballast (must order SCWA option). All ballasts are mounted on a removable power tray with tool-less latch and have positive locking disconnect plugs. Ballasts are copper-wound and 100% factory-tested. Porcelain, mogul-base socket with copper alloy, nickel-plated screw shell and center contact. UL listed.

INSTALLATION — Integral arm for pole or wall mounting. Optional mountings

LISTING — UL Listed (standard). UL listed suitable for wet locations (damp location listed in lens-up orientation).

Catalog Number	
OAKBROOK	
Notes	Туре
AS2 250M SR4W RPA TB DDB LPI	A

Architectural Area & Roadway Luminaires




METAL HALIDE

200W, 250W, 320W, 350W, 400W 10' to 35' Mounting

AERIS.

Specifications

EPA: 1.2 ft2 Length: 28.0 (71.0 cm) Width: 16.5 (41.9 cm) Depth: 8.3 (21.0 cm) Weight: 45 lbs (20.4 kg)



All dimensions are inches (centimeters) unless otherwise specified

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the

opropriate line. Order accessories as separate catalog number.

RPA

Mounting

RPA Round pole mounting

DSAS2 Decorative straight arm,

square pole only DSAS2R Decorative straight arm,

round pole only

DCAS2 Decorative curved arm,

DCAS2R Decorative curved arm,

Note: Aeris[™] has a unique drilling

Example: SSA 20 4C DM19AS DDB

DM19AS 1 at 90 degrees

DM28AS 2 at 180 degrees

DM29AS 2 at 90 degrees DM39AS 3 at 90 degrees

DM49AS 4 at 90 degrees DM32AS 3 at 120 degrees

(round poles only)

poles. See example below.

Aeris Drilling Pattern

template that requires an Aeris drilling

pattern to be specified when ordering

round pole only5

square pole only5

ASKMA2 Mast arm adapter⁵

SPA Square pole mounting (std)

WBA Wall bracket (up or down)4

A52250Ms	R4W TB
Series	Voltage
AS2 200M	120
AS2 250M	208 ²
AS2 320M	240 ²
AS2 350M1	277
AS2 400M1	347
	480 ²
	TB ³

	Distribution
SR2	Segmented type II roadway
SR3	Segmented type III asymmetric
SR4SC	Segmented type IV forward throw, sharp cutoff
SR4W	Segmented type IV wide, forward throw

NOTES:

SRSS

1 Must use reduced jacket lamp ED28.

Segmented type V

square

- 2 Consult factory for availability in Canada.
- 3 Optional multi-tap ballast (120, 208, 240, 277V) (120, 277, 347V in Canada).
- 4 Mounted in lens-up orientaion, fixture is damp location listed.
- 5 Shipped separately.
- 6 May be ordered as an accessory.
- Additional architectural colors available; see www.lithonia.com for more information.

Example: AS2 250M SR4SC 120 SPA SF DNA LPI

DDB LPI Options Shipped installed SF Single fuse (120, 277, 347, n/a TB)

DF Double fuse (208, 240, 480V, n/a TB) PER NEMA twist-lock receptacle only (no photocontrol)

CR Enhanced corrosion resistance QRS Quartz restrike system (250W maximum, lamp not included)

HS Houseside shield (SR2, SR3, SR4W)

EC Emergency circuit

TP Tamperproof

SCWA Super CWA pulse start ballast

LPI Lamp included as standard

L/LP Less lamp

Shipped separately⁶

PE1 NEMA twist-lock PE (120, 208, 240V)

PE3 NEMA twist-lock PE (347V)

PE4 NEMA twist-lock PE (480V)

PE7 NEMA twist-lock PE (277V)

AS2VG Vandal quard

SC Shorting cap for PER option

Architectural colors7 Standard colors **DDB** Dark bronze (standard) **DWH** White **DBL** Black Textured colors **DSPD** Dark gray **DSPJ** Light gray **DBLB** Black **DWHGWhite DBNH** Dark bronze **DSPE** Green **DSPG** Dark red **DSPH** Red **DSPF** Rust

Accessories: Tenon Mounting Slipfitter

Order as separate catalog number. Only available with RPA option.

Number of fixtures

Tenon O.I	D. One	Two@180°	Two@90°	Three@120°	Three@90°	Four@90°
2-3/8"	AST20-190	AST20-280	n/a	AST20-320	n/a	n/a
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

LITHONIA LIGHTING

FEATURES & SPECIFICATIONS

INTENDED USE — Streets, walkways, parking lots and surrounding areas.

CONSTRUCTION - Rugged, die-cast, single-piece aluminum housing with nominal wall thickness of 1/8". Die-cast door frame has impact-resistant, tempered, glass lens (3/16" thick). Door frame is fully gasketed with onepiece tubular silicone and has tool-less entry and resealing. US. Patent No. D447,590. Canada Patent No. 94324.

FINISH - Standard finish is dark bronze (DDB) polyester powder finish, with other architectural colors available.

OPTICAL SYSTEM — Anodized segmented reflectors for superior uniformity and control. Reflectors attach with tool-less fasteners and are rotatable and interchangeable. Five full cutoff distributions available: Type II (roadway). Type III (asymmetric), Type IV (forward throw), Type IV (wide, forward throw) and Type V (symmetric square).

ELECTRICAL SYSTEM -- Ballast is constant-wattage autotransformer ballast standard, 200W, 320W and 350W require Super CWA Pulse Start ballast (must order SCWA option). All ballasts are mounted on a removable power tray with tool-less latch and have positive locking disconnect plugs. Ballasts are copper-wound and 100% factory-tested. Porcelain, mogul-base socket with copper alloy, nickel-plated screw shell and center contact. UL listed.

INSTALLATION — Integral arm for pole or wall mounting. Optional mountings available.

LISTING — UL Listed (standard). UL listed suitable for wet locations (damp location listed in lens-up orientation).

Catalog Number	
OAKBROOK	
Notes	Туре
AS2 250M SR4SC RPA TB DDB LPI	В

Architectural Area & Roadway Luminaires




METAL HALIDE

200W, 250W, 320W, 350W, 400W 10' to 35' Mounting

AERIS...

Specifications

EPA: 1.2 ft2 Length: 28.0 (71.0 cm) Width: 16.5 (41.9 cm) Depth: 8.3 (21.0 cm) Weight: 45 lbs (20.4 kg)



All dimensions are inches (centimeters) unless otherwise specified.

ORDERING INFORMATION

Choose the boldface catalog nomenclature that best suits your needs and write it on the ate line, Order accessories as separate catalog number.

250M SR4SC TB Voltage Series AS2 200M 120 208² AS2 250M AS2 320M 240² AS2 350M1 277 AS2 400M1 347 4804 TR^3

Distribution SR₂ Segmented type II roadway SR₃ Segmented type III asymmetric SR4SC Segmented type IV forward throw, sharp cutoff

SR4W Segmented type IV wide, forward throw SR5S Segmented type V

square

RPA

	Mounting
SPA	Square pole mounting (std)
RPA	Round pole mounting
WBA	Wall bracket (up or down)4
ASKMA2	Mast arm adapter ⁵
DSAS2	Decorative straight arm, square pole only ⁵
DSAS2R	Decorative straight arm,

DCAS2 Decorative curved arm, square pole only5

DCAS2R Decorative curved arm, round pole only⁵

round pole only⁵

Note: Aeris™ has a unique drilling template that requires an Aeris drilling pattern to be specified when ordering poles. See example below.

Example: SSA 204C DM19AS DDB

Aeris Drilling Pattern

DM19AS 1 at 90 degrees DM28AS 2 at 180 degrees DM29AS 2 at 90 degrees DM39AS 3 at 90 degrees DM49AS 4 at 90 degrees DM32AS 3 at 120 degrees

(round poles only)

L/LP Less lamp Shipped separately⁶

PE1 NEMA twist-lock PE (120, 208, 240V)

PE3 NEMA twist-lock PE (347V)

QRS Quartz restrike system (250W

SCWA Super CWA pulse start ballast

LPI Lamp included as standard

EC Emergency circuit

TP Tamperproof

maximum, lamp not included)

HS Houseside shield (SR2, SR3, SR4W)

PE4 NEMA twist-lock PE (480V)

PE7 NEMA twist-lock PE (277V)

AS2VG Vandal guard

SC Shorting cap for PER option

Example: AS2 250M SR4SC 120 SPA SF DNA LPI

DDB LPI	
Options	
Shipped installed	Architectural colors
SF Single fuse (120, 277, 347, n/a TB)	Standard colors
DF Double fuse (208, 240, 480V, n/a TB)	DDB Dark bronze
PER NEMA twist-lock receptacle only	(standard)
(no photocontrol)	DWH White
CR Enhanced corrosion resistance	DBL Black

Textured colors **DSPD** Dark gray **DSPJ** Light gray **DBLB** Black

DWHGWhite

DBNH Dark bronze **DSPE** Green

DSPG Dark red **DSPH** Red

DSPF Rust

NOTES:

- 1 Must use reduced lacket lamp ED28.
- 2 Consult factory for availability in Canada.
- 3 Optional multi-tap ballast (120, 208, 240, 277V) (120, 277, 347V in Canada).
- 4 Mounted in lens-up orientaion, fixture is damp location listed.
- 5 Shipped separately.
- 6 May be ordered as an accessory.
- Additional architectural colors available; see www.lithonia.com for more information.

Accessories: Tenon Mounting Slipfitter

Order as separate catalog number. Only available with RPA option.

Number of fixtures

Tenon O.I	D. One	Two@180°	Two@90°	Three@120°	Three@90°	Four@90°
2-3/8"	AST20-190	AST20-280	n/a	AST20-320	n/a	n/a
2-7/8"	AST25-190	AST25-280	AST25-290	AST25-320	AST25-390	AST25-490
4"	AST35-190	AST35-280	AST35-290	AST35-320	AST35-390	AST35-490

AS2 Metal Halide Area Lighting

Coefficient of Utilization Initial Footcandles


AS2 400M SR2

TEST NO: LTL10098 AS2 400M SR3


TEST NO: LTL10099 AS2 400M SR4SC

TEST NO: LTL10102


TEST NO: LTL10100



400W lamp, rated 32000 lumens. Footcandle values based on 20' mounting height. Classification: Type II, Medium. Full Cutoff




400W lamp, rated 32000 lumens. Footcandle values based on 20' Classification: Type III, Medium, Full Cutoff



400W lamp, rated 32000 lumens. Footcandle values based on 20' mounting height.


Classification: Unclassified (Type IV, Very Short), Full Cutoff

AS2 400M SR4W



400W lamp, rated 32000 lumens. Footcandle values based on 20' mounting height. Classification: Type IV, Short, Full Cutoff

TEST NO: LTL10101 AS2 400M SR5S



mounting height. Classification: Unclassified (Type V), Full Cutoff

NOTES:

- 1 Photometric data for other distributions can be accessed at www.lithonia.com.
- 2 For electrical characteristics consult technical data tab.
- 3 Tested to current IESNA and NEMA standards under stabilized laboratory conditions. Various operating factors can cause differences between laboratory and actual field measurements. Dimensions and specifications are based on the most current data and are subject to change.

Mounting Height Correction Factor

(Multiply the fc level by the correction factor)

10 ft. = 12.25 15 ft. = 5.4 30 ft. = 1.36 40ft. = 0.77

Existing Mounting Height² = Correction Factor New Mounting Height



An Sacuity Brands Company



FEATURES & SPECIFICATIONS

CONSTRUCTION

Weldable-grade A500 or A513 carbon steel tubing with a minimum yield of 46,000 or 42,000 psi. Uniform wall thickness of .120". Shaft is one-piece construction with a full longitudinal weld. The round straight tube is uniform in cross-section down the length of the shaft.

Anchor base is fabricated from carbon steel plate (ASTM A-36), 3/4" thickness. Base plate and shaft are circumferentially welded at both the top and the bottom to provide maximum strength at the area of critical stress.

Nominal 3" x 5" handhole is located 18" above the base. Cover and attachment hardware provided.

Top cap provided with all drill-mount poles.

Fasteners are high-strength galvanized zinc-plated or stainless steel.

Base cover is finished to match pole.

FINISH — Dark bronze (DDB) polyester powder standard. Other architectural colors available.

GROUNDING— A nut holder located immediately inside the handhole is provided with a 1/2" - 13 UNC ground bolt and nut.

ANCHOR BOLTS — Top protion of anchor bolt is galvanized per ASTM A-153. Made of steel rod having a minimum yield strength of 55,000 psi.

Catalog Number	
OAKBROO	OK
Notes	Туре
RSS 20 4B DM19AS DDB	A&B

Anchor Base Poles
RSS

ROUND STRAIGHT STEEL

ORDERING INFORMATION


Choose the boldface catalog nomenclature that best suits your needs and write it in the appropriate blank.

RSS 20 4B

Shaft type RSS Nominal shaft length Nominal shaft base size/ wall thickness

8 - 30 feet (See back page.) (See back page.)

HANDHOLE ORIENTATION



NOTES:

- When ordering tenon mounting and drill mounting for the same pole, follow this example: DM28/T20. The combination requires an extra handhole.
- 2 3-1/2" and 4" tenons available on 5" shafts only.
- 3 The drilling template to be used for a particular luminaire depends on the luminaire that is used. Refer to the Technical Data Section of the Outdoor Binder for Drilling Templates.
- Specify location and orientation when ordering option.

For 1st "x": Specify the height in feet above base of pole.

Example: 5ft = 5 and 20ft = 20

For 2nd "x": Specify orientation from handhole (A,B,C,D)

Refer to the Handhole Orientation diagram on this page.

- 5 Horizontal arm is 18" x 2-3/8" O.D. tenon standard.
- 6 Combination of tenon top and drill mount requires an extra handhole.
- 7 Additional colors available; see Architectural Colors brochure,form

DM19AS DDB

Example: RSS 20 4-5B DM19 DDB

Mounting¹ Options Shipped Installed **Architectural Colors Tenon Mounting** (powder finish)7 L/AB Less Anchor Bolts РΤ Open top **VD** Vibration Damper Standard Colors 2-3/8" O.D. (2" NPS) T20 TP Tamper Proof DDB Dark bronze T25 2-7/8" O.D. (2-1/2" NPS) Hxx^{4,5} Horizontal Arm DWH White T30² 3-1/2" O.D. (3" NPS) Bracket (1 fixture) DRI Black 4" O.D. (3-1/2" NPS) FDLxx4 Festoon Outletless Classic Colors electrical Drill Mounting³ Festoon GFI Outlet DMB FGLxx⁴ Medium bronze **DM19** 1at90° less electrical DNA Natural DM28 2 at 180° 12CPxx4 1/2" Coupling aluminum 2 at 180° with one side DM28PL 34CPxx4 3/4" Coupling **DSS** Sandstone plugged 1CPxx4 1" Coupling Charcoal gray DM29 2 at 90° 12NPxx4 1/2" Threaded Nipple Tennisgreen **DM32** 3 at 120° 34 NPxx4 3/4" Threaded Nipple Brightred DRR DM39 3 at 90° 1NPxx4 1 Threaded Nipple DSR Steel blue HHxx^{4,6} Extra Handhole DM49 4 at 90° GALV Galvanized Aeris Drill Mounting³

DM19AS 1at90°
DM28AS 2at180°
DM29AS 2at90°
DM32AS 3at120°
DM39AS 3at90°

DM49AS 4 at 90°

IMPORTANT INSTALLATION NOTES:


- Do not erect poles without having fixtures installed.
- Factory-supplied templates must be used when setting anchor bolts. Lithonia will not accept claim for incorrect anchorage placement due to failure to use factory template.

finish

- If poles are stored outside, all protective wrapping must be removed immediately to prevent finish damage.
- Lithonia is not responsible for the foundation design.
- Installation requires grout to be packed under base to ensure full contact with foundation.

RSS Round Straight Steel Poles


			TE	CHN	ICAL I	NFOF	RMATI	ON				
						EPA	(ft²) with	1.3 gust				
Catalog Number RSS 8 4-5B	Nominal shaft length (feet) 8	Pole Shaft Size(in x in x ft) 4.5 x 8.0	Wall Thickness (inches) 0.120	80 mph 24.5	Max. weight 615	90 mph 19.5	Max. weight	100 mph 15.8	Max. weight	Bolt Circle (inches)	Bolt Size (in. x in. x in.) 3/4 x 18 x 3	Approximate ship weight (pounds) 55
RSS 10 3B	10	3.0 x 10.0	0.120	10	250	7.7	190	6.0	175	8	3/4 x 18 x 3	55
RSS 10 4B	10	4.0 x 10.0	0.120	19.1	480	15.0	375	12.2	305	8	3/4 x 18 x 3	70
RSS 10 4-5B	10	4.5 x 10.0	0.120	24.5	615	19.5	490	15.8	395	8	3/4 x 18 x 3	75
RSS 12 3B	12	3.0 x 12.0	0.120	7.7	195	5.8	145	4.4	130	8	3/4 x 18 x 3	60
RSS 12 4B	12	4.0 x 12.0	0.120	15.0	390	11.8	300	9.5	240	8	3/4 x 18 x 3	80
RSS 12 4-5B	12	4.5 x 12.0	0.120	19.8	495	15.7	395	12.7	320	8	3/4 x 18 x 3	85
RSS 14 3B	14	3.0 x 14.0	0.120	6.0	175	4.4	130	3.3	90	8	3/4 x 18 x 3	70
RSS 14 4B	14	4.0 x 14.0	0.120	12.2	305	9.4	250	7.6	195	8	3/4 x 18 x 3	90
RSS 14 4-5B	14	4.5 x 14.0	0.120	16.2	405	12.8	320	10.3	260	8	3/4 x 18 x 3	95
RSS 15 4-5B	15	4.5 x 15.0	0.120	13.1	330	10.2	265	8.2	205	8	3/4 x 18 x 3	96
RSS 16 3B	16	3.0 x 16.0	0.120	4.6	125	3.2	100	2.3	60	8	3/4 x 18 x 3	80
RSS 16 4B	16	4.0 x 16.0	0.120	9.6	250	7.4	185	5.9	150	8	3/4 x 18 x 3	100
RSS 16 4-5B	16	4.5 x 16.0	0.120	13.1	330	10.2	265	8.2	205	8	3/4 x 18 x 3	105
RSS 18 3B	18	3.0 x 18.0	0.120	3.4	90	2.3	60	1.4	70	8	3/4 x 18 x 3	90
RSS 18 4B	18	4.0 x 18.0	0.120	7.6	190	5.7	180	4.5	130	8	3/4 x 18 x 3	110
RSS 18 4-5B	18	4.5 x 18.0	0.120	10.5	265	8.2	210	6.5	165	8	3/4 x 18 x 3	115
RSS 20 3B	20	3.0 x 20.0	0.120	2.4	100	1.4	75			8	3/4 x 18 x 3	100
RSS 20 4B	20	4.0 x 20.0	0.120	6.0	150	4.45	150	3.45	125	8	3/4 x 18 x 3	120
RSS 20 4-5B	20	4.5 x 20.0	0.120	8.5	215	6.6	165	5.2	130	8	3/4 x 18 x 3	130
RSS 20 5B	20	5.0 x 20.0	0.120	11.75	300	9.1	230	7.25	180	8	3/4 x 18 x 3	145
RSS 22 4-5B	22	4.5 x 22.0	0.120	4.8	130	3.6	90	2.7	90	8	3/4 x 18 x 3	134
RSS 25 4B	25	4.0 x 25.0	0.120	2.85	100	1.95	75	1.35	75	8	3/4 x 18 x 3	145
RSS 25 4-5B	25	4.0 x 25.0	0.120	4.8	130	3.6	90	2.7	90	8	3/4 x 18 x 3	145
RSS 25 5B	25	5.0 x 25.0	0.120	7.25	180	5.5	150	4.25	150	8	3/4 x 18 x 3	180
RSS 30 4-5B	30	4.5 x 30.0	0.120	2.3	80	1.5	75	1.0	60	8	3/4 x 18 x 3	185
RSS 30 5B	30	5.0 x 30.0	0.120	4.2	150	3	125	2.25	100	8	3/4 x 18 x 3	210

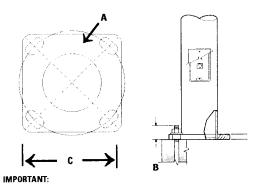

 These specifications are intended for general purposes only. Lithonia reserves the right to change material or design, without prior notice, in a continuing effort to upgrade its products.

Shaft Base Size	Bolt Circle A	Bolt Projection B	Base Square C	Anchor Bolt Description	Warehouse Anchor Bolt Description	Template Number
3"	8"	3-1/4"3-1/2"	' 8"	ABRSS-4	AB18-0	PJ50041
4-1/2"	8"	3-1/4"-3-1/2"	' 8"	ABRSS-4	AB18-0	PJ50041
4"	8"	3-1/4"3-1/2"	' 8"	ABRSS-4	AB18-0	PJ50041
5"	8"	3-1/4"-3-1/2"	" 8"	ABRSS-4	AB18-0	PJ50041







Sheet #: Pole-RSS

@1998 Lithonia Lighting, Rev. 6/02 Pole-RSS.P65

Lithonia Lighting
Acuity Lighting Group, Inc.
Outdoor Lighting
One Lithonia Way, Conyers, GA 30012-3957
Phone: 770-922-9000 Fax: 770-918-1209
In Canada: 1100 50th Ave., Lachine, Quebec H8T 2V3
www.lithonia.com

		şy	
• 🔲	• 🗆	mbol	NIM
В	>	Label	LUMINAIRE SCHEDULE
ڻ.	4	Qty	SCHED
AS2 250M SR4SC	AS2 250M SR4W	Symbol Label Qty Catalog Number	ULE
ARCHITECTURAL ARM- MOUNTED CUTOFF LUMINAIRE WITH SR4SC REFLECTOR.	ARCHITECTURAL ARM- MOUNTED CUTOFF LUMINAIRE WITH SR4W REFLECTOR.	Description	
ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.	ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.	Lamp	
Ltl10399.ies	Ltl10415.ies	File	
20500	20500	Lumens LLF	
0.72	0.72	투	
297	297	Watts	

LUMINA	LUMINAIRE LOCATIONS	TIONS								
			ocation						Aim	
Š	Label	×	Location Y	2	M	Orientation	Tilt	×	ΥÄ	Z
_	>	935.1	-76.3	22.0	22.0	179.4	0.0	935.1	-77.7	0.0
2	>	847.7	-77.2	22.0	22.0	179.4	0.0	847.7	-78.6	0.0
ω	>	750.8	-77.2	22.0	22.0	179.4	0.0	750.9	-78.6	0.0
4	Þ	663.9	-76.3	22.0	22.0	179.4	0.0	663.9	-77.7	0.0
5	В	601.5	74.7	22.0	22.0	90.8	0.0	602.9	74.7	0.0
6	В	654.2	-143.8	22.0	22.0	-89.2	0.0	652.8	-143.7	0.0
7	В	930.3	-144.2	22.0	22.0	88.4	0.0	931.7	-144.2	0.0
8	В	610.4	1.3	22.0	22.0	90.8	0.0	611.8	1.2	0.0
9	В	601.5	-75.0	22.0	22.0	90.8	0.0	602.9	-75.0	0.0
						-				

STATISTICS						
Description	Symbol	Avg	Max	Min	Max/Min	Avg/Min
Calc Zone #1	+	1.8 fc	4.1 fc	0.4 fc	10.3:1	4.5:1

```
2.1 3.7
2.0 2.7
                                                                    100 054
100 054
7 7 2 2 D 2
                 2 8 8
                 1 6 6 6
                 रू
छ 4 ळ 2
                 5
                   1.6
                            16
                 10 10
                 0.7
0.8
                                0
                   e e e
                 5
                 ರ್
ತಿ
                      3 3
                 1 0.8 0.8 1.7
9 1.1 0.8 1.0
0 1.0 1.0 1.3
2 0.7 0.9 1.3
           7 10 13 16 24 20 1
18 11 23 20 1
                    1.3 1.7
                      _* 13*
30 4
                    8 5.2 28 2.0
7 2.4 20 1.7
                   2.4 20
  24 20 20
23 20 26
22 28 34
24 27 27
24 4 7 27
24 5 33
                          2.0 2.0 2.0
is.
2
```

LUMINA	LUMINAIRE LOCATIONS	TIONS								
N _O	Label	×	Location Y	N	š	Orientation	Tit	×	≺ Aim	Z
٦	>	935.1	-76.3	22.0	22.0	179.4	0.0	935.1	-77.7	0.0
2	>	847.7	-77.2	22.0	22.0	179.4	0.0	847.7	-78.6	0.0
ω	>	750.8	-77.2	22.0	22.0	179.4	0.0	750.9	-78.6	0.0
4	>	663.9	-76.3	22.0	22.0	179.4	0.0	663.9	-77.7	0.0
							,		4	•

Symbol

Label

Qy

Catalog Number AS2 250M SR4W

Description

Lamp

<u>ه</u> 🗀

⋗

ARCHITECTURAL ARM-MOUNTED CUTOFF LUMINAIRE WITH SR4W REFLECTOR.

ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.

Ltl10415.ies Fie

20500

0.72 Ë

297

Lumens

Watts

•

 $\boldsymbol{\omega}$

5

AS2 250M SR4SC

ARCHITECTURAL ARM-MOUNTED CUTOFF LUMINAIRE WITH SR4SC REFLECTOR.

ONE 250-WATT CLEAR ED-28 METAL HALIDE, HORIZONTAL POSITION.

Ltl10399.ies

20500

0.72

297

LUMINAIRE SCHEDULE

			Location						Aim	
N _o	Label	×	≺ ′	Z	š	Orientation	T#	×	~	2
-	>	935.1	-76.3	22.0	22.0	179.4	0.0	935.1	-77.7	0.0
2	>	847.7	-77.2	22.0	22.0	179.4	0.0	847.7	-78.6	0.0
3	>	750.8	-77.2	22.0	22.0	179.4	0.0	750.9	-78.6	0.0
4	A	663.9	-76.3	22.0	22.0	179.4	0.0	663.9	-77.7	0.0
Ci	В	601.5	74.7	22.0	22.0	90.8	0.0	602.9	74.7	0.0
6	В	654.2	-143.8	22.0	22.0	-89.2	0.0	652.8	-143.7	0.0
7	В	930.3	-144.2	22.0	22.0	88.4	0.0	931.7	-144.2	0.0
∞	8	610.4	1.3	22.0	22.0	90.8	0.0	611.8	1.2	0.0
9	В	601.5	-75.0	22.0	22.0	90.8	0.0	602.9	-75.0	0.0

Calc Zone #1

STATISTICS Description

Symbol +

Αvg

<u>≼</u>

Avg/Min N/A

0.4 fc

4.1 fc Max

N/A

