


TYPICAL FINISHED SECTION - E. JOHNSON STREET

STA. 75+48 - STA. 77+44


* EXISTING CONCRETE SIDEWALK TO REMAIN (2% MAX.) OR NEW CONCRETE SIDEWALK 5-INCH (1.5% TYP.) OVER 2" BASE AGGREGATE DENSE 3/4-INCH. SEE PLAN DETAILS FOR LOCATIONS.

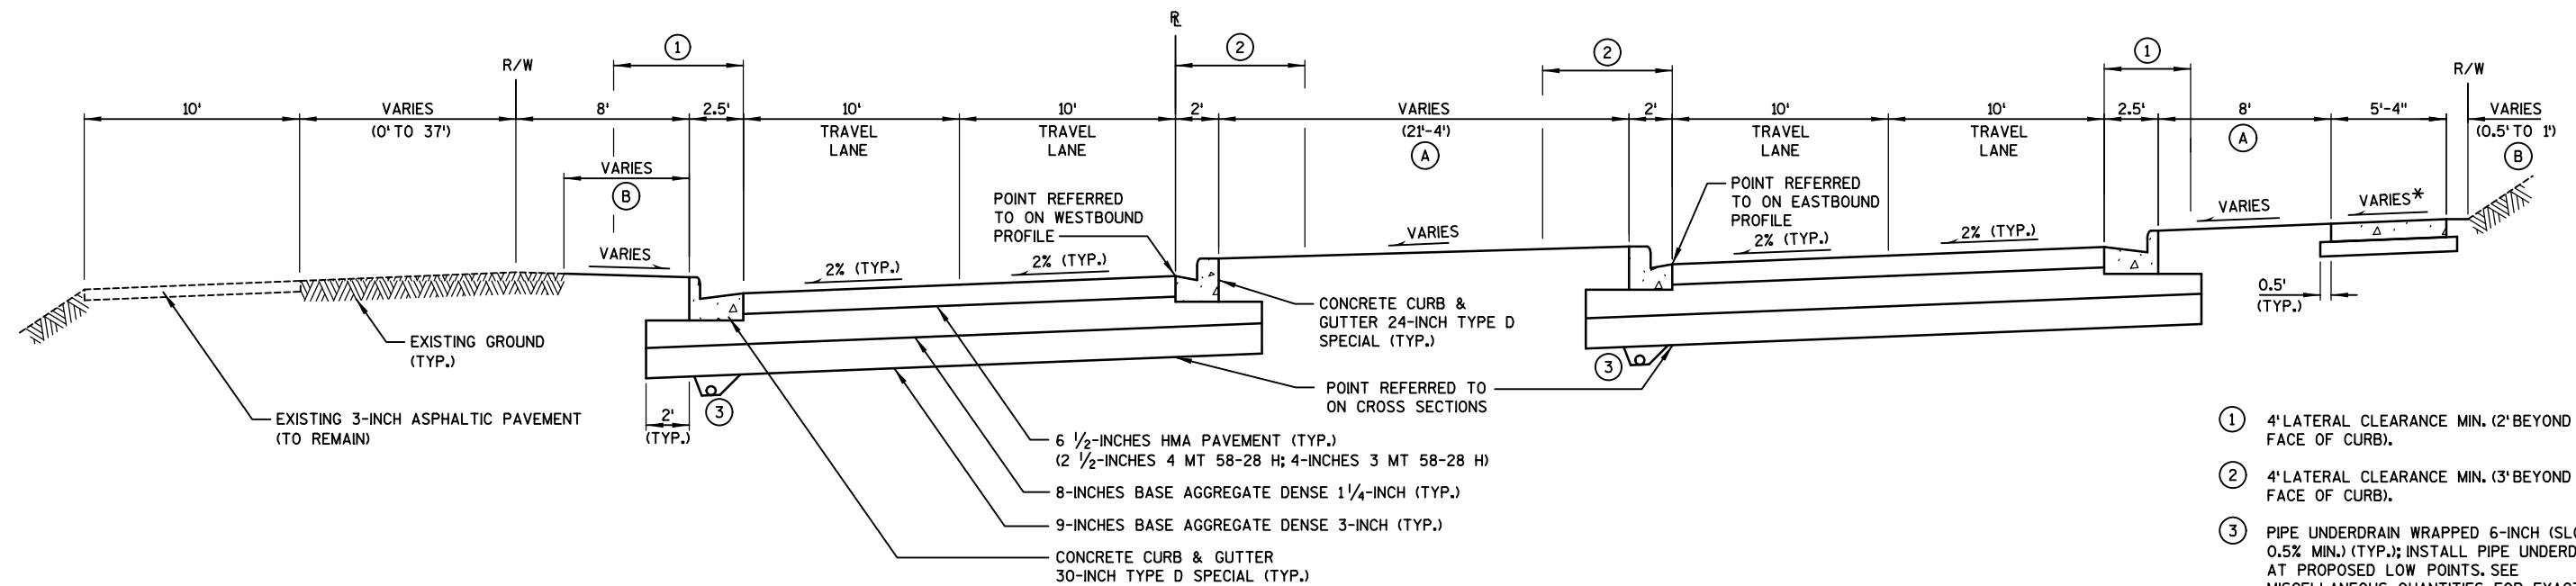

TYPICAL FINISHED SECTION - E. JOHNSON STREET

STA. 77+44 - STA. 81+11


- ① 4' LATERAL CLEARANCE MIN. (2' BEYOND FACE OF CURB).
- ② 4' LATERAL CLEARANCE MIN. (3' BEYOND FACE OF CURB).
- ③ PIPE UNDERDRAIN WRAPPED 6-INCH (SLOPE 0.5% MIN.) (TYP.); INSTALL PIPE UNDERDRAIN AT PROPOSED LOW POINTS. SEE MISCELLANEOUS QUANTITIES FOR EXACT LOCATIONS AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.
- (A) TOPSOIL; FERTILIZER TYPE B; SOD LAWN.
- (B) TOPSOIL; FERTILIZER TYPE B; SEEDING MIXTURE NO. 40; AND MULCHING.

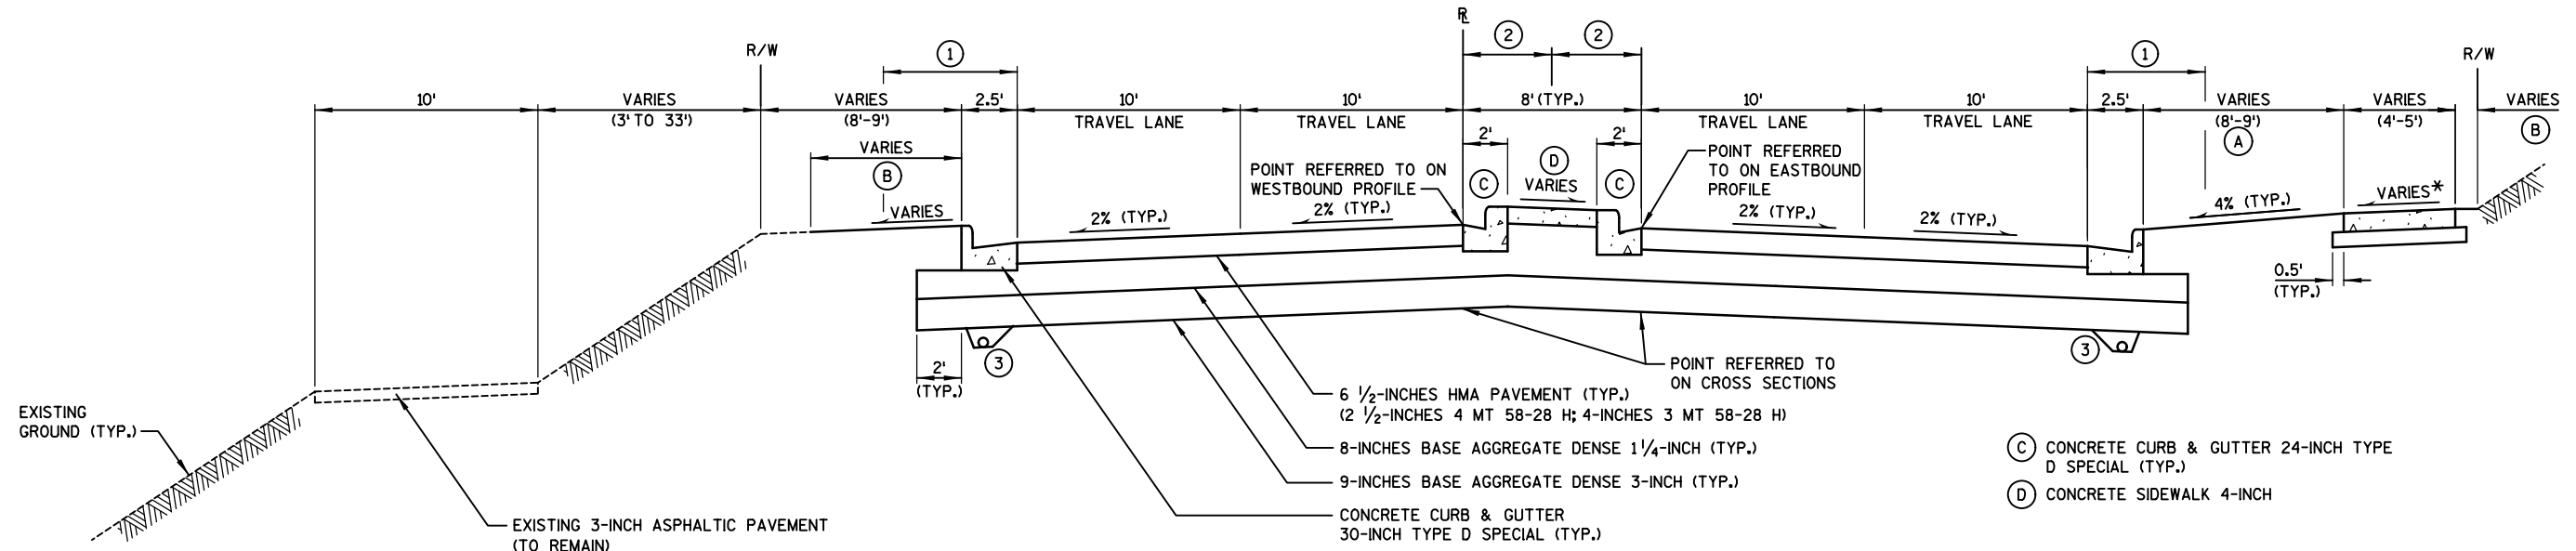

TYPICAL FINISHED SECTION - E. JOHNSON STREET
STA. 81+11 - STA. 87+90


- (C) CONCRETE CURB & GUTTER 24-INCH TYPE D SPECIAL (TYP.)
- (D) CONCRETE SIDEWALK 4-INCH

* EXISTING CONCRETE SIDEWALK TO REMAIN (2% MAX.) OR NEW CONCRETE SIDEWALK 5-INCH (1.5% TYP.) OVER 2" BASE AGGREGATE DENSE 3/4-INCH. SEE PLAN DETAILS FOR LOCATIONS.

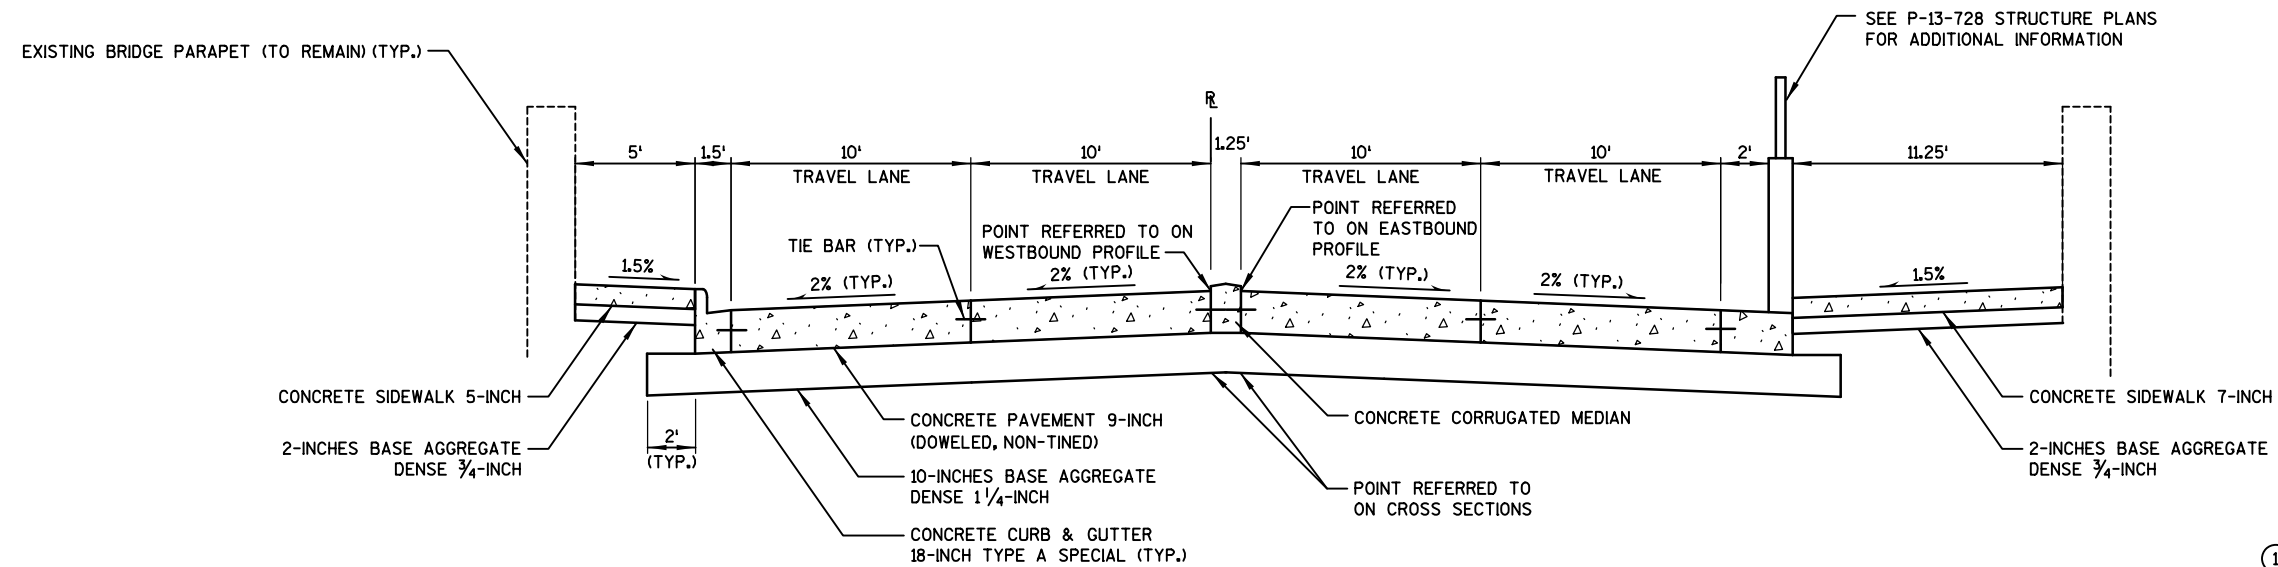

TYPICAL FINISHED SECTION - E. JOHNSON STREET
STA. 87+90 - STA. 89+75
(YAHARA RIVER BRIDGE, P-13-728)


- (1) 4' LATERAL CLEARANCE MIN. (2' BEYOND FACE OF CURB).
- (2) 4' LATERAL CLEARANCE MIN. (3' BEYOND FACE OF CURB).
- (3) PIPE UNDERDRAIN WRAPPED 6-INCH (SLOPE 0.5% MIN.) (TYP.); INSTALL PIPE UNDERDRAIN AT PROPOSED LOW POINTS. SEE MISCELLANEOUS QUANTITIES FOR EXACT LOCATIONS AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.
- (A) TOPSOIL; FERTILIZER TYPE B; SOD LAWN.
- (B) TOPSOIL; FERTILIZER TYPE B; SEEDING MIXTURE NO. 40; AND MULCHING.

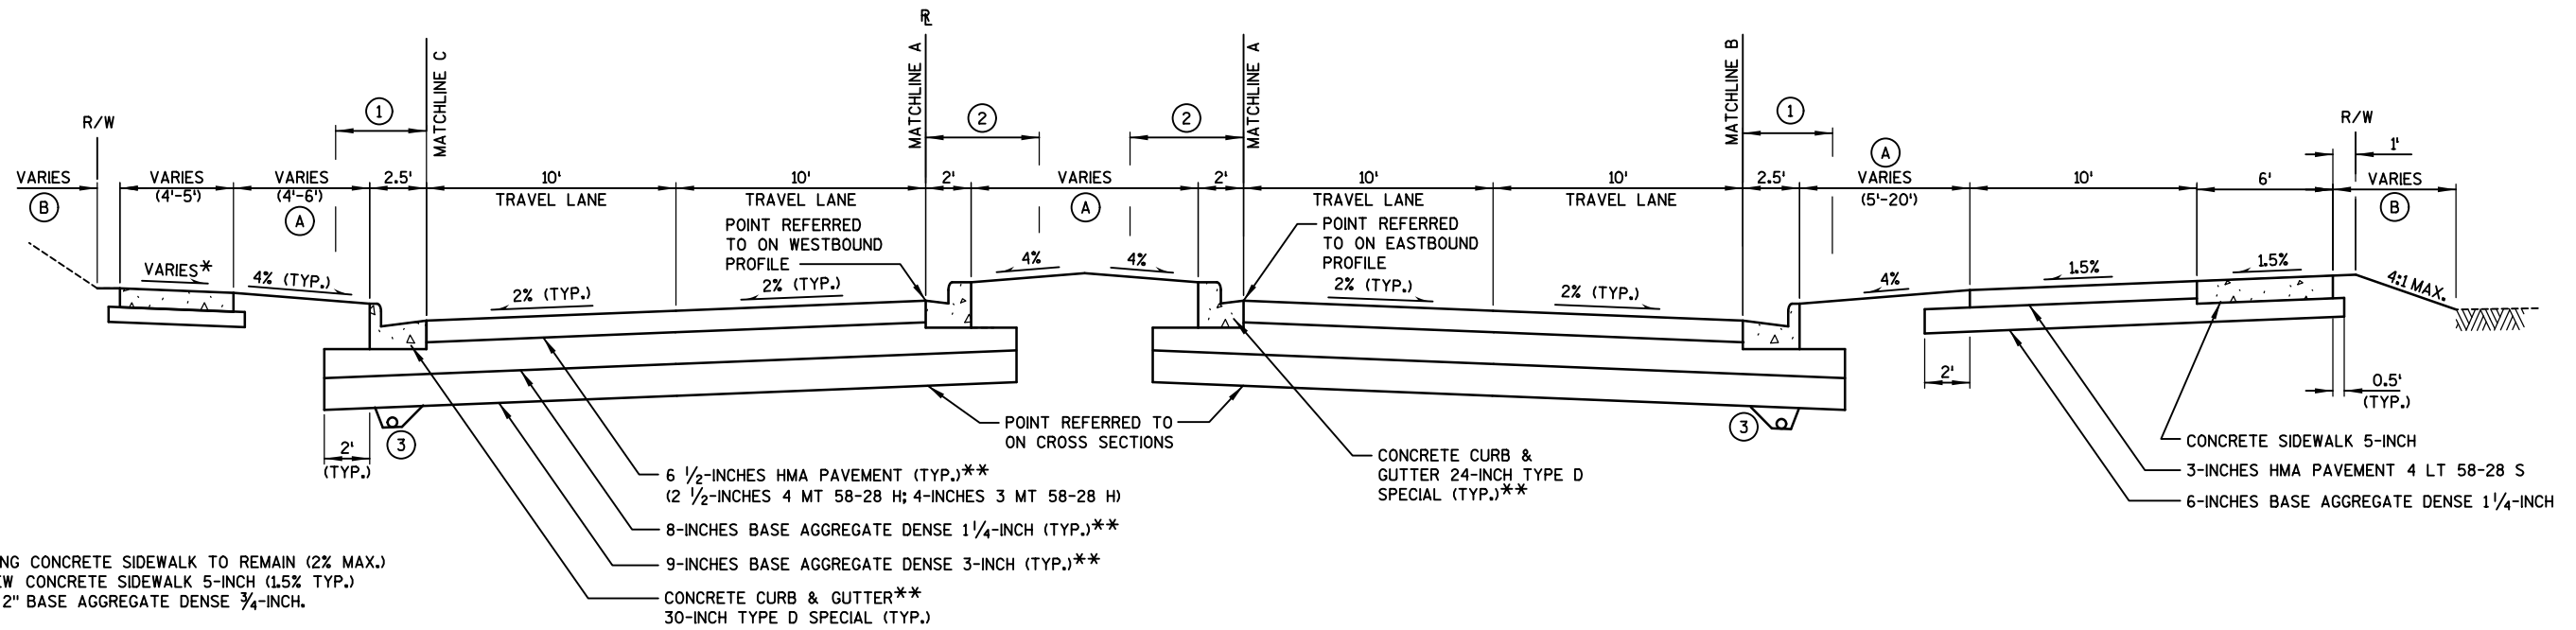


TYPICAL FINISHED SECTION - E. JOHNSON STREET

STA. 89+75 - STA. 100+75 LT
 STA. 89+75 - STA. 100+88 RT
 CONCRETE PAVEMENT BEGINNING AT STA. 99+42
 (SEE PLAN DETAIL SHEETS FOR ADDITIONAL INFORMATION;
 TIE BARS REQ'D WHEN CONCRETE PAVEMENT)


* EXISTING CONCRETE SIDEWALK TO REMAIN (2% MAX.)
 OR NEW CONCRETE SIDEWALK 5-INCH (1.5% TYP.)
 OVER 2" BASE AGGREGATE DENSE 3/4-INCH.

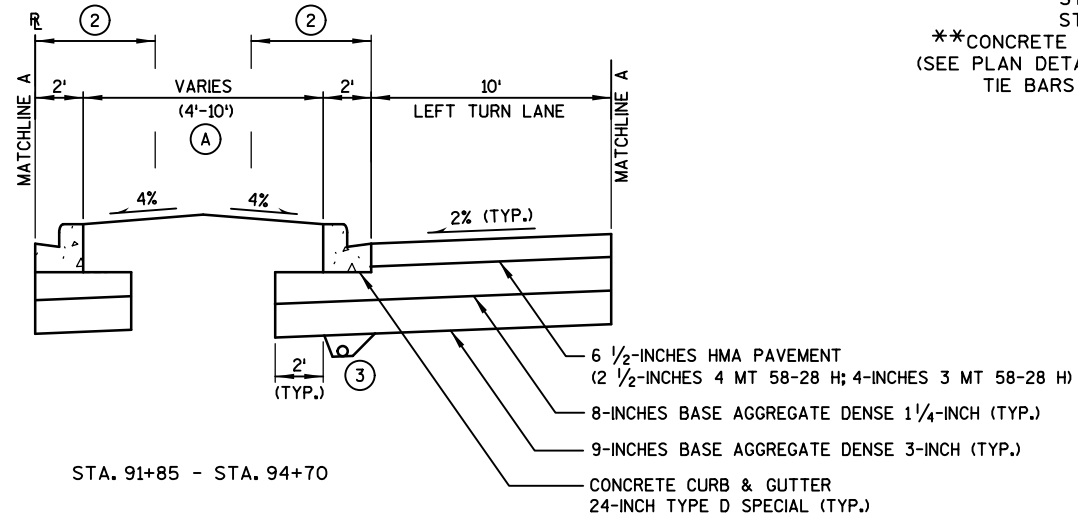

STA. 91+85 - STA. 94+70

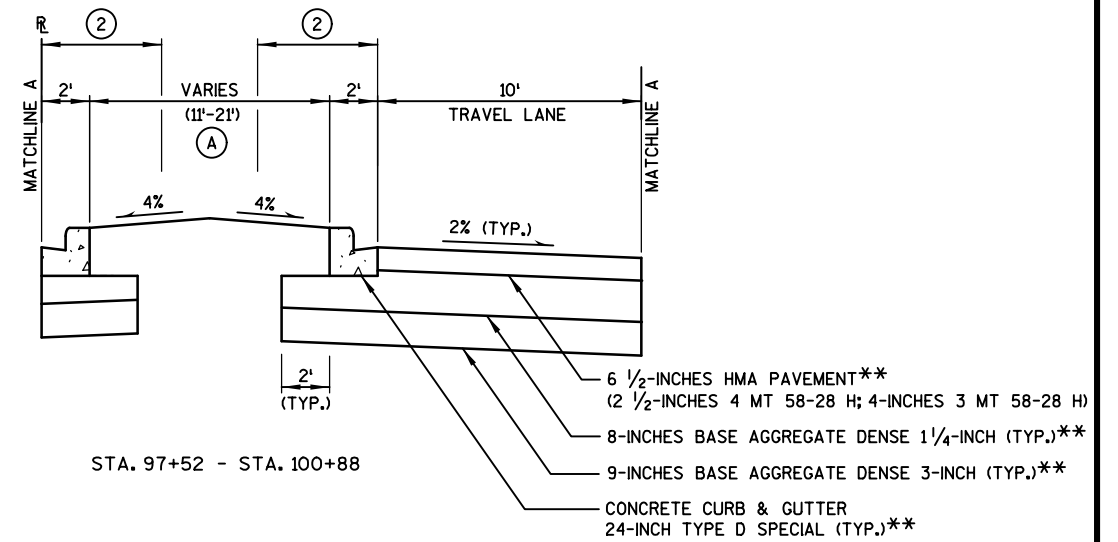


STA. 97+52 - STA. 100+88

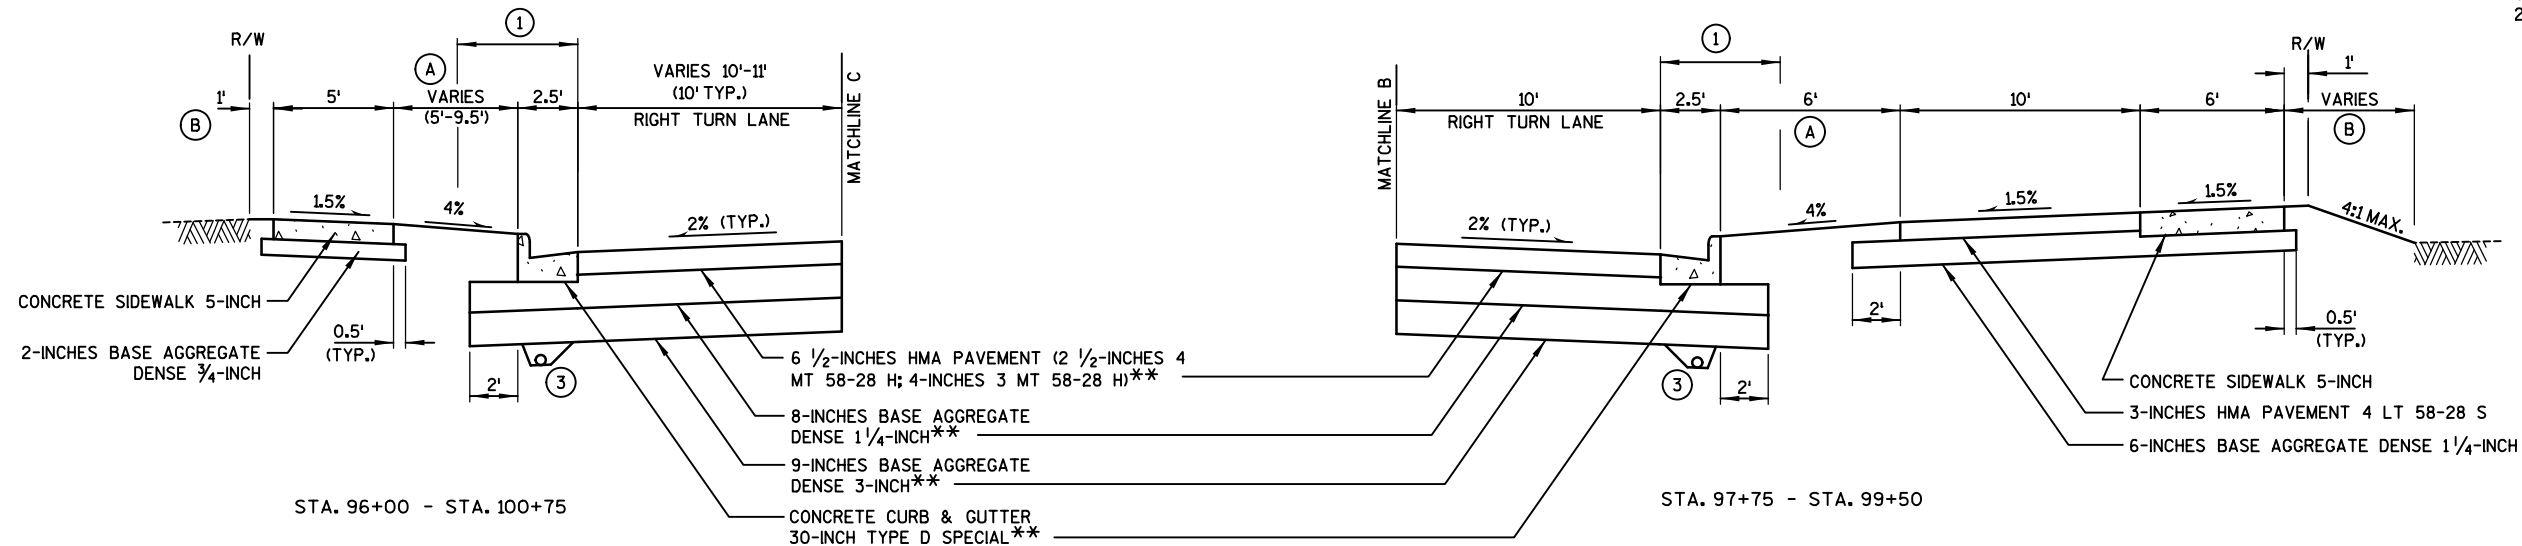

STA. 96+00 - STA. 100+75



STA. 97+75 - STA. 99+50

- ① 4' LATERAL CLEARANCE MIN. (2' BEYOND FACE OF CURB).
- ② 4' LATERAL CLEARANCE MIN. (3' BEYOND FACE OF CURB).
- ③ PIPE UNDERDRAIN WRAPPED 6-INCH (SLOPE 0.5% MIN.) (TYP.); INSTALL PIPE UNDERDRAIN AT PROPOSED LOW POINTS. SEE MISCELLANEOUS QUANTITIES FOR EXACT LOCATIONS AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.
- (A) TOPSOIL; FERTILIZER TYPE B; SOD LAWN.
- (B) TOPSOIL; FERTILIZER TYPE B; SEEDING MIXTURE NO. 40; AND MULCHING.

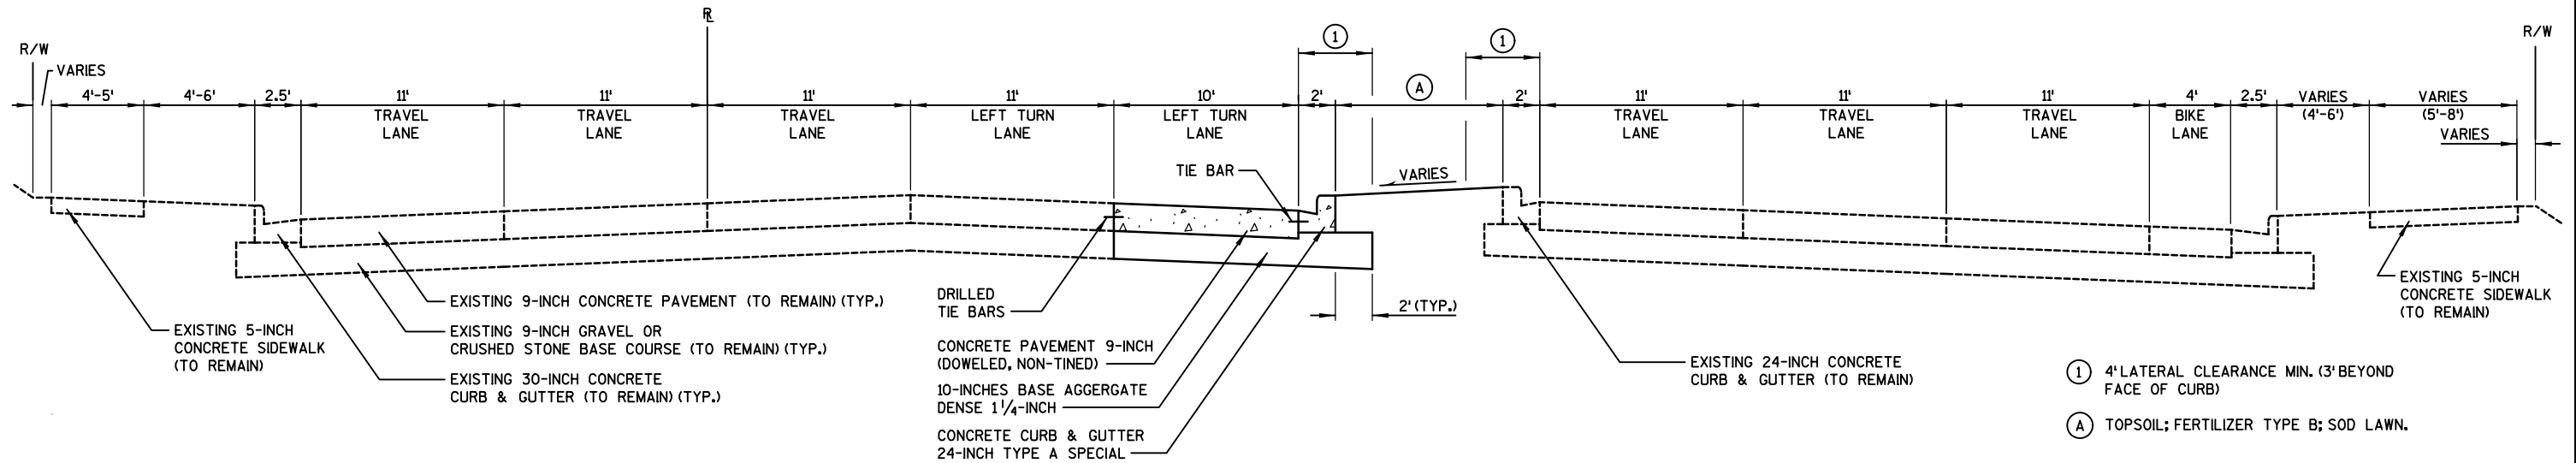

TYPICAL FINISHED SECTION - EAST JOHNSON STREET

STA. 100+75 - STA. 104+86 LT

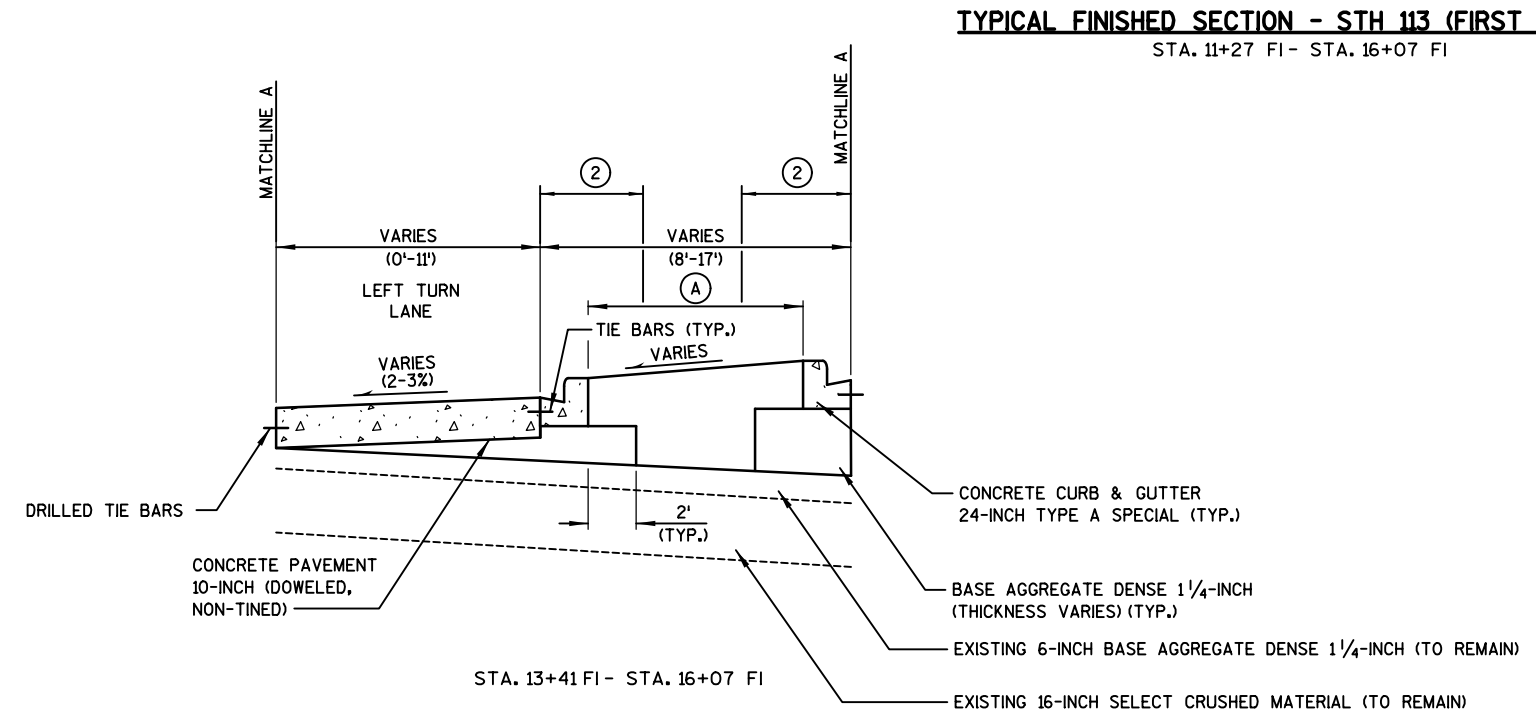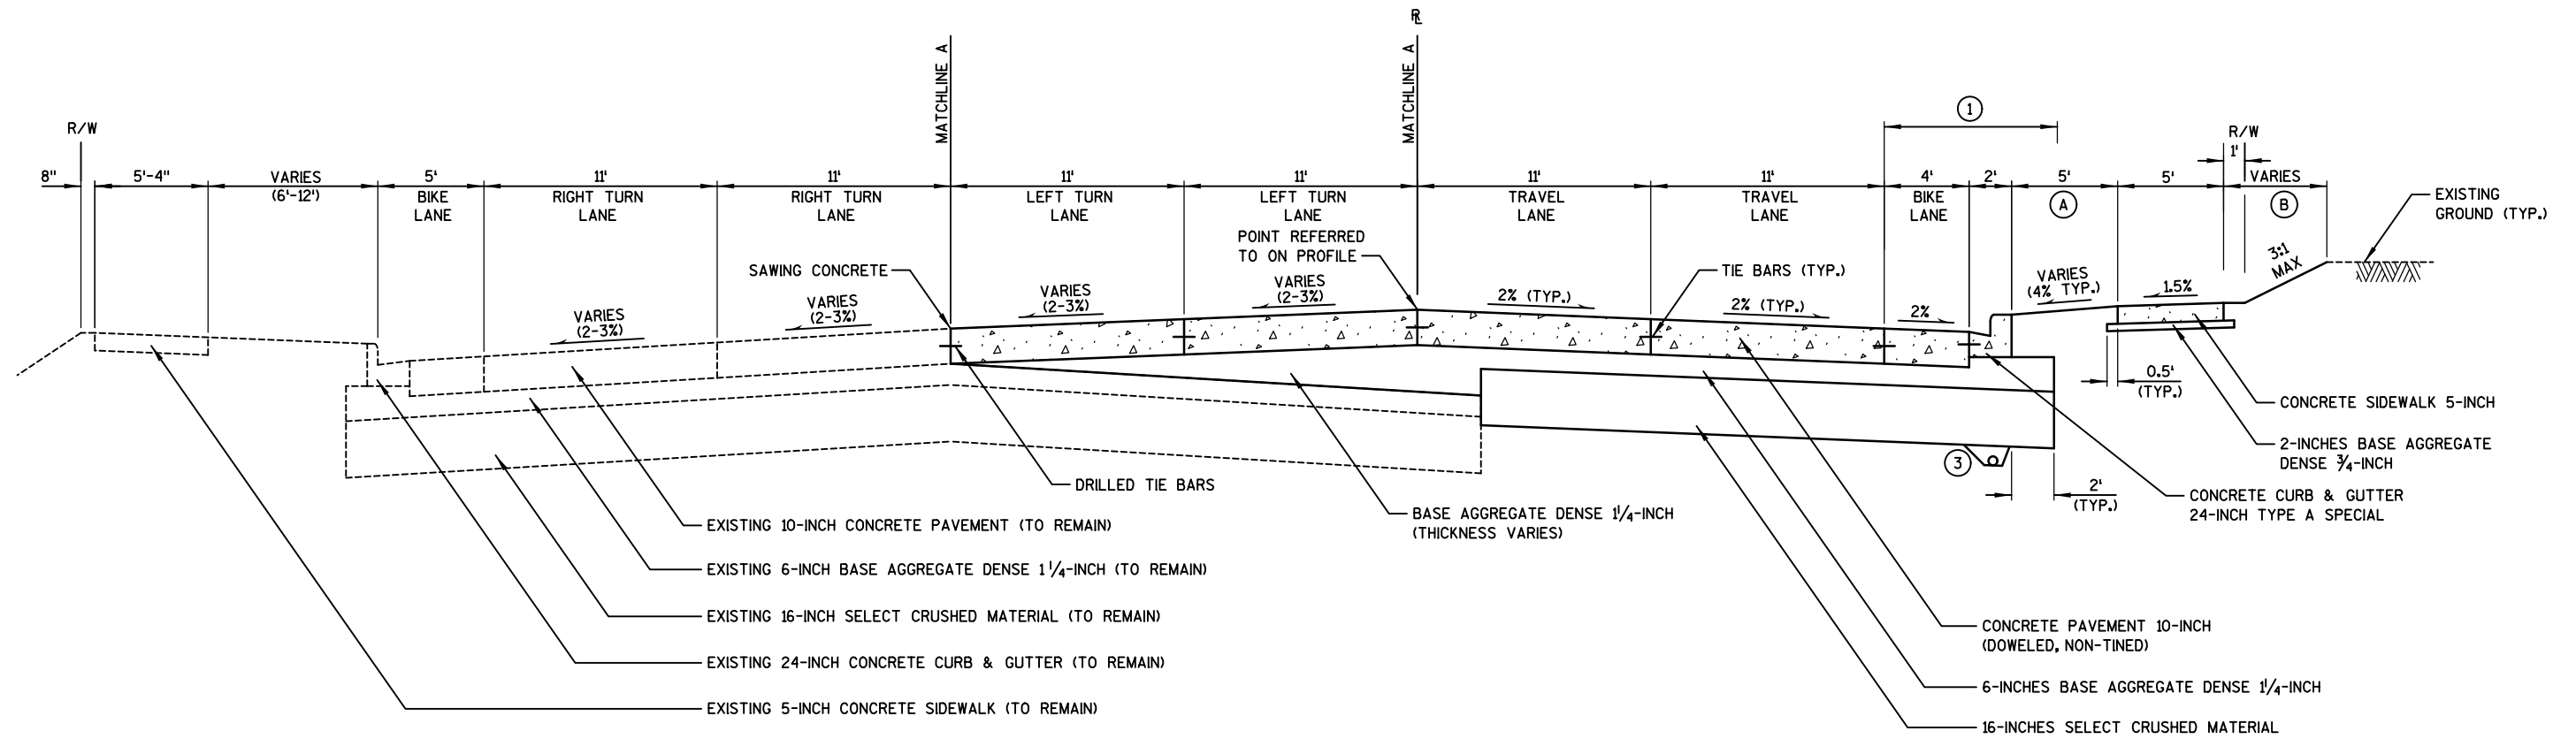

- ① 7' LATERAL CLEARANCE MIN. (2' BEYOND FACE OF CURB).
- ② 4' LATERAL CLEARANCE MIN. (3' BEYOND FACE OF CURB).
- ③ PIPE UNDERDRAIN WRAPPED 6-INCH (SLOPE 0.5% MIN.) (TYP.); INSTALL PIPE UNDERDRAIN AT PROPOSED LOW POINTS. SEE MISCELLANEOUS QUANTITIES FOR EXACT LOCATIONS AND CONSTRUCTION DETAILS FOR ADDITIONAL INFORMATION.
- Ⓐ TOPSOIL; FERTILIZER TYPE B; SOD LAWN.
- Ⓑ TOPSOIL; FERTILIZER TYPE B; SEEDING MIXTURE NO. 40; AND MULCHING.