
Panel / Trim

Gateway Gray (SW7644)

Panel / Trim

Iron Ore

(SW7069)

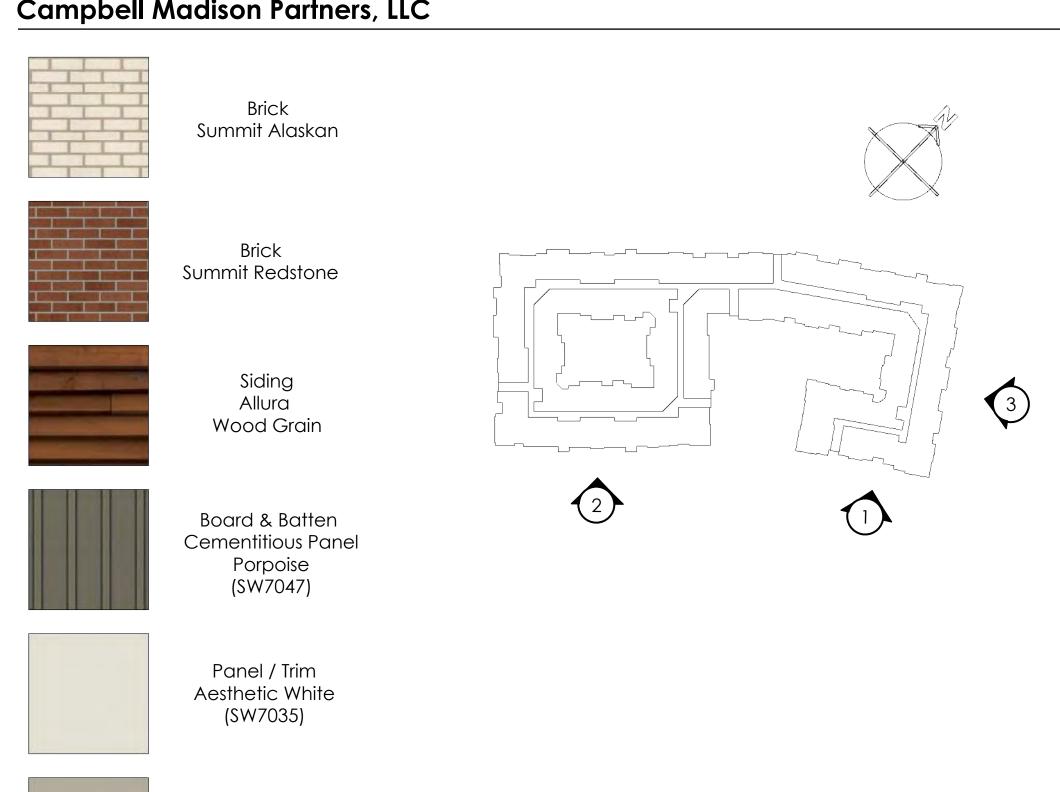

Cementitious Panel Wood Siding -Brick —Board & Batten Siding TOP OF THIRD FLR. TOP OF SECOND FLR. TOP OF FIRST FLR. TOP OF SLAB UNIT B6 UNIT A1 - ALT 1 UNIT A1 - ALT 1 UNIT A1 - ALT 1 UNIT A2 UNIT A2 - ALT 6 UNIT A2 UNIT B3 - ALT 1 UNIT A1 - ALT 1 UNIT B6 UNIT B6 UNIT B6 UNIT A1 - ALT 1 UNIT A2 - ALT 6 UNIT A2 UNIT A2 UNIT A2 UNIT B3 - ALT 1 UNIT A2 - ALT 6 UNIT A1 - ALT 1 UNIT A2 UNIT B3 - ALT 1 UNIT A1 - ALT 1 UNIT A1 - ALT 1 UNIT A2 UNIT A2 - ALT 6 UNIT A2 UNIT B3


Right Elevation (East Elevation)

Elevation



POOLE & POOLE ARCHITECTURE

Page 1 of 6

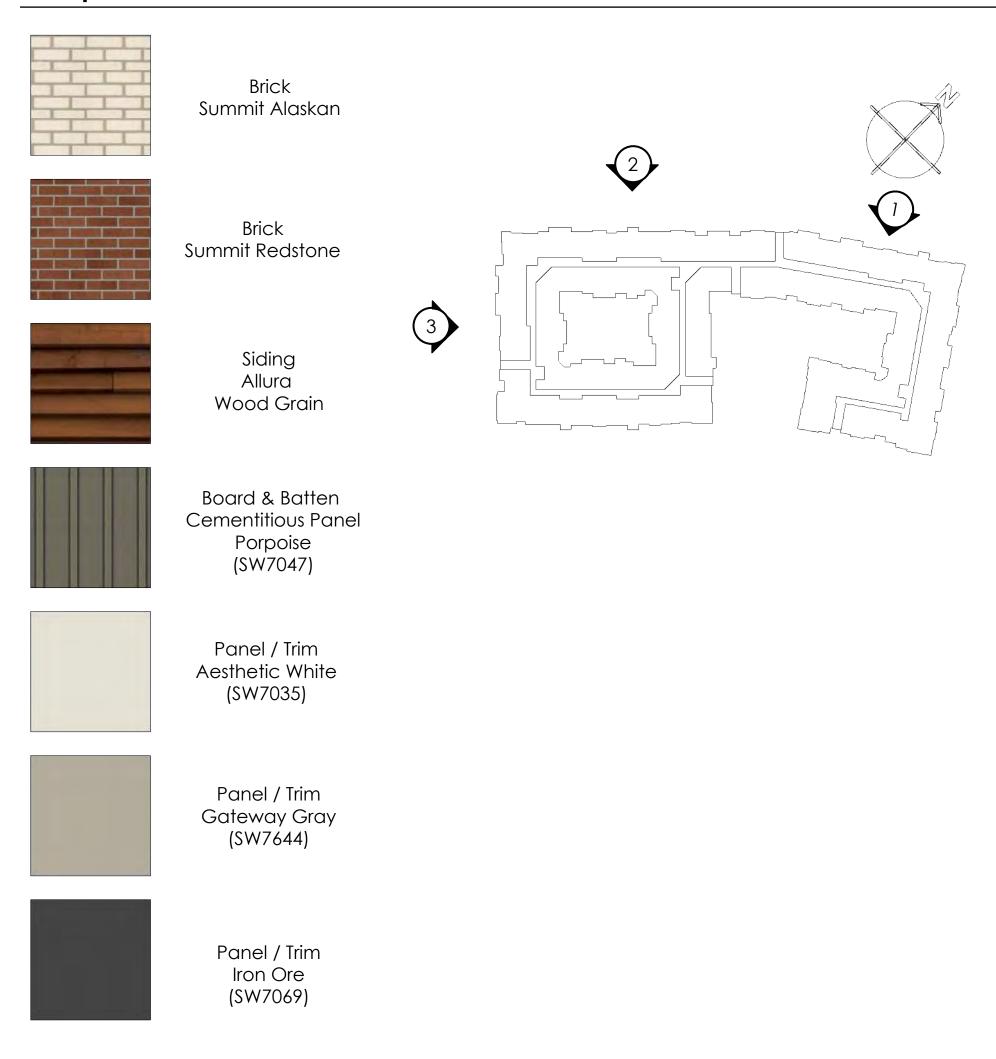




Left Elevation (West Elevation) Elevation



East Main Street Elevation (North Elevation) East Main Street Elevation (North Elevation) Scale: 1/16" = 1'-0" Elevation





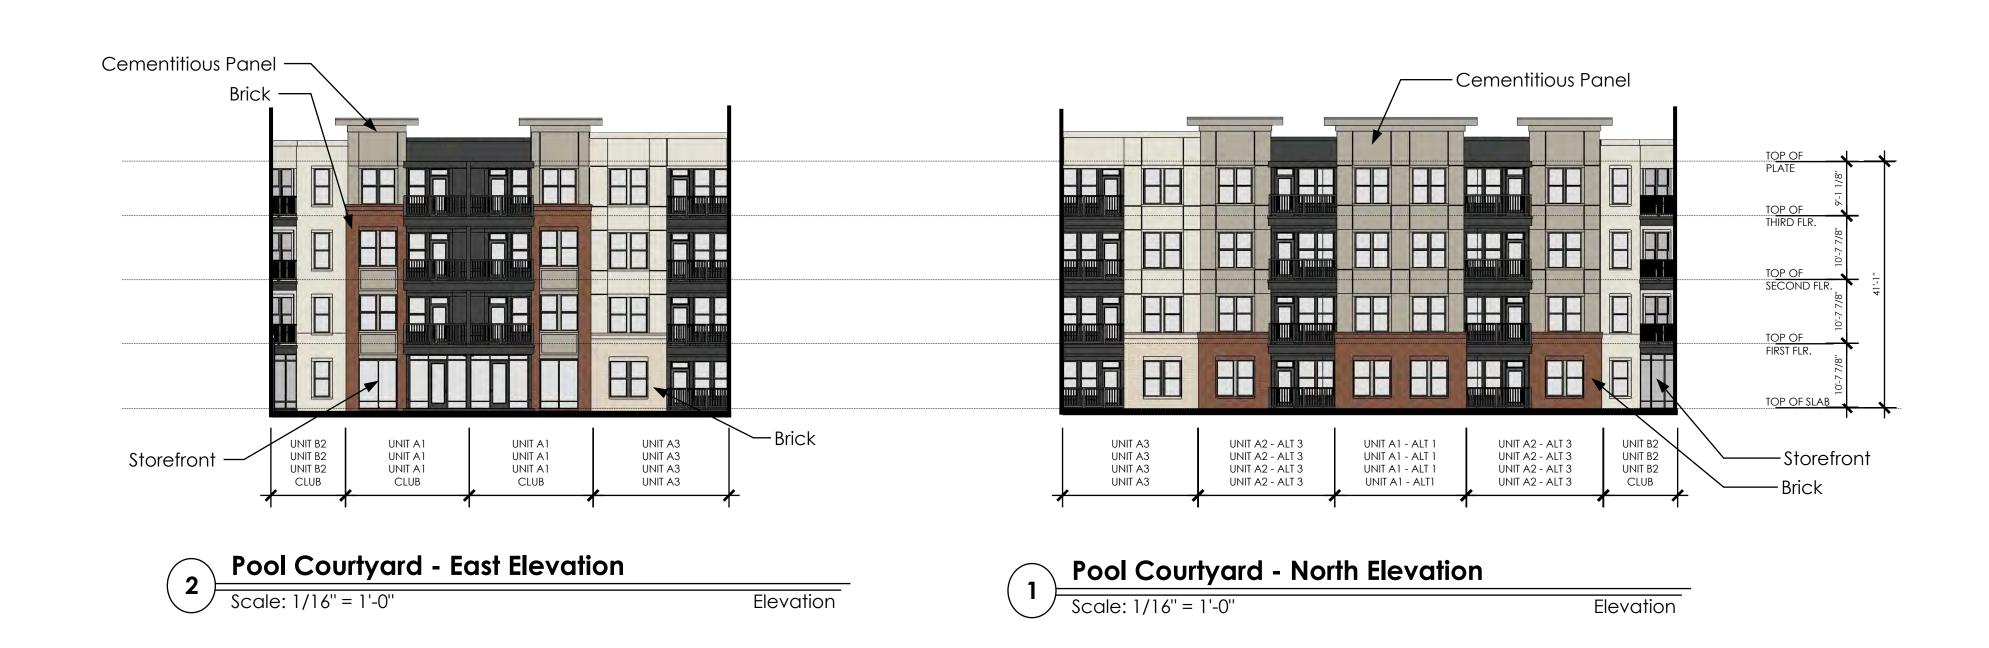



Corner at Buttonwood & American Parkway

Perspective





Entry Drive at American Parkway



	ode Data for Ame	ilicali Falkway	Multi-Fallilly — I	JZU AITIEITCALI	rainway – Ma	IUISUII, VVI	1 0	^		F	_
Building N		O T-bl- 500				1	2	3	4	5	6
	onstruction per IB	C Table 503				IIA NEDA 42	VA NEDA 12D	VA NEDA 12D	VA NEDA 12D	VA NEDA 12D	VA
	System Provided					NFPA 13	NFPA 13R	NFPA 13R	NFPA 13R	NFPA 13R	NFPA 13F
Group	Niverban of Otavia	IDO Tabla	500			S2	R2	R2	R2	R2	R2
	Number of Stories	•	503			3	3	3	3	3	3
	dification per IBC		011-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1-1	47		1	1	1	1	1	1
	Number of Stories	after IBC 504.	2 Height Modific	cations		4	4	4	4	4	4
Actual Nur	mber of Stories					4	4	4	4	4	4
Mavimum	Building Height p	er IRC Table 50	3 (Feet)			50	50	50	50	50	50
	dification per IBC		o (i eet)			20	20	20	20	20	20
_	Building Height af		leight Modificati	on (Feet)	70	60	60	60	60	60	
	lding Height (Feet		leight Modificati	or (reet)		55	55	55	55	55	55
Actual Dui	iding rieigni (Feet	.)				33	55	33	30	33	- 55
Allowable	Building Area Floo	or Area per IBC	Table 503			39,000	12,000	12,000	12,000	12,000	12,000
	ncrease allowed p			pace/Assume	0	3,554	2,903	3,116	6,391	7,562	
	Sprinkler System			pare and the same	39,000	0	0	0	0	0	
	Building Floor Are				78,000	15,554	14,903	15,116	18,391	19,562	
	Iding Floor Area (				93,566	15,468	12,940	14,671	14,142	13,055	
	Building Area per		termination) - T	OTAL	312,000	62,218	59,612	60,462	73,562	78,246	
Actual Building Area – TOTAL							60,616	51,740	56,390	56,808	50,994
Otan Wiati	n – Minimum requ	- 0.25 W/30	7 T TOVIGED VWG		If			Building Squ	ıare Footage		
			10/6.5446	F/P		LavelD	Laurald			Level 4	Total
Ida 1	(frontage)	P (perimeter)	W (width)	0.00	0.00	Level B	Level 1	Level 2	Level 3	Level 4	Total
lldg 1 lldg 2	396	725	30	0.00 0.55	0.00	93,566	15 110	14 222	15 460	15 460	60 616
Ida 2	304	618	30		0.30		15,448	14,232	15,468	15,468	60,616
ldg 4	_		30	0.49			12,920	12,940	12,940	12,940	51,740
lda 5	344 511	675 653	30	0.51 0.78	0.26		14,716	12,242	14,716	14,716	56,390
ldg 3 ldg 4 ldg 5 ldg 6	536	609	30	0.78	0.53 0.63		14,187 13,035	14,207 11,849	14,207 13,055	14,207 13,055	56,808 50,994
		•		0.00	0.03		70,306	65,470	70,386	70,386	276,548
A	$a = \{A_t + [A_t]\}$	x <b>[</b> f] + [ <b>A</b> t x	[s]}				70,500	05,470	70,300	70,300	270,540
	At	A <sub>t x</sub> I <sub>f</sub>	At x Is	_ = [							
ildg 1 ildg 2 ildg 3 ildg 4 ildg 5	39,000	0	39,000								
ldg 2	12,000	3,554	0			) fu					
ldg 3	12,000	2,903	0								
ldg 4	12,000	3,116	0								
Labor T	12,000	6,391	0								
siag 5											

	Frontage Increase Diagram - Level 1
( 1	Scale: 1/64" = 1'-0"

Unit Plan Totals												05/02/
Unit Description												
Name	Description	Heated S.F.	Unheated S.F.	Gross S.F.	Level 1	Level 2	Level 3	Level 4	Total	Unit %	Net S.F.	Gross S.F.
Number of Residential Stories					151.75	162.51	173.17	183.82				
A1	1BR/1BA	599	53	652	2	5	5	5	17	6.30%	10,183	11,0
A1 ALT-1	1BR/1BA	640	0	640	5	5	5	5	20	7.41%	12,800	12,8
A1 ALT-2	1BR/1BA	609	53	662	3	3	3	3	12	4.44%	7,308	7,9
A1 ALT-3	1BR/1BA	609	53	662	1	1	1	1	4	1.48%	2,436	2,6
A2	1BR/1BA	626	58	684	9	9	9	9	36	13.33%	22,536	24,6
A2 ALT-1	1BR/1BA	652	46	698	3	3	3	3	12	4.44%	7,824	8,3
A2 ALT-2	1BR/1BA	638	57	695	5	7	7	7	26	9.63%	16,588	18,0
A2 ALT-3	1BR/1BA	621	58	679	7	7	7	7	28	10.37%	17,388	19,0
A2 ALT-4	1BR/1BA	676	0	676	1	1	1	1	4	1.48%	2,704	2,7
A2 ALT-5	1BR/1BA	632	58	690	1	1	1	1	4	1.48%	2,528	2,7
A2 ALT-6	1BR/1BA	662	56	718	1	1	1	1	4	1.48%	2,648	2,8
A3	1BR/1BA	758	65	823	7	8	8	8	31	11.48%	23,498	25,5
A4	1BR/1BA	777	64	841	1	0	0	0	1	0.37%	777	8
One Bedroom Totals					46	51	51	51	199	73.70%		
B1	2BR/2BA	1,085	60	1,145	8	9	11	11	39	14.44%	42,315	44,6
B2	2BR/2BA	1,034	61	1,095	1	2	2	2	7	2.59%	7,238	7,6
B2 ALT-1	2BR/2BA	1,068	61	1,129	0	1	1	1	3	1.11%	3,204	3,3
B3	2BR/2BA	1,198	48	1,246	2	0	0	0	2	0.74%	2,396	2,4
B3 ALT-1	2BR/2BA	1,218	48	1,266	0	2	4	4	10	3.70%	12,180	12,6
B4	2BR/2BA	1,144	42	1,186	1	1	1	1	4	1.48%	4,576	4,7
B5	2BR/2BA	1,250	124	1,374	0	1	1	0	2	0.74%	2,500	2,7
B6	2BR/2BA	1,283	124	1,407	]	1	1	1	4	1.48%	5,132	5,6
Two Bedroom Totals					13	17	21	20	71	26.30%		
THE DEGLECTIF TOTALS					59	68	72	71	Total	Unit %	Net S.F.	Gross S.F.

<u>Parking</u>	SF	# Spaces	Compact	%			Totals
Below Grade Structure	93,566	270	67	24.81%			93,566
Surface Parking & Roads	57,670	109	0	0.00%			
Bicycle Parking (1 per unit + 1 guest space per 10 units)		299			GARAC	GE Gross Sq. Ft.	93,566
Building 1	Level 1	Level 2	Level 3	Level 4			Totals
Leasing / Mail	1,800						1,800
Club / Pool Baths	3,535						3,535
Lobby / Fitness	1,266						1,266
Sky Lounge				1,407			1,407
Retail	2,462						2,462
Drive Thru	3,566	2,450					6,016
Corridor/Service/Storage/HVAC/Elec/Trash/Etc	8,760	9,455	9,671	9,671			37,557
Unit Gross SF	49,639	53,565	60,715	59,308			223,227
Building Totals	70,306	65,470	70,386	70,386	T	OTAL Gross Sq.Ft.	276,548
					EAD w/o \$	ubgrade Parking	0.85

Parking Provided								Parking	Parking	
Benchmark Elevations	Size	Isle Width		Surface	Structured			Totals	Totals	
Standard Spaces	9' x 18'	24'-0"		104	0			104	27.44%	
Standard Spaces	8.6' x 18'	26'-0"		0	180			180	47.49%	
HC Spaces	8' x 17'	5'-0"		3	5			8	2.11%	
Van Spaces	8' x 17'	8'-0"		2	1			3	0.79%	
Compact Spaces	7.5' x 16'	21'-0"		0	84			84	22.16%	
				109	270	0	0	379	100.00%	
Gross Sq.Ft.				70,276	70,276	70,276	70,276	Total	Gross Sq.Ft.	281,104
Parking Required									742 SF	/ Car
	Minimum Req	uired	Total		Notes:					
Residential	•	1 per unit		270						
Tenant Spaces (2,494 sf)	1	1 per 400sqft		6	i i					
Leasing (1,800 sf)	1	1 per 400sqft		5						
Total Required				281						

arking Required	1 & 2 Bedroom	Guests (1 per 10	General Comm.			Parking P		
	Units	units)	(1/2,000)					
	270	270	2,462					
required	1	1/10	1/2000			Outdoor	56	18.73%
		(round up)	(round up)			Indoor (regular)	187	62.54%
						Indoor (stacked)	56	18.73%
Total	270	27	2	299	Required bike parking	Total	299	100.00%

PRESCRIPTIVE 0.35

PEFORMANCE

		AF	PLICABLE CODES					
BUILDING CODE -		WISCONSIN COMMERCIAL TERNATIONAL BUILDING CO	BUILDING CODE DE WITH STATE AMENDMENTS	5)				
MECHANICAL CO		WISCONSIN COMMERCIAL TERNATIONAL MECHANICA	BUILDING CODE L CODE WITH STATE AMENDN	MENTS)				
PLUMBING CODE - SPS 381-387: WISCONSIN COMMERCIAL BUILDING CODE (2015 INTERNATIONAL PLUMBING CODE WITH STATE AMENDMENTS)								
ELECTRICAL CODE - SPS 316: WISCONSIN STATE ELECTRICAL CODE VOLUME 2 (2017 NATIONAL ELECTRICAL CODE WITH STATE AMENDMENTS)								
ENERGY CODE - SPS 363: WISCONSIN COMMERCIAL BUILDING CODE (2015 INTERNATIONAL ENERGY CONSERVATION CODE WITH STATE AMENDMENTS)								
GAS CODE -			COMMERCIAL BUILDING CODE L FUEL GAS CODE WITH STATE AMENDMENTS)					
FIRE CODE -	2012 NF	2015 INTERNATIONAL FIRE ( PA-01 WITH STATE AMENDM IN GENERAL ORDINANCE C	· · · <del>-</del>	NTS)				
ACCESSIBILITY -		C/ANSI A-117.1 ACCESSIBLE USING ACT DESIGN MANUA	AND USABLE BUILDINGS AND	) FACILITIES				
		INSULATI	ON TABLE PER 2009 IEC	C				
	METHOD	WINDOW	STOREFRONT		INSUL	ATION		
CLIMATE	METHOD	U-FACTOR SHGC	U-FACTOR SHGC	WALL	ROOF	FLOOR	SLAI	

0.45

0.4

MICHAEL R.
POOLE
A-11791
MIDLOTHIAN,



900LE & POOLE ARCHITECTURE
3736 Winterfield Road, Suite 102
Midlothian, Virginia 23113
Telephone 804.225.0215
www.2pa.net

www.2pa.net

Project: 1819.00

CADD File: CODE

Drawn By: TJG

Permit Release:

Checked By: TJG

Construction Release Set:

204,674.00

1,800.00

3,255.00

No. Date Description

1,890.00

1,000.00

2,400.00

.00

37,557.00

ASI / RFI Revisions
No. Date Description

344,984.00

346,584.00

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.

w/o balconies 355,646

FAR w/ parking w/o balconies 1.10

property of Poole & Poole Architecture, LLC be used or reproduced in whole or part in a without prior written consent of Poole & Poole Architecture, LLC.

Parkway Multi-Family

sartment Community by
bell Madison Partners, 11 C.

American Park


Drawing Title:
Code Data, Project Data,
Calculations & Life Safety

**40.3**a

Plan

### LEGEND:

- \*FE\* = LOCATE CLASS 2A FIRE EXTINGUISHERS IN RECESSED CABINETS (NON-RATED / RATED RELATIVE TO PLAN LOCATION). FIRE EXTINGUISHERS LOCATED AT CIP AND PRECAST WALLS TO BE SURFACED MOUNTED. SEE 9&10/A1.0a FOR PLAN DETAILS. MAXIMUM SEPARATION BETWEEN TWO UNITS IS 150' ALONG CENTERLINE OF CORRIDOR. SET TOP OF EXTINGUISHER AT 4'-6" ABOVE FINISH FLOOR.
- \* = TRAVEL DISTANCE FROM MOST REMOTE POINT OF DWELLING UNIT TO CORRIDOR NOT EXCEEDING 125' PER NFPA 101, SECTION 30.2.6.
- \*\* = TRAVEL DISTANCE FROM DWELLING UNIT ENTRY DOOR TO NEAREST EXIT NOT EXCEEDING 200' AS REQUIRED PER NFPA 101, SECTION 30.2.6.3.2.
- \*\*\* = LOCATE A TWO-WAY COMMUNICATION SYSTEM PER NCBC, SECTION 1007.8

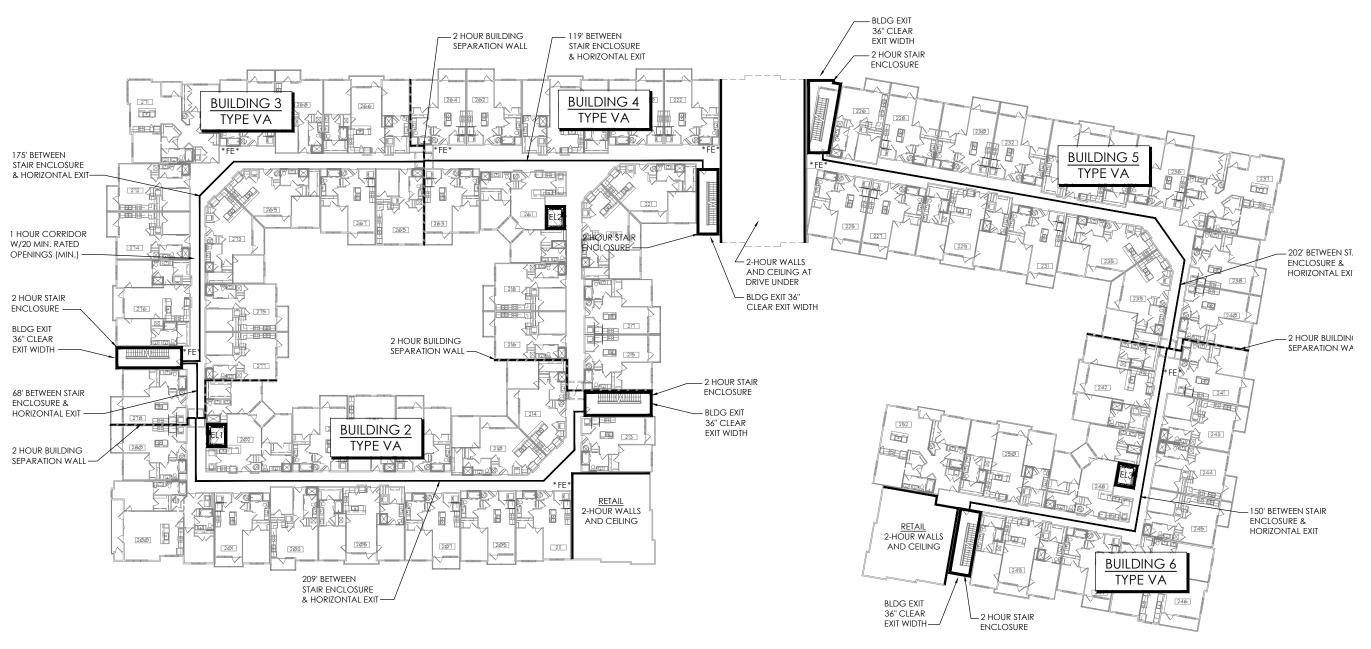

Scale: 1" = 40'-0"

2-HOUR WALLS AND CEILING AT DRIVE UNDER—

SEPARATION WALL

Plan

ASI / RFI Revisions No. Date Description

MICHAEL R. POOLE A-11791

POOLE & POOLE ARCHITECTURE

3736 Winterfield Road, Suite 102

Midlothian, Virginia 23113

Telephone 804.225.0215 www.2pa.net

Project:

CADD File:

Drawn By:

Revisions

Checked By:

Permit Release:

Construction Release Set:

No. Date Description

1819.00

CODE

TJG

TJG


Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall not be used or reproduced in whole or part in any form without prior written consent of Poole & Poole

Drawing Title: Life Safety Plans

A0.3b


36" CLEAR EXIT WIDTH STAIR ENCLOSURE & HORIZONTAL EXIT 2 HOUR BUILDING SEPARATION WALL 1 HOUR CORRIDOR W/20 MIN. RATED OPENINGS (MIN.) — ─ 2 HOUR STAIR
ENCLOSURE 2 HOUR STAIR
ENCLOSURE — BLDG EXIT 36" CLEAR EXIT WIDTH —— STAIR ENCLOSURE & HORIZONTAL EXIT 68' BETWEEN STAIR ENCLOSURE & HORIZONTAL EXIT — SKY LOUNGE
360 SF (NET)
49 OCCUPANTS (A-2)
B OCCUPANCY PER IBC
303.1 (<50 OCCUP.)
1 REQUIRED EXIT

Scale: 1" = 40'-0"

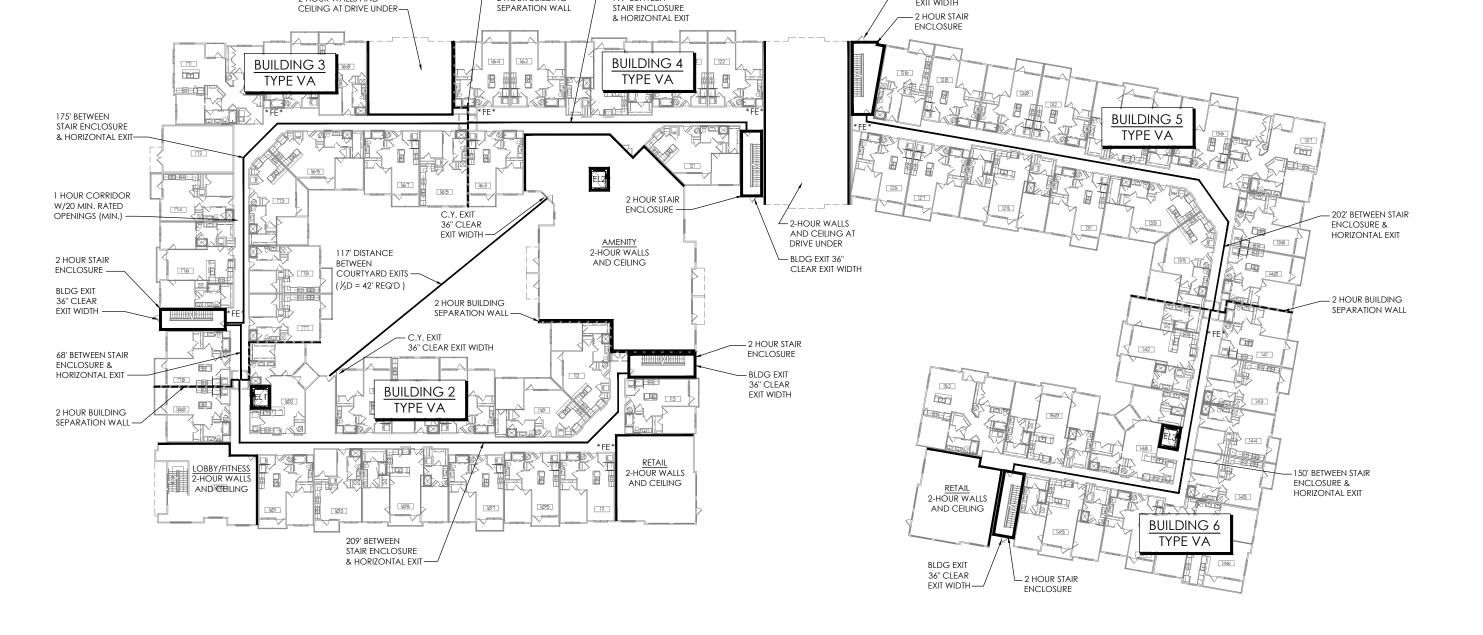

36" CLEAR EXIT WIDTH

2 Life Safety - Level 2
Scale: 1" = 40'-0"

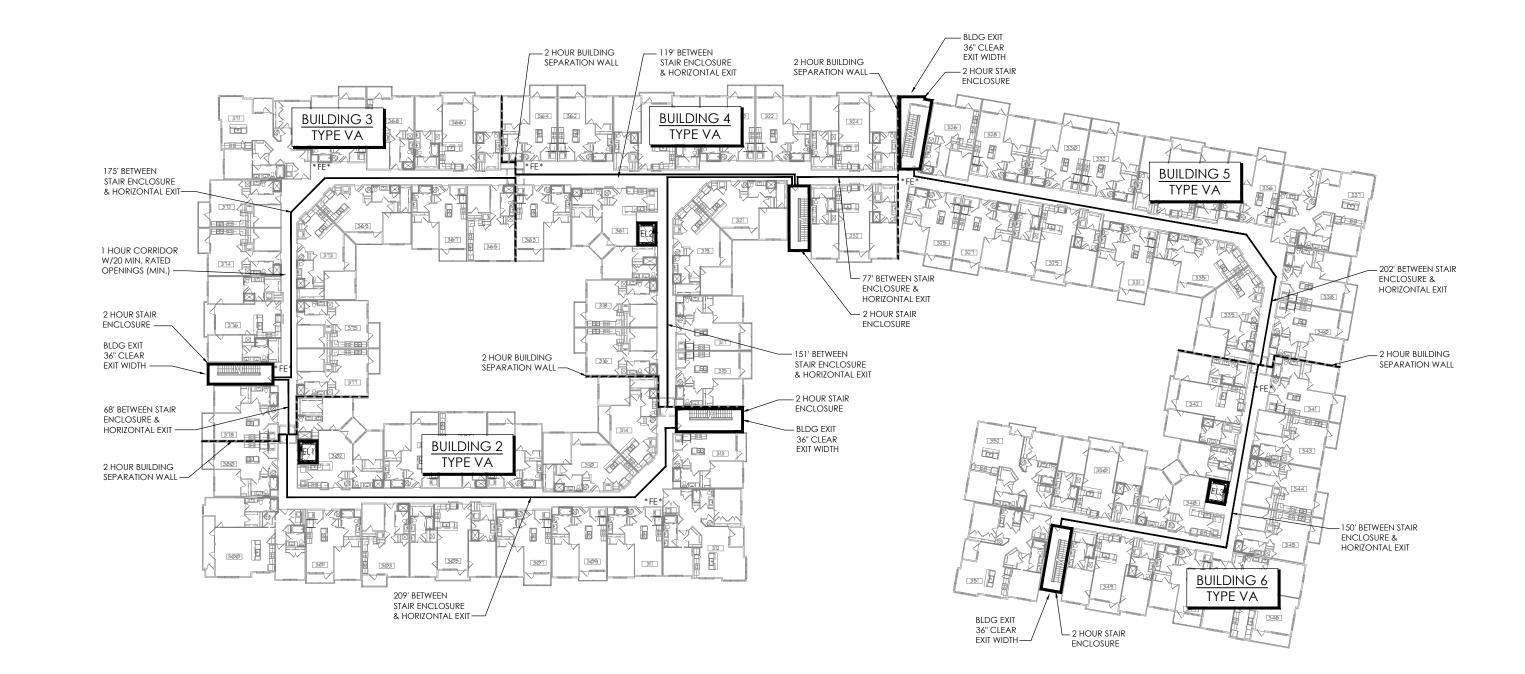


2 HOUR STAIR ENCLOSURE —— 75' BETWEEN STAIR ENCLOSURE AND LOBBY

Life Safety - Level 1
Scale: 1" = 40'-0"

Life Safety - Level 4

Scale: 1" = 40'-0"

Plan

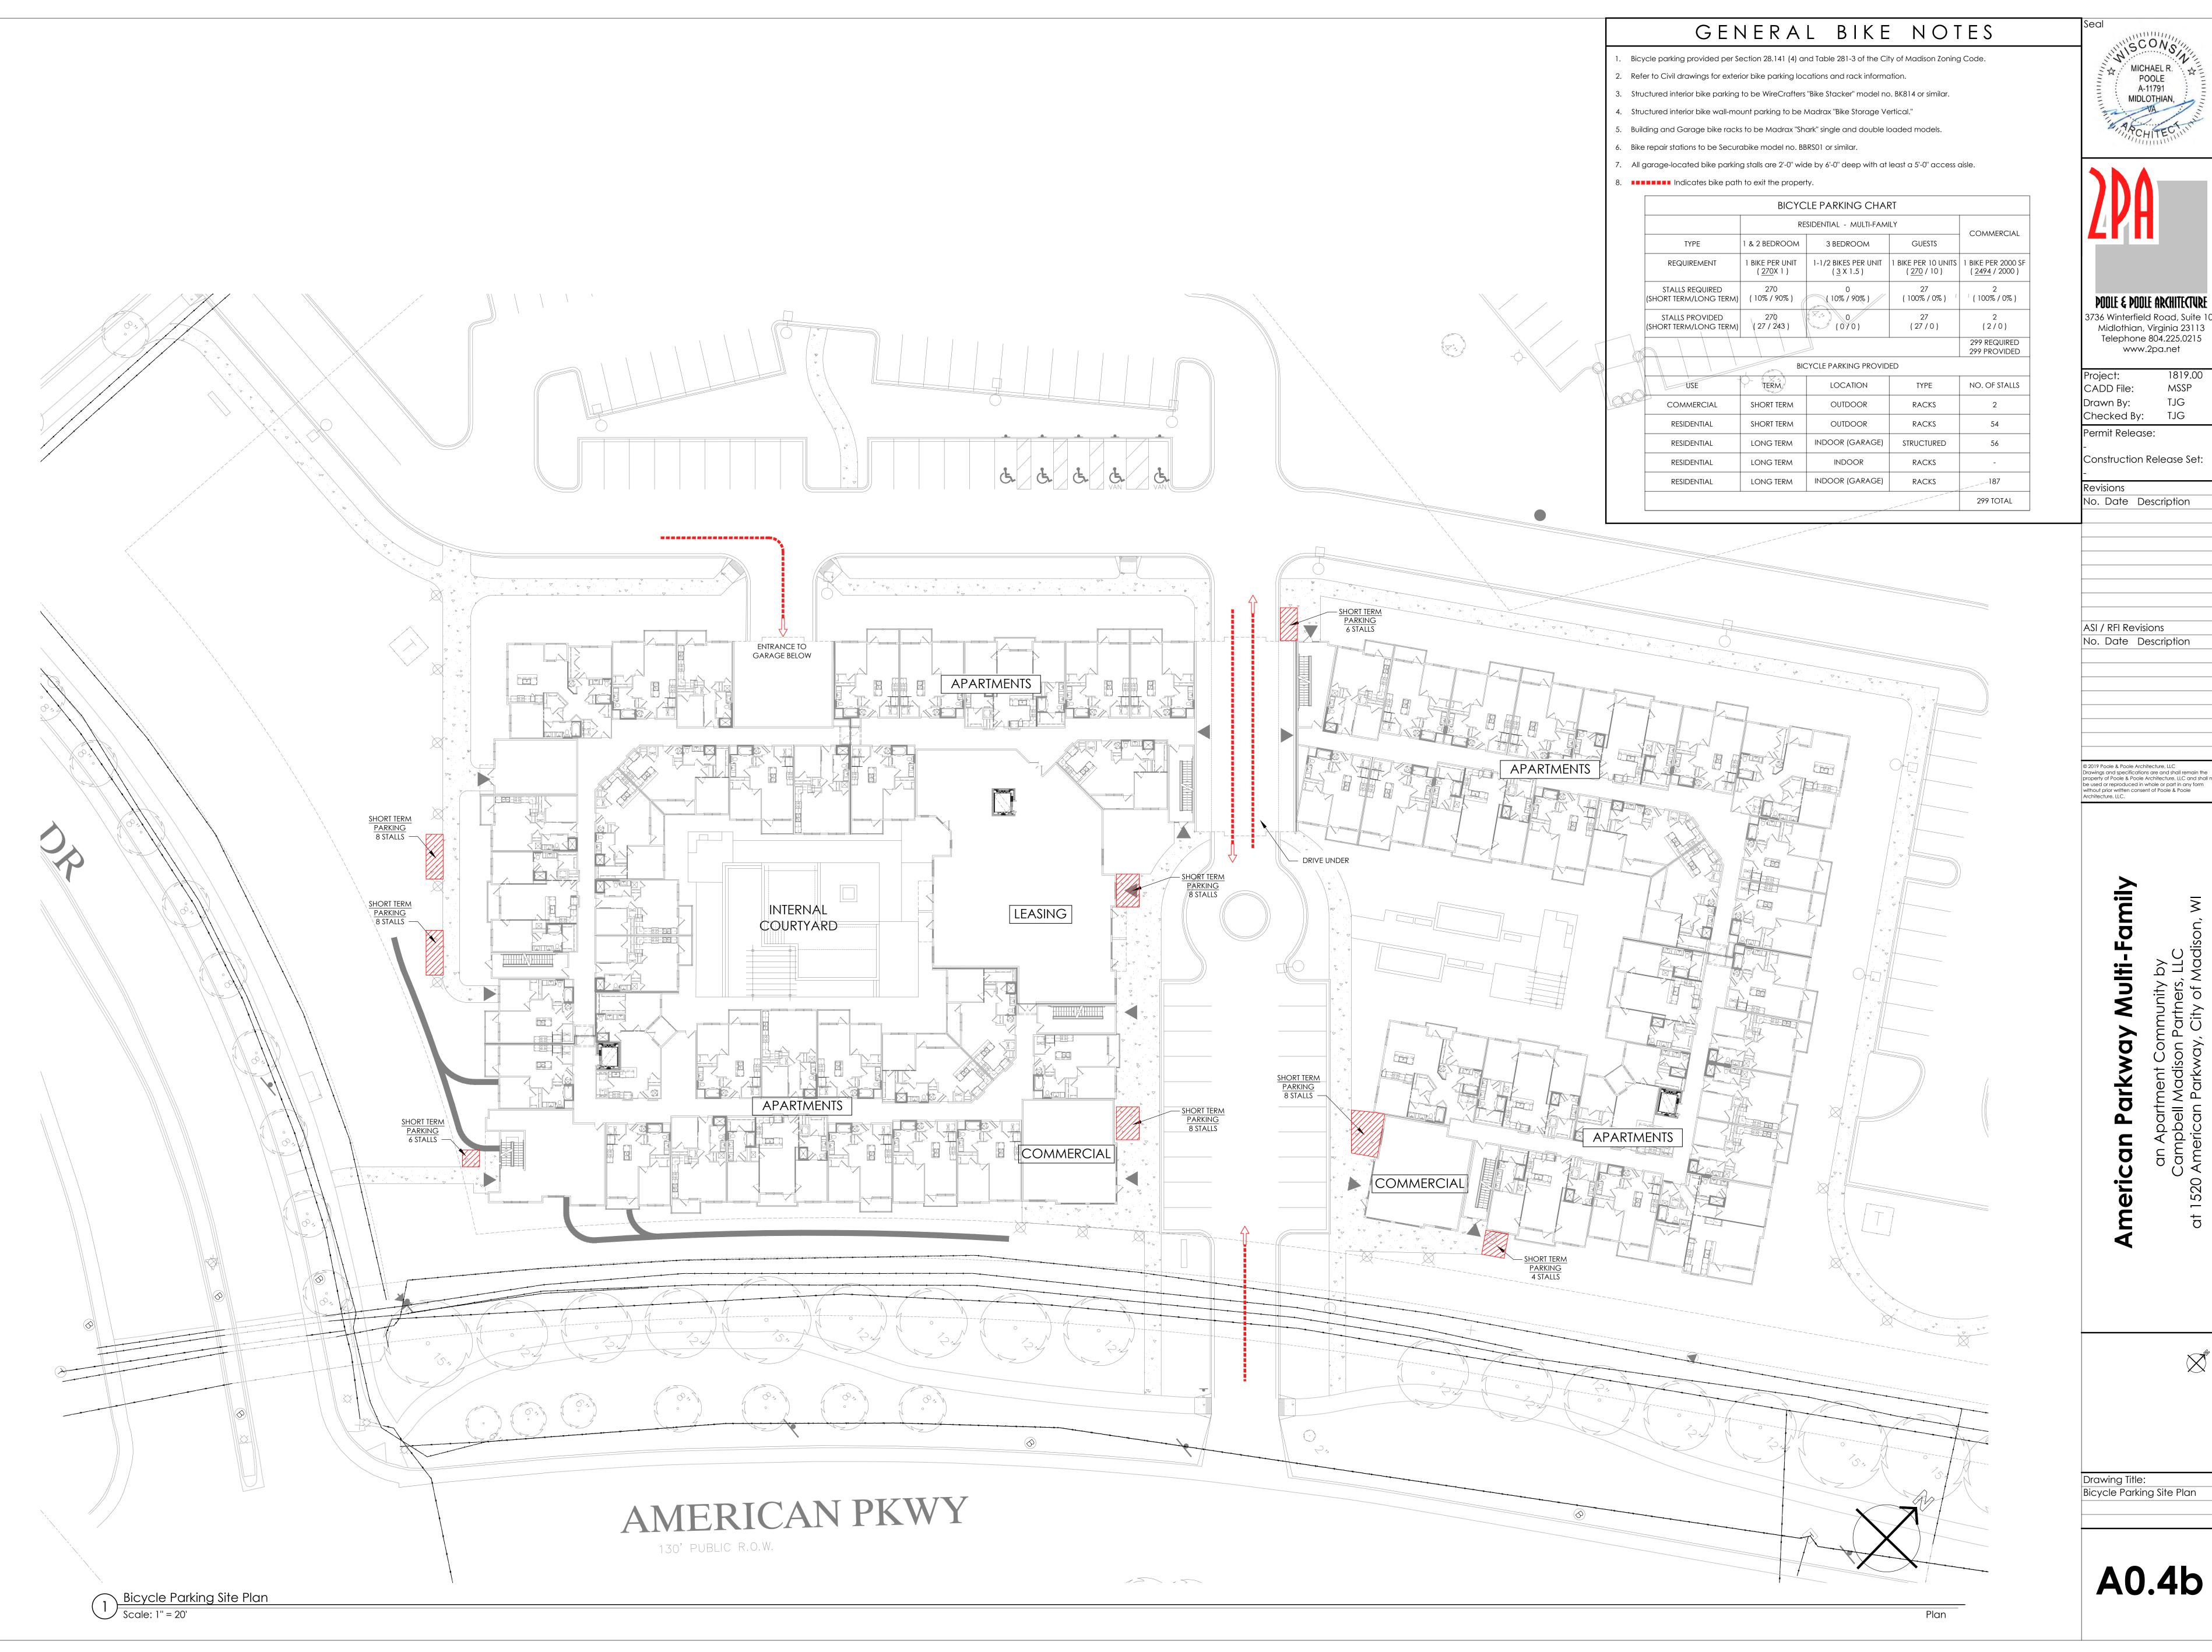

MICHAEL R. POOLE A-11791 MIDLOTHIAN,

3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113 Telephone 804.225.0215 www.2pa.net

MSSP TJG Checked By: TJG Permit Release:

ASI / RFI Revisions


Drawing Title:
Bicycle Parking Site Plan


A0.4b

### GENERAL BIKE NOTES

- . Bicycle parking provided per Section 28.141 (4) and Table 281-3 of the City of Madison Zoning Code.
- 2. Refer to Civil drawings for exterior bike parking locations and rack information.
- 3. Structured interior bike parking to be WireCrafters "Bike Stacker" model no. BK814 or similar.
- 4. Structured interior bike wall-mount parking to be Madrax "Bike Storage Vertical."
- 5. Building and Garage bike racks to be Madrax "Shark" single and double loaded models.
- 6. Bike repair stations to be Securabike model no. BBRS01 or similar.
- 7. All garage-located bike parking stalls are 2'-0" wide by 6'-0" deep with at least a 5'-0" access aisle.
- 8. Indicates bike path to exit the property.

	BICYC	CLE PARKING CHA	RT		
	RE	SIDENTIAL - MULTI-FAM	ILY	COMMERC	
TYPE	1 & 2 BEDROOM	3 BEDROOM	GUESTS	COMMINICIPA	
REQUIREMENT	1 BIKE PER UNIT ( <u>270</u> X 1 )	1-1/2 BIKES PER UNIT ( <u>3</u> X 1.5 )	1 BIKE PER 10 UNITS ( <u>270</u> / 10 )	1 BIKE PER 200 ( <u>2494</u> / 200	
STALLS REQUIRED (SHORT TERM/LONG TERM)	270 ( 10% / 90% )	0 ( 10% / 90% )	27 ( 100% / 0% )	2 ( 100% / 0%	
STALLS PROVIDED (SHORT TERM/LONG TERM)	270 ( 27 / 243 )	0 (0/0)	27 ( 27 / 0 )	2 (2/0)	
				299 REQUIR 299 PROVID	
	ВІС	CYCLE PARKING PROVIE	DED		
USE	TERM	LOCATION	TYPE	NO. OF STA	
COMMERCIAL	SHORT TERM	OUTDOOR	RACKS	2	
RESIDENTIAL	SHORT TERM	OUTDOOR	RACKS	54	
RESIDENTIAL	LONG TERM	INDOOR (GARAGE)	STRUCTURED	56	
RESIDENTIAL	LONG TERM	INDOOR	RACKS	-	
RESIDENTIAL	LONG TERM	INDOOR (GARAGE)	RACKS	187	
		•		299 TOTA	

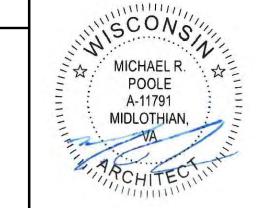



POOLE & POOLE ARCHITECTURE 3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113 Telephone 804.225.0215

Project: 1819.00 CADD File: MSSP Drawn By: Checked By: TJG Permit Release:

www.2pa.net


Construction Release Set:

Revisions No. Date Description

ASI / RFI Revisions No. Date Description


© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.

Drawing Title:
Bicycle Parking Site Plan

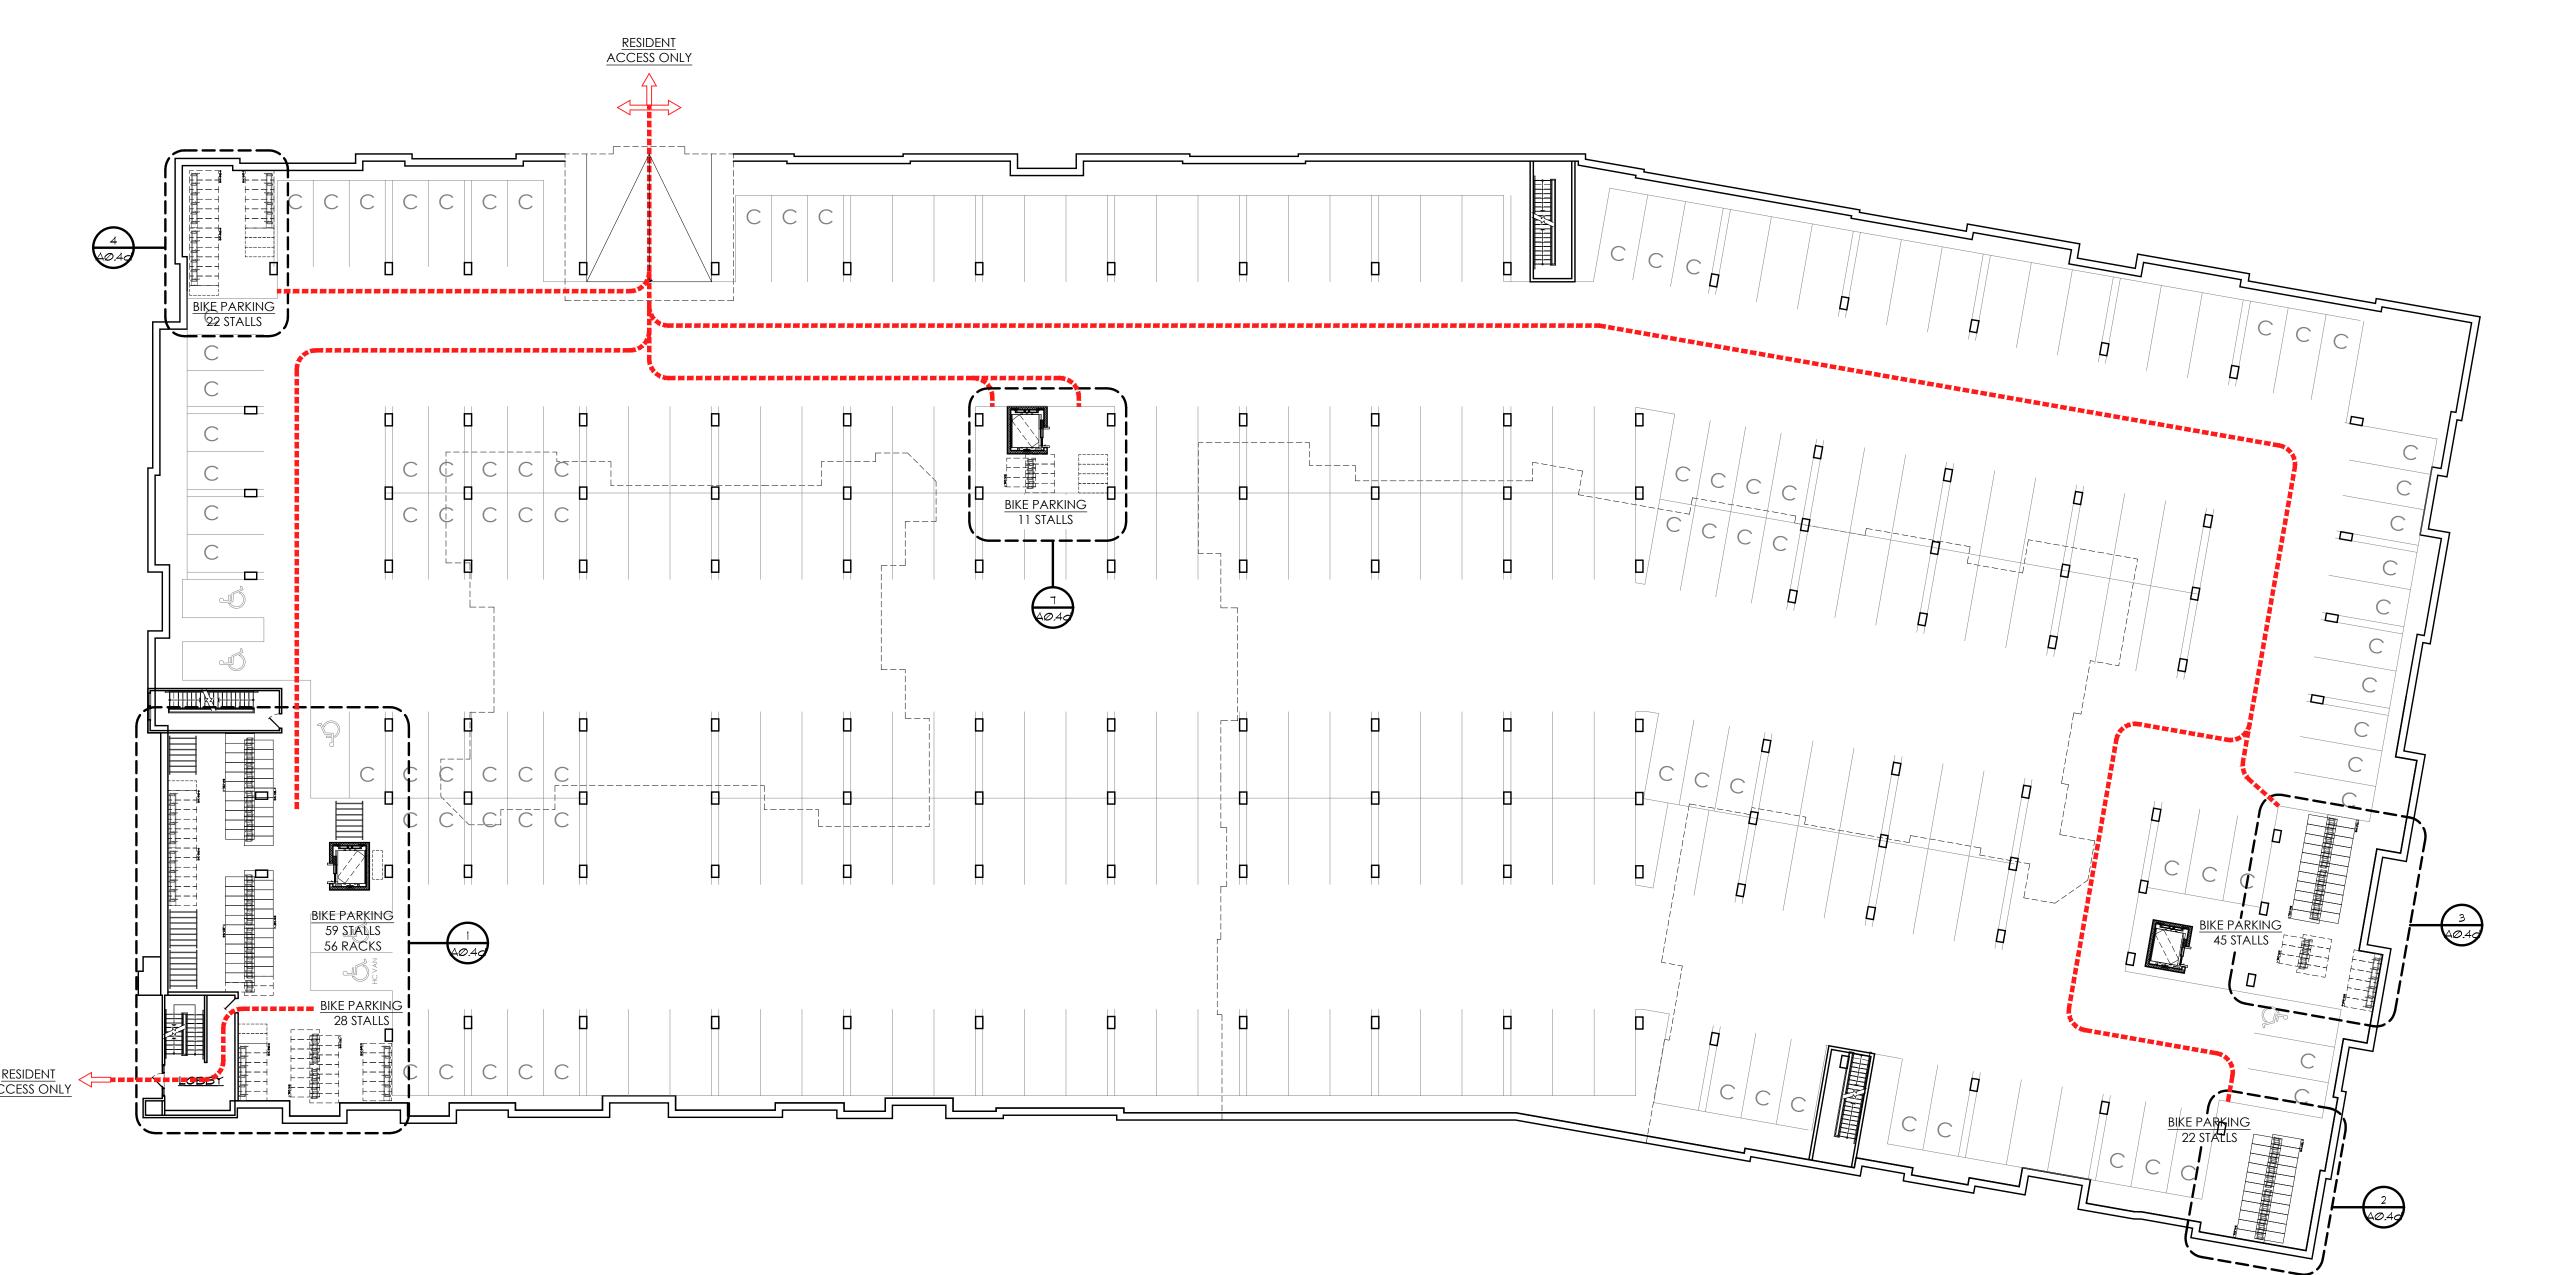

Bicycle Parking Plan - Garage


Scale: 1" = 20'

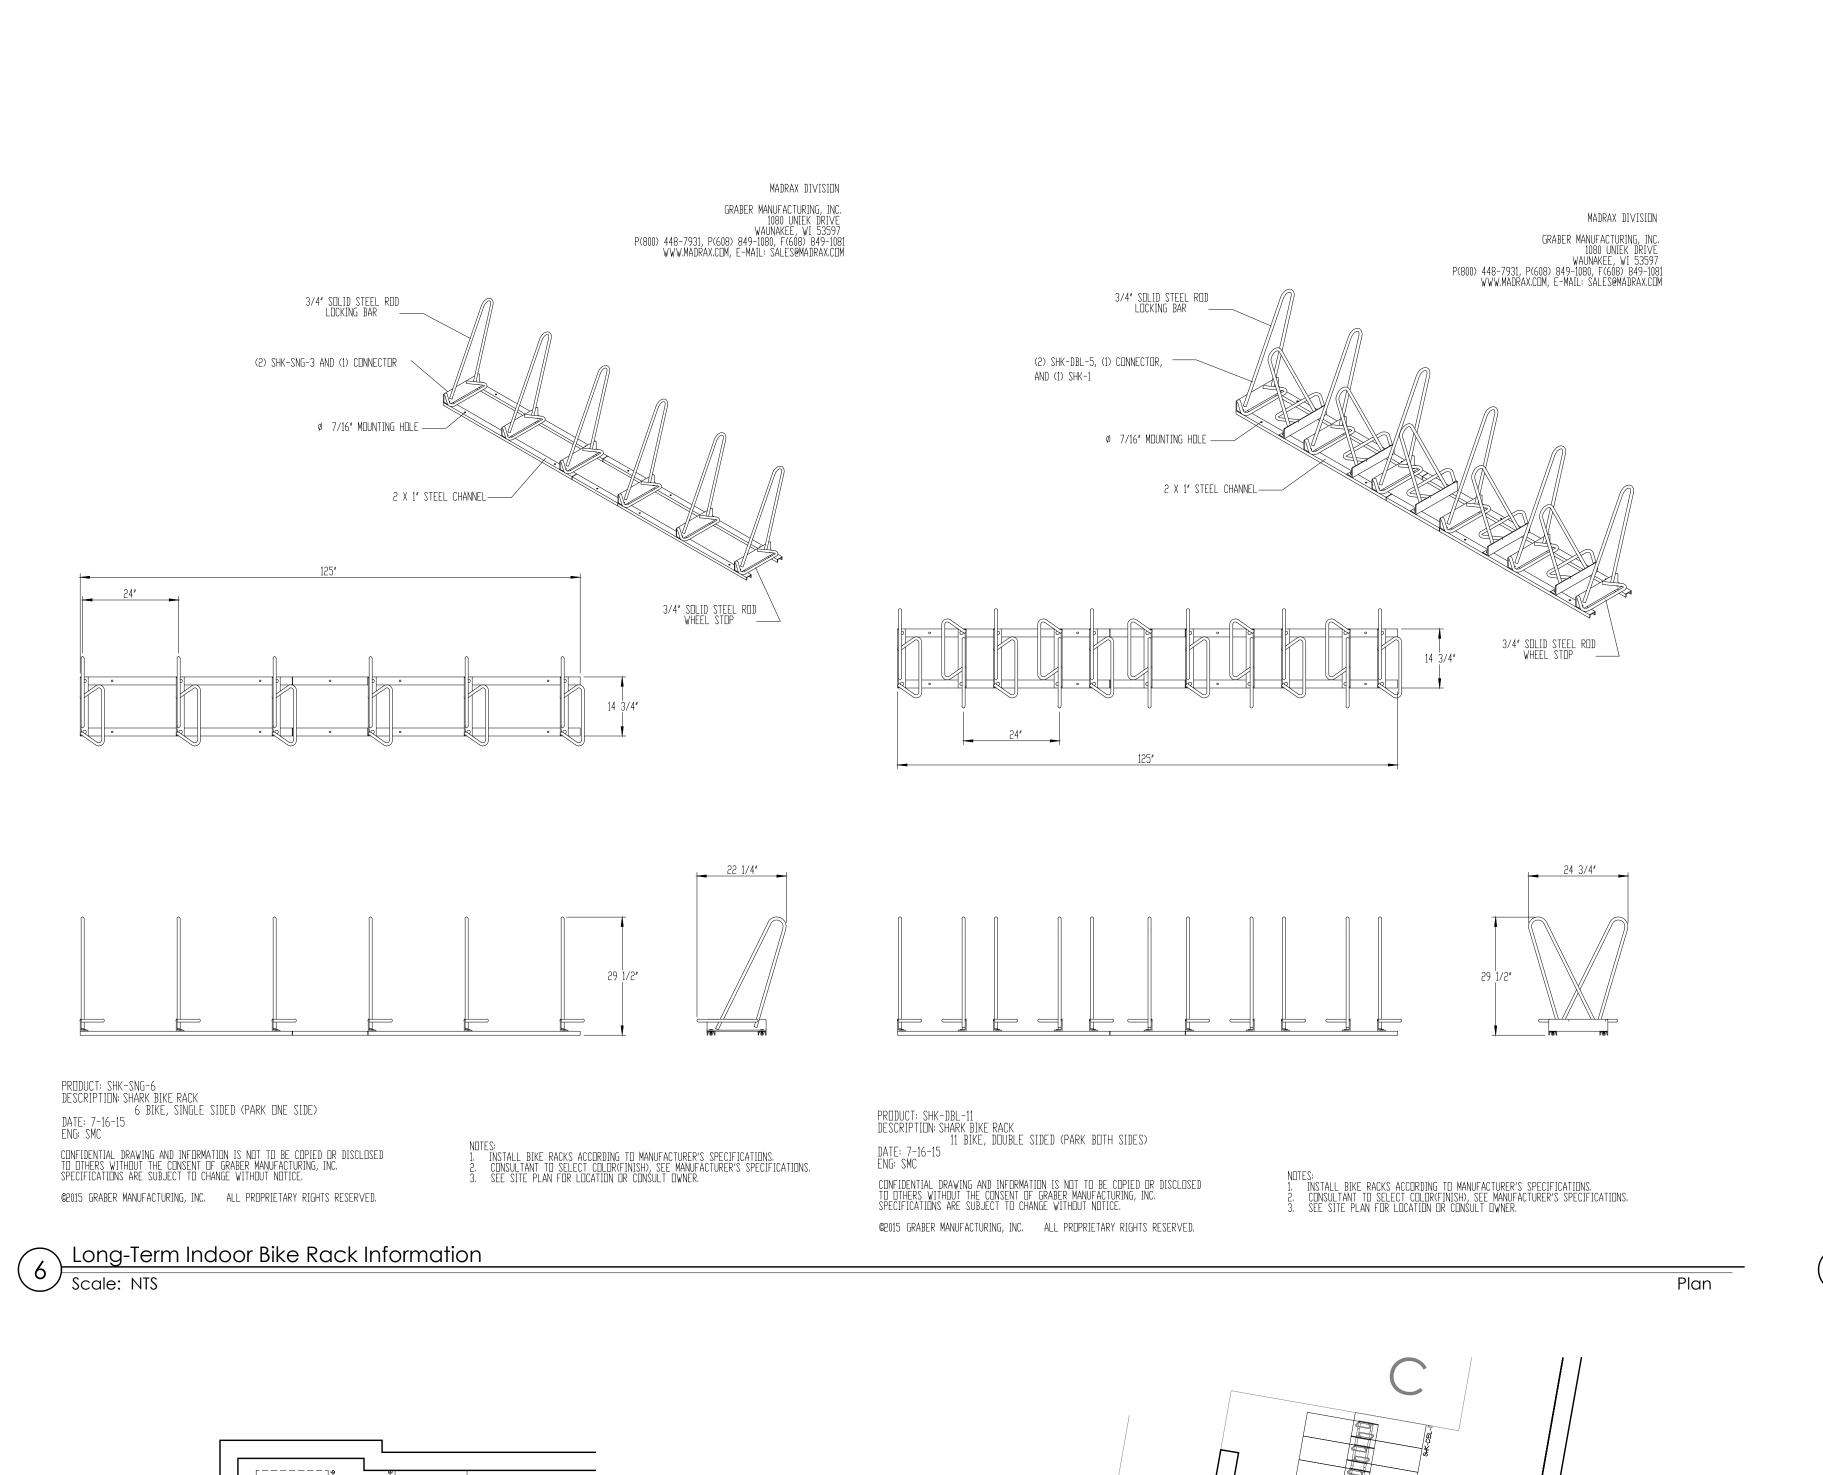


Scale: 1/8" = 1'-0"

Enlarged Plan at Bicycle Parking in Garage

Scale: 1/8" = 1'-0"

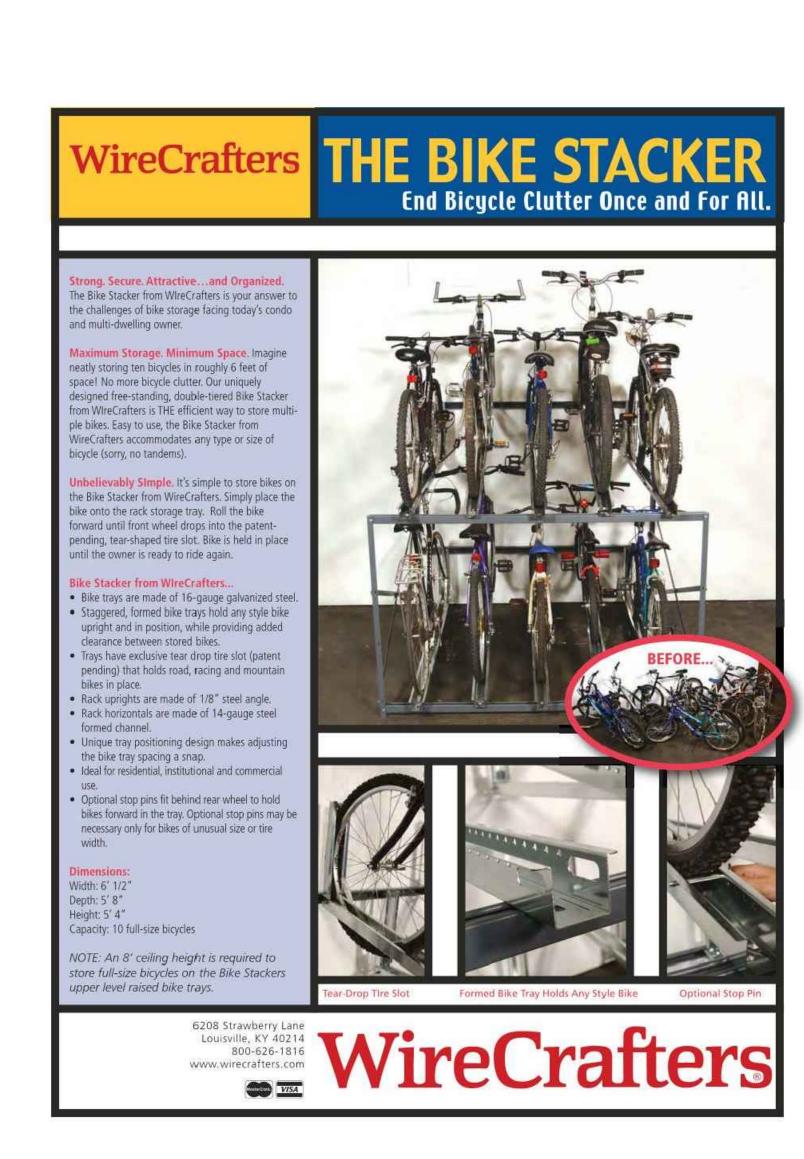



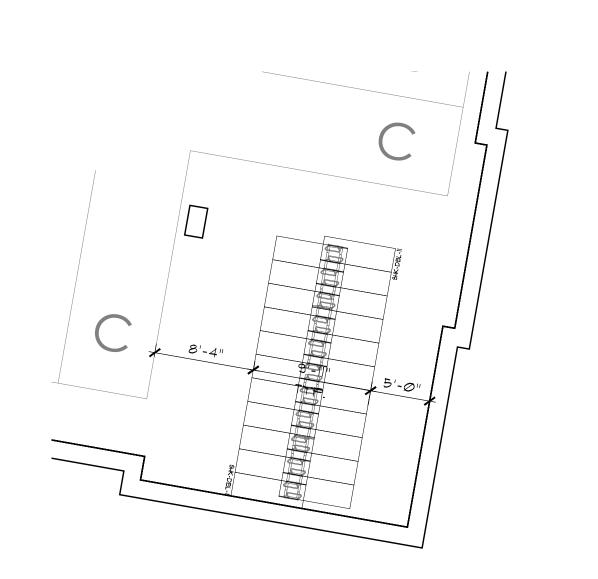


Enlarged Plan at Bicycle Parking in Garage


Scale: 1/8" = 1'-0"

### GENERAL BIKE NOTES

- Bicycle parking provided per Section 28.141 (4) and Table 281-3 of the City of Madison Zoning Code.
- 2. Refer to Civil drawings for exterior bike parking locations and rack information.
- 3. Structured interior bike parking to be WireCrafters "Bike Stacker" model no. BK814 or similar.
- 4. Structured interior bike wall-mount parking to be Madrax "Bike Storage Vertical."
- 5. Building and Garage bike racks to be Madrax "Shark" single and double loaded models.
- 6. Bike repair stations to be Securabike model no. BBRS01 or similar.
- 7. All garage-located bike parking stalls are 2'-0" wide by 6'-0" deep with at least a 5'-0" access aisle.
- 8. Indicates bike path to exit the property.

	BICYC	LE PARKING CHAI	RT	
	RE	SIDENTIAL - MULTI-FAM	ILY	COMMERCIAL
TYPE	1 & 2 BEDROOM	3 BEDROOM	GUESTS	COMMERCIAL
REQUIREMENT	1 BIKE PER UNIT ( <u>270</u> X 1 )	1-1/2 BIKES PER UNIT ( <u>3</u> X 1.5 )	1 BIKE PER 10 UNITS ( <u>270</u> / 10 )	1 BIKE PER 2000 SF ( <u>2494</u> / 2000 )
STALLS REQUIRED (SHORT TERM/LONG TERM)	270 ( 10% / 90% )	0 ( 10% / 90% )	27 ( 100% / 0% )	2 (100%/0%)
STALLS PROVIDED (SHORT TERM/LONG TERM)	270 ( 27 / 243 )	0 (0/0)	27 ( 27 / 0 )	2 (2/0)
				299 REQUIRED 299 PROVIDED
	ВІС	CYCLE PARKING PROVID	DED	
USE	TERM	LOCATION	TYPE	NO. OF STALLS
COMMERCIAL	SHORT TERM	OUTDOOR	RACKS	2
residential	SHORT TERM	OUTDOOR	RACKS	54
RESIDENTIAL	LONG TERM	INDOOR (GARAGE)	STRUCTURED	56
residential	LONG TERM	INDOOR	RACKS	-
residential	LONG TERM	INDOOR (GARAGE)	RACKS	187
		I		299 TOTAL

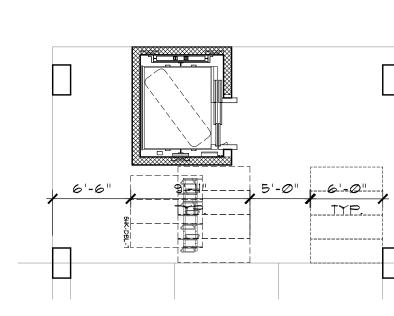

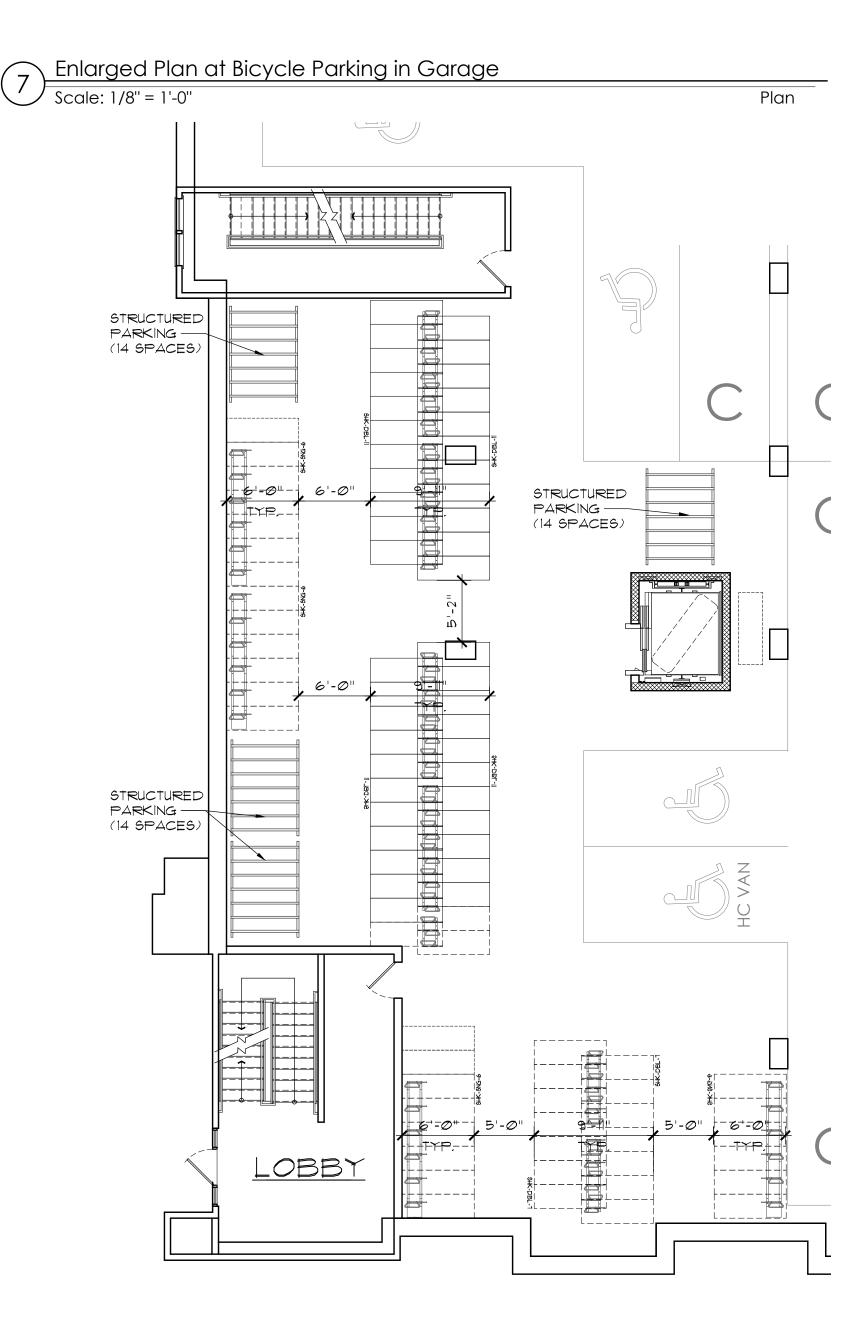



MICHAEL R. POOLE A-11791 MIDLOTHIAN,

POOLE & POOLE ARCHITECTURE 3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113

Telephone 804.225.0215 www.2pa.net

1819.00 Project: CADD File: MSSP TJG Drawn By: TJG Checked By:

Permit Release: Construction Release Set:


Revisions No. Date Description

ASI / RFI Revisions No. Date Description

Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall not be used or reproduced in whole or part in any form without prior written consent of Poole & Poole

Drawing Title:
Bicycle Parking Enlarged Plans and Details

**A0.4d** 

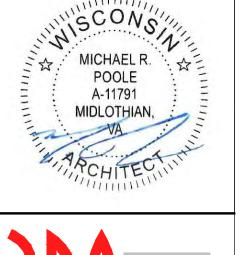



POOLE & POOLE ARCHITECTURE 3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113 Telephone 804.225.0215 www.2pa.net

Project: CADD File: 1819.00 MSBD Drawn By: TJG TJG Checked By:

Permit Release:


Construction Release Set:

Revisions No. Date Description


ASI / RFI Revisions No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.

Drawing Title:
Building Plan
Level B (Garage)

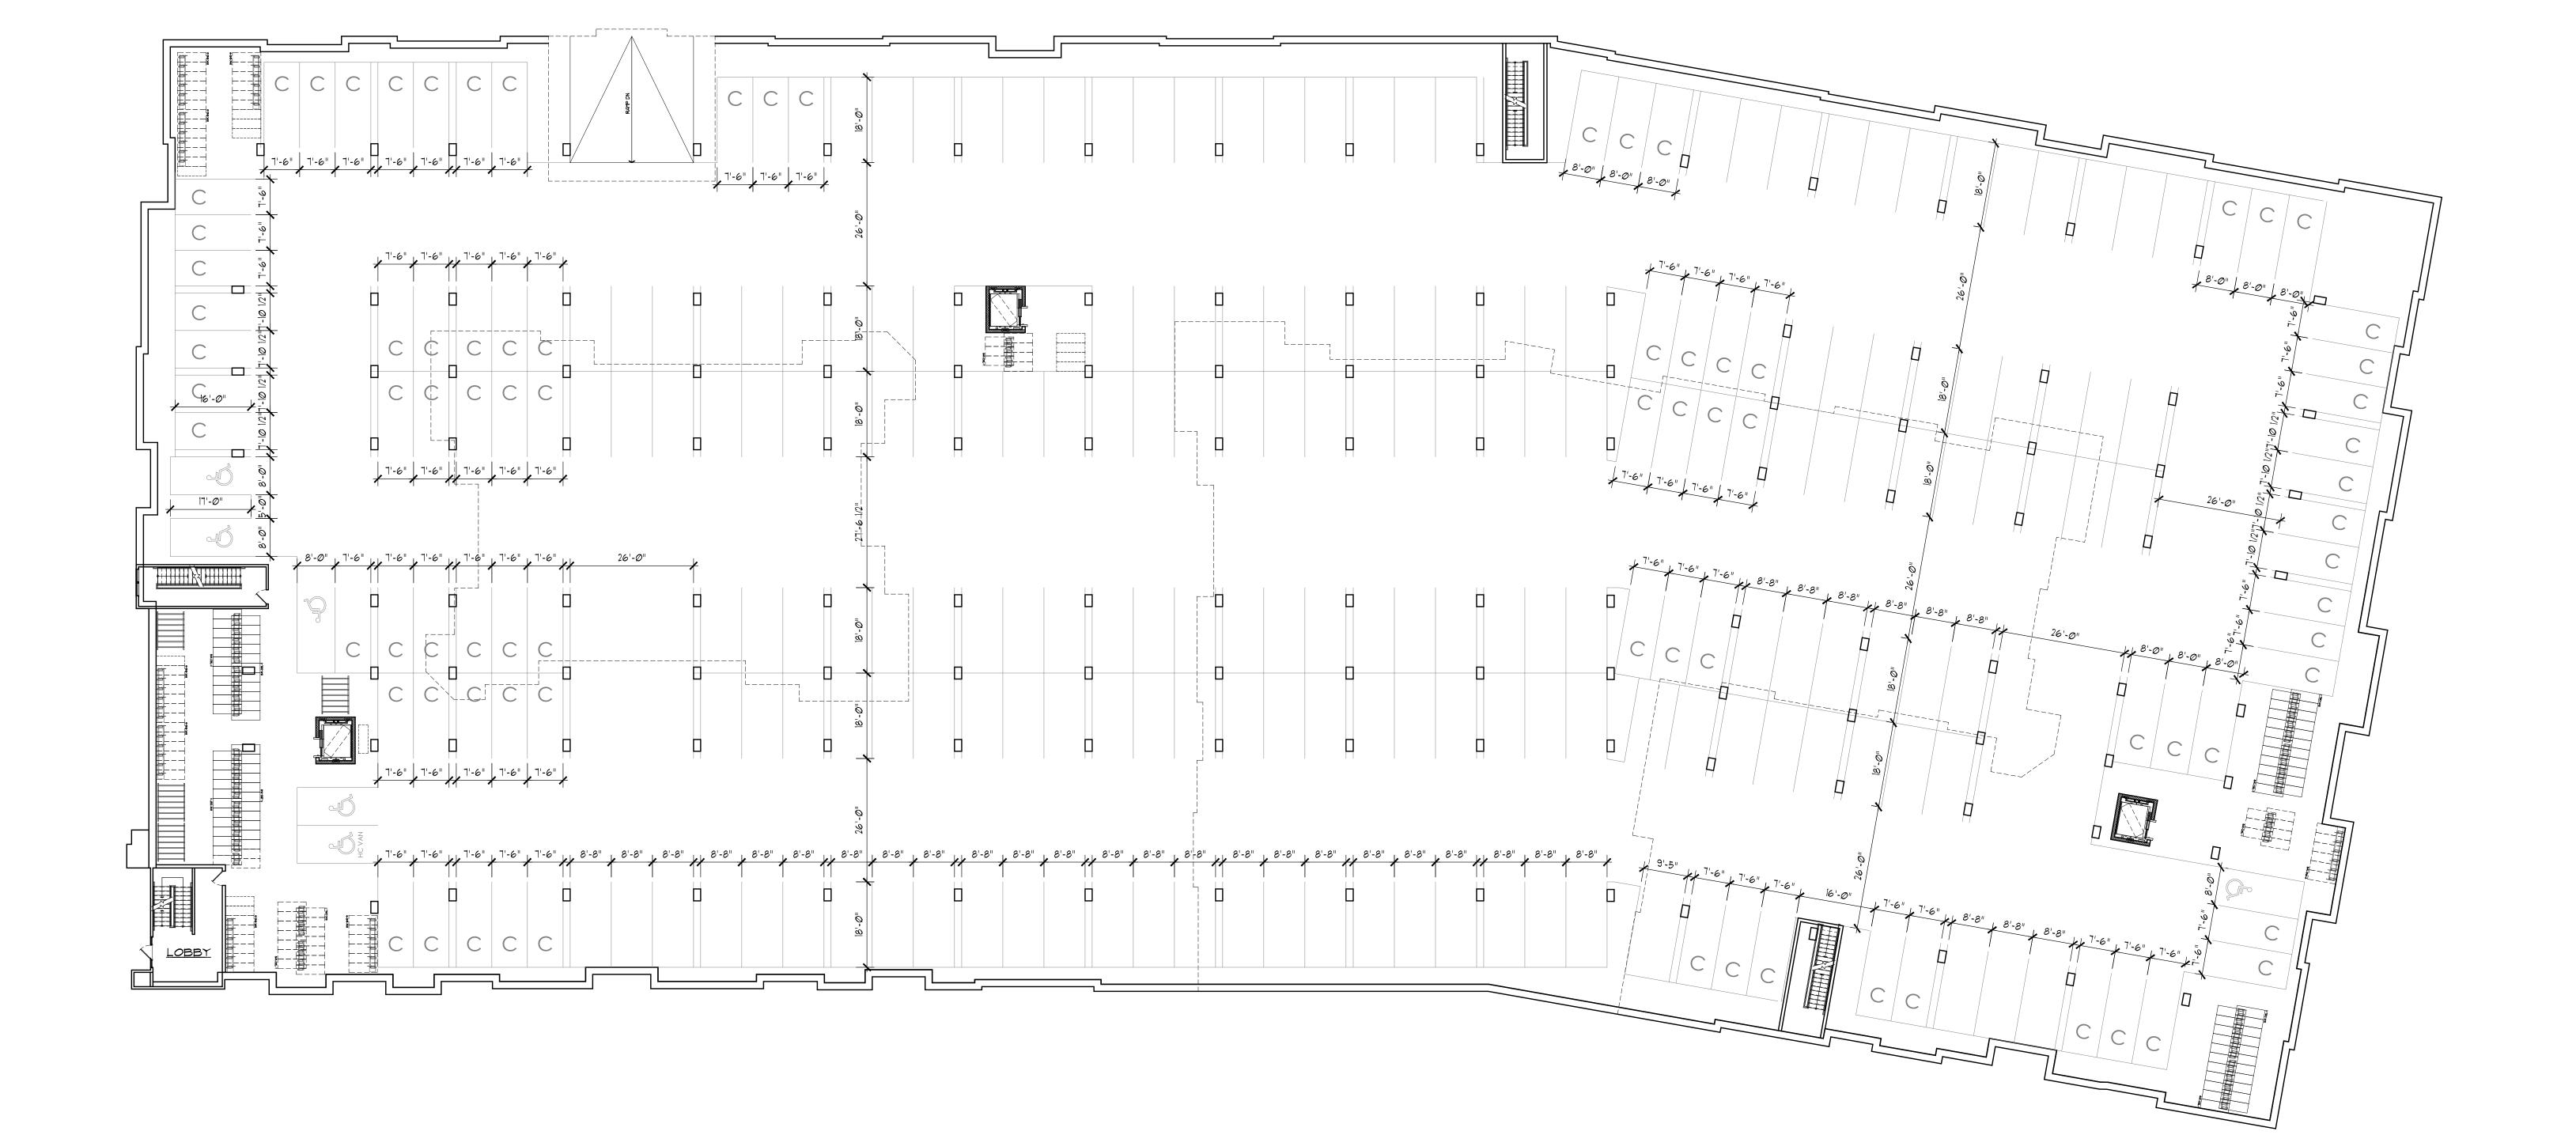



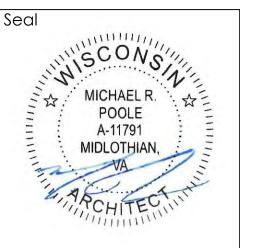

**POOLE & POOLE ARCHITECTURE**3736 Winterfield Road, Suite 102
Midlothian, Virginia 23113

Telephone 804.225.0215
www.2pa.net

Project: 1819.00
CADD File: MSBD
Drawn By: TJG
Checked By: TJG

Permit Release: -

Construction Release Set:

Revisions
No. Date Description

ASI / RFI Revisions
No. Date Description

Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall be used or reproduced in whole or part in any form without prior written consent of Poole & Poole Architecture, LLC.

without prior written consent of Poole & Poole
Architecture, LLC.


unity by ners, LLC v of Madison, Wl

an Apartment Community by ampbell Madison Partners, Ll ımerican Parkway, City of Ma

 $\bigotimes$ 

Drawing Title:
Building Plan
Level 1



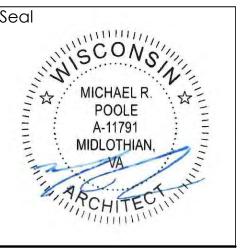

**POOLE & POOLE ARCHITECTURE**3736 Winterfield Road, Suite 102
Midlothian, Virginia 23113

Telephone 804.225.0215 www.2pa.net

Project: 1819.00
CADD File: MSBD
Drawn By: TJG
Checked By: TJG

-Construction Release Set:

Permit Release:

-Revisions

No. Date Description

ASI / RFI Revisions

No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.


ectore, etc.

rtment Community by Il Madison Partners, LLC n Parkway, City of Madison, W

American Po

Drawing Title:
Building Plan
Level 2



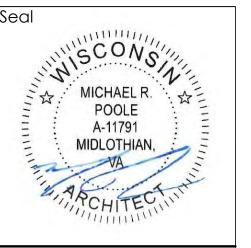

**POOLE & POOLE ARCHITECTURE**3736 Winterfield Road, Suite 102
Midlothian, Virginia 23113
Telephone 804.225.0215
www.2pa.net

Project: 1819.00
CADD File: MSBD
Drawn By: TJG
Checked By: TJG

Permit Release:
Construction Release Set:

-Revisions

No. Date Description

ASI / RFI Revisions

No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.


nent Community by Aadison Partners, LLC Parkway, City of Madison, WI

American Parl

 $\boxtimes$ 

Drawing Title:
Building Plan
Level 3



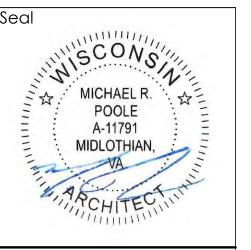

**POOLE & POOLE ARCHITECTURE** 3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113

Telephone 804.225.0215
www.2pa.net

Project: 1819.00
CADD File: MSBD
Drawn By: TJG
Checked By: TJG

Permit Release: -

Construction Release Set:

Revisions
No. Date Description

ASI / RFI Revisions
No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall not be used or reproduced in whole or part in any form without prior written consent of Poole & Poole
Architecture, LLC

property of Poole & Poole Architecture, LLC and shal be used or reproduced in whole or part in any form without prior written consent of Poole & Poole Architecture, LLC.

munity by artners, LLC

an Apartment Community Campbell Madison Partners, 20 American Parkway, City of *I* 

 $\sim$ 

Drawing Title: Building Plan Level 4

### ROOFING GENERAL NOTES

- All 1/4:12 roofing to be TPO single ply membrane (chemical or mechanically fastened.) Penetration and transition details per manufacturer installation instructions. See plan for direction. Slope is a minimum 1/4:12 unless noted otherwise on plan.
- 2. Locate secondary drain (S.D.) a minimum of 24" from primary drain (P.D.), typ. Secondary drain shall be 2" (4" max.) above primary drain. Downspout nozzle (15/A2.6a) to be provided at all secondary drains at the locations shown in roof plan (S.D.N.), unless otherwise noted. Install 'sump-pit' at all roof drain locations per detail 15/A2.6a.
- 3. Double layer of TPO membrane roof for work area adjacent to mechanical units, hatch indicates.
- 4. Exterior walls adjacent to flat roof platforms to be TPO for 12" min./ 36" max. above roof trusses. Remaining wall surface to be horizontal cementitious siding.
- 5 Roof truss depth to be 30" minimum.
- 6. Attic access panels to be provided, located as shown. AP1 is a 2'x4' ceiling access panel. All access panels shall maintain sam rating of the assembly and have self closing hardware. Refer to details on 1/A2.8d. Locations shown in plan with this symbol:
- 7 Provide taller top plate height at locations shown hatched = 11'-1-1/8" = 10'-1-1/8"
- 8. Provide screen wall at locations where roof equipment or roof access hatch is less than 10'-0" from the roof edge/parapet.
- P. Refer to area drainage calculation chart for size of primary and secondary roof drain. Primary roof drain to run vertical through the building as shown in plan. Refer to MEP for continuation below slab. Secondary drain line typically runs horizontal in roof truss cavity and daylight at a downspout nozzle in the exterior building wall. Locations are noted at Bldg 7 & Bldg 8 where secondary drain lines run vertical through the building.
- 10. No roof penetrations are allowed 4'-0" on each side of a firewall or building area separation wall. Extents of no penetration zon is shown with this hatch pattern:
- 11. X'-X" PRPT indicates distance from top plate to top of parapet wall.
- 12. Draftstopping not required in attics per IBC 717.3.2, Exception 1.
- 13. Refer to detail 2/A2.6c for Roof Drainage Diagram and Subdivision for sizing of drain pipe.

MICHAEL R. POOLE
A-11791
MIDLOTHIAN,

POOLE & POOLE ARCHITECTURE 3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113

Telephone 804.225.0215 www.2pa.net Project: 1819.00 MSRP

Drawn By: TJG TJG Checked By: Permit Release:

Construction Release Set:

Revisions No. Date Description

ASI / RFI Revisions


No. Date Description

Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall not

be used or reproduced in whole or part in any form without prior written consent of Poole & Poole

Roof Details

Table

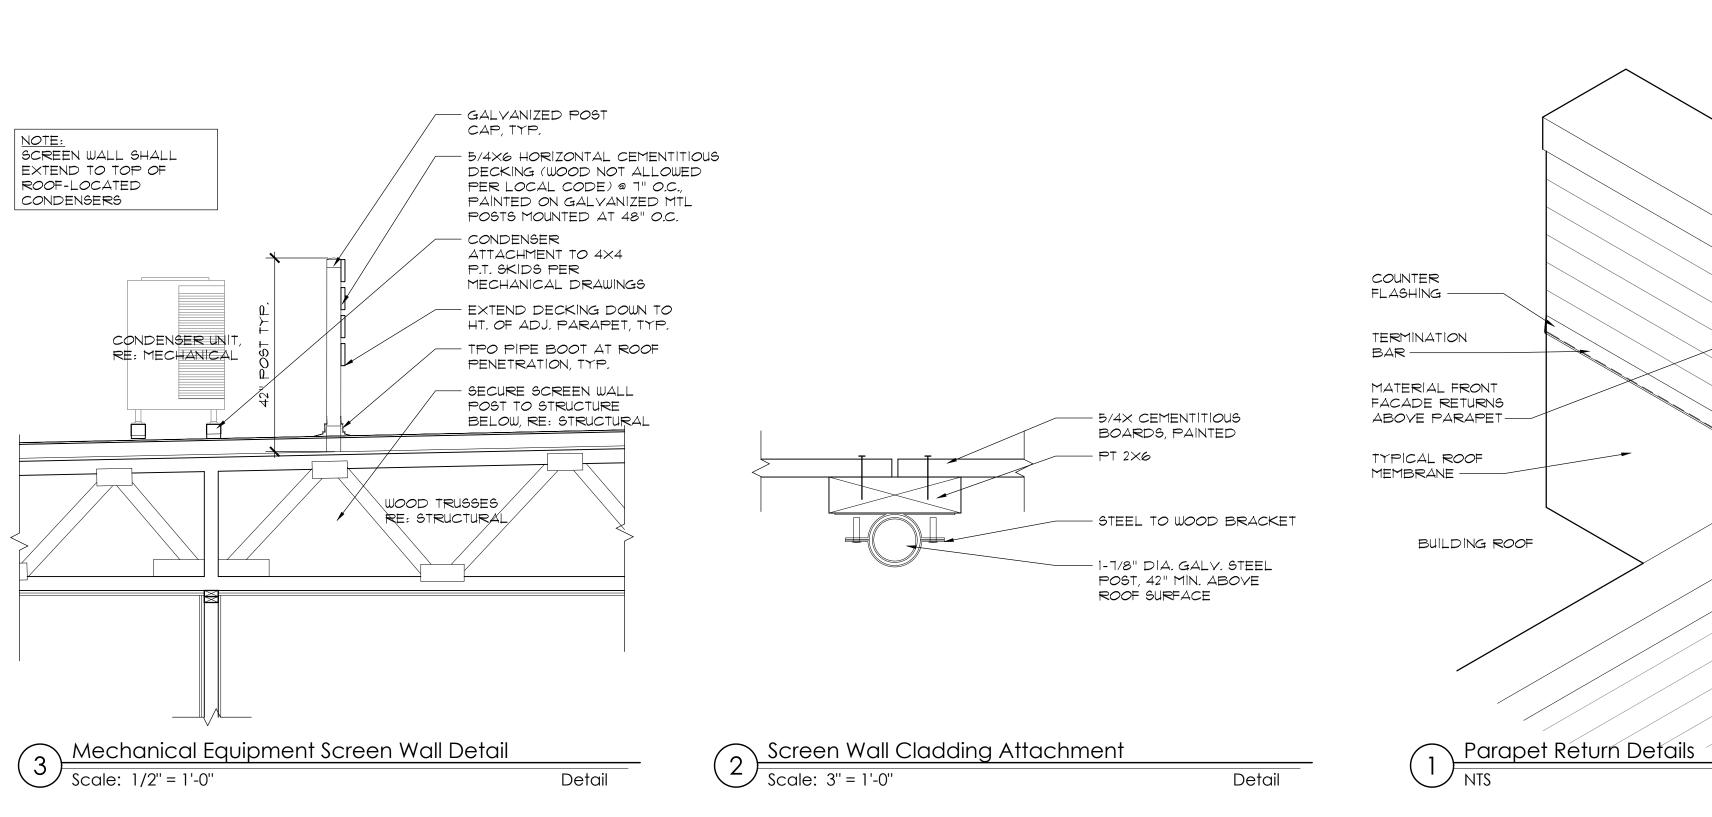



MICHAEL R.
POOLE
A-11791

POOLE & POOLE ARCHITECTURE

3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113 Telephone 804.225.0215 www.2pa.net

Project: MSRP Drawn By: TJG Checked By:

Permit Release:

Construction Release Set:

Revisions No. Date Description

ASI / RFI Revisions No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the property of Poole & Poole Architecture, LLC and shall not be used or reproduced in whole or part in any form without prior written consent of Poole & Poole



Drawing Title: Roof Plan



primary drain. Downspout nozzle (15/A2.6a) to be provided at all secondary drains at the locations shown in roof plan (S.D.N.),

P. Refer to area drainage calculation chart for size of primary and secondary roof drain. Primary roof drain to run vertical through the building as shown in plan. Refer to MEP for continuation below slab. Secondary drain line typically runs horizontal in roof truss cavity and daylight at a downspout nozzle in the exterior building wall. Locations are noted at Bldg 7 & Bldg 8 where secondary

Telephone 804.225.0215 www.2pa.net

Permit Release:

Revisions

MICHAEL R. ☆
POOLE
A-11791

Project: MSRP Drawn By: Checked By: TJG

POOLE & POOLE ARCHITECTURE

3736 Winterfield Road, Suite 102 Midlothian, Virginia 23113

Construction Release Set:

No. Date Description

ASI / RFI Revisions

No. Date Description

© 2019 Poole & Poole Architecture, LLC
Drawings and specifications are and shall remain the
property of Poole & Poole Architecture, LLC and shall not
be used or reproduced in whole or part in any form
without prior written consent of Poole & Poole
Architecture, LLC.

Drawing Title: Roof Plan

## SITE ANALYSIS AND SITE, GRADING, EROSION CONTROL, PAVING, UTILITY AND LANDSCAPE PLANS

LEGEND

### PROPOSED EXISTING INDICATES RECORDED DIMENSION CONTROL BOX RAILROAD CROSSING SIGNAL SPOT/PEDESTAL/PAVER ACCENT LIGHT HANDICAPPED PARKING GAS WARNING SIGN ROUND INLET OR CATCH BASIN STORM SEWER END SECTION CLEANOUT OR VENT MISCELLANEOUS MANHOLE WATER SERVICE CURB STOP WETLANDS FLAG DECIDUOUS TREE -EDGE OF TREES -GRAVITY SANITARY SEWER -SANITARY FORCE MAIN -STORM SEWER -WATFRMAIN -GAS MAIN -ELECTRIC SERVICE -OVERHEAD WIRES -BUREAU ELEC. SERV. -TELEPHONE SERVICE -MARKED CABLE TV LINE -MARKED FIBER OPTIC -GRAVITY LEACHATE SYSTEM -LEACHATE FORCE MAIN -EXISTING UTILITY TO BE ABANDONED XXXXXXXX IN PLACE -EXISTING MANHOLE/INLET TO BE ABANDONED IN PLACE OR EXISTING LIGHT POLE AND BASE TO BE PROPOSED 1-FOOT GRADE CONTOUR <del>-----</del> 870 <del>----</del> PROPOSED 5-FOOT GRADE CONTOUR × 780.55 SPOT/CURB FLOW LINE ELEVATION × (780.55) TOP OF CURB SPOT ELEVATION TEMPORARY INLET PROTECTION 2898 PROPOSED CONSTRUCTION ENTRANCE CONCRETE SIDEWALK PAVEMENT ASPHALT PAVEMENT

### SIGN LEGEND


PROPOSED LANDSCAPE AREA








### AMERICAN PARKWAY MULTI-FAMILY CITY OF MADISON, WISCONSIN

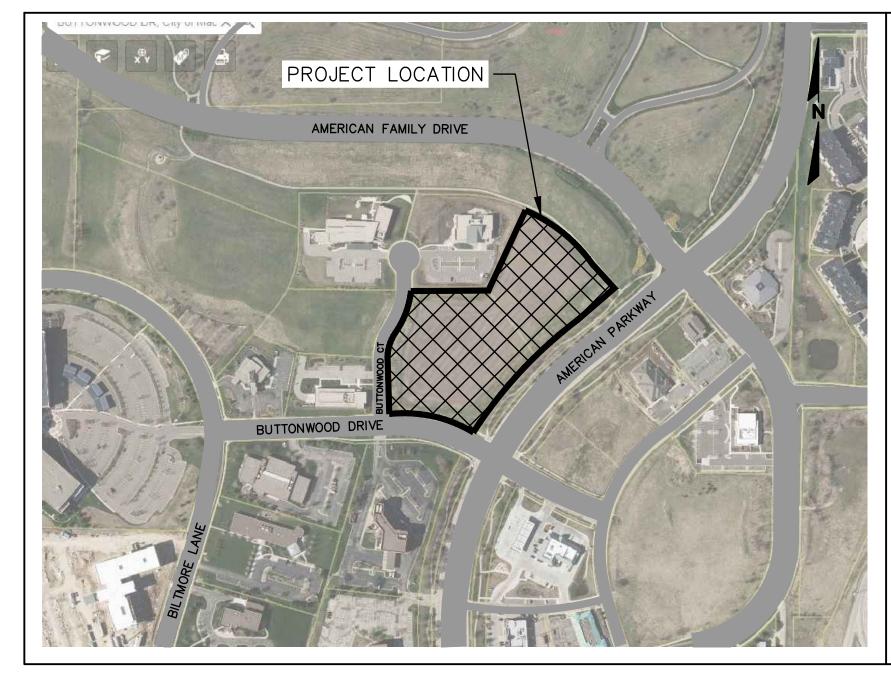

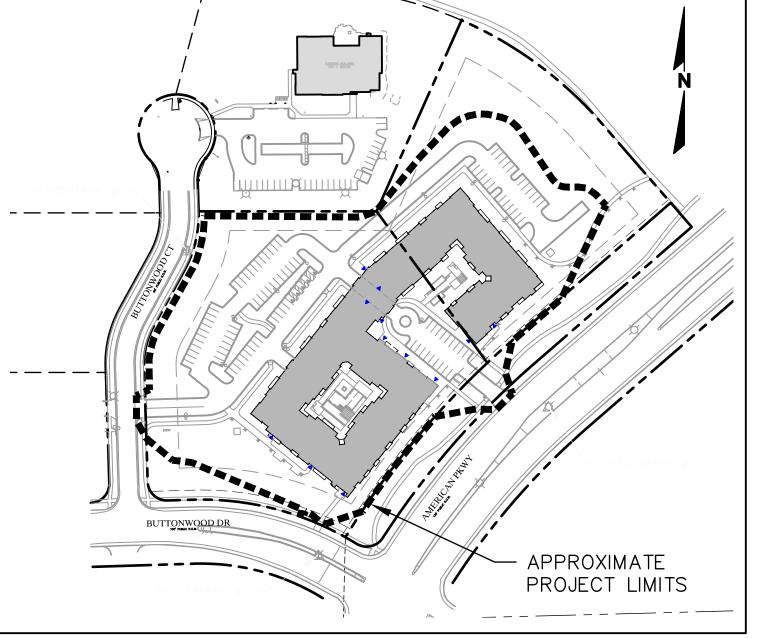

LOCATION MAP

SCALE: 1"=150'

# PLAN SHEET NO. C000 C100 C101 C200 C300 C400 C501 C502 C503 C504 C505 L100 L200 SX01

**DESCRIPTION** COVER SHEET SITE ANALYSIS DEMOLITION & INITIAL EROSION CONTROL PLAN SITE & PAVING PLAN GRADING & DRAINAGE PLAN UTILITY PLAN **SPECIFICATIONS** EROSION CONTROL DETAILS PAVING DETAILS SITE DETAILS UTILITY DETAILS STORMWATER DETAILS LANDSCAPE PLAN LANDSCAPE DETAILS & NOTES FIRE ACCESS EXHIBIT

**INDEX** 

### SCALE: NOT TO SCALE

VICINITY MAP

### **GENERAL NOTES**

- 1. THE CONTRACTOR SHALL NOTIFY THE OWNER AND THE MUNICIPALITY FORTY— EIGHT (48) HOURS PRIOR TO THE START OF CONSTRUCTION.
- 2. THE CONTRACTOR SHALL INDEMNIFY THE OWNER, THE ENGINEER, AND THE MUNICIPALITY, THEIR AGENTS, ETC, FROM ALL LIABILITY INVOLVED WITH THE CONSTRUCTION, INSTALLATION, AND TESTING OF THE WORK ON THIS PROJECT.
- 3. SITE SAFETY SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- 4. THE BIDDER WILL BE SOLELY RESPONSIBLE FOR DETERMINING QUANTITIES AND SHALL STATE SUCH QUANTITIES IN HIS PROPOSAL. HE SHALL BASE HIS BID ON HIS OWN ESTIMATE OF THE WORK REQUIRED AND SHALL NOT RELY ON THE ENGINEER'S ESTIMATE.
- 5. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING SOIL CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION. A GEOTECHNICAL REPORT IS AVAILABLE FROM THE OWNER. THE CONTRACTOR SHALL ABIDE BY THE RECOMMENDATIONS OF THE GEOTECHNICAL ENGINEER.
- 6. THE CONTRACTOR IS RESPONSIBLE FOR EXAMINING ALL SITE CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION AND SHALL COMPARE FIELD CONDITIONS WITH DRAWINGS.
- 7. THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS REQUIRED FOR EXECUTION OF THE WORK. THE CONTRACTOR SHALL CONDUCT HIS WORK ACCORDING TO THE REQUIREMENTS OF THE PERMITS.
- 8. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL UTILITY INFORMATION SHOWN ON THE PLANS PRIOR TO THE START OF CONSTRUCTION. THE CONTRACTOR SHALL CALL DIGGERS HOTLINE TO NOTIFY THE UTILITIES OF HIS INTENTIONS, AND TO REQUEST FIELD STAKING OF EXISTING LITHLITES.
- 9. CONTRACTOR IS ADVISED THAT ALL MUD AND DEBRIS MUST NOT BE DEPOSITED ONTO THE ADJACENT ROADWAYS PER THE REQUIREMENT OF THE MUNICIPALITY OR OTHER APPROPRIATE GOVERNMENT AGENCIES.
- 10. ANY ADJACENT PROPERTIES OR ROAD RIGHT-OF-WAYS WHICH ARE DAMAGED DURING CONSTRUCTION MUST BE RESTORED BY THE CONTRACTOR. THE COST OF THE RESTORATION IS CONSIDERED INCIDENTAL, AND SHOULD BE INCLUDED IN THE BID PRICES.
- 11. VERTICAL DATUM IS NAVD1927.
- 12. TOPOGRAPHIC AND EXISTING CONDITIONS SHOWN HERON TAKEN FROM A PLAN ENTITLED "ALTA/NSPS LAND TITLE SURVEY WITH TOPOGRAPHIC DATA" PREPARED BY RASMITH, DATED APRIL 18, 2018.
- 13. PRIOR TO CONSTRUCTION IT IS THE CONTRACTOR'S RESPONSIBILITY TO VERIFY THAT THE BENCHMARKS ILLUSTRATED HAVE NOT BEEN DISTURBED AND THEIR ELEVATIONS HAVE BEEN CONFIRMED. ANY CONFLICTS MUST BE REPORTED PRIOR TO CONSTRUCTION

### BENCHMARKS

BENCHMARK #1 CHISELED BOX NW CORNER OF LIGHT POLE BASE ELEVATION: 948.24

BENCHMARK #2 CHISELED BOX NW CORNER OF LIGHT POLE BASE ELEVATION: 942.06

BENCHMARK #3 CHISELED BOX NW CORNER OF LIGHT POLE BASE ELEVATION: 946.33

### PROJECT DIRECTORY

OWNER:
CAMPBELL MADISON PARTNERS, LLC
5887 GLENRIDGE DRIVE NE, SUITE 360
SANDY SPRINGS, GA 30328
PH: 404/495-0884

MUNICIPALITY:
CITY OF MADISON
210 MLK, JR. BLVD, ROOM 115
MADISON, W 53703
CITY ENGINEER
CONTACT: ROBERT F. PHILLIPS, P.E.
PH: 608/264-4751
EMAIL: engineering@cityofmadison.com

SITE CIVIL ENGINEER:

raSmith
16475 W. BLUEMOUND ROAD
SUITE 200
BROOKFIELD, WI 53005
PH: 262/781-1000
PROJECT MANAGER
CONTACT: MATT KOCOUREK
EMAIL: MATT.KOCOUREK@rasmith.com
PROJECT ENGINEER
CONTACT: ROBERT PONTO
EMAIL: robert.ponto@rasmith.com

SURVEYOR:
raSmith
16475 W. BLUEMOUND ROAD
SUITE 200
BROOKFIELD, WI 53005
PH: 262/781-1000
PROJECT MANAGER
CONTACT: ERIC STURM
EMAIL: ERIC.STURM@rasmith.com

## REVISIONS ISSUE DATE SHEET NO.'S ISSUED FOR:

# 16745 W. Bluemound R. Brookfield, WI 53005-59 (262) 781-1000 rasmith.com


# MULTI-FAMILY RWAY


### MERICAN PARKWAY MULT 1520 AMERICAN PARWA CITY OF MADISON DANE COUNTY, WISCONS


PRELIMINARY
NOT FOR
CONSTRUCTION


DATE: **05-08-19**PROJ. NO: **3180058** 


C000

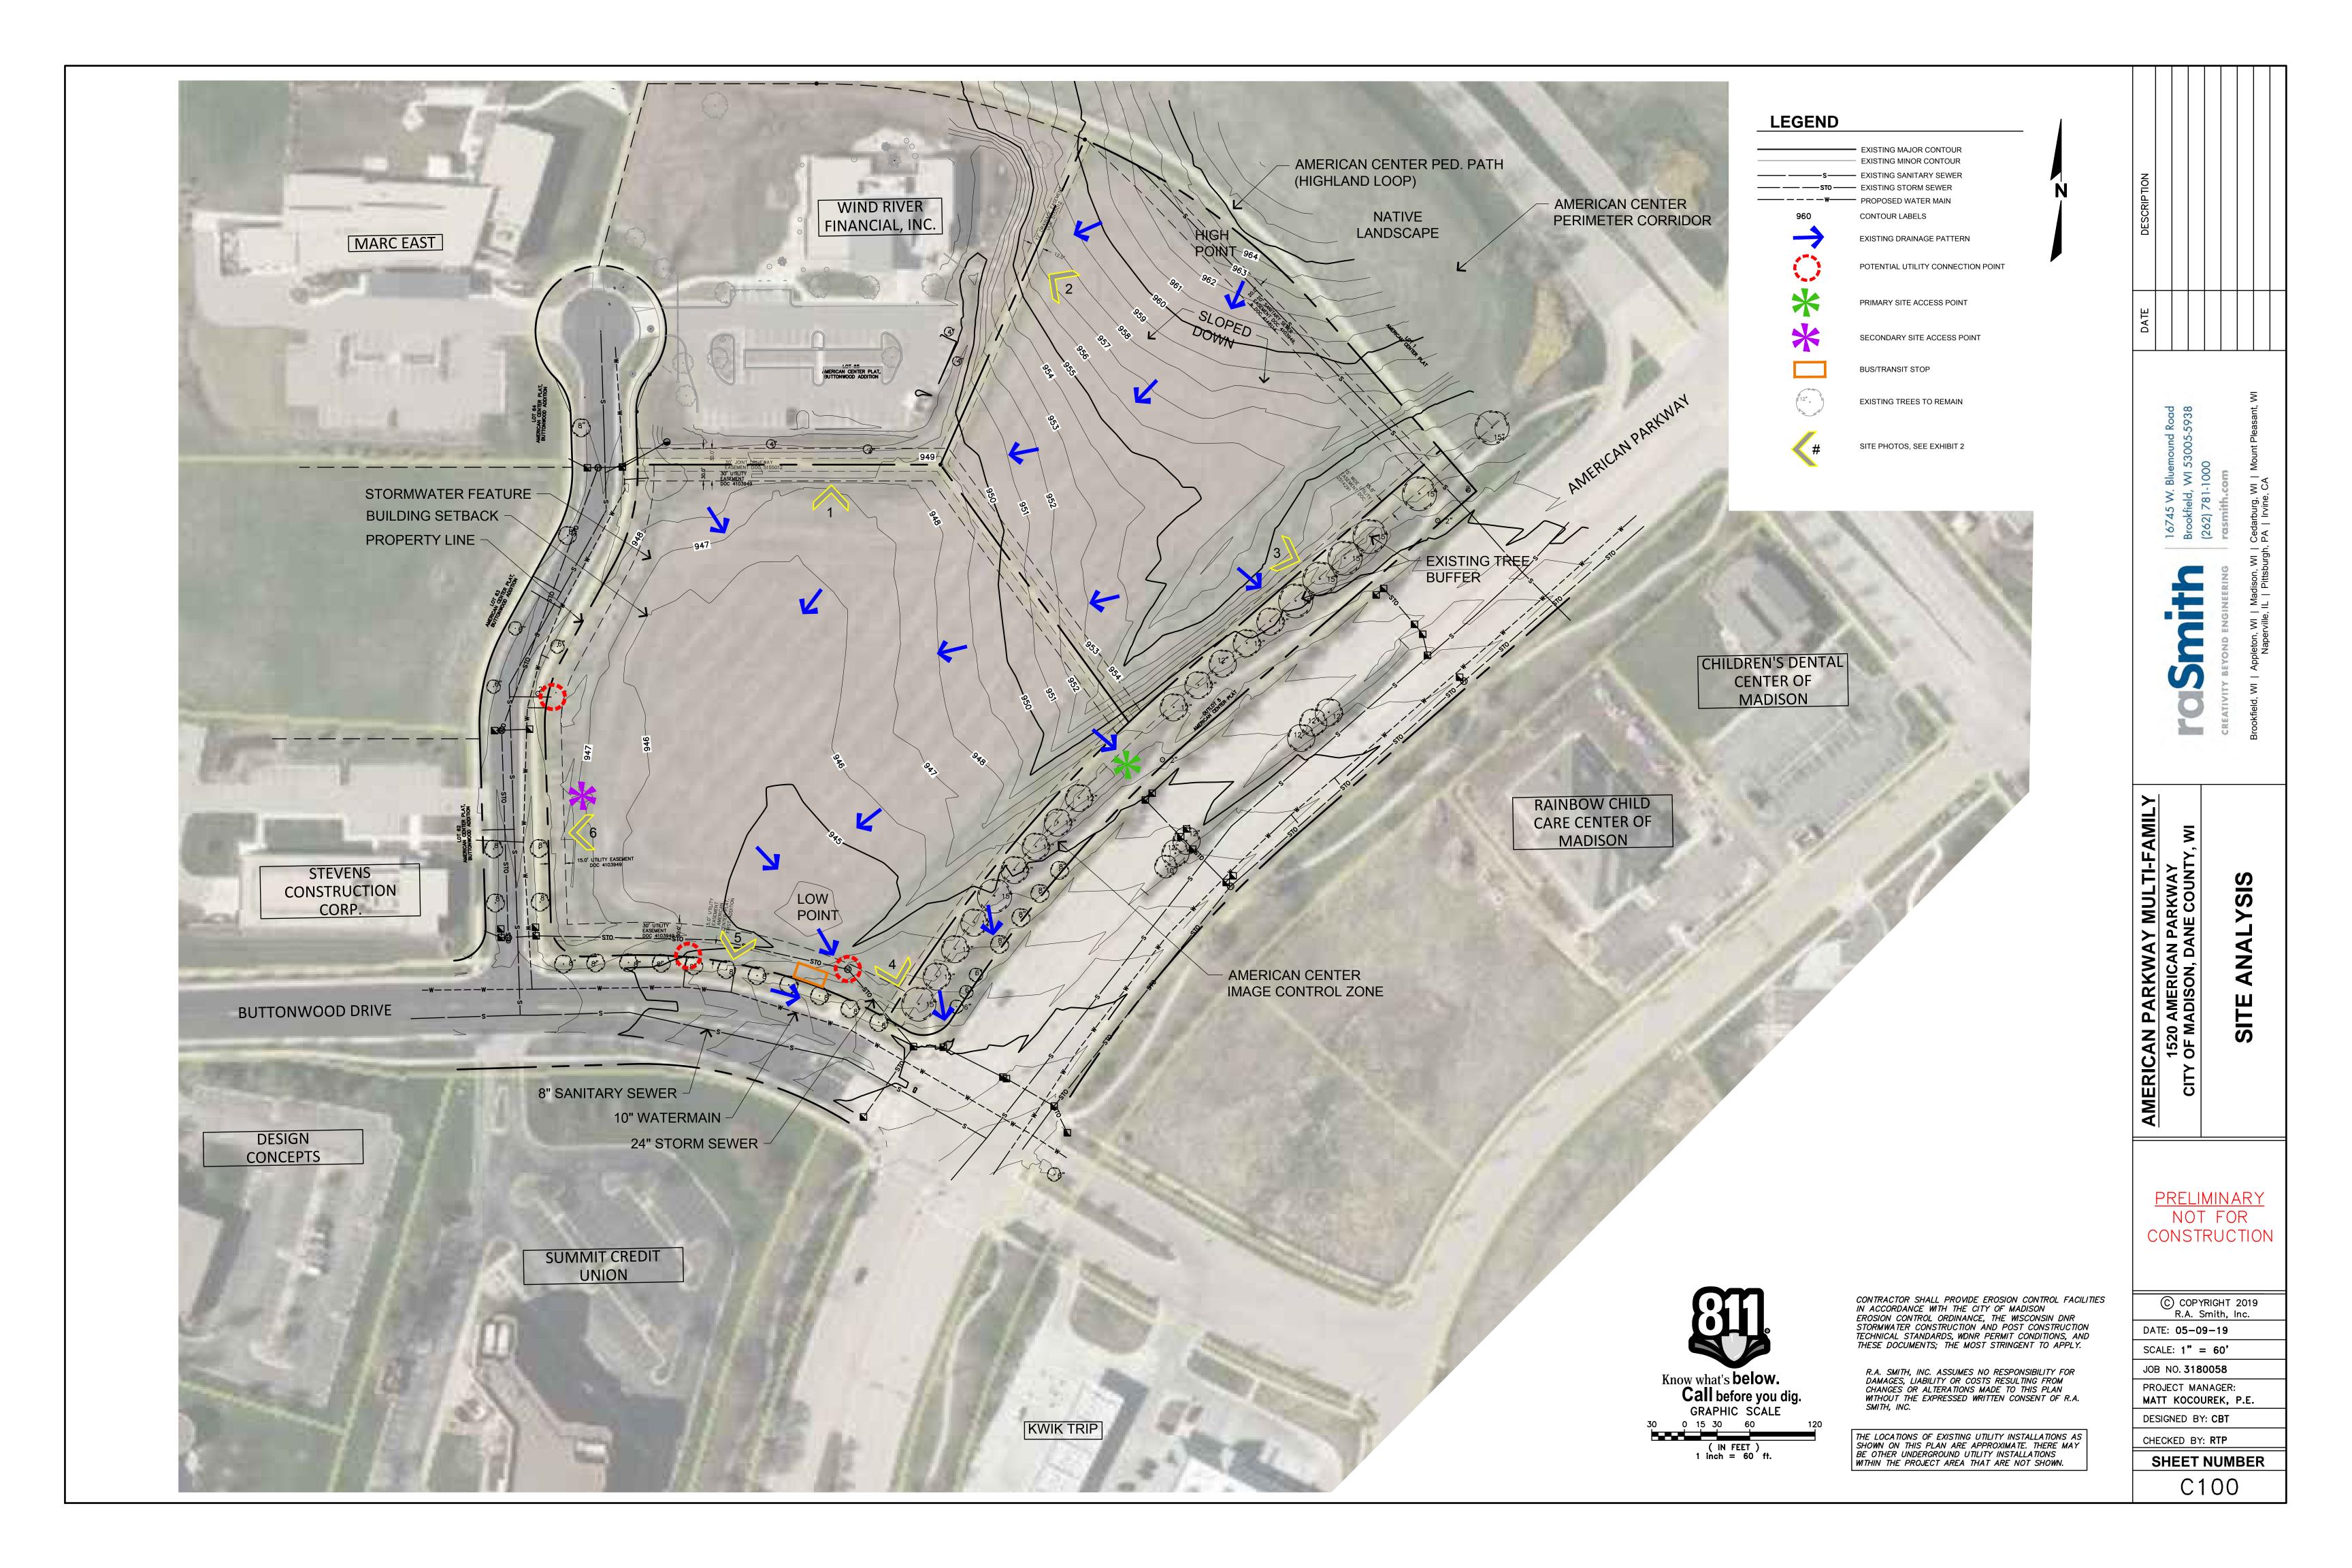

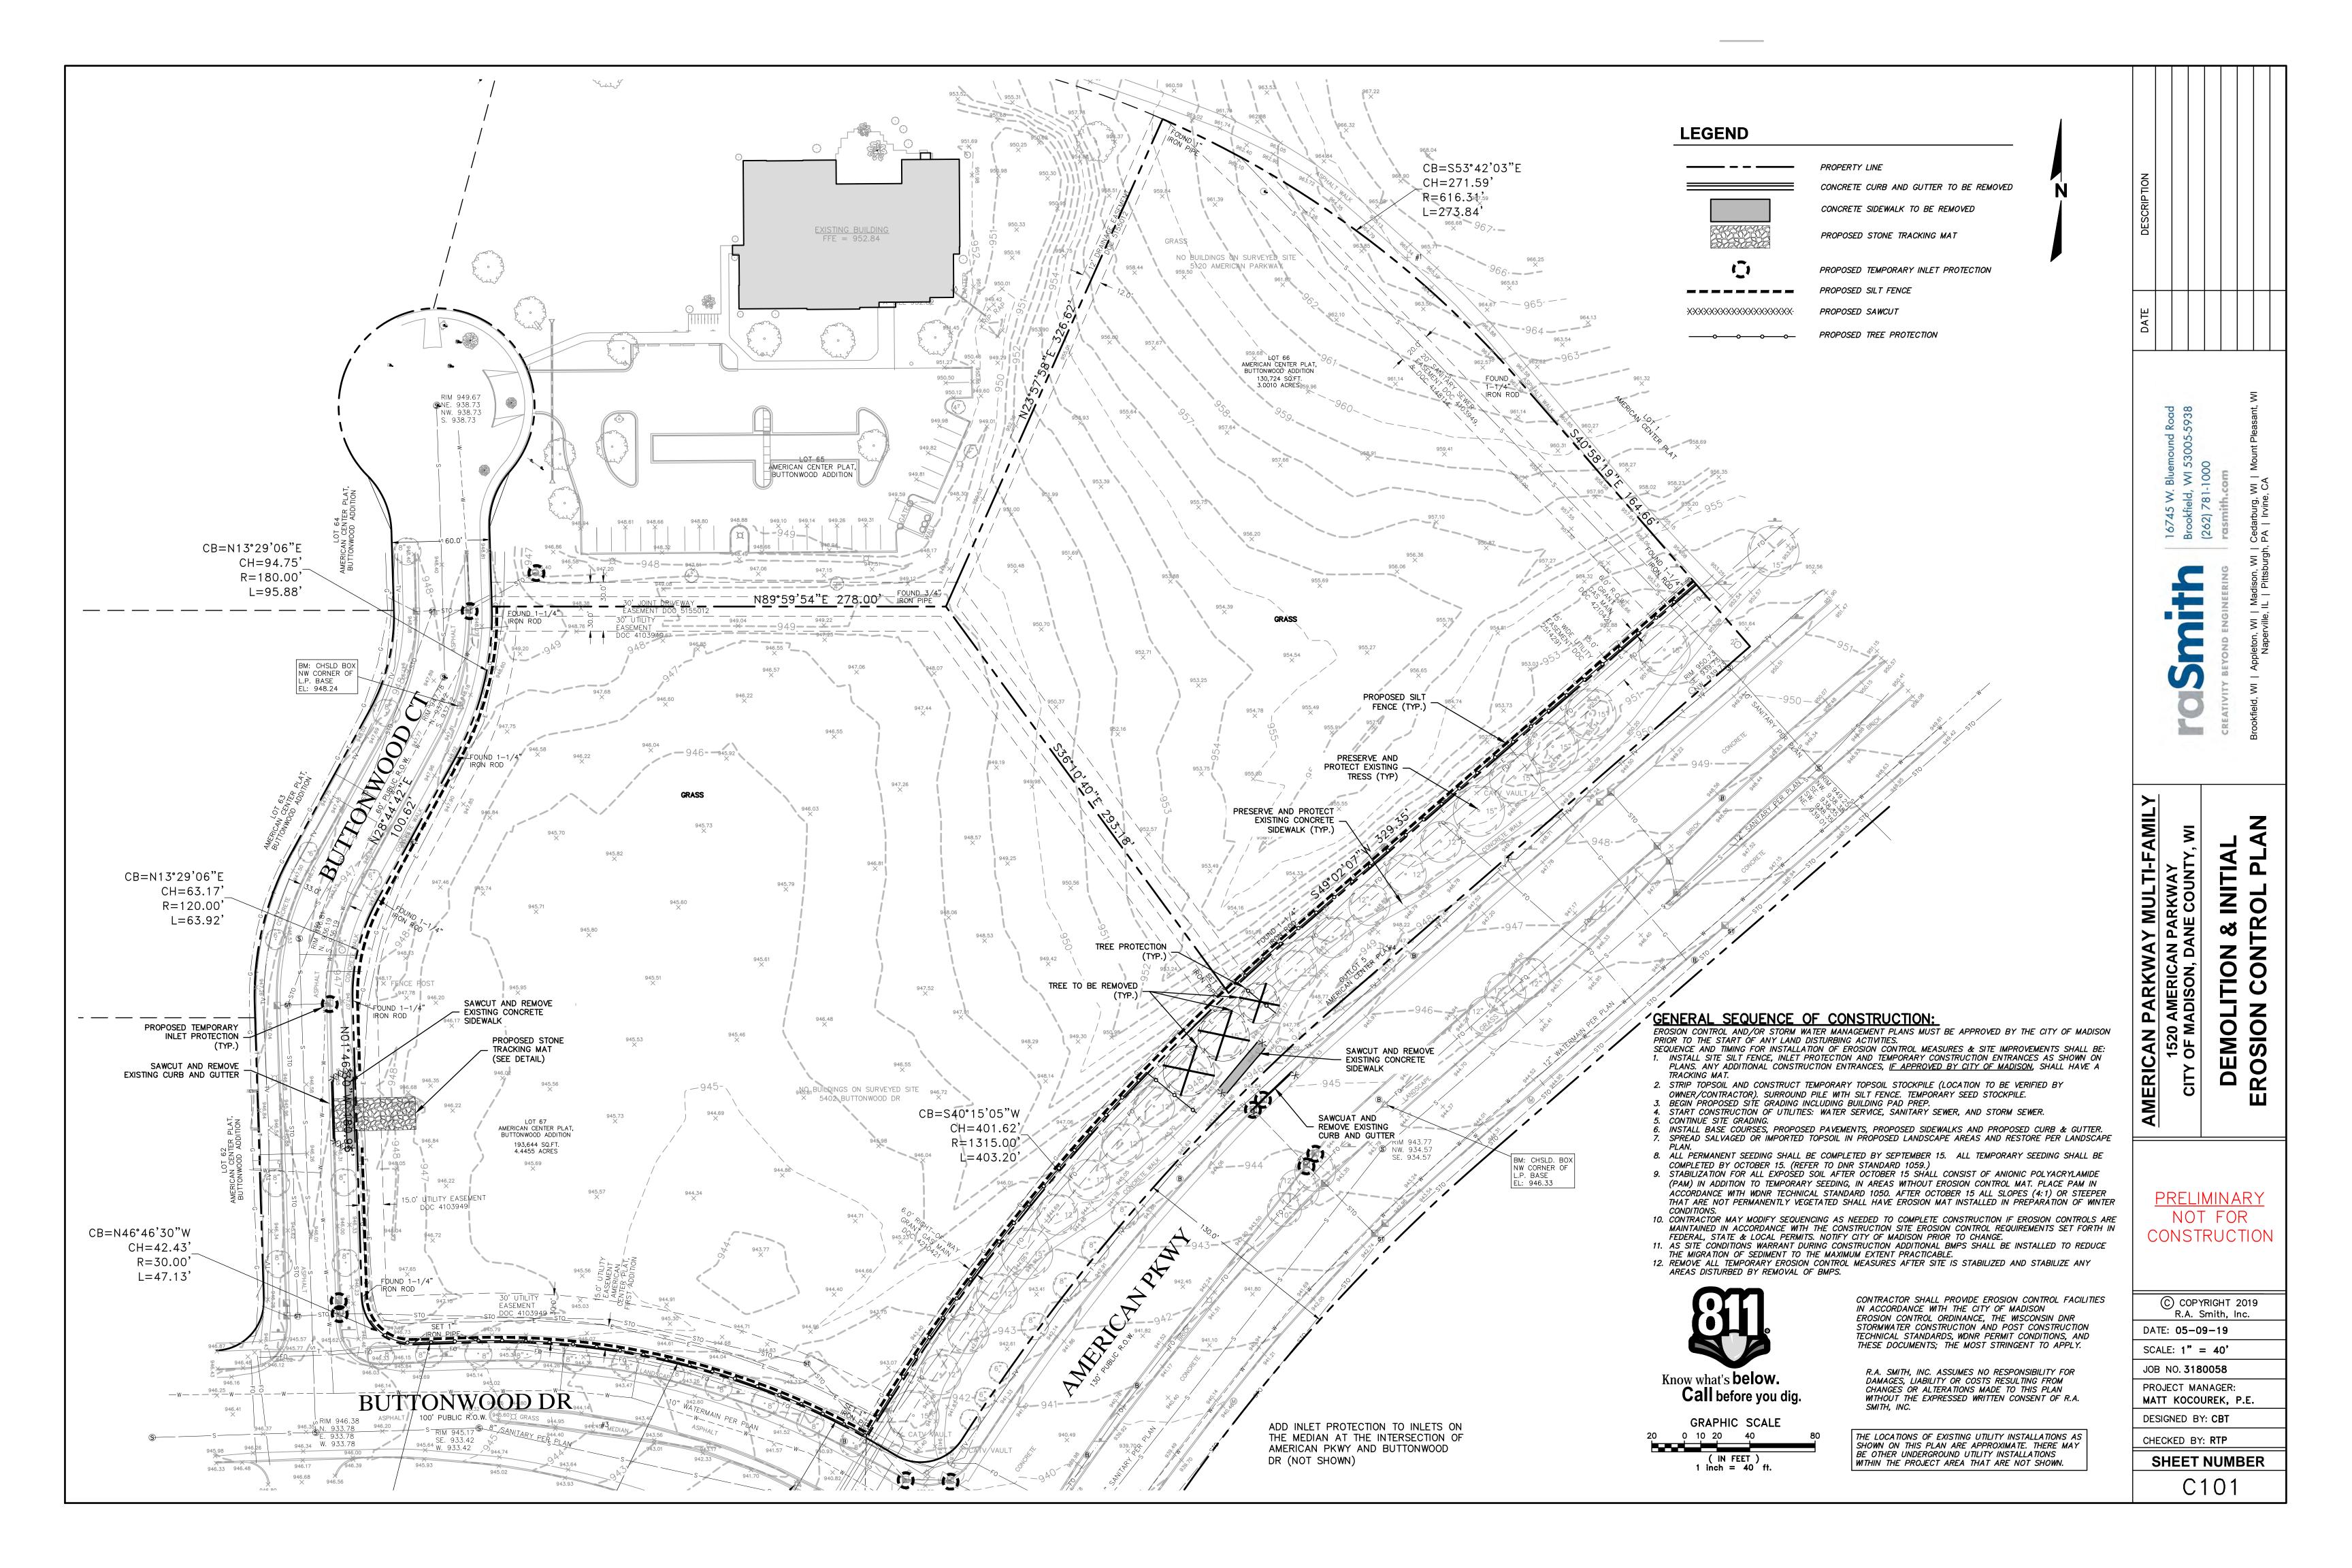

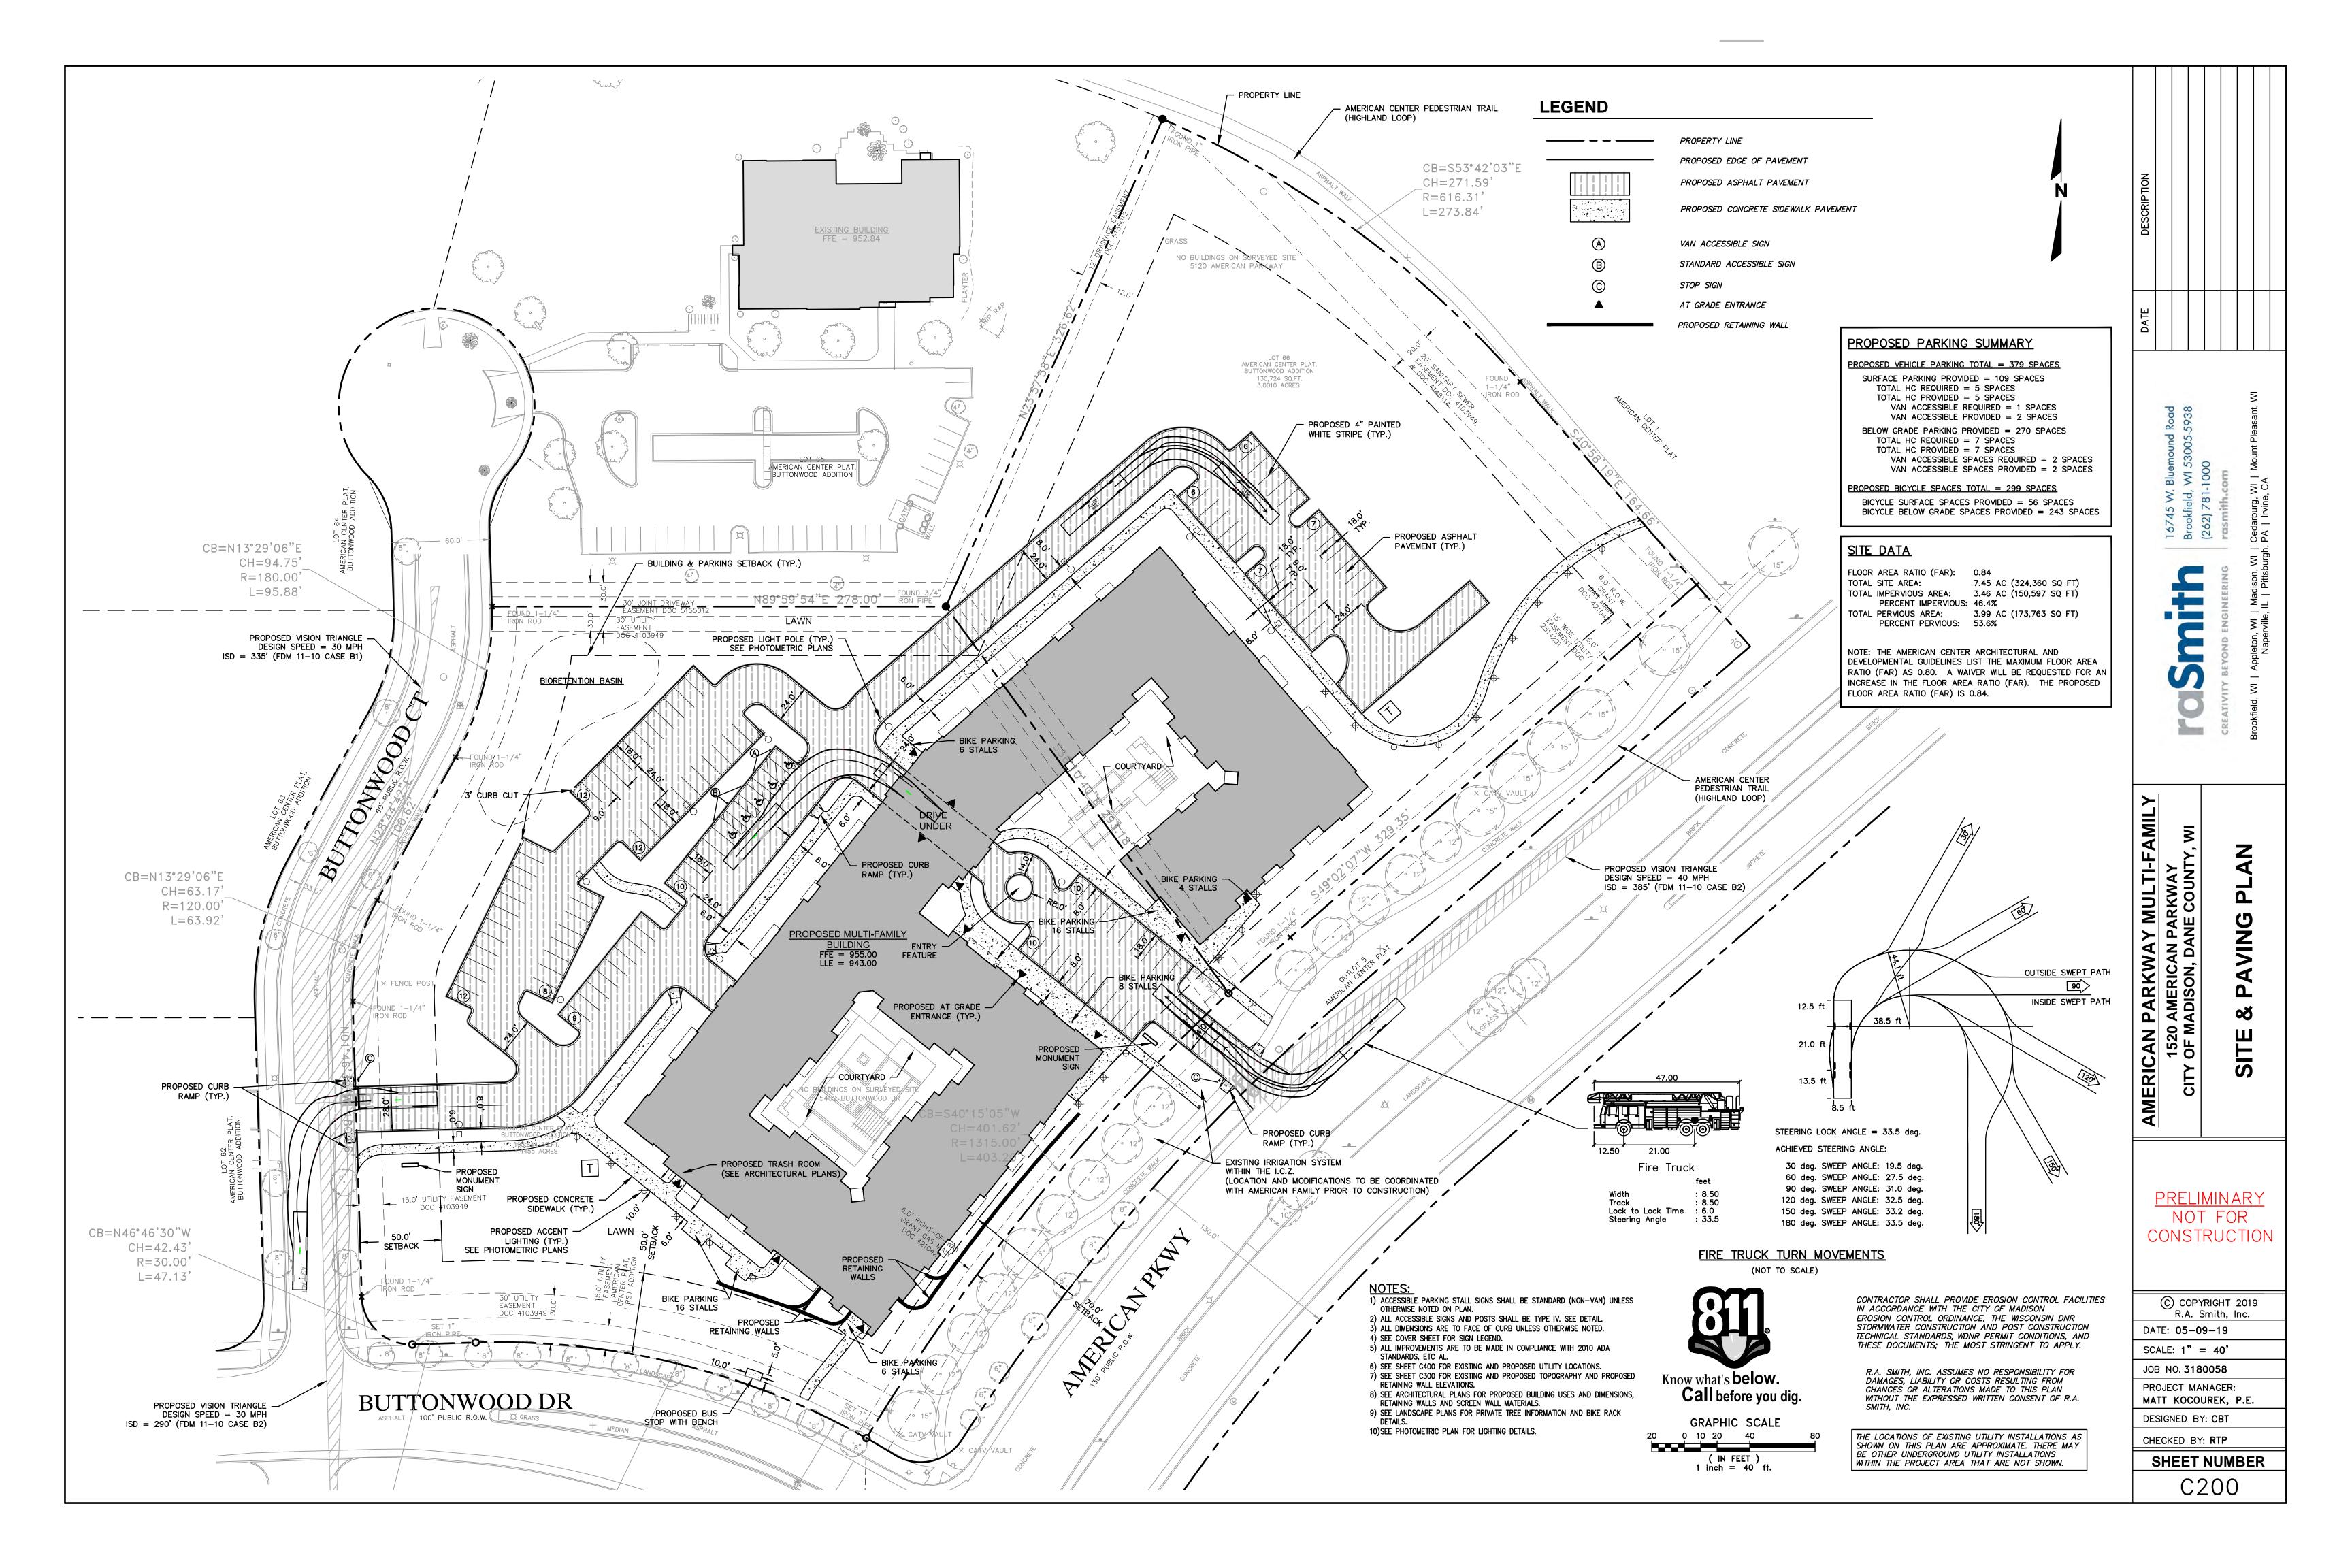

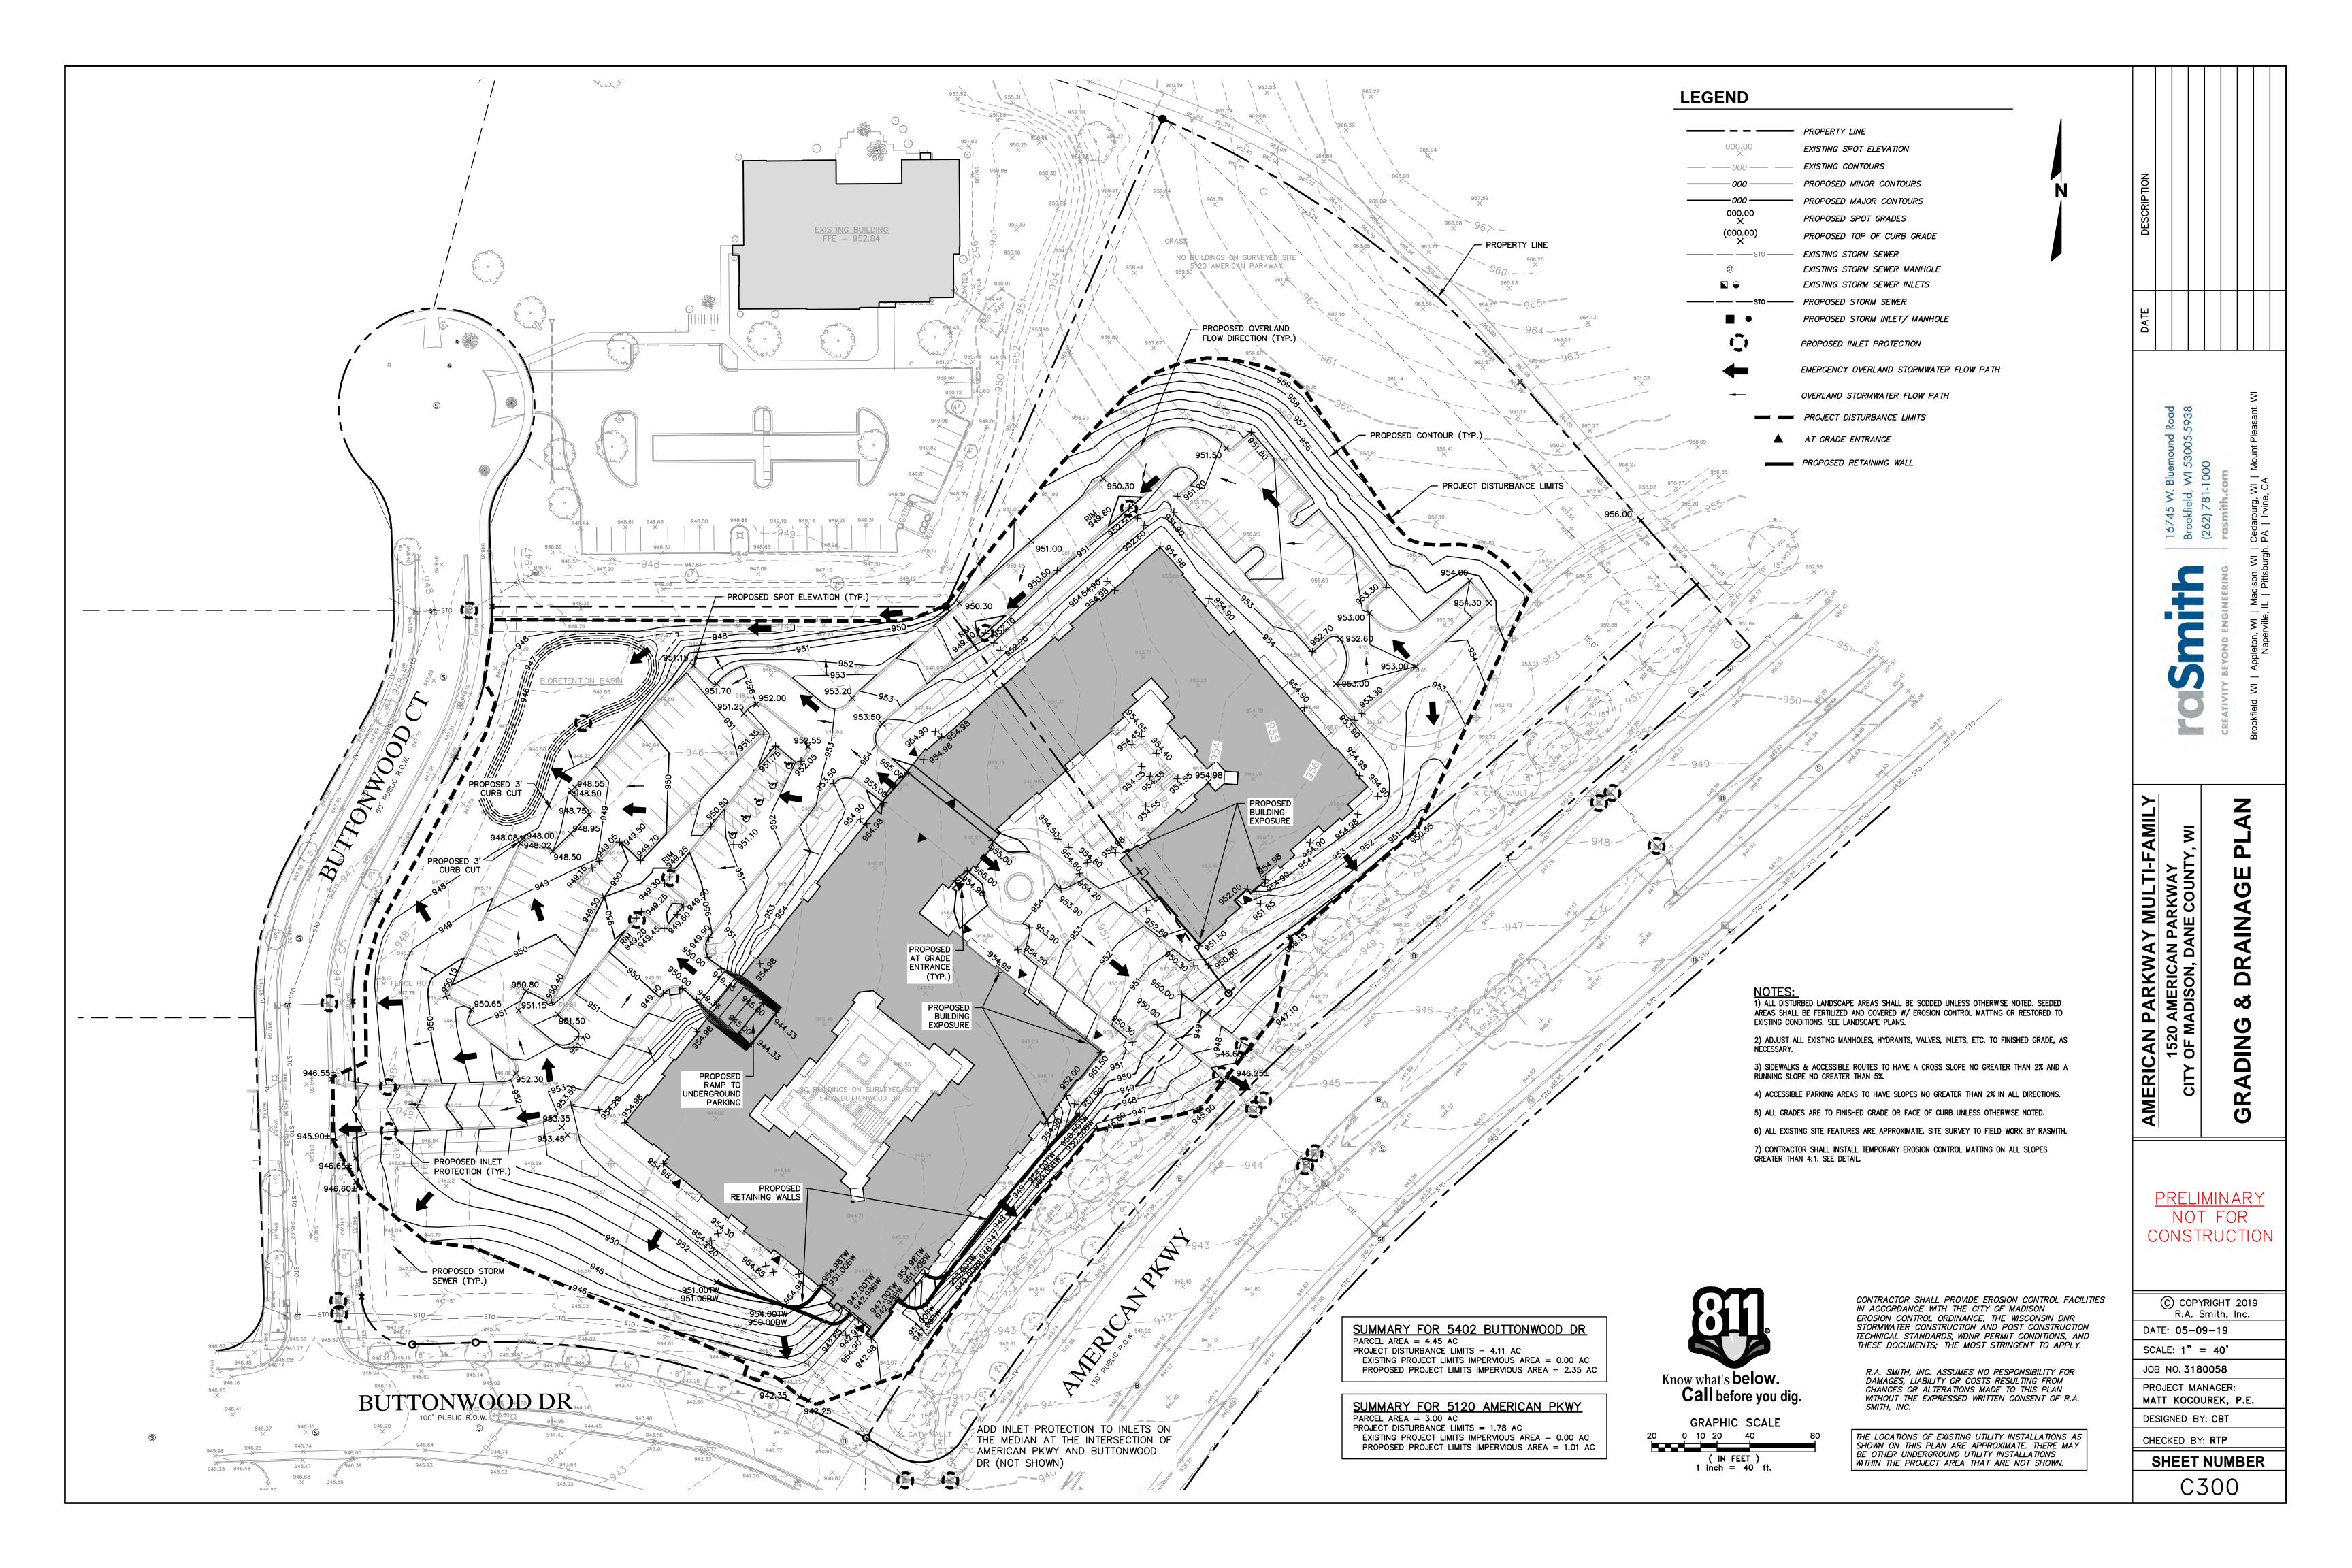

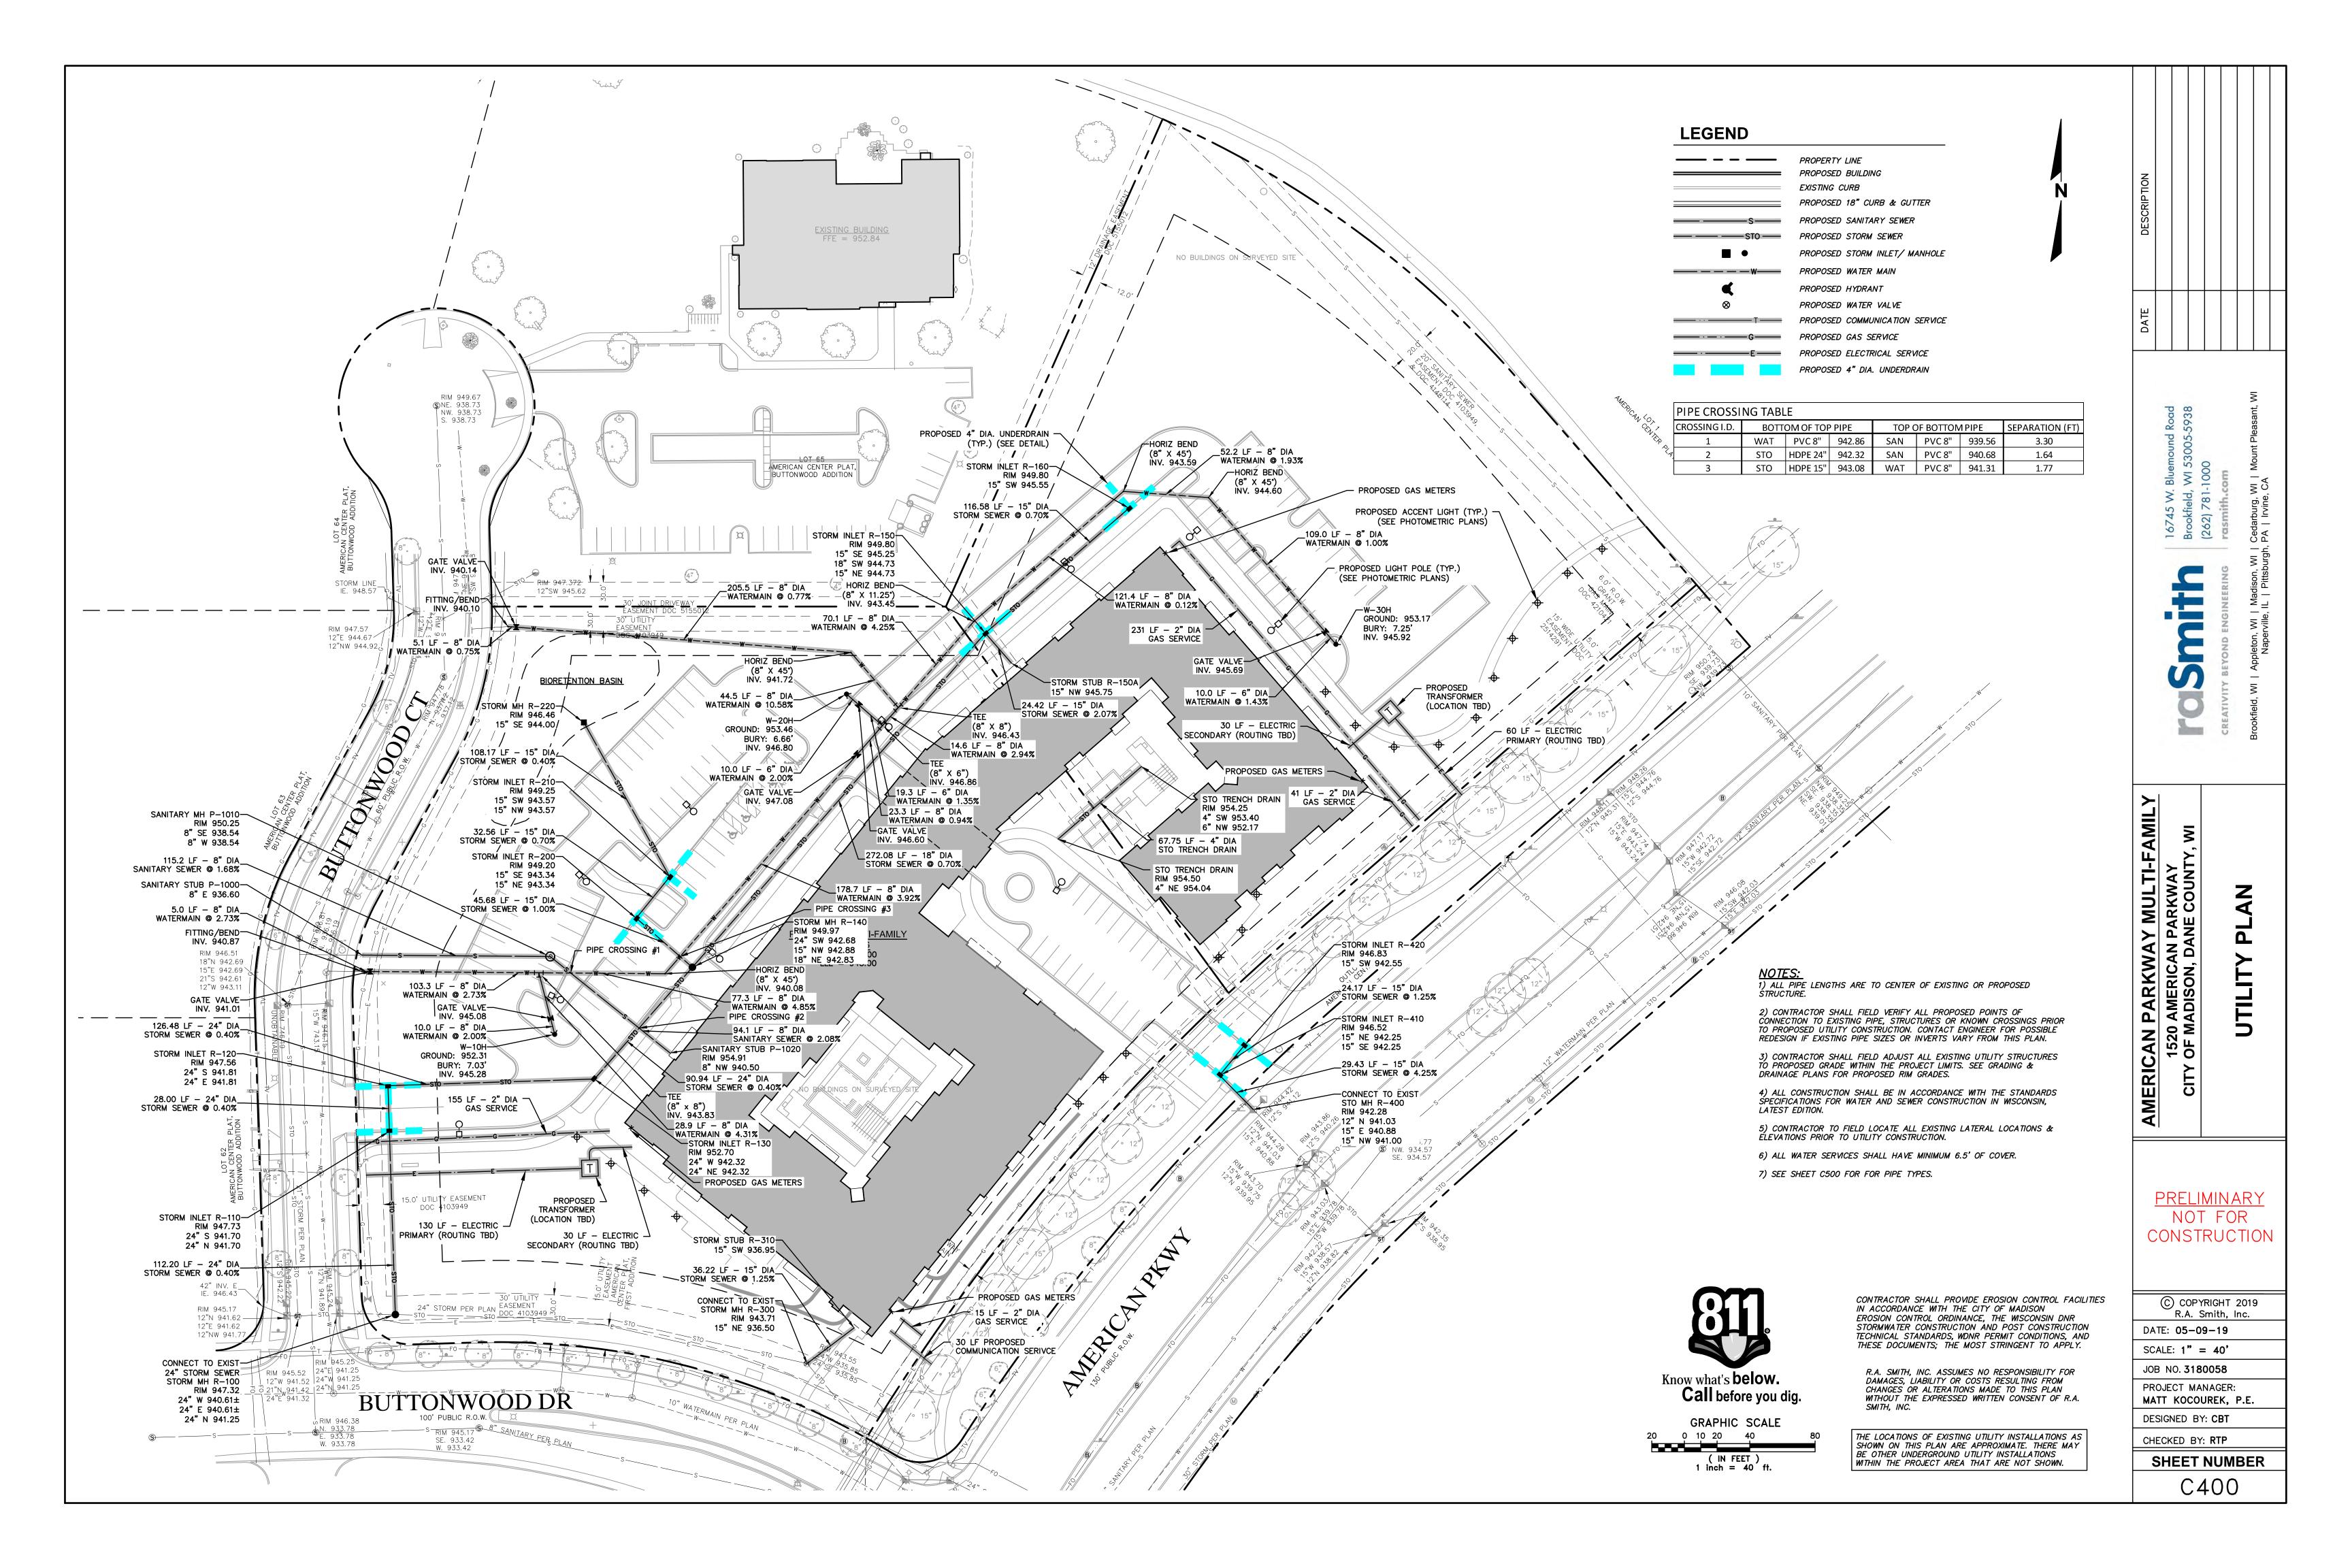

### <u>SPECIFICATIONS</u>

### A. GENERAL

- 1. THE CONTRACTOR SHALL NOTIFY THE OWNER AND THE MUNICIPALITY FORTY— EIGHT (48) HOURS PRIOR TO THE START OF CONSTRUCTION.
- 2. THE CONTRACTOR SHALL INDEMNIFY THE OWNER, THE ENGINEER, AND THE MUNICIPALITY, THEIR AGENTS, ETC, FROM ALL LIABILITY INVOLVED WITH THE CONSTRUCTION, INSTALLATION, AND TESTING OF THE WORK ON THIS PROJECT.
- 3. SITE SAFETY SHALL BE THE SOLE RESPONSIBILITY OF THE CONTRACTOR.
- 4. THE BIDDER WILL BE SOLELY RESPONSIBLE FOR DETERMINING QUANTITIES AND SHALL STATE SUCH QUANTITIES IN THEIR PROPOSAL. THE CONTRACTOR SHALL BASE THEIR BID ON THEIR OWN ESTIMATE OF THE WORK REQUIRED AND SHALL NOT RELY ON THE ENGINEER'S ESTIMATE
- 5. THE CONTRACTOR IS RESPONSIBLE FOR VERIFYING SOIL CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION. A
  GEOTECHNICAL REPORT MAY BE AVAILABLE FROM THE OWNER. THE CONTRACTOR SHALL ABIDE BY THE RECOMMENDATIONS OF THE
  GEOTECHNICAL ENGINEER.
- 6. THE CONTRACTOR IS RESPONSIBLE FOR EXAMINING ALL SITE CONDITIONS PRIOR TO COMMENCEMENT OF CONSTRUCTION AND SHALL COMPARE FIELD CONDITIONS WITH DRAWINGS.
- 7. THE CONTRACTOR SHALL OBTAIN AND PAY FOR ALL PERMITS REQUIRED FOR EXECUTION OF THE WORK. THE CONTRACTOR SHALL CONDUCT THEIR WORK ACCORDING TO THE REQUIREMENTS OF THE PERMITS.
- 8. THE CONTRACTOR IS RESPONSIBLE FOR FIELD VERIFYING ALL UTILITY INFORMATION SHOWN ON THE PLANS PRIOR TO THE START OF CONSTRUCTION. THE CONTRACTOR SHALL CALL DIGGER'S HOTLINE AT 1-800-242-8511 TO NOTIFY THE UTILITIES OF THEIR INTENTIONS, AND TO REQUEST FIELD STAKING OF EXISTING UTILITIES.
- 9. CONTRACTOR IS ADVISED THAT ALL MUD AND DEBRIS MUST NOT BE DEPOSITED ONTO THE ADJACENT ROADWAYS PER THE REQUIREMENT OF THE MUNICIPALITY OR OTHER APPROPRIATE GOVERNMENT AGENCIES.
- 10. ANY ADJACENT PROPERTIES OR ROAD RIGHT-OF-WAYS WHICH ARE DAMAGED DURING CONSTRUCTION MUST BE RESTORED BY THE CONTRACTOR. THE COST OF THE RESTORATION IS CONSIDERED INCIDENTAL, AND SHOULD BE INCLUDED IN THE BID PRICES.
- 11. SUBMITTALS:
- A. SHOP DRAWINGS AND/OR MANUFACTURER'S PRODUCT DATA SUBMITTALS ARE REQUIRED ONLY IF THE PRODUCT OR METHOD
  - a. IS DIFFERENT FROM THAT SPECIFIED OR b. IS PART OF THE WORK THAT WILL BE DEDICATED AS A PUBLIC UTILITY OR ROADWAY AT THE END OF THE PROJECT
- c. IF REQUIRED BY THE MUNICIPAL ENGINEER. B. FOR UTILITY OR ROAD WORK THAT WILL BE DEDICATED TO A MUNICIPALITY, CONTRACTOR MUST MAKE SUBMITTALS TO THE
- MUNICIPALITY AS WELL AS ENGINEER.

  C. ALL DOCUMENTS SUBMITTED FOR REVIEW SHALL HAVE THE SPECIFIC MATERIAL, PART, SIZE, ETC. RELATED TO THE DESIGN HIGHLIGHTED IN SOME FASHION. EXAMPLE: A FITTING CUT SHEET HAS MULTIPLE PRESSURE RATING FOR DIFFERENT SIZE BENDS. HIGHLIGHT THE PRESSURE CLASS & SIZE TO BE USED ON THE PROJECT. ALL SUBMITTALS NOT PROPERLY
- IDENTIFYING THE SPECIFIC MATERIAL BEING USED WILL BE REJECTED. D. ALL DOCUMENTS SUBMITTED FOR REVIEW MUST INDICATE WHAT PART OF THE DESIGN THEY RELATE TO.
- E. CONTRACTOR SHALL ALLOW A MINIMUM OF 10 WORKING DAYS FOR SUBMITTAL REVIEW.
- F. SUBSTITUTION REQUESTS

  a. IF A SUBSTITUTION IS REQUESTED, CONTRACTOR SHALL SUBMIT A SHOP DRAWING AND/OR MANUFACTURER'S DATA AND AN EXPLANATION AS TO EXACTLY HOW THE PROPOSED SUBSTITUTION MEETS THE PROPOSED DESIGN TO THE OWNER'S REPRESENTATIVE OR ENGINEER FOR REVIEW AND APPROVAL. PRODUCT SPECIFICATION SHEETS WITHOUT EXPLANATION WILL NOT BE ACCEPTED.
  - b. THE CONTRACTOR SHALL ALSO INDICATE WITH THE SUBSTITUTION REQUEST THE AMOUNT THAT WILL BE CREDITED FROM THE CONTRACT AMOUNT TO THE OWNER IF THE SUBSTITUTION IS APPROVED.
  - c. THE CONTRACTOR SHALL NOT PROCEED UNTIL THE OWNER'S APPROVAL IS GIVEN.

### B. EROSION CONTROL

- 1. THE CONTRACTOR IS RESPONSIBLE FOR OBTAINING COPIES OF ALL PERMITS, INCLUDING WPDES DISCHARGE PERMITS (IF APPLICABLE), AND THE (LOCAL MUNICIPALITY) EROSION CONTROL PERMIT. CONTRACTOR IS RESPONSIBLE FOR ABIDING BY ALL PERMIT REQUIREMENTS AND RESTRICTIONS.
- 2. ALL INSTALLATION AND MAINTENANCE OF EROSION CONTROL PRACTICES SHALL BE IN ACCORDANCE WITH THE APPLICABLE WISCONSIN DEPARTMENT OF NATURAL RESOURCES (WDNR) TECHNICAL STANDARD.
- 3. ALL EROSION CONTROL FACILITIES SHALL BE MAINTAINED THROUGHOUT THE DURATION OF THE PROJECT AND WARRANTY PERIOD IN CONFORMANCE WITH THE DNR WPDES GENERAL PERMIT.
- 4. ALL EROSION AND SEDIMENTATION CONTROL PRACTICES SHALL BE INSPECTED WEEKLY AND WITHIN 24 HOURS AFTER EVERY PRECIPITATION EVENT THAT PRODUCES 0.5 INCHES OF RAIN OR MORE DURING A 24 HOUR PERIOD. NEEDED REPAIRS WILL BE MADE IMMEDIATELY.
- 5. ALL DISTURBED GROUND LEFT INACTIVE FOR FOURTEEN DAYS OR MORE SHALL BE STABILIZED WITH TOPSOIL, SEED, AND MULCH IN ACCORDANCE WITH THE WONR TECHNICAL STANDARDS 1059 AND 1058.
- 6. TEMPORARY SEED MIXTURE SHALL CONFORM TO 630.2.1.5.1.4 OF THE WISDOT STANDARD SPECIFICATIONS. USE WINTER WHEAT OR RYE FOR FALL PLANTINGS STARTED AFTER SEPTEMBER 1.
- 7. DISTURBED AREAS THAT CANNOT BE STABILIZED WITH A DENSE GROWTH OF VEGETATION BY SEEDING AND MULCHING DUE TO TEMPERATURE OR TIMING OF CONSTRUCTION, SHALL BE STABILIZED BY APPLYING ANIONIC POLYACRYLAMIDE (PAM) IN ACCORDANCE WITH WDNR TECHNICAL STANDARD 1050.
- 8. SEDIMENT SHALL BE REMOVED FROM THE SEDIMENT BASINS TO MAINTAIN A THREE FOOT DEPTH OF TREATMENT, MEASURED BELOW THE NORMAL WATER ELEVATION. SEDIMENT WILL BE REMOVED FROM THE DIVERSION DITCHES WHEN IT REACHES HALF THE OF THE DITCH. SEDIMENT WILL BE REMOVED FROM BEHIND THE SILT FENCE AND DITCH CHECKS WHEN IT REACHES HALF THE HEIGHT OF THE FENCE/BALE. THE SILT FENCE AND DITCH CHECKS SHALL BE REPAIRED AS NECESSARY TO MAINTAIN A BARRIER.
- 9. ALL WATER FROM CONSTRUCTION DEWATERING SHALL BE TREATED IN ACCORDANCE WITH WDNR TECHNICAL STANDARD 1061 PRIOR TO DISCHARGE TO WATERS OF THE STATE, WETLANDS, OR OFFSITE. CONTRACTOR RESPONSIBLE FOR REVISING THE PERMIT, IF NECESSARY.
- 10. THE CONTRACTOR IS RESPONSIBLE FOR INSTALLATION OF ANY ADDITIONAL EROSION CONTROL MEASURES NECESSARY TO PREVENT EROSION AND SEDIMENTATION. ALL DISTURBED AREAS ARE TO DRAIN TO APPROVED SEDIMENT CONTROL MEASURES AT ALL TIMES DURING SITE DEVELOPMENT UNTIL FINAL STABILIZATION IS ACHIEVED. DEPENDING ON HOW THE CONTRACTOR GRADES THE SITE, IT MAY BE NECESSARY TO INSTALL TEMPORARY SEDIMENT TRAPS IN VARIOUS LOCATIONS THROUGHOUT THE PROJECT. TEMPORARY SEDIMENT TRAPS SHALL BE DESIGNED, INSTALLED, AND MAINTAINED IN ACCORDANCE WITH WONR TECHNICAL STANDARD 1063.
- 11. ANY SEDIMENT TRACKED ONTO A PUBLIC OR PRIVATE ROAD SHOULD BE REMOVED BY STREET CLEANING, NOT FLUSHING, BEFORE THE END OF EACH WORKING DAY.
- 12. DUST CONTROL SHALL BE PROVIDED AS NECESSARY IN ACCORDANCE WITH WDNR TECHNICAL STANDARD 1068.
- 13. FINAL STABILIZATION OF LANDSCAPED AREAS SHALL BE IN ACCORDANCE WITH THE APPROVED LANDSCAPE PLAN.
- 14. ALL SEEDED AREAS WILL BE FERTILIZED, RESEEDED AS NECESSARY, AND MULCHED ACCORDING TO SPECIFICATIONS IN THE APPROVED LANDSCAPE PLAN TO MAINTAIN A VIGOROUS DENSE VEGETATIVE COVER.

### C. GRADING

- 1. THE PROPOSED IMPROVEMENTS SHALL BE CONSTRUCTED ACCORDING TO THE WISCONSIN D.O.T. STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, LATEST EDITION, THE GEOTECHNICAL REPORT AND THE LOCAL ORDINANCES AND SPECIFICATIONS.
- 2. THE CONTRACTOR SHALL MAINTAIN SITE DRAINAGE THROUGHOUT CONSTRUCTION. THIS MAY INCLUDE THE EXCAVATION OF TEMPORARY DITCHES OR PUMPING TO ALLEVIATE WATER PONDING.
- 3. SILT FENCE AND OTHER EROSION CONTROL FACILITIES MUST BE INSTALLED PRIOR TO CONSTRUCTION OR ANY OTHER LAND DISTURBING ACTIVITY. THE CONTRACTOR SHALL BE RESPONSIBLE FOR REMOVING ALL EROSION CONTROL FACILITIES ONCE THE THREAT OF EROSION HAS PASSED WITH THE APPROVAL OF THE GOVERNING AGENCY.
- 4. THE CONTRACTOR SHALL ASSUME SOLE RESPONSIBILITY FOR THE COMPUTATIONS OF ALL GRADING AND FOR ACTUAL LAND BALANCE, INCLUDING UTILITY TRENCH SPOIL. THE CONTRACTOR SHALL IMPORT OR EXPORT MATERIAL AS NECESSARY TO COMPLETE THE PROJECT.
- 5. GRADING SHALL CONSIST OF CLEARING AND GRUBBING EXISTING VEGETATION, STRIPPING TOPSOIL, REMOVAL OF EXISTING
  PAVEMENT OR FOUNDATIONS, IMPORTING OR EXPORTING MATERIAL TO ACHIEVE AN ON—SITE EARTHWORK BALANCE, GRADING THE
  PROPOSED BUILDING PADS AND PAVEMENT AREAS, SCARIFYING AND FINAL COMPACTION OF THE PAVEMENT SUBGRADE, AND
  PLACEMENT OF TOPSOIL.
- 6. NO FILL SHALL BE PLACED ON A WET OR SOFT SUBGRADE. THE SUBGRADE SHALL BE PROOF—ROLLED AND INSPECTED BY THE GEOTECHNICAL ENGINEER BEFORE ANY MATERIAL IS PLACED.
- 7. ALL FILL SHALL BE CONSIDERED STRUCTURAL FILL AND SHALL BE PLACED IN ACCORDANCE WITH THE GEOTECHNICAL REPORT.
- 8. TOPSOIL IN PARKING ISLANDS: ALL PARKING LOT ISLANDS TO BE BACKFILLED WITH TOPSOIL TO A MINIMUM DEPTH OF 18" BY GRADING CONTRACTOR TO INSURE LONG TERM PLANT HEALTH. CROWN ALL PLANTING ISLANDS A MINIMUM OF 6" TO PROVIDE PROPER DRAINAGE, UNLESS OTHERWISE SPECIFIED.

### D. PAVING

- 1. THE PROPOSED IMPROVEMENTS SHALL BE CONSTRUCTED ACCORDING TO THE WISCONSIN D.O.T. STANDARD SPECIFICATIONS FOR HIGHWAY AND STRUCTURE CONSTRUCTION, LATEST EDITION, AND THE LOCAL ORDINANCES AND SPECIFICATIONS.
- 2. PAVING SHALL CONSIST OF FINE GRADING PAVEMENT AREAS, INSTALLATION OF CRUSHED STONE BASE, CONCRETE AND/OR BITUMINOUS PAVEMENT, PAVEMENT MARKING, AND CLEANUP. ALL MATERIALS SHALL BE PROVIDED BY THE CONTRACTOR.
- 3. AGGREGATES USED IN THE CRUSHED AGGREGATE BASE SHALL BE (\*-INCH) DENSE GRADED BASE IN ACCORDANCE WITH SUBSECTION 305.2.2 OF THE STANDARD SPECIFICATIONS.
- 4. HOT MIX ASPHALT PAVEMENT (HMA) SHALL BE CLASSIFIED AS (\*\*) IN ACCORDANCE WITH SECTION 460 AND TABLE 460-2 OF THE
- 5. ASPHALTIC MATERIALS SHALL BE PERFORMANCE GRADED (PG) BINDERS IN ACCORDANCE WITH SECTION 455 OF THE STANDARD SPECIFICATIONS. UPPER LAYERS SHALL BE (\*\*\*), AND LOWER LAYERS SHALL BE (\*\*\*).
- 6. AGGREGATES USED IN THE HMA SHALL BE IN ACCORDANCE WITH SUBSECTION 460.2.2.3 OF THE STANDARD SPECIFICATIONS. THE NOMINAL AGGREGATE SIZE FOR THE UPPER LAYER PAVEMENT SHALL BE (\*\*\*\*), AND THE LOWER LAYER PAVEMENT SHALL BE
- 7. TACK COAT SHALL BE IN ACCORDANCE WITH SUBSECTION 455.2.5 OF THE STANDARD SPECIFICATIONS. THE RATE OF APPLICATION SHALL BE 0.050-0.070 GAL/SY.
- 8. CONCRETE FOR CURB, DRIVEWAY, WALKS AND NON-FLOOR SLABS SHALL BE GRADE A (OR GRADE A2 IF PLACING BY SLIP-FORMED PROCESS) AIR ENTRAINED IN ACCORDANCE WITH SECTION 501 FOR THE STANDARD SPECIFICATIONS, WITH A MINIMUM 28 DAY COMPRESSIVE STRENGTH OF 3,500 PSI.
- 9. CONCRETE CONSTRUCTION SHALL BE IN ACCORDANCE WITH THE FOLLOWING SECTIONS OF THE STANDARD SPECIFICATIONS: SECTION 415 FOR CONCRETE PAVEMENT, SECTION 601 FOR CONCRETE CURB AND GUTTER, AND SECTION 602 FOR CONCRETE SIDEWALKS.
- 10. ALL FINISHED CONCRETE SHALL BE COVERED WITH A LIQUID CURING COMPOUND CONFORMING TO AASHTO M 148, TYPE 2, IN ACCORDANCE WITH SECTION 415 OF THE STANDARD SPECIFICATIONS.
- 11. PAVEMENT MARKINGS SHALL BE PAINT IN ACCORDANCE WITH SECTION 646 OF THE STANDARD SPECIFICATIONS. (COLOR SHALL BE AS INDICATED ON THE PLANS.) THE FOLLOWING ITEMS SHALL BE PAINTED WITH COLORS NOTED BELOW:

PARKING STALLS: WHITE
PEDESTRIAN CROSSWALKS: WHITE
LANE STRIPING WHERE SEPARATING TRAFFIC IS MOVING IN OPPOSITE DIRECTIONS: YELLOW
LANE STRIPING WHERE SEPARATING TRAFFIC IS MOVING IN SAME DIRECTIONS: WHITE
ADA SYMBOLS: BLUE OR PER LOCAL CODE
FIRE LANES: PER LOCAL CODE

EXTERIOR SIDEWALK CURBED, LIGHTPOLE BASES, AND GUARD POSTS: YELLOW

### E. PRIVATE UTILITIES

- 1. THE PROPOSED IMPROVEMENTS SHALL BE CONSTRUCTED ACCORDING TO WISCONSIN ADMINISTRATIVE CODE, SECTION SPS 382—384,
  LATEST EDITION, THE STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN, LATEST EDITION, AND THE
  LOCAL ORDINANCES AND SPECIFICATIONS.
- 2. BEFORE PROCEEDING WITH ANY UTILITY CONSTRUCTION, THE CONTRACTOR SHALL EXCAVATE EACH EXISTING LATERAL OR POINT OF CONNECTION AND VERIFY THE LOCATION AND ELEVATION OF ALL UTILITIES. IF ANY EXISTING UTILITIES ARE NOT AS SHOWN ON THE DRAWINGS, THE CONTRACTOR SHALL NOTIFY THE ENGINEER IMMEDIATELY FOR POSSIBLE REDESIGN.
- 3. ALL CONNECTIONS TO EXISTING PIPES AND MANHOLES SHALL BE CORED CONNECTIONS.
- 4. PROPOSED SANITARY SEWER, WATER MAIN, AND INTERNALLY CONNECTED STORM SEWER SHOWN ON THIS PLAN SHALL TERMINATE AT A POINT FIVE (5) FEET FROM THE EXTERIOR BUILDING WALL. STORM SEWER CONNECTING TO EXTERIOR DOWN SPOUTS SHALL BE PER DETAILS ON THE ARCHITECTURAL PLANS. THE EXACT LOCATION OF ALL DOWN SPOUTS SHALL BE PER THE ARCHITECTURAL PLANS.
- 5. MATERIALS FOR STORM SEWER SHALL BE AS FOLLOWS:

STORM SEWER PIPE 30" OR LARGER SHALL BE REINFORCED CONCRETE, ASTM C-76, CLASS III OR GREATER, WITH ELASTOMERIC SEALS CONFORMING TO ASTM C-443.

STORM SEWER PIPE 24" OR LESS SHALL BE EITHER:

- A) HIGH DENSITY POLYETHYLENE (HDPE) WITH A SMOOTH INTERIOR AND ANNULAR EXTERIOR CORRUGATIONS, SUCH AS ADS N-12 WT. HDPE PIPE SHALL CONFORM TO ASTM F2648 AND F2306. JOINTS SHALL BE WATER TIGHT CONFORMING TO ASTM D3212 WITH ELASTOMERIC SEALS (GASKETS) CONFORMING TO ASTM F477.
- B) POLYVINYL CHLORIDE (PVC) PIPE, ASTM D-3034, SDR 35, WITH ELASTOMERIC PUSH-ON JOINTS CONFORMING TO
- ASTM D-3212.

  C) REINFORCED CONCRETE, ASTM C-76, CLASS III OR GREATER, WITH ELASTOMERIC SEALS CONFORMING TO ASTM C-443.

TRENCH SECTION SHALL BE CLASS "C" FOR CONCRETE AND CLASS "B" FOR ALL OTHER MATERIALS.

INLETS SHALL BE SOLID CONCRETE BLOCK OR PRE CAST REINFORCED CONCRETE, ASTM C-478.

6. MATERIALS FOR SANITARY SEWER SHALL BE AS FOLLOWS:

SANITARY SEWER PIPE SHALL BE PVC, ASTM D-3034, SDR-35 WITH RUBBER GASKETED JOINTS, CONFORMING TO ASTM D-3212.

TRENCH SECTION SHALL BE CLASS "B" BEDDING. CRUSHED STONE CHIPS SHALL BE USED FOR BEDDING MATERIAL.

PREFABRICATED WYE CONNECTIONS ARE REQUIRED FOR SANITARY LATERALS

7. MATERIALS FOR WATER SERVICE SHALL BE AS FOLLOWS:

WATER SERVICE SHALL BE PVC, SDR-18, CLASS 235, AWWA C-900, WITH ELASTOMERIC JOINTS (ASTM D-3139), WITH A VALVE AT THE SUPPLY MAIN.

WATER SERVICE SHALL BE DUCTILE IRON (DI), ASTM A-377, WITH ELASTOMERIC JOINTS (AWWA C-111), WITH A VALVE AT THE SUPPLY MAIN.

WATER SERVICE SHALL BE COPPER, TYPE "K", WITH A VALVE AT THE SUPPLY MAIN.

ALL FITTINGS SHALL BE MECHANICAL JOINT, DUCTILE IRON CONFORMING TO AWWA C-111.

HYDRANTS SHALL BE IN ACCORDANCE WITH THE MUNICIPALITY'S STANDARD SPECIFICATIONS.

GATE VALVES SHALL BE RESILIENT WEDGE TYPE, AWWA C-509, AND SHALL BE INSTALLED WITH AN ADJUSTABLE VALVE BOX AND COVER MARKED "WATER".

TRENCH SECTION SHALL CONFORM TO SECTION 4.3.C, FILE NO. 38 OF THE STANDARD SPECIFICATIONS. SAND OR STONE CHIP BEDDING MATERIAL IS REQUIRED.

- 8. EXTREME CAUTION MUST BE FOLLOWED REGARDING THE COMPACTION OF ALL UTILITY TRENCHES. MECHANICALLY COMPACTED GRANULAR BACKFILL IS REQUIRED UNDER & WITHIN 5 FEET OF ALL PAVEMENT INCLUDING SIDEWALKS. FLOODING OF BACKFILL MATERIAL IS NOT ALLOWED. THE COST OF THIS GRANULAR MATERIAL AND ITS COMPACTION IS CONSIDERED INCIDENTAL AND SHALL BE INCLUDED IN THE COST OF THE PROPOSED UTILITY.
- 9. UPON COMPLETION OF FINAL PAVING OPERATIONS, THE UTILITY CONTRACTOR SHALL ADJUST ALL MANHOLE AND INLET RIMS AND VALVE BOXES TO FINISHED GRADE.
- 10. THE CONTRACTOR IS RESPONSIBLE FOR PROVIDING THE OWNER WITH A SET OF MARKED—UP PRINTS SHOWING ALL CHANGES MADE DURING THE CONSTRUCTION PROCESS. ANY CHANGES TO THE DRAWINGS OR ADDITIONAL ITEMS MUST BE REPORTED TO THE OWNER
- 11. TRACER WIRE SHALL BE INSTALLED ON ALL BURIED NON-METALLIC SANITARY SEWERS, PRIVATE SANITARY INTERCEPTOR MAIN SEWERS, STORM BUILDING SEWERS, AND PRIVATE STORM INTERCEPTOR MAIN SEWERS THAT DISCHARGE TO MUNICIPAL MAINS. TRACER WIRE SHALL ALSO BE INSTALLED ON ALL BURIED NON-METALLIC WATER SERVICES AND PRIVATE WATER MAINS CONNECTED TO MUNICIPAL SUPPLY SYSTEMS. TRACER WIRE SHALL BE IN ACCORDANCE WITH COMM 82.30(11)(h)(1). TRACER WIRE SHALL BE A MINIMUM OF 18-GAUGE, INSULATED, SINGLE-CONDUCTOR COPPER WIRE OR EQUIVALENT. TRACER WIRE COLOR SHALL BE BLUE FOR POTABLE WATER, GREEN FOR SANITARY SEWER, AND BROWN FOR STORM SEWER.

Brookfield, WI 53005-5938 (262) 781-1000 rasmith.com



ECIFICATIONS

PRELIMINARY

NOT FOR

ONSTRUCTION

© COPYRIGHT 2019 R.A. Smith, Inc.

DATE: **05-09-19**SCALE: N.T.S

ш

JOB NO. 3180058
PROJECT MANAGER:

MATT KOCOUREK, P.E.


DESIGNED BY: CBT


CHECKED BY: RTP


C500


Know what's below.
Call before you dig.


R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A. SMITH. INC.

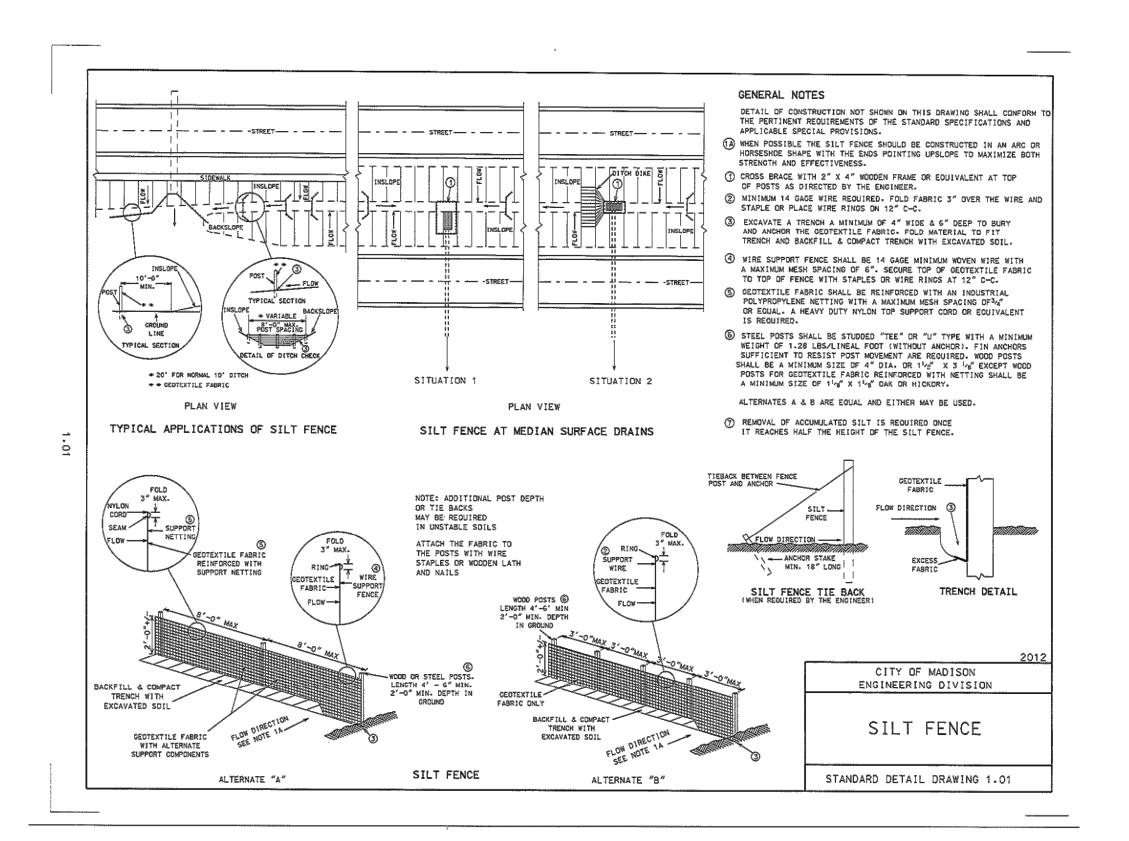


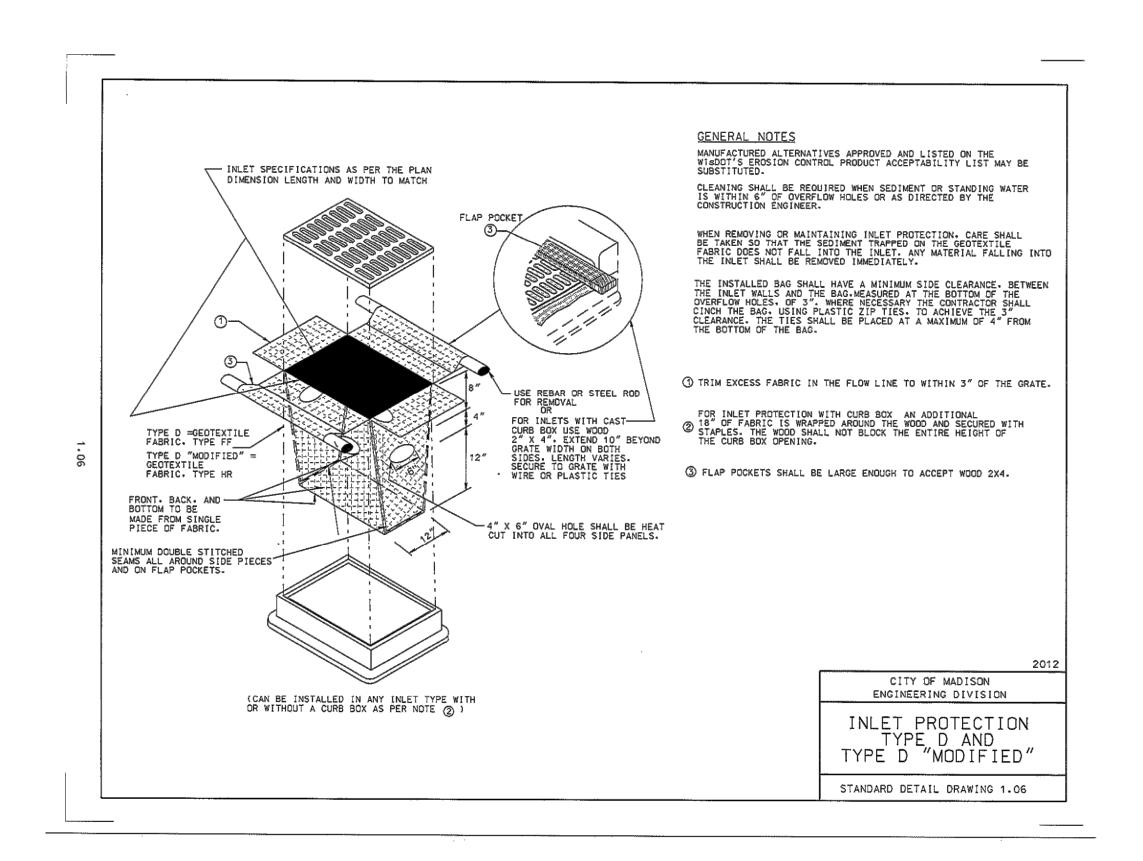


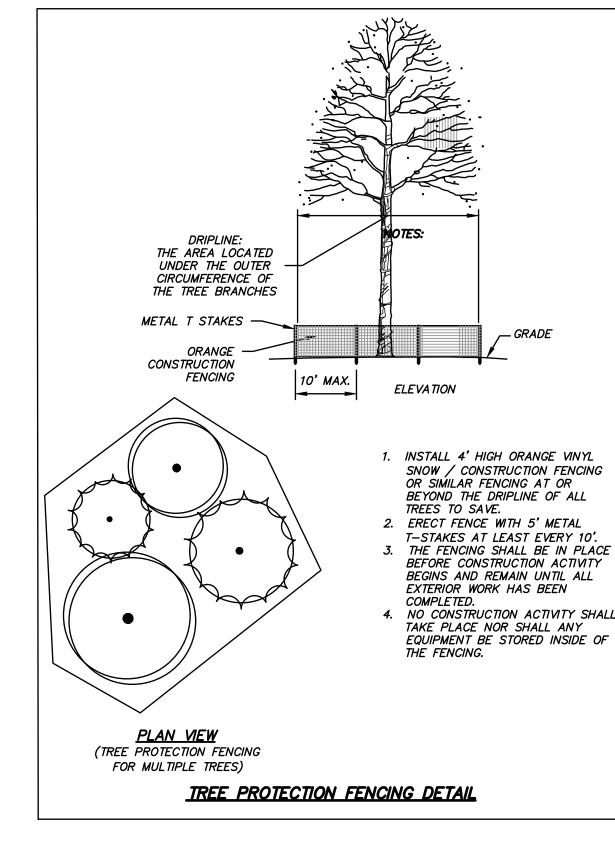

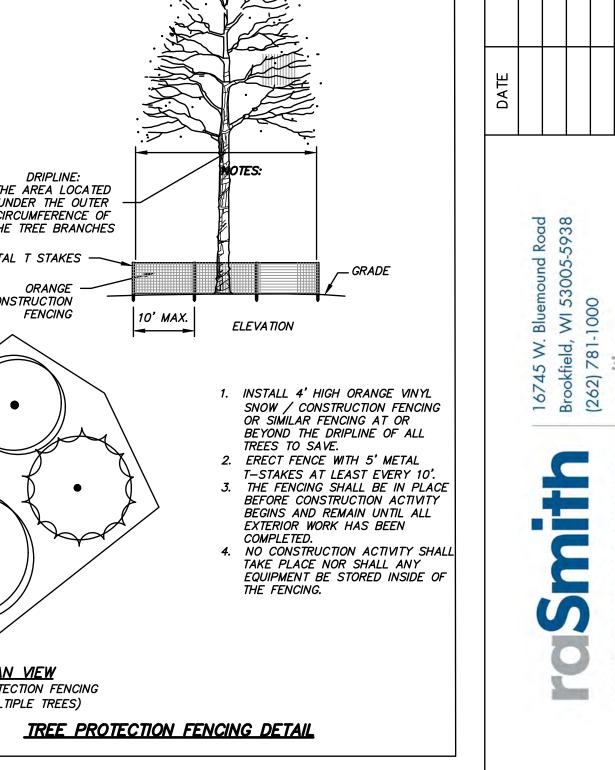

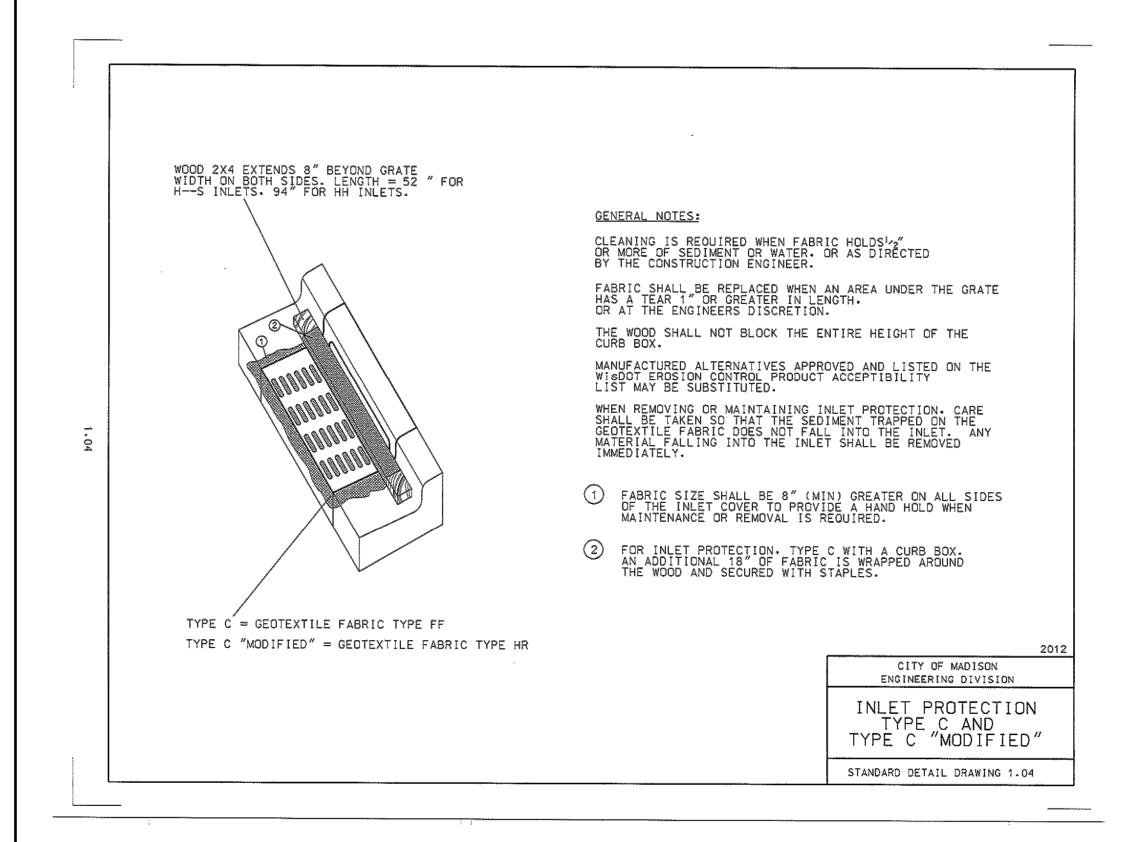

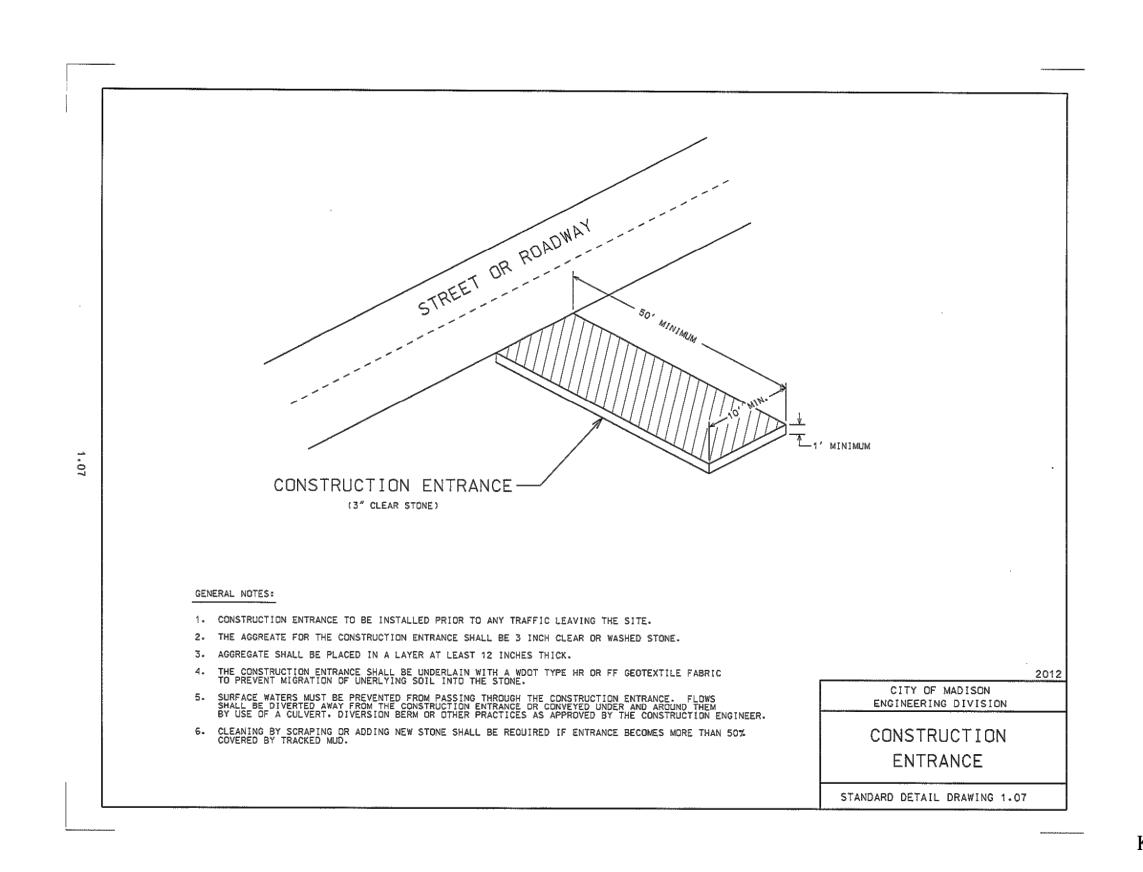

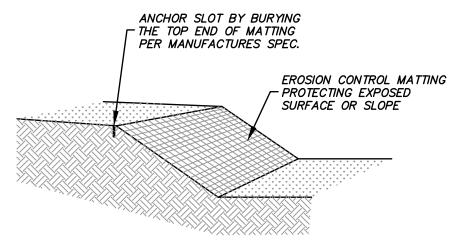

NOTES:

1. PRIOR TO THE INSTALLATION OF ANY EROSION CONTROL MATTING, ALL ROCKS, DIRT CLODS, STUMPS, ROOTS, TRASH AND ANY OTHER OBSTRUCTIONS WHICH WOULD PREVENT THE MAT FROM LAYING IN DIRECT CONTACT WITH THE SOIL SHALL BE REMOVED.

2. INSTALLATION SHALL ALSO BE IN ACCORDANCE WITH MANUFACTURERS RECOMMENDED GUIDELINES. 3. EROSION CONTROL MATTING SHALL BE:

A. NORTH AMERICAN GREEN S150BN OR EQUIVALENT FOR ALL TEMPORARILY PROTECTED SLOPES GREATER THAN 4:1.

4. MATTED AREAS MUST BE INSPECTED ON A WEEKLY BASIS, AND AFTER EACH SIGNIFICANT RAINFALL. BARE SPOTS, MISSING OR LOOSENED MATTING MUST BE IMMEDIATELY REPLACED AND/OR RE-ANCHORED.

EROSION CONTROL MATTING DETAIL NOT TO SCALE

5. CONSTRUCTION SHALL BE IN ACCORDANCE WITH WIDNR CPS TECHNICAL STANDARD 1052 & 1053.



R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A.

ANCHOR SLOT BY BUR THE TOP END OF MATT PER MANUFACTURES SI	7ING
	EROSION CONTROL MATTING - PROTECTING EXPOSED SURFACE OR SLOPE

1520 CITY OF M

**PRELIMINARY** NOT FOR CONSTRUCTION

© COPYRIGHT 2019 R.A. Smith, Inc.

DATE: **05-09-19** 

SCALE: N.T.S


JOB NO. **3180058** 


PROJECT MANAGER: MATT KOCOUREK, P.E.


DESIGNED BY: CBT CHECKED BY: RTP

**SHEET NUMBER** 

C501

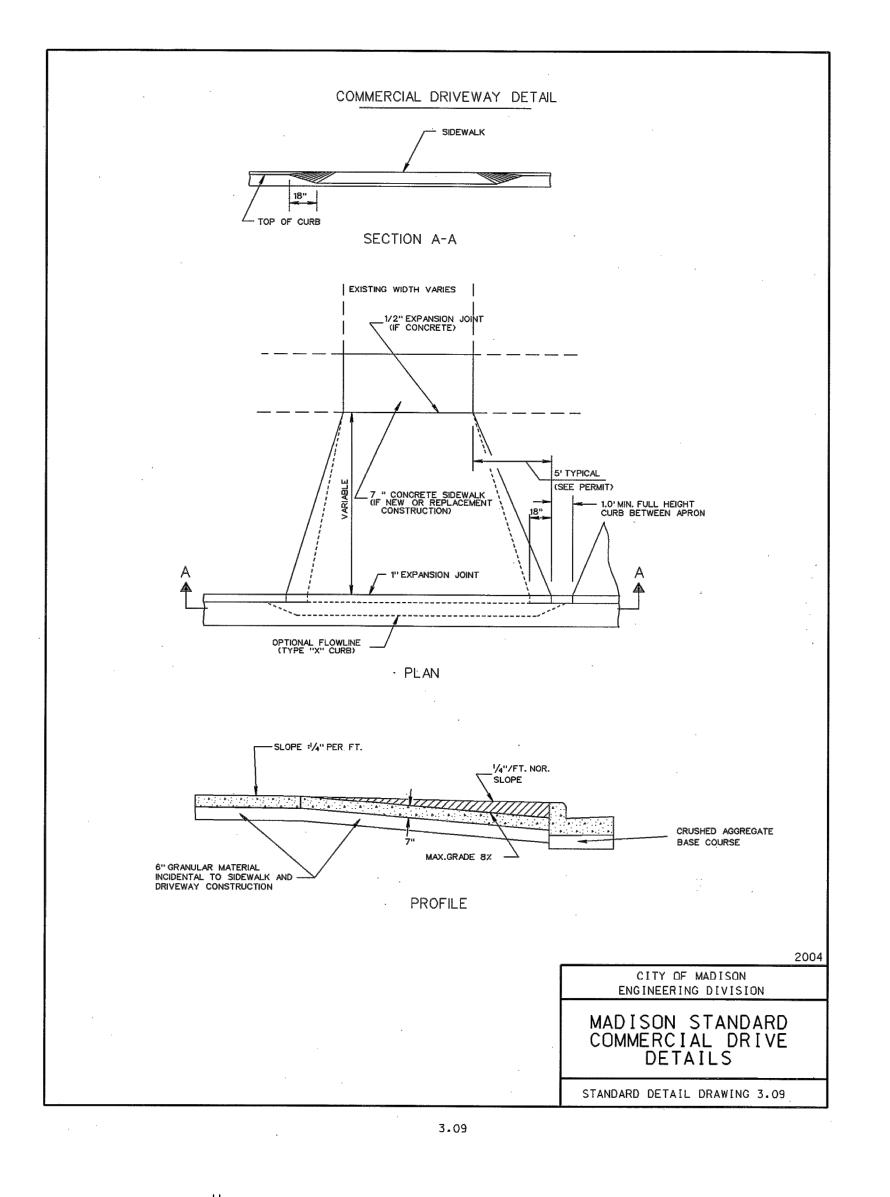

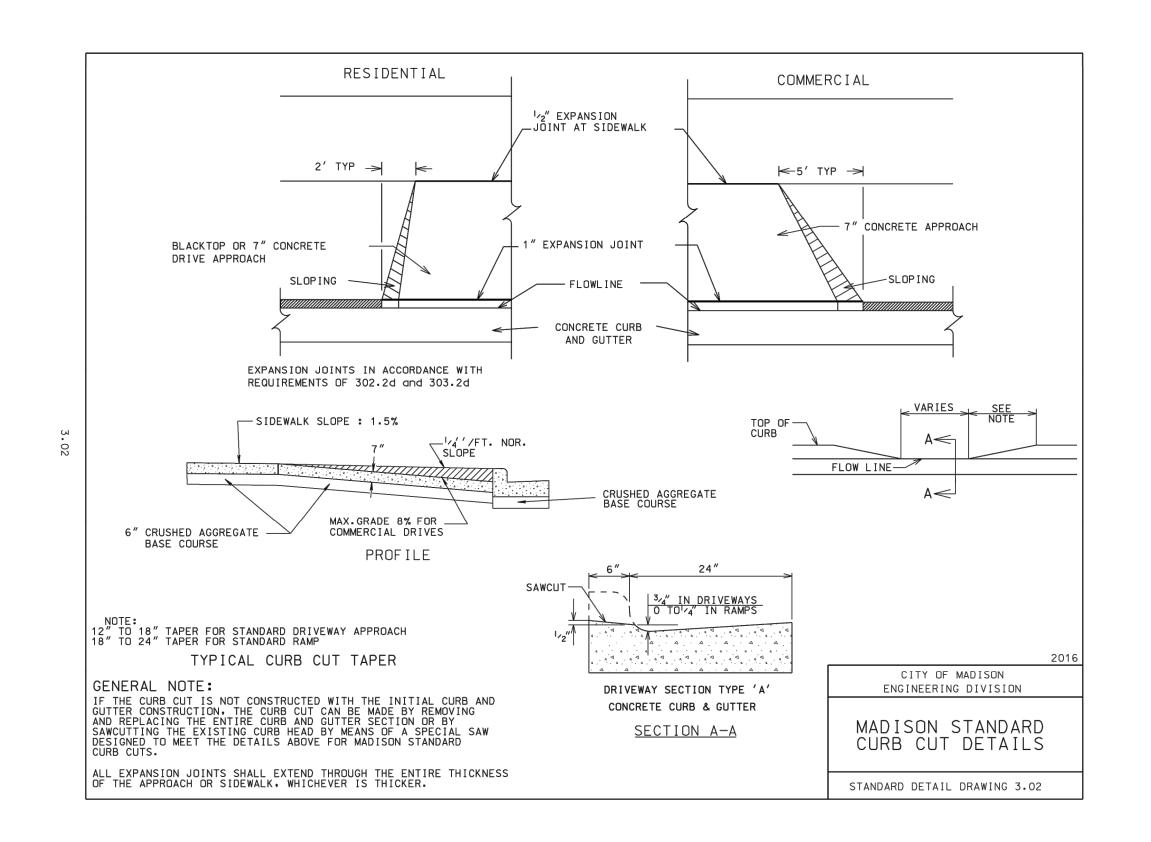

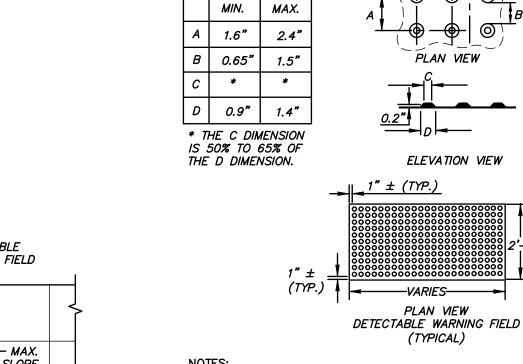


1. DETECTABLE WARNING SURFACES SHALL CONTRAST VISUALLY WITH ADJACENT WALKING SURFACES EITHER LIGHT-ON-DARK OR DARK-ON-LIGHT.

2. DETECTABLE WARNING FIELDS SHALL BE "NEENAH DETECTABLE WARNING PLATES" 4984-XXX, OR EQUIV.


6 TO 8 INCHES FROM THE FACE OF CURB.

3. CURB RAMP DETECTABLE WARNING FIELDS TO BE INSTALLED


DETECTABLE WARNING FIELD DETAIL NOT TO SCALE

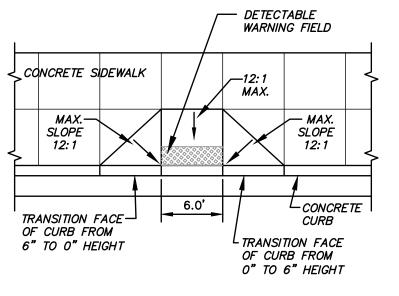



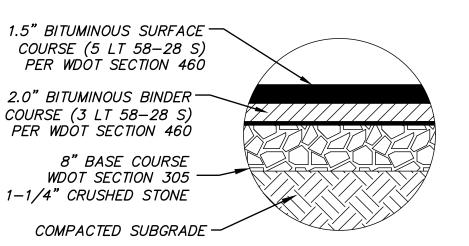


ASPHALT PAVEMENT SECTION (LIGHT DUTY)

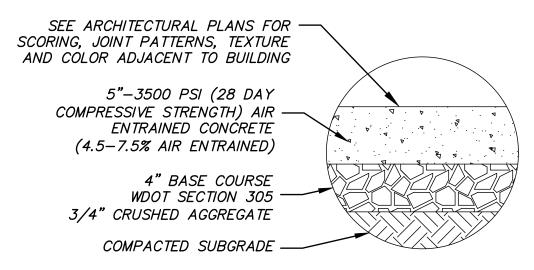

CONCRETE SIDEWALK PAVEMENT SECTION

NOTE: PAVEMENT SECTIONS ARE FOR REPRESENTATIVE PURPOSES ONLY. REFER TO GEOTECH REPORT AND GEOTECHNICAL ENGINEER FOR FINAL PAVEMENT SECTIONS TO BE CONSTRUCTED.

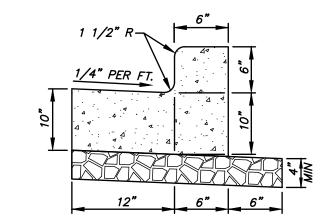


HIGH-SIDE CURB


LOW-SIDE CURB

3,500 PSI CONCRETE SHALL BE USED IN CONSTRUCTION OF THE CURB & GUTTER OR PER GEOTECHNICAL REPORT. THE MORE STRINGENT SHALL APPLY. THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING THE SLOPE OF THE GUTTER PAN. 1/2" PREFORMED EXPANSION JOINT FILLER SHALL BE PLACED TRANSVERSELY IN THE CURB 1) AT EACH JUNCTION OF RADIUS RETURN CURB AND THE CURB WHICH IS PARALLEL TO THE PROJECT CENTER LINE. 2) AT EACH JUNCTION WITH EXISTING CONCRETE CURB OR CONCRETE CURB & GUTTER.
3) AT EACH JUNCTION WITH EXISTING CONCRETE SIDEWALK, TO THE DEPTH OF THE SIDEWALK.

### 18" CONCRETE CURB & GUTTER DETAIL NOT TO SCALE

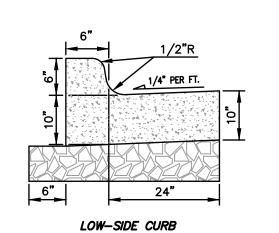

THE PROJECT CENTER LINE.

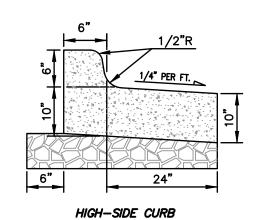


3,500 PSI CONCRETE SHALL BE USED IN CONSTRUCTION OF THE CURB & GUTTER THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING THE SLOPE OF THE GUTTER PAN. 1/2" PREFORMED EXPANSION JOINT FILLER SHALL BE PLACED TRANSVERSELY IN THE CURB ÀS FOLLOWS: 1) AT EACH JUNCTION OF RADIUS RETURN CURB AND THE CURB WHICH IS PARALLEL TO


2) AT EACH JUNCTION WITH EXISTING CONCRETE CURB OR CONCRETE CURB & GUTTER.

30" CONCRETE CURB & GUTTER DETAIL

3) AT EACH JUNCTION WITH EXISTING CONCRETE SIDEWALK, TO THE DEPTH OF THE SIDEWALK.

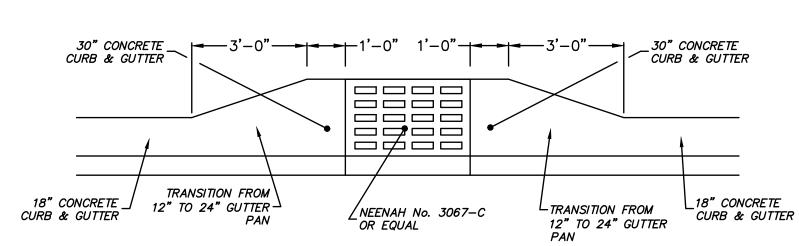

### TYPICAL CURB AND GUTTER TRANSITION AT STORM INLET/CATCH BASIN NOT TO SCALE

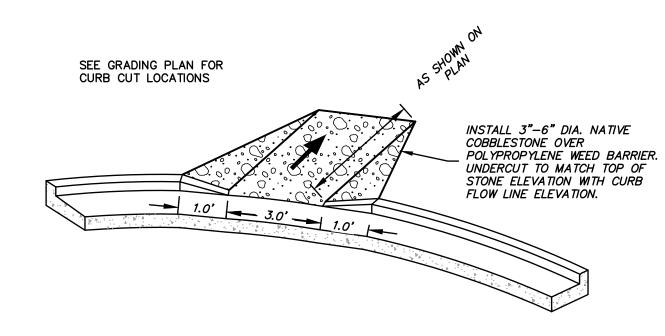

CURB CUT WITH RIP RAP OUTFALL



R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A.

PARKWAY AMERICAN FIADISON, DAN 1520 CITY OF M

TI-FAMI

PRELIMINARY NOT FOR CONSTRUCTION

© COPYRIGHT 2019


R.A. Smith, Inc. DATE: **05-09-19** 

> SCALE: N.T.S JOB NO. **3180058**

PROJECT MANAGER: MATT KOCOUREK, P.E.

DESIGNED BY: CBT CHECKED BY: RTP

SHEET NUMBER C502

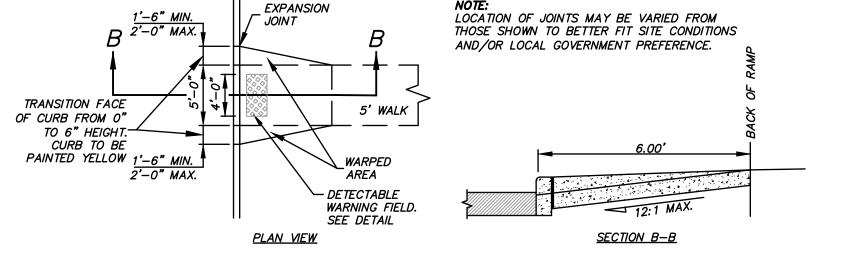

DEPRESSED SIDEWALK RAMP (TYPE 1) NOT TO SCALE

1.5" BITUMINOUS SURFACE -

COURSE (5 LT 58-28 S)

PER WDOT SECTION 460

2.5" BITUMINOUS BINDER

COURSE (3 LT 58-28 S)

1-1/4" CRUSHED STONE

PER WDOT SECTION 460

10" BASE COURSE


WDOT SECTION 305

COMPACTED SUBGRADE -

ASPHALT PAVEMENT SECTION


(HEAVY DUTY)

TRANSITION FACE OF CURB FROM O"

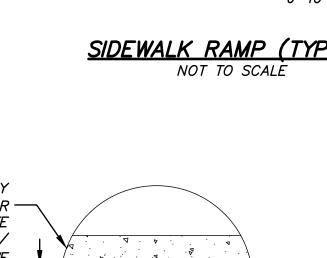


7"-4000 PSI (28 DAY COMPRESSIVE STRENGTH) AIR -ENTRAINED CONCRETE (4.5-7.5% AIR ENTRAINED) W/ 6"x6" W2.9xW2.9 WWF REINFORCEMENT 6" BASE COURSE WDOT SECTION 305 1-1/4" CRUSHED STONE COMPACTED SUBGRADE


> CONCRETE PAVEMENT SECTION (HEAVY DUTY)

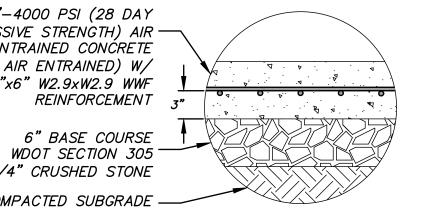

1-1/4" CRUSHED STONE

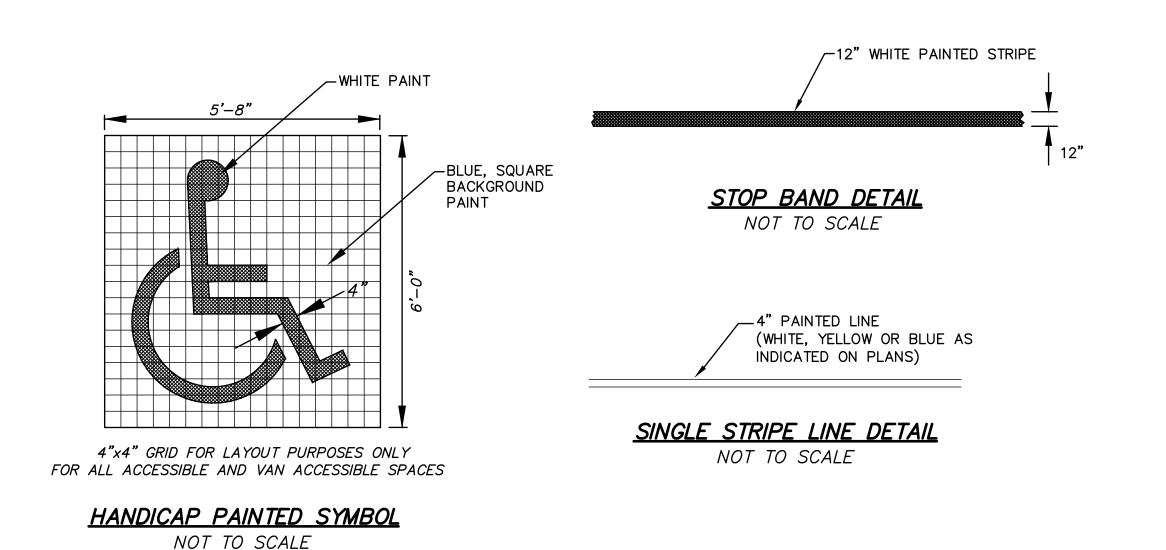

TYPE II

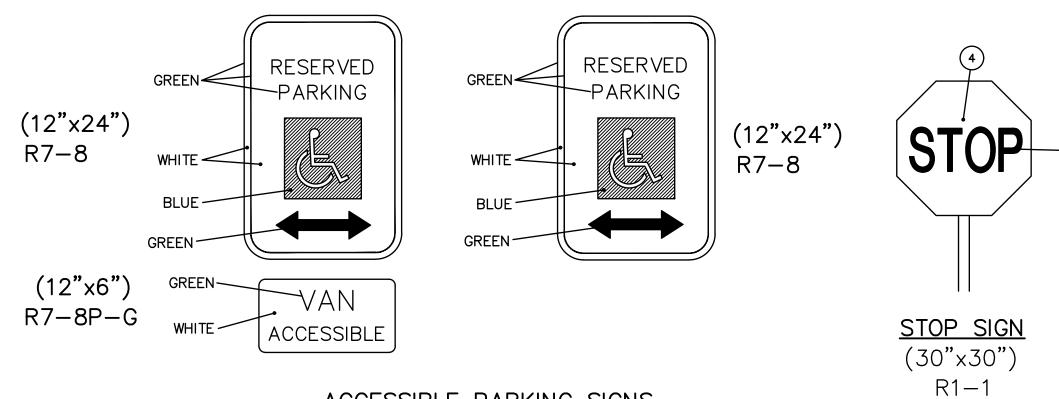


ACCESSIBLE PARKING SIGNS


TYPE IV

### COLOR CODE KEY YELLOW

NOTE: ALL STANDARD SIGNS CONFORM TO THE "MANUAL ON TRAFFIC DEVICES FOR STREETS AND HIGHWAYS", (MUTCD), ADAPTED BY THE FEDERAL HIGHWAY ADMINISTRATION, U.S. DEPARTMENT OF TRANSPORTATION, LATEST EDITION.

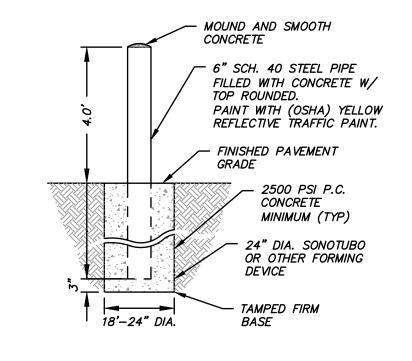

**BOLLARD DETAIL** NOT TO SCALE

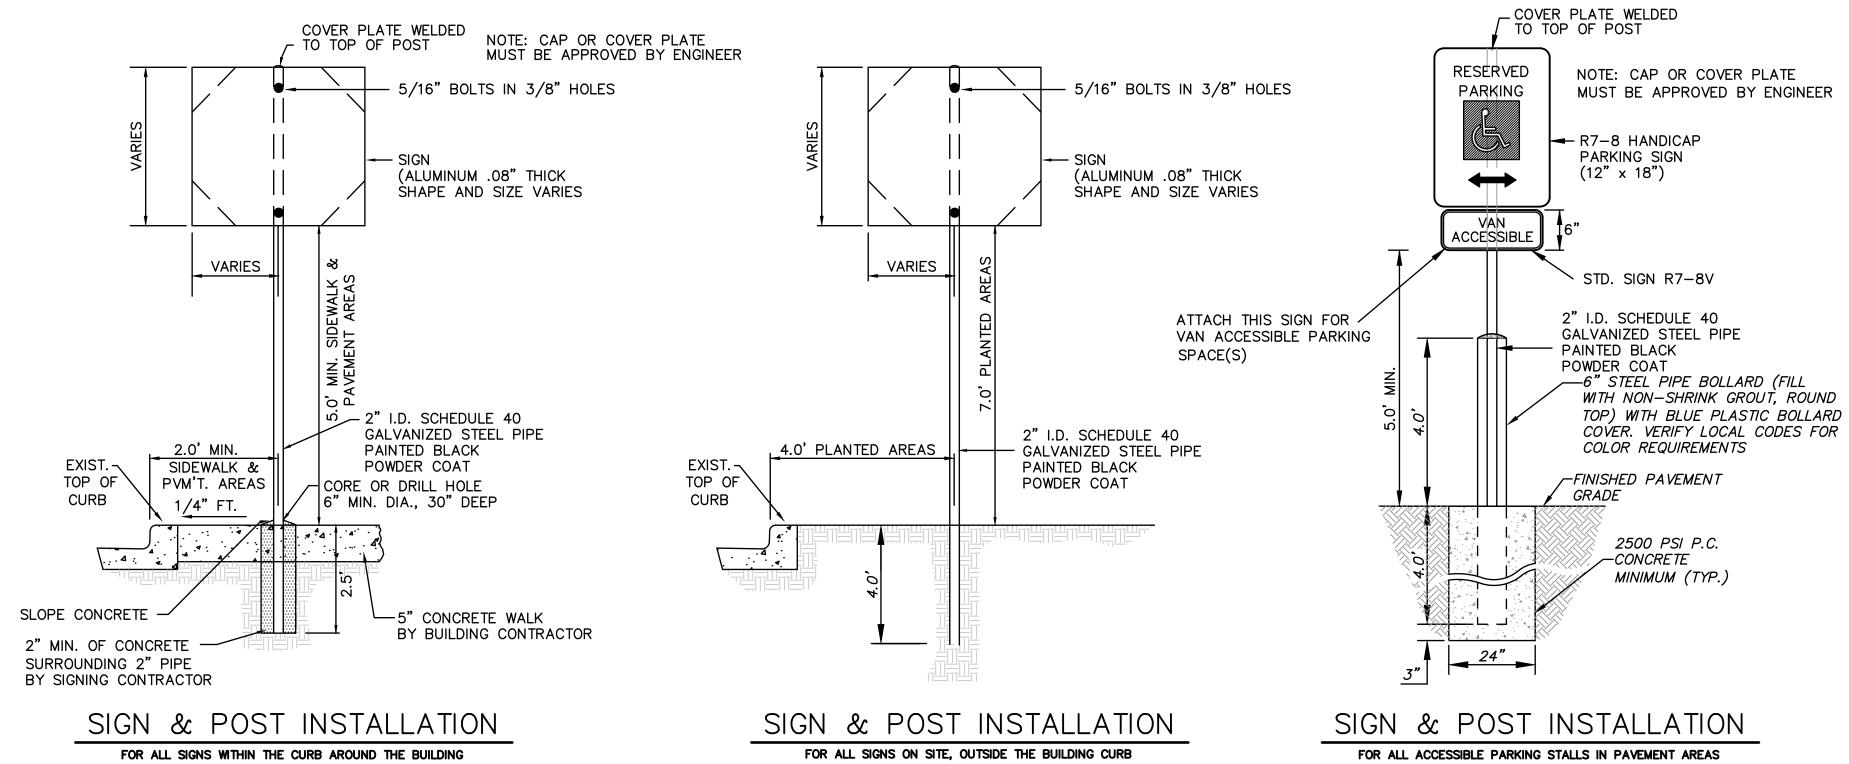

TYPE III

NOTE:
ALL SIGNS SHALL BE MOUNTED TO POSTS BY MEANS OF

5/16" BOLTS. HOLES 3/8" IN DIAMETER, DRILLED THROUGH BOTH SIDES OF POSTS PRIOR TO SIGN INSTALLATION.

Know what's **below.** Call before you dig.

R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A. SMITH, INC.

N PARKWAY MULTI-FAMIL
O AMERICAN PARKWAY
MADISON, DANE COUNTY, WI IERICAN F 1520 A

> PRELIMINARY NOT FOR CONSTRUCTION

© COPYRIGHT 2019 R.A. Smith, Inc.


DATE: **05-09-19** 

SCALE: N.T.S

JOB NO. **3180058** PROJECT MANAGER: MATT KOCOUREK, P.E.

DESIGNED BY: CBT CHECKED BY: RTP

**SHEET NUMBER** C503

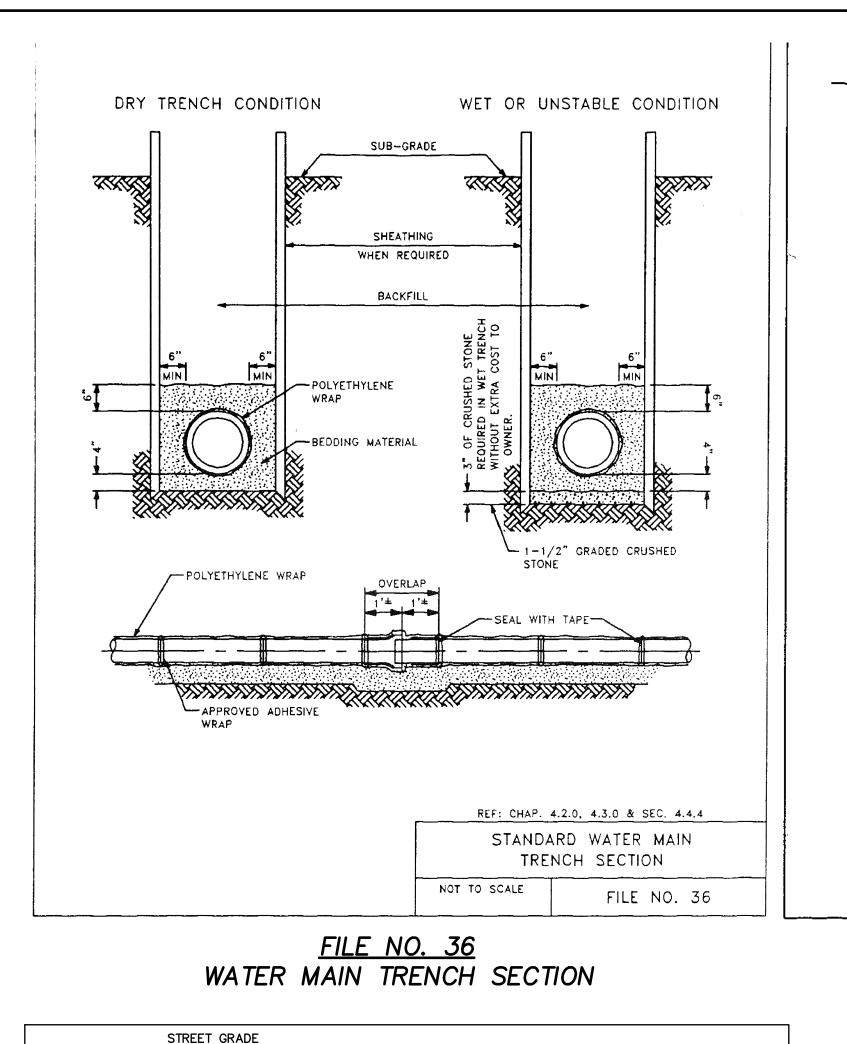

TYPE 1 FRAME/CHIMNEY JOINT REQUIRED

MATERIAL

ON ALL SANITARY MANHOLES UNLESS

OTHERWISE SPECIFIED. TYPE III JOINT

REQUIRED ON ALL STORM MANHOLES.

INTEGRAL BASE

FLAT TOP SLAB MAY BE USED FOR 5'-0" AND 6'-0" DIA.

ADJUST FRAME TO GRADE WITH BRICK OR CONCRETE RINGS OF VARIABLE THICKNESS, MAXIMUM RING

HEIGHT=6", MINIMUM RING HEIGHT=2". CONCRETE

RINGS SHALL BE REINFORCED WITH ONE LINE OF

NECESSARY RINGS SHALL BE GROOVED TO RECEIVE

CONFORM TO DESIGNATION C-478 REQUIREMENTS OF

JOINTS SHALL BE WATERTIGHT AND SHALL BE MADE

STORM AND BUTYL RUBBER GASKETS FOR SANITARY

AREA OF CIRCUMFERENTIAL STEEL=0.12 SQ. INCH PER

SPACE BETWEEN PIPE AND PRECAST MANHOLE WALL

TO BE FILLED WITH BRICK AND MORTARED IN PLACE

IBLE SANITARY SEWER CONNECTIONS. THE ANNULAR SPACE BETWEEN THE PIPE AND MANHOLE WALL SHALL

MATERIAL BELOW SURFACE OF BENCH OF SPRINGLINE.

3" STONE CUSHION UNDER BASE IS REQUIRED ONLY ON

PROVIDE A MINIMUM 1/2" DIA. HOLE FOR LEAKAGE TEST,

SANITARY MANHOLE 2" PER FOOT

REF: CHAP. 3.5.0 PRECAST MANHOLE

FILE NO. 12

EXCEPT THAT AN APPROVED FLEXIBLE WATERTIGHT PIPE TO MANHOLE SEAL IS REQUIRED FOR ALL FLEX-

BE FILLED WITH FLEXIBLE BUTYL RUBBER GASKET

NOT GREATER THAN 2' ABOVE LOWEST PIPE.

BENCH SLOPE-STORM MANHOLE 1" PER FOOT

USING MORTAR OR BUTYL RUBBER GASKETS FOR

STEEL CENTERED WITHIN THE RING. WHERE

CONCRETE AND STEEL REINFORCEMENT SHALL

CONE-TOP SECTION

STANDARD

FLAT-TOP SLAB

(OPTIONAL)

SEE TABLE

POURED BASE

3'-6"

4'-0"

6'-0"

MANHOLE DIA. | WALL THICKNESS

4 1/2"

TABLE NO. 1

PIPE DIA.

8" THRU 27"

REINFORCING

FILLET

STEEL

MANHOLES.


LINEAL FOOT.


WET SUB-GRADE.

CLASS "D" CONCRETE


NOT TO SCALE


JAN. 2, 1992

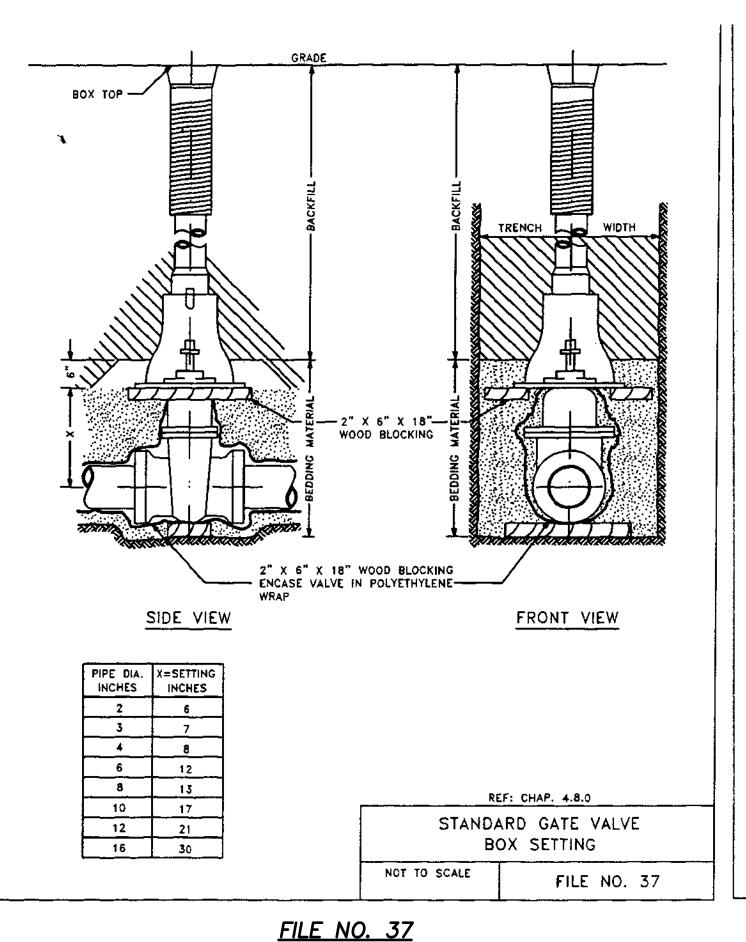

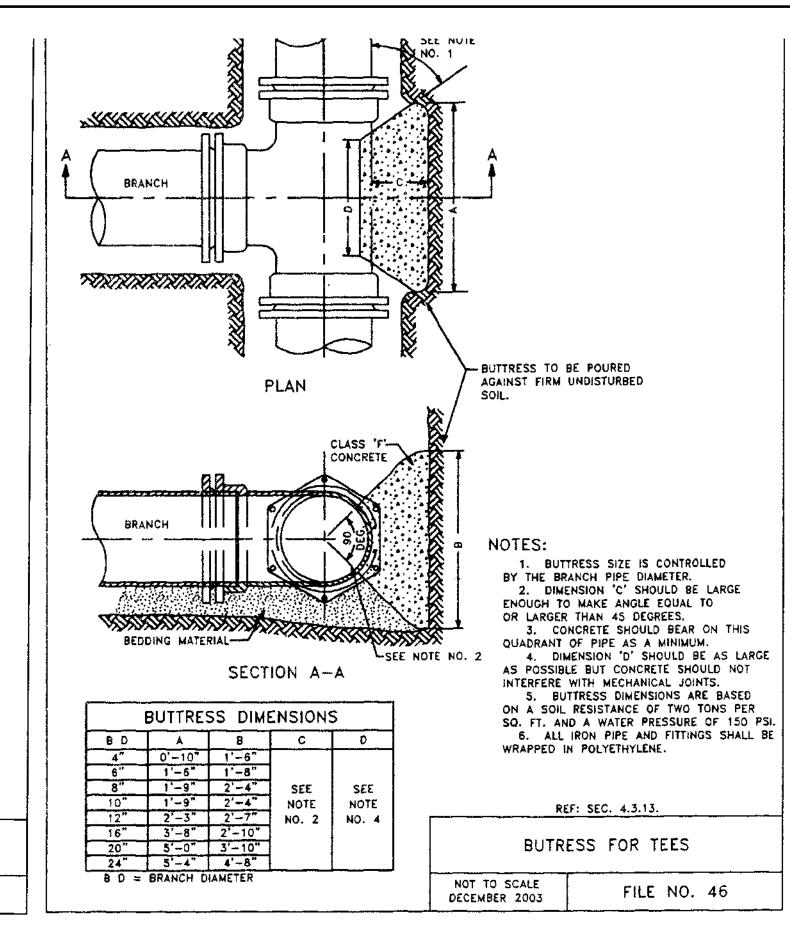


FILE NO. 46

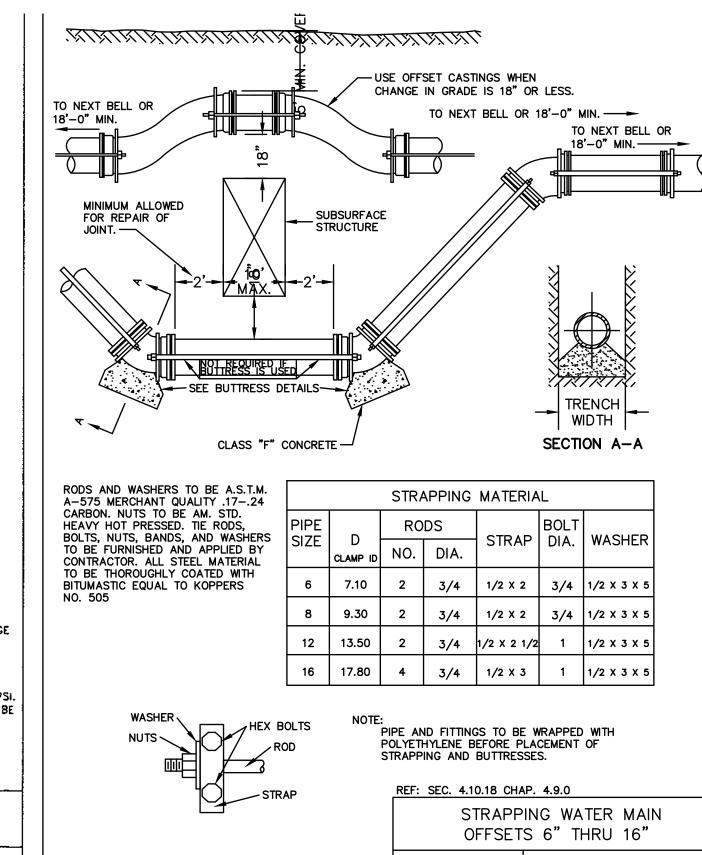

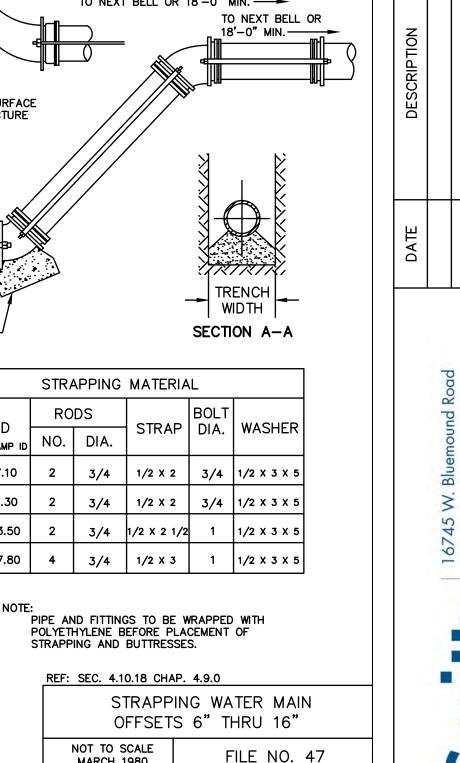





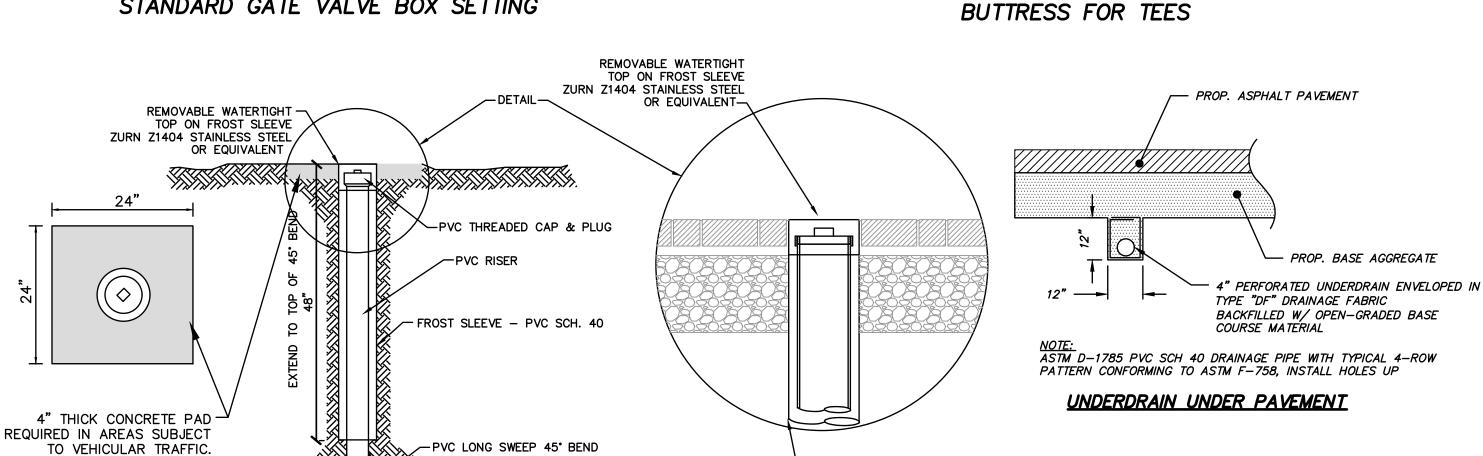

CLEAN-OUT STRUCTURE DETAIL

FLOW ——



### NOTES:

REFER TO FILE No. 12 (STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN, DETAIL ON THIS SHEET - ABOVE) EXCEPT:

A. USE NEENAH CASTING R-3067-C AT ALL CURB INLET LOCATIONS. USE NEENAH CASTING R-2050-C AT INLET R-120B, USE ZURN TYPE INLET RIGHT AT ALL PATIO INLETS UNLESS OTHERWISE NOTED ON PLANS. B. USE 48" MINIMUM DIAMETER UNLESS INDICATED OTHERWISE ON PLAN

CONTRACTOR RESPONSIBLE FOR VERIFYING REQUIRED CASTING IS COMPATIBLE WITH STRUCTURE. IF NOT COMPATIBLE, CONTACT ENGINEER IMMEDIATELY FOR POSSIBLE REDESIGN.

### REFER TO FILE No. 12 (STANDARD SPECIFICATIONS FOR SEWER AND WATER CONSTRUCTION IN WISCONSIN, DETAIL ON THIS SHEET) FOR ALL PROPOSED STORM MANHOLES, EXCEPT:

TO BE ENCASED IN CONCRETE -

A. USE NEENAH R-1713 FRAME AND LID B. CONTRACTOR RESPONSIBLE FOR VERIFYING REQUIRED CASTING IS COMPATIBLE WITH STRUCTURE. IF NOT COMPATIBLE, CONTACT ENGINEER IMMEDIATELY FOR POSSIBLE REDESIGN. C. USE 48" MINIMUM DIAMETER UNLESS INDICATED OTHERWISE ON PLAN

<u>NOTE:</u> ASTM D-1785 PVC SCH 40 DRAINAGE PIPE WITH TYPICAL 4-ROW PATTERN CONFORMING TO ASTM F-758, INSTALL HOLES UP

- CONC. CURB & GUTTER

- PROP. ASPHALT PAVEMENT

- PROP. BASE AGGREGATE


4" PERFORATED UNDERDRAIN ENVELOPED IN

TYPE "DF" DRAINAGE FABRIC

BACKFILLED W/ OPEN-GRADED BASE COURSE MATERIAL

UNDERDRAIN UNDER CURB

### FILE NO. 47 STRAPPING WATER MAIN OFFSETS

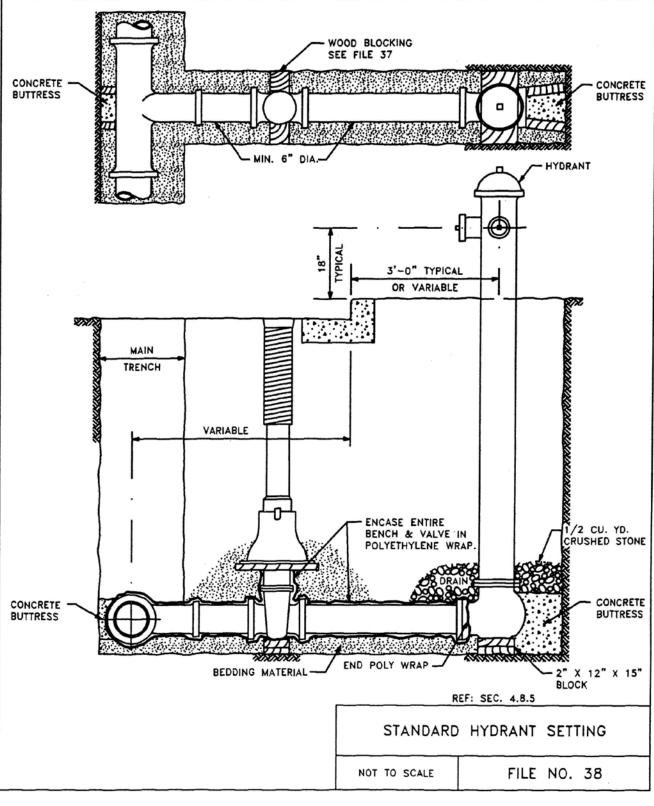

Know what's **below.** Call before you dig.

STANDARD HYDRANT SETTING FILE NO. 38

> R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A.

PRELIMINARY NOT FOR

PARKWAY AMERICAN FIADISON, DAN

RICAN 1520 ITY OF M

© COPYRIGHT 2019 R.A. Smith, Inc. DATE: **05-09-19** 

CONSTRUCTION

SCALE: N.T.S

JOB NO. **3180058** 

PROJECT MANAGER: MATT KOCOUREK, P.E. DESIGNED BY: CBT

CHECKED BY: RTP

SHEET NUMBER C504


MANHOLE & INLET STRUCTURE DETAIL PER FILE NO. 12. STANDARD SPECIFICATIONS FOR SEWER & WATER CONSTRUCTION IN WISCONSIN

NOT TO SCALE


FROST SLEEVE - PVC SCH. 40 1. RISER PIPE SHALL BE EXTENDED ABOVE GROUND LEVEL INTIALLY &

THEN IT MAY BE CUT BACK TO MATCH FINAL GRADE (BY OTHERS) POSITION CLEAN-OUTS UPSTREAM OF BENDS, WHEN FEASIBLE REMOVABLE WATERTIGHT TOP ON FROST SLEEVES SUBJECT TO VEHICLE TRAFFICE SHALL BE CAST IRON

NOT TO SCALE

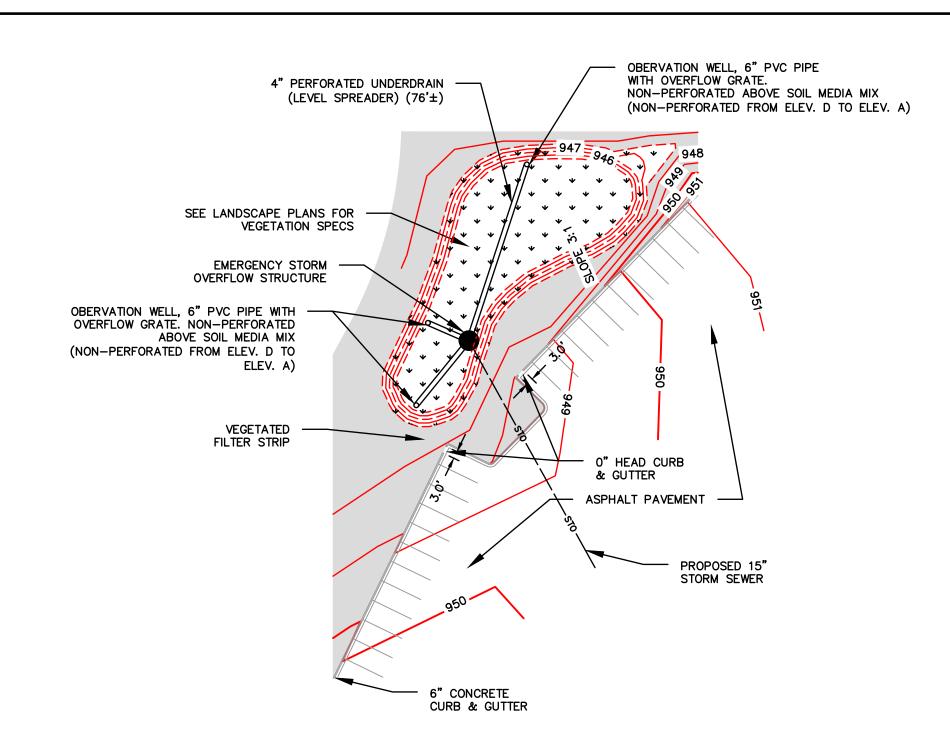

### PLAN VIEW (NOT TO SCALE)

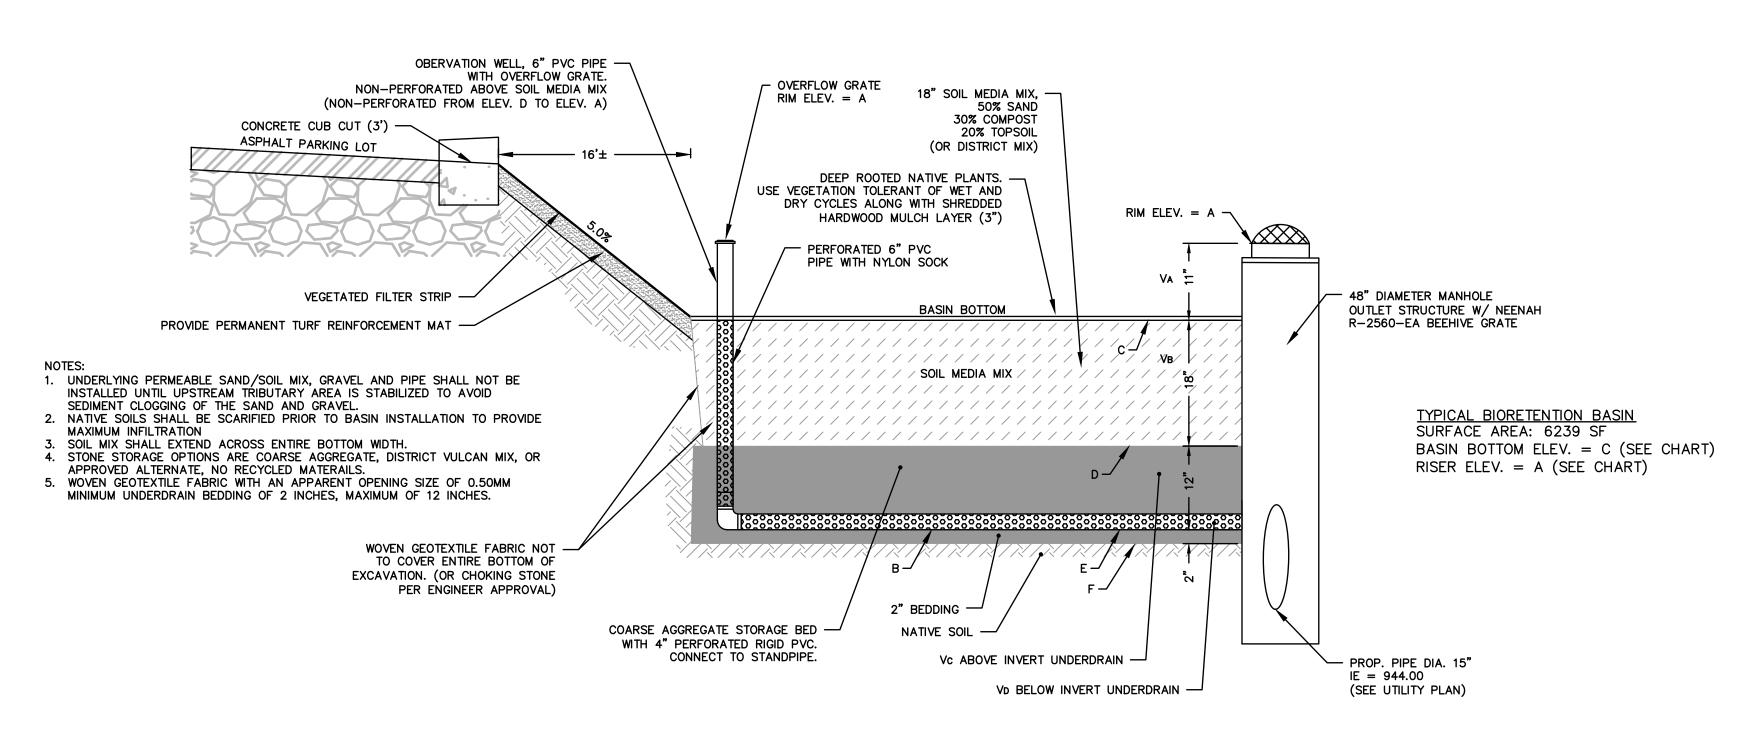

### TYPICAL SECTION

	А	В	С	D	E	F
	RIM ELEVATION	UNDER DRAIN INVERT	BOTTOM OF BASIN	TOP OF AGGREGATE ABOVE UNDER DRAIN	TOP OF AGGREGATE BELOW UNDER DRAIN	BOTTOM OF AGGREGATE
BASIN	946.46	943.00	945.50	944.00	943.00	942.83

VOLUME TYPE SURFACE STORAGE SOIL MEDIA MIX COARSE AGG. (ABOVE INV.) COARSE AGG. (BELOW INV.)	POROSITY 1.00 0.25 0.36 0.36	MEDIA VOLUME VA = 5719 CF VB = 9359 CF VC = 6239 CF VD = 90 CF	STORAGE VOLUME 1.00 X VA 0.5 X 0.25 X VB 0.5 X 0.36 X VC 0.36 X VD	VOLUME PROVIDED 5719 CF 1170 CF 1123 CF 1040 CF TOTAL: 9052 CF 0.21 AC-FT
--	--	--	--	---

Know what's **below. Call** before you dig.

R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A. SMITH, INC.

N PARKWAY MULTI-FAMIL
O AMERICAN PARKWAY
MADISON, DANE COUNTY, WI

IERICAN I 1520 , CITY OF MA

PRELIMINARY NOT FOR CONSTRUCTION

0

© COPYRIGHT 2019 R.A. Smith, Inc.

DATE: **05-09-19** SCALE: N.T.S

JOB NO. **3180058** 

PROJECT MANAGER: MATT KOCOUREK, P.E.


CHECKED BY: RTP

DESIGNED BY: CBT


**SHEET NUMBER** C505

BIORETENTION BASIN DETAIL

(NOT TO SCALE)

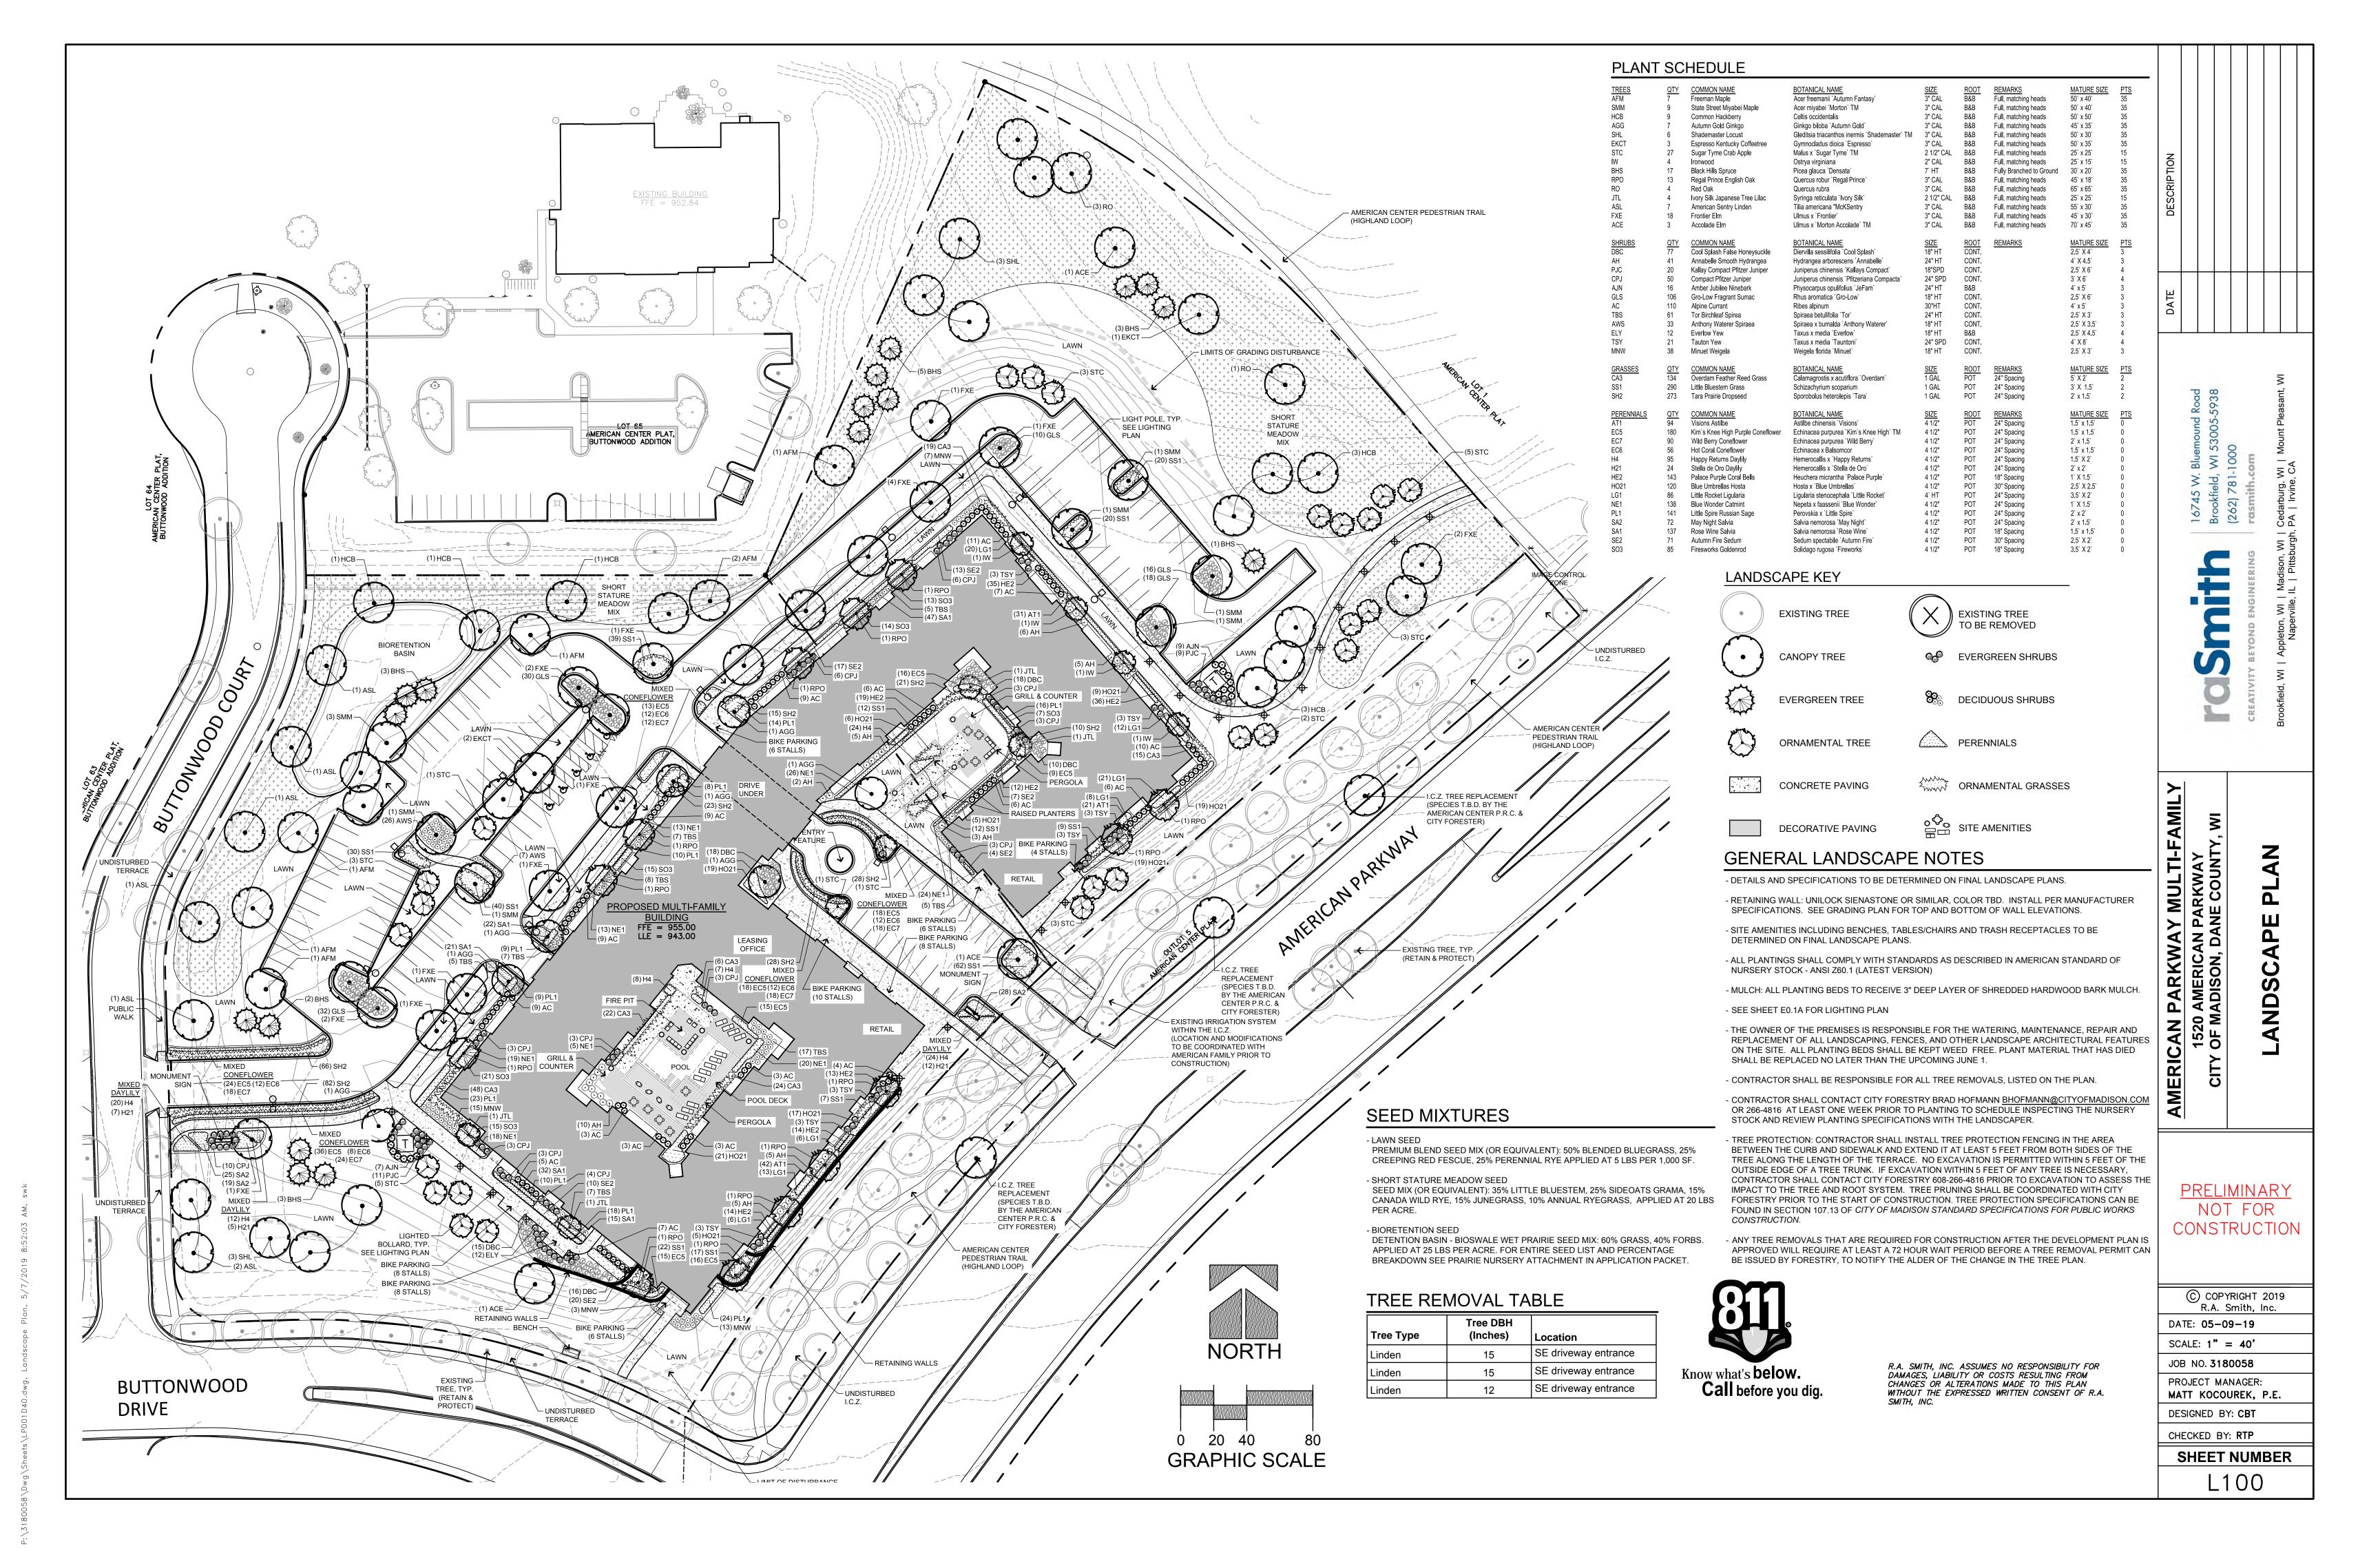



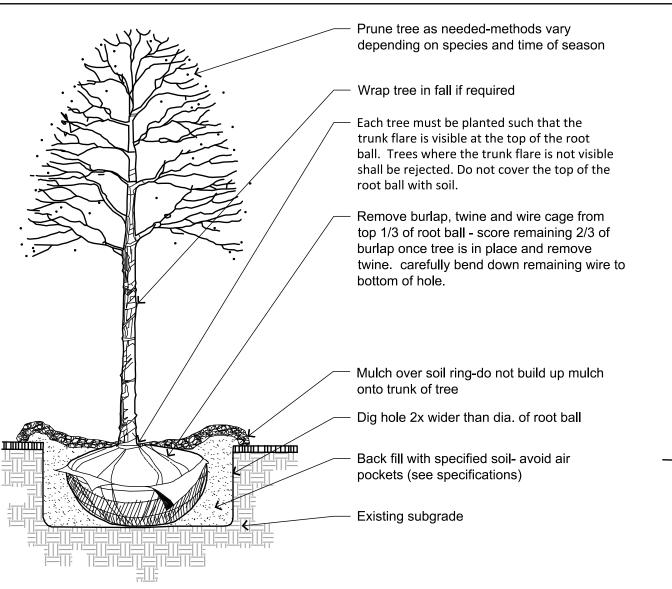

1. Install 4' high orange vinyl snow

2. Erect fence with 5' metal t-stakes

The fencing shall be in place

4. No construction activity shall take

stored inside of the fencing.

before construction activity begins

and remain until all exterior work

place nor shall any equipment be

at least every 10'.


has been completed.

construction fencing or similar


fencing as shown on this plan.

DECIDUOUS TREE PLANTING DETAIL

2"x2"x24" Wood stakes Rubber hose Root ball **PLAN VIEW** Rubber hose-affix above first crotch of tree Yellow poly rope 2"x2"x24" Notched wood stakes-3 per tree-set into solid ground

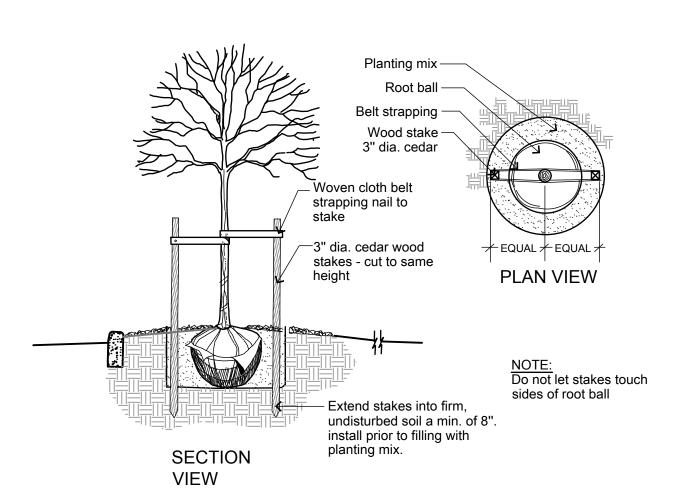

DECIDUOUS TREE STAKING FOR RESTRICTED AREAS

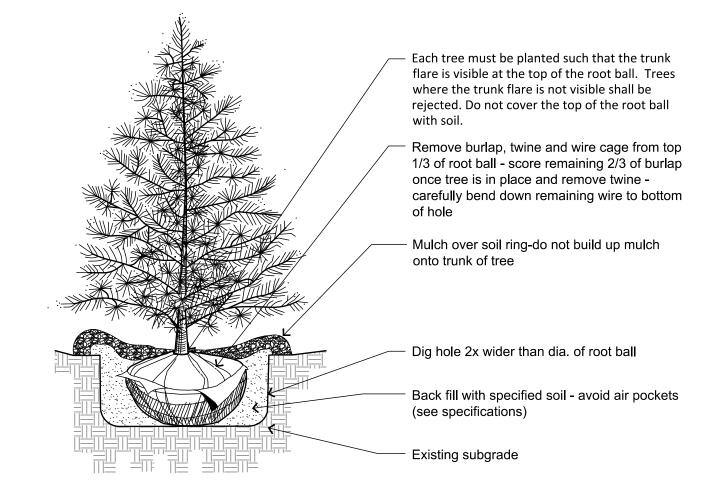

- Prune cut dead and broken branches retain natural plant shape – Plant at same depth as previous level — Do not bury any bottom branches Prune out anybrown branches Dig hole 2x wider – than dia. of root ball -Finished grademulch level (see specifications) Container grown Balled & Burlapped Remove burlap and twine from top 1/3 Carefully remove from plastic pot and of root ball and score remaining 2/3 score roots 1" deep with a sharp knife

**REE PROTECTION FENCING DETAIL** 

Minimum 5' —

Grade ·

beyond drip line


Orange construction fencing -


**EVERGREEN TREE PLANTING DETAIL** 

SHRUB PLANTING DETAIL

©2014 GRABER MANUFACTURING, INC. ALL PRIPRIETARY RIGHTS RESERVED.

P-BI-02

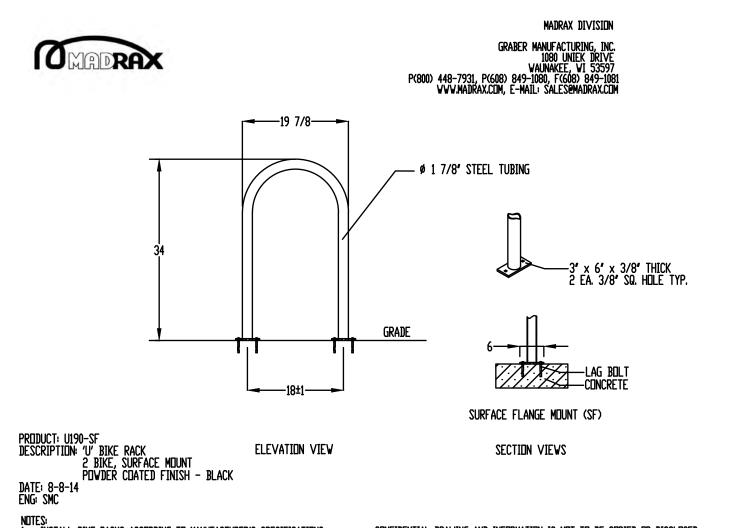

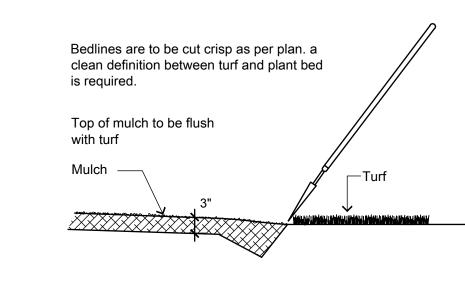

MADRAX "U" BIKE RACK DETAIL

SHOVEL CUT PLANT BED EDGING DETAIL

### LANDSCAPE NOTES

- Contractor responsible for contacting public and private underground utility locating service to have site marked prior to any digging
- 2. Contractor to verify all plant quantities shown on plant list and verify with plan. Report any discrepancies immediately to general
- 3. All plantings shall comply with standards as described in American Standard of Nursery Stock ANSI Z60.1 (latest version). General contractor or owner's representative reserves the right to inspect and potentially reject any plants that are inferior, compromised, undersized, diseased, improperly transported, installed incorrectly or damaged.
- 4. Any potential plant substitutions must be submitted in writing and approved by the general contractor or owner's representative prior to installation. All plants must be installed as per sizes shown on plant material schedule, unless approved by general contractor or owner's representative.
- 5. All seeded areas and planting beds require topsoil to be placed within 3" of finish grade during rough grading operations. All parking lot islands require topsoil placed to a minimum depth of 18" to insure long term plant health. These requirements should be coordinated between the general contractor, grading contractor and landscape contractor.
- 6. The landscape contractor to be responsible for placing a minimum depth of 3" of blended, prepared and non-compacted topsoil in all seeded areas. The fine grading of planting beds and parking lot islands may require additional topsoil to bring to finish grade. Finished landscaped areas to be smooth, uniform and provide positive drainage away from all structures and pavement.

Tree planting (see planting detail):

Plant all trees slightly higher than finished grade at root flare. Remove excess soil from top of root ball, if needed. Scarify side walls of tree pit prior to installation. Remove and discard non-biodegradable ball wrapping and support wire. Remove biodegradable burlap and wire cage (if applicable) from top one-third of rootball. Carefully bend remaining wire down to the bottom of hole once the tree has been placed into the hole and will no longer be moved. Score the remaining two-thirds of burlap and remove twine. Backfill pit with 80% existing soil removed from excavation and 20% plant starter mix blended prior to backfilling holes. Discard any gravel, heavy clay or stones. Avoid any air pockets and do not tamp soil down. When hole is two-thirds full, trees shall be watered thoroughly, and water left to soak in before proceeding.

Provide a 3" deep, 4 ft. diameter shredded hardwood bark mulch ring around all lawn trees. Do not build up any mulch onto trunk of any tree. Trees that are installed incorrectly will be replaced at the time and expense of the landscape contractor. Stake trees according to the staking detail.

- 8. Shrub planting: all shrubs to be pocket planted with a 50/50 mix of plant starter and topsoil. Install topsoil into all plant beds as needed to achieve proper grade and replace undesirable soil (see planting detail). Remove all excessive gravel, clay and stones from plant beds prior to planting. When hole is two-thirds full, shrubs shall be watered thoroughly and water left to soak in before
- 9. Mulching: all tree and shrub planting beds to receive a 3" deep layer of high quality shredded hardwood bark mulch (not enviromulch). All perennial planting areas to receive a 2" layer and groundcover areas a 1-2" layer of the same mulch. Do not mulch annual flower beds (if applicable). Do not allow mulch to contact plant stems and tree trunks.
- 10. Edging: edge all planting beds with a 4" deep spaded edge (shovel cut or mechanical). Bedlines are to be cut crisp, as per plan. A clean definition between lawn area and plant bed is required.
- 11. Plant bed preparation: all perennial, ornamental grass, annual and groundcover areas are required to receive a blend of organic soil amendments prior to installation. Rototill the following materials, at the ratio given, into the required 18" of topsoil to a depth of

### Per every 100 square feet of bed area add:

2 cu. ft. bale of peat moss

2 lbs. of 5-10-5 slow release fertilizer 1/4 cu. yard of composted manure

12.Lawn installation for all seeded turfgrass areas: remove / kill off any existing unwanted vegetation prior to seeding. Prepare the topsoil and seed bed by removing all surface stones 1" or larger and grading lawn areas to finish grade. Apply a starter fertilizer and specified seed uniformly and provide mulch covering suitable to germinate and establish turf. Provide seed and fertilizer mix information to general contractor prior to installation. Erosion control measures are to be used in swales and on steep grades, where applicable. Methods of installation may vary at the discretion of the landscape contractor on his/her responsibility to establish and guarantee a smooth, uniform, quality turf. A minimum depth of 3" of blended, prepared and non-compacted topsoil is required for all lawn areas. If straw mulch is used as a mulch covering, a tackifier may be necessary to avoid wind damage. Marsh hay containing reed canary grass is not acceptable as a mulch covering.

An acceptable quality turf is defined as having no more than 10% of the total area with bare spots larger than 1 square foot and uniform coverage throughout all turf areas

- 13. Seed mix for lawn areas use only a premium quality seed mix installed at recommended rates. Premium blend seed mix example (or equivalent): 50% blended bluegrass, 25% creeping red fescue, 25% perennial rye applied at 5 lbs per 1,000 SF. Provide seed specifications to general contractor prior to installation.
- 14. Lawn installation for all sodded turfgrass areas: remove / kill off any existing unwanted vegetation prior to sodding. Prepare the topsoil and sod bed by removing all surface stones 1" or larger and grading lawn areas to finish grade. Apply a 10-10-10 starter fertilizer uniformly throughout areas prior to laying the sod. Use only premium sod blend according to TPI (revised 1995) and ASPA standards. Install sod uniformly with staggered joints, laid tightly end to end and side to side. Roll sod with a walk behind roller and water immediately upon installation to a 3" depth. Stake any sod installed on steep slopes or in swales, etc. Landscape contractor is responsible to provide a smooth, uniform, healthy turf, and is responsible for the first two mowings of the newly installed turf, and is also responsible for the required watering during this period.
- 15. Warranty and replacements: Trees, evergreens, and shrubs to be guaranteed (100% replacement) for a minimum of one (1) year from the date of substantial project completion. Perennials, groundcovers, and ornamental grasses to be guaranteed for a minimum of one growing season from the date of substantial project completion. Perennials, groundcovers, and ornamental grasses planted after September 1st shall be guaranteed through May 31st of the following year. Only one replacement per plant will be required during the warranty period, except for losses or replacements due to failure to comply with specified requirements.
- 16. The landscape contractor is responsible for the watering and maintenance of all landscape areas at time of planting and throughout construction until the substantial completion of the installation and acceptance by the owner. This includes all trees, shrubs, evergreens, perennials, ornamental grasses and turf grass. Work also includes weeding, edging, mulching (only if required), fertilizing, trimming, sweeping up grass clippings, pruning and deadheading.
- 17. Project completion: upon substantial completion of the project, the landscape contractor is responsible to conduct a final review with the owner's representative and the general contractor to answer questions and insure that all specifications have been met. The landscape contractor is to provide watering and general ongoing maintenance instructions (in writing) for the new plantings and lawn to the owner and general contractor.



R.A. SMITH, INC. ASSUMES NO RESPONSIBILITY FOR DAMAGES, LIABILITY OR COSTS RESULTING FROM CHANGES OR ALTERATIONS MADE TO THIS PLAN WITHOUT THE EXPRESSED WRITTEN CONSENT OF R.A.

M PARKWAY MULTI-F AMERICAN PARKWAY AADISON, DANE COUNTY

TI-FAMI

1520 CITY OF M.

**PRELIMINARY** NOT FOR CONSTRUCTION

© COPYRIGHT 2019

R.A. Smith, Inc. DATE: **05-09-19** 


SCALE: 1" = 40' JOB NO. 3180058

PROJECT MANAGER: MATT KOCOUREK, P.E.


CHECKED BY: RTP


DESIGNED BY: CBT

SHEET NUMBER L200

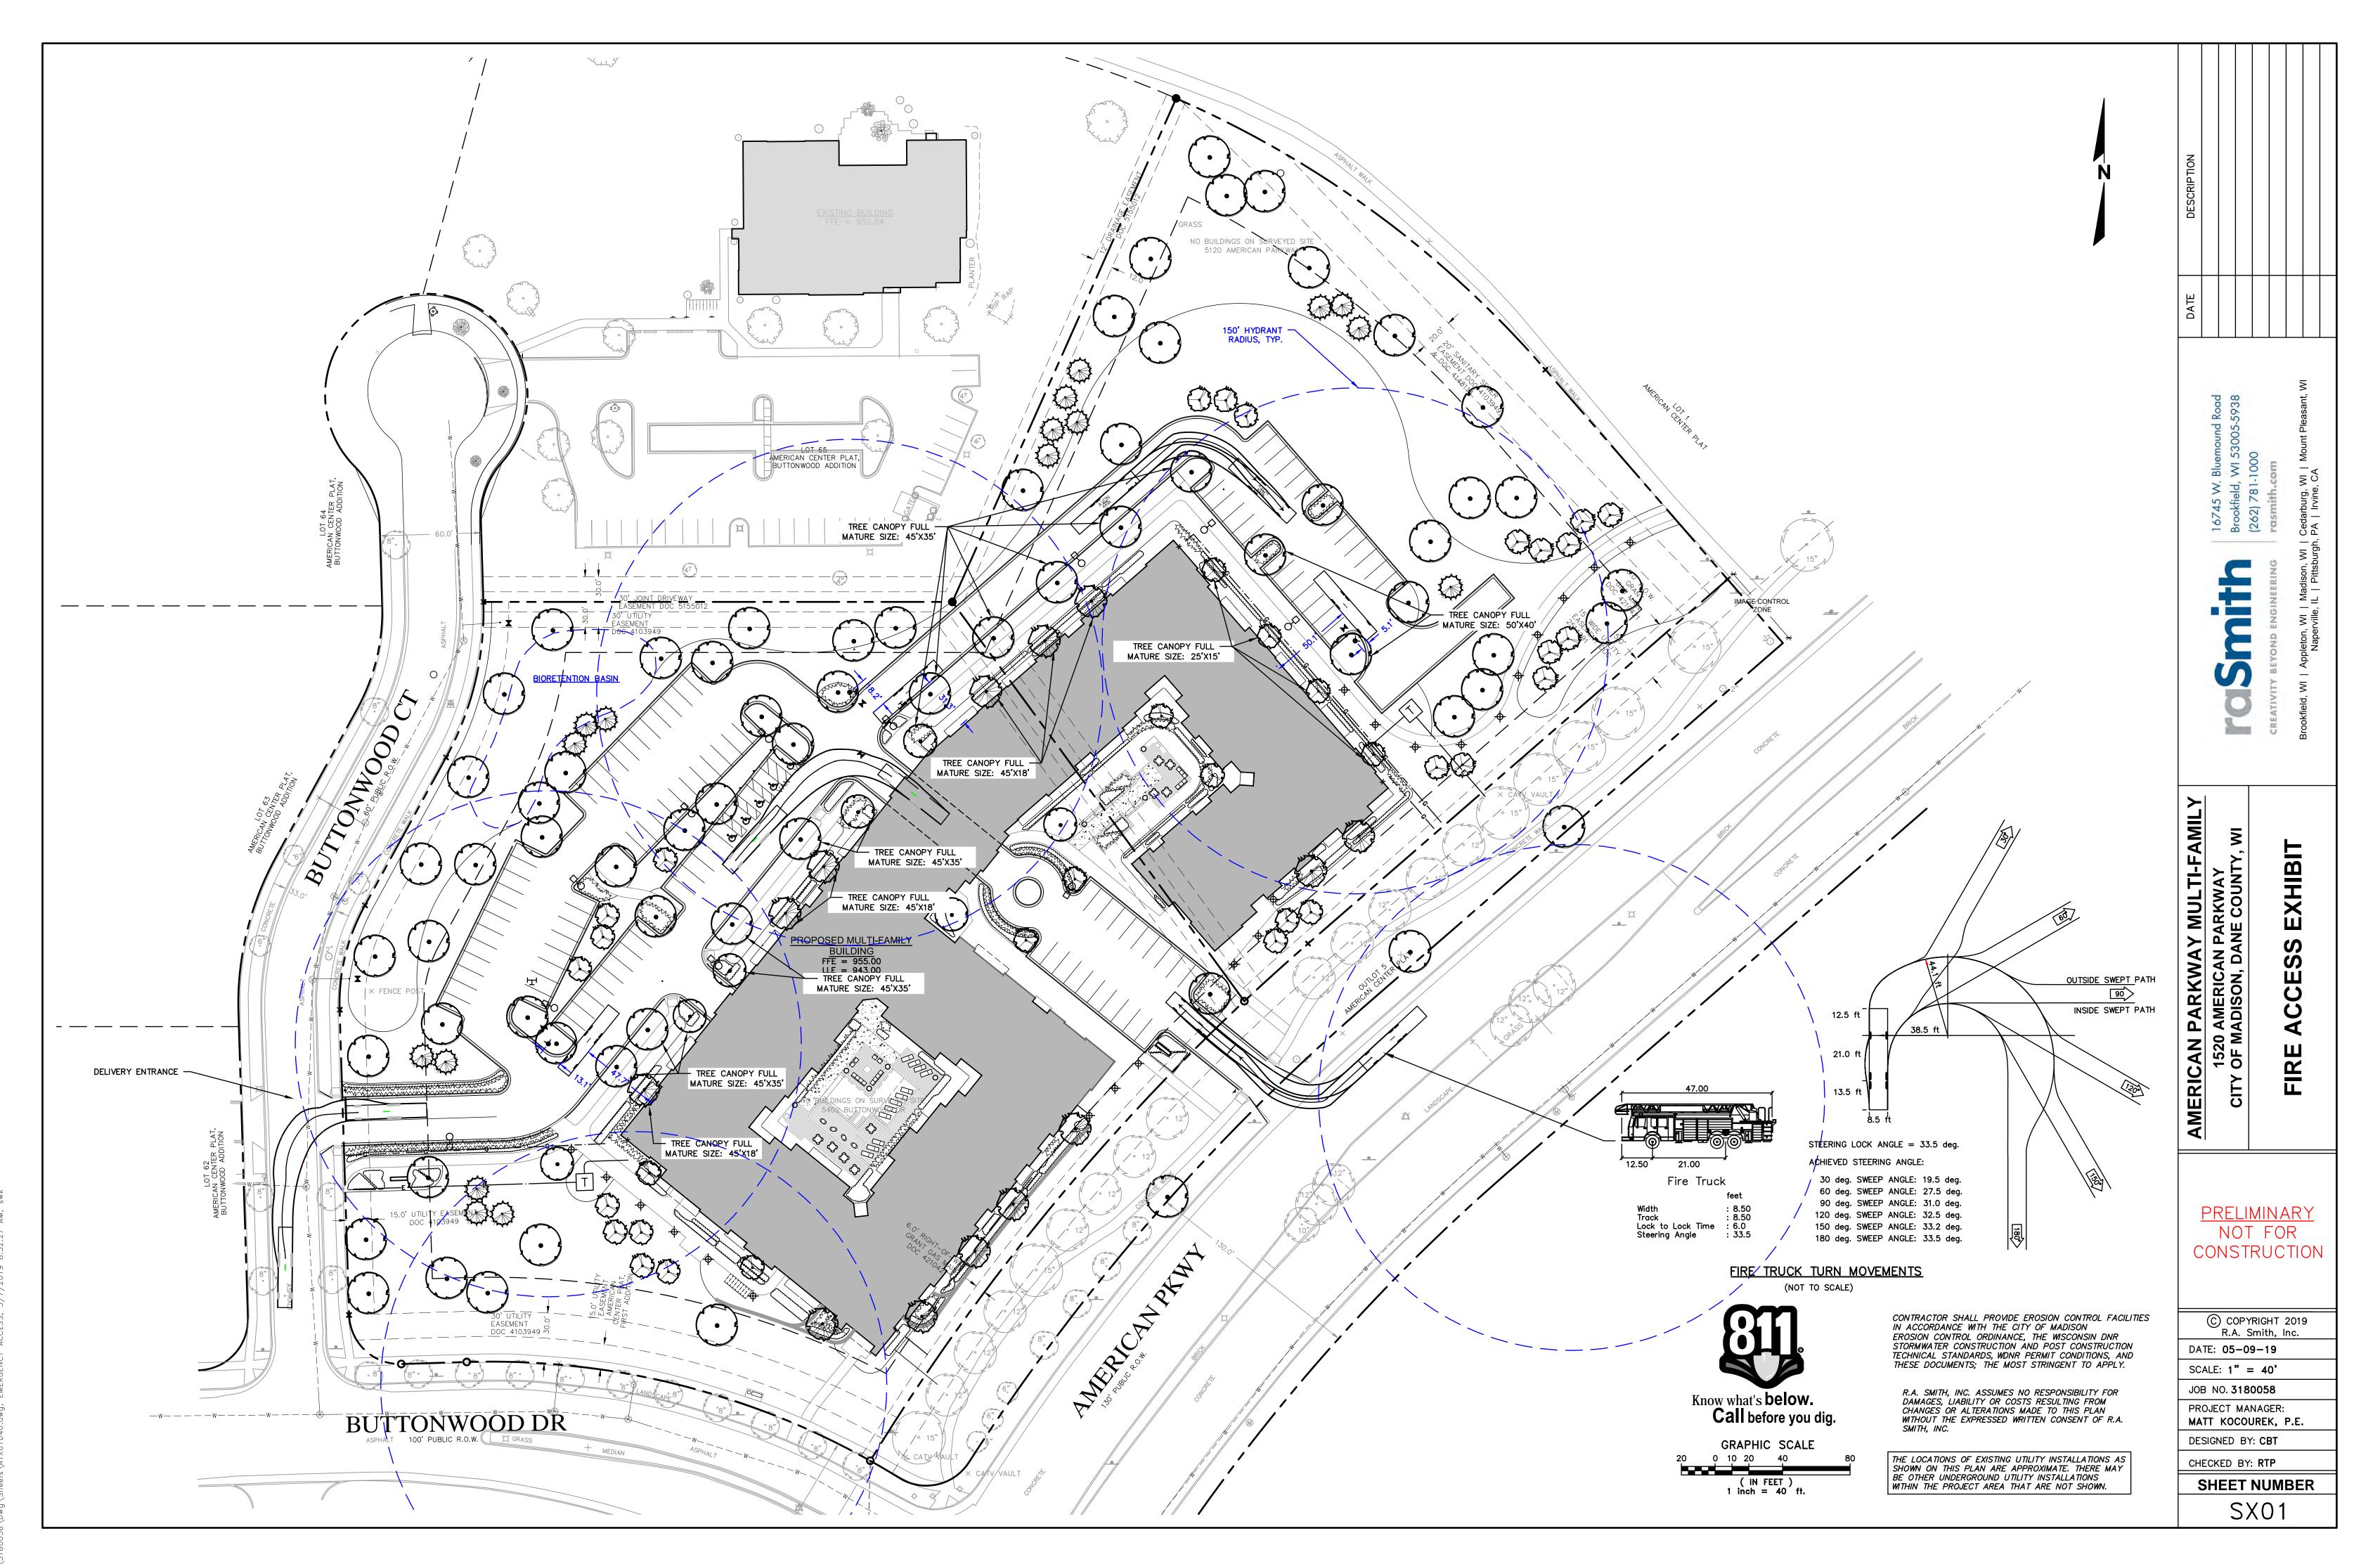

A CC.CE.O 0.000/ C/ A 000000 A CC.CE.O DATE OF THE OFFICE A CO.CE.O DATE O

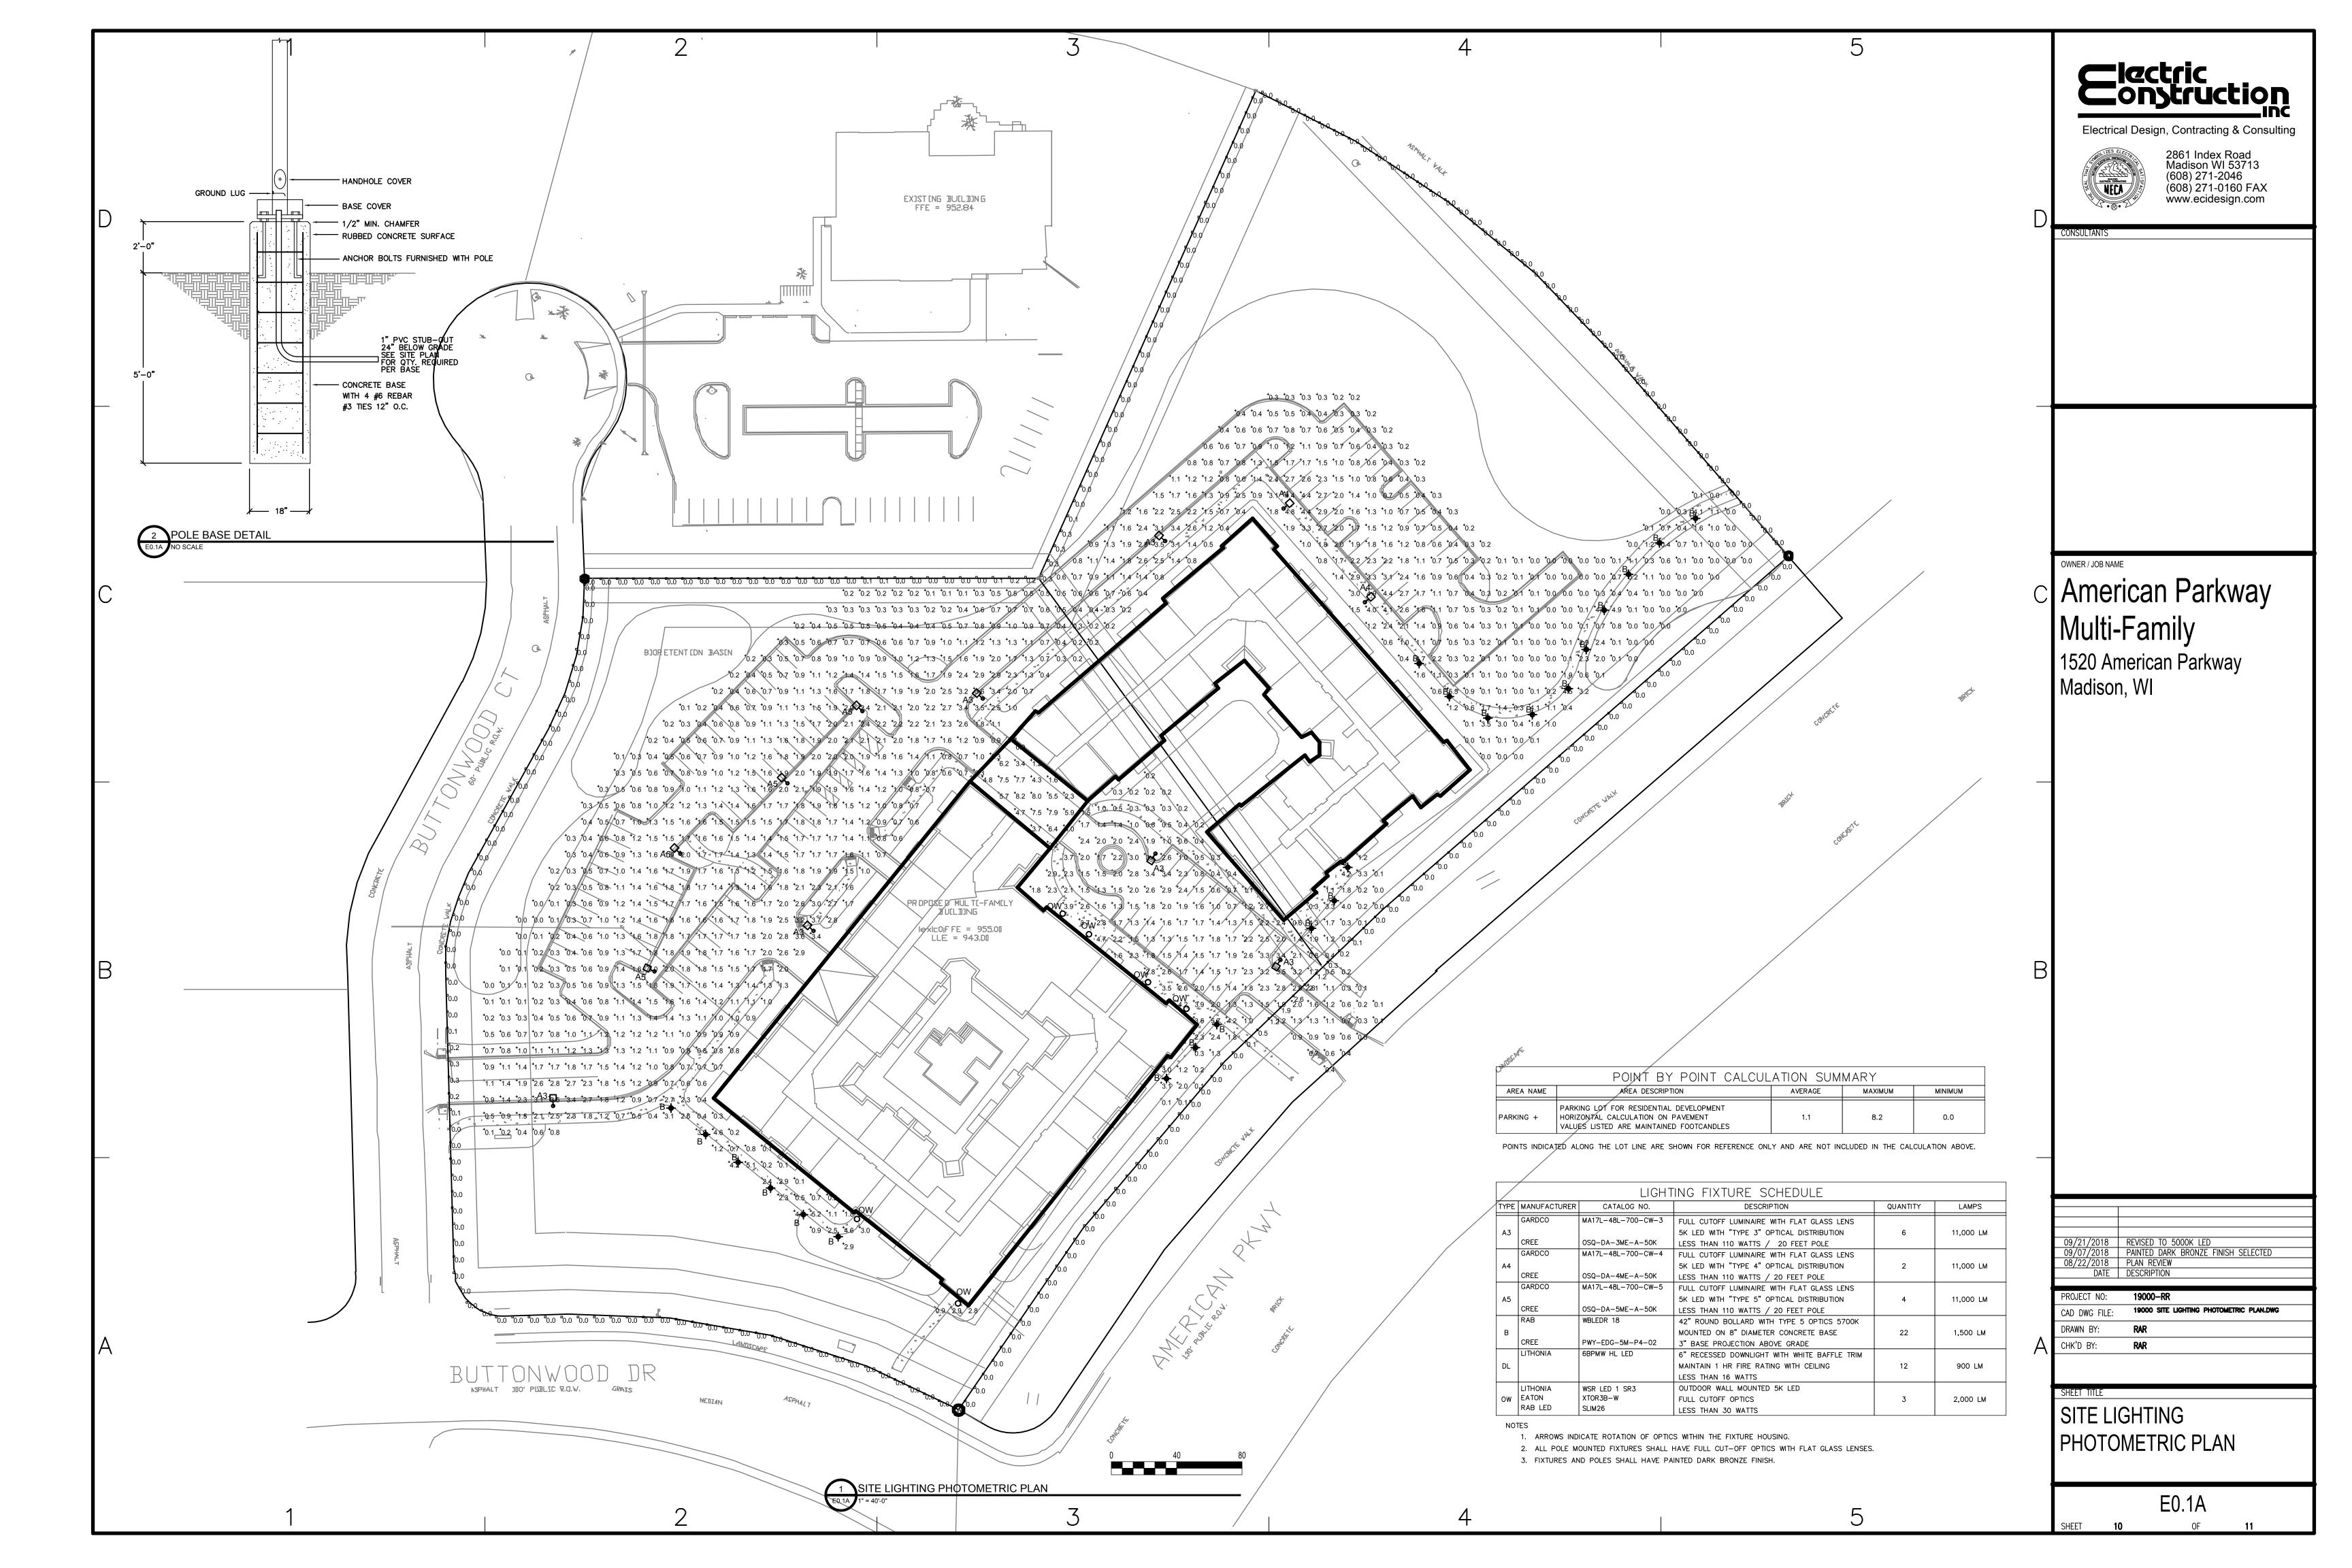

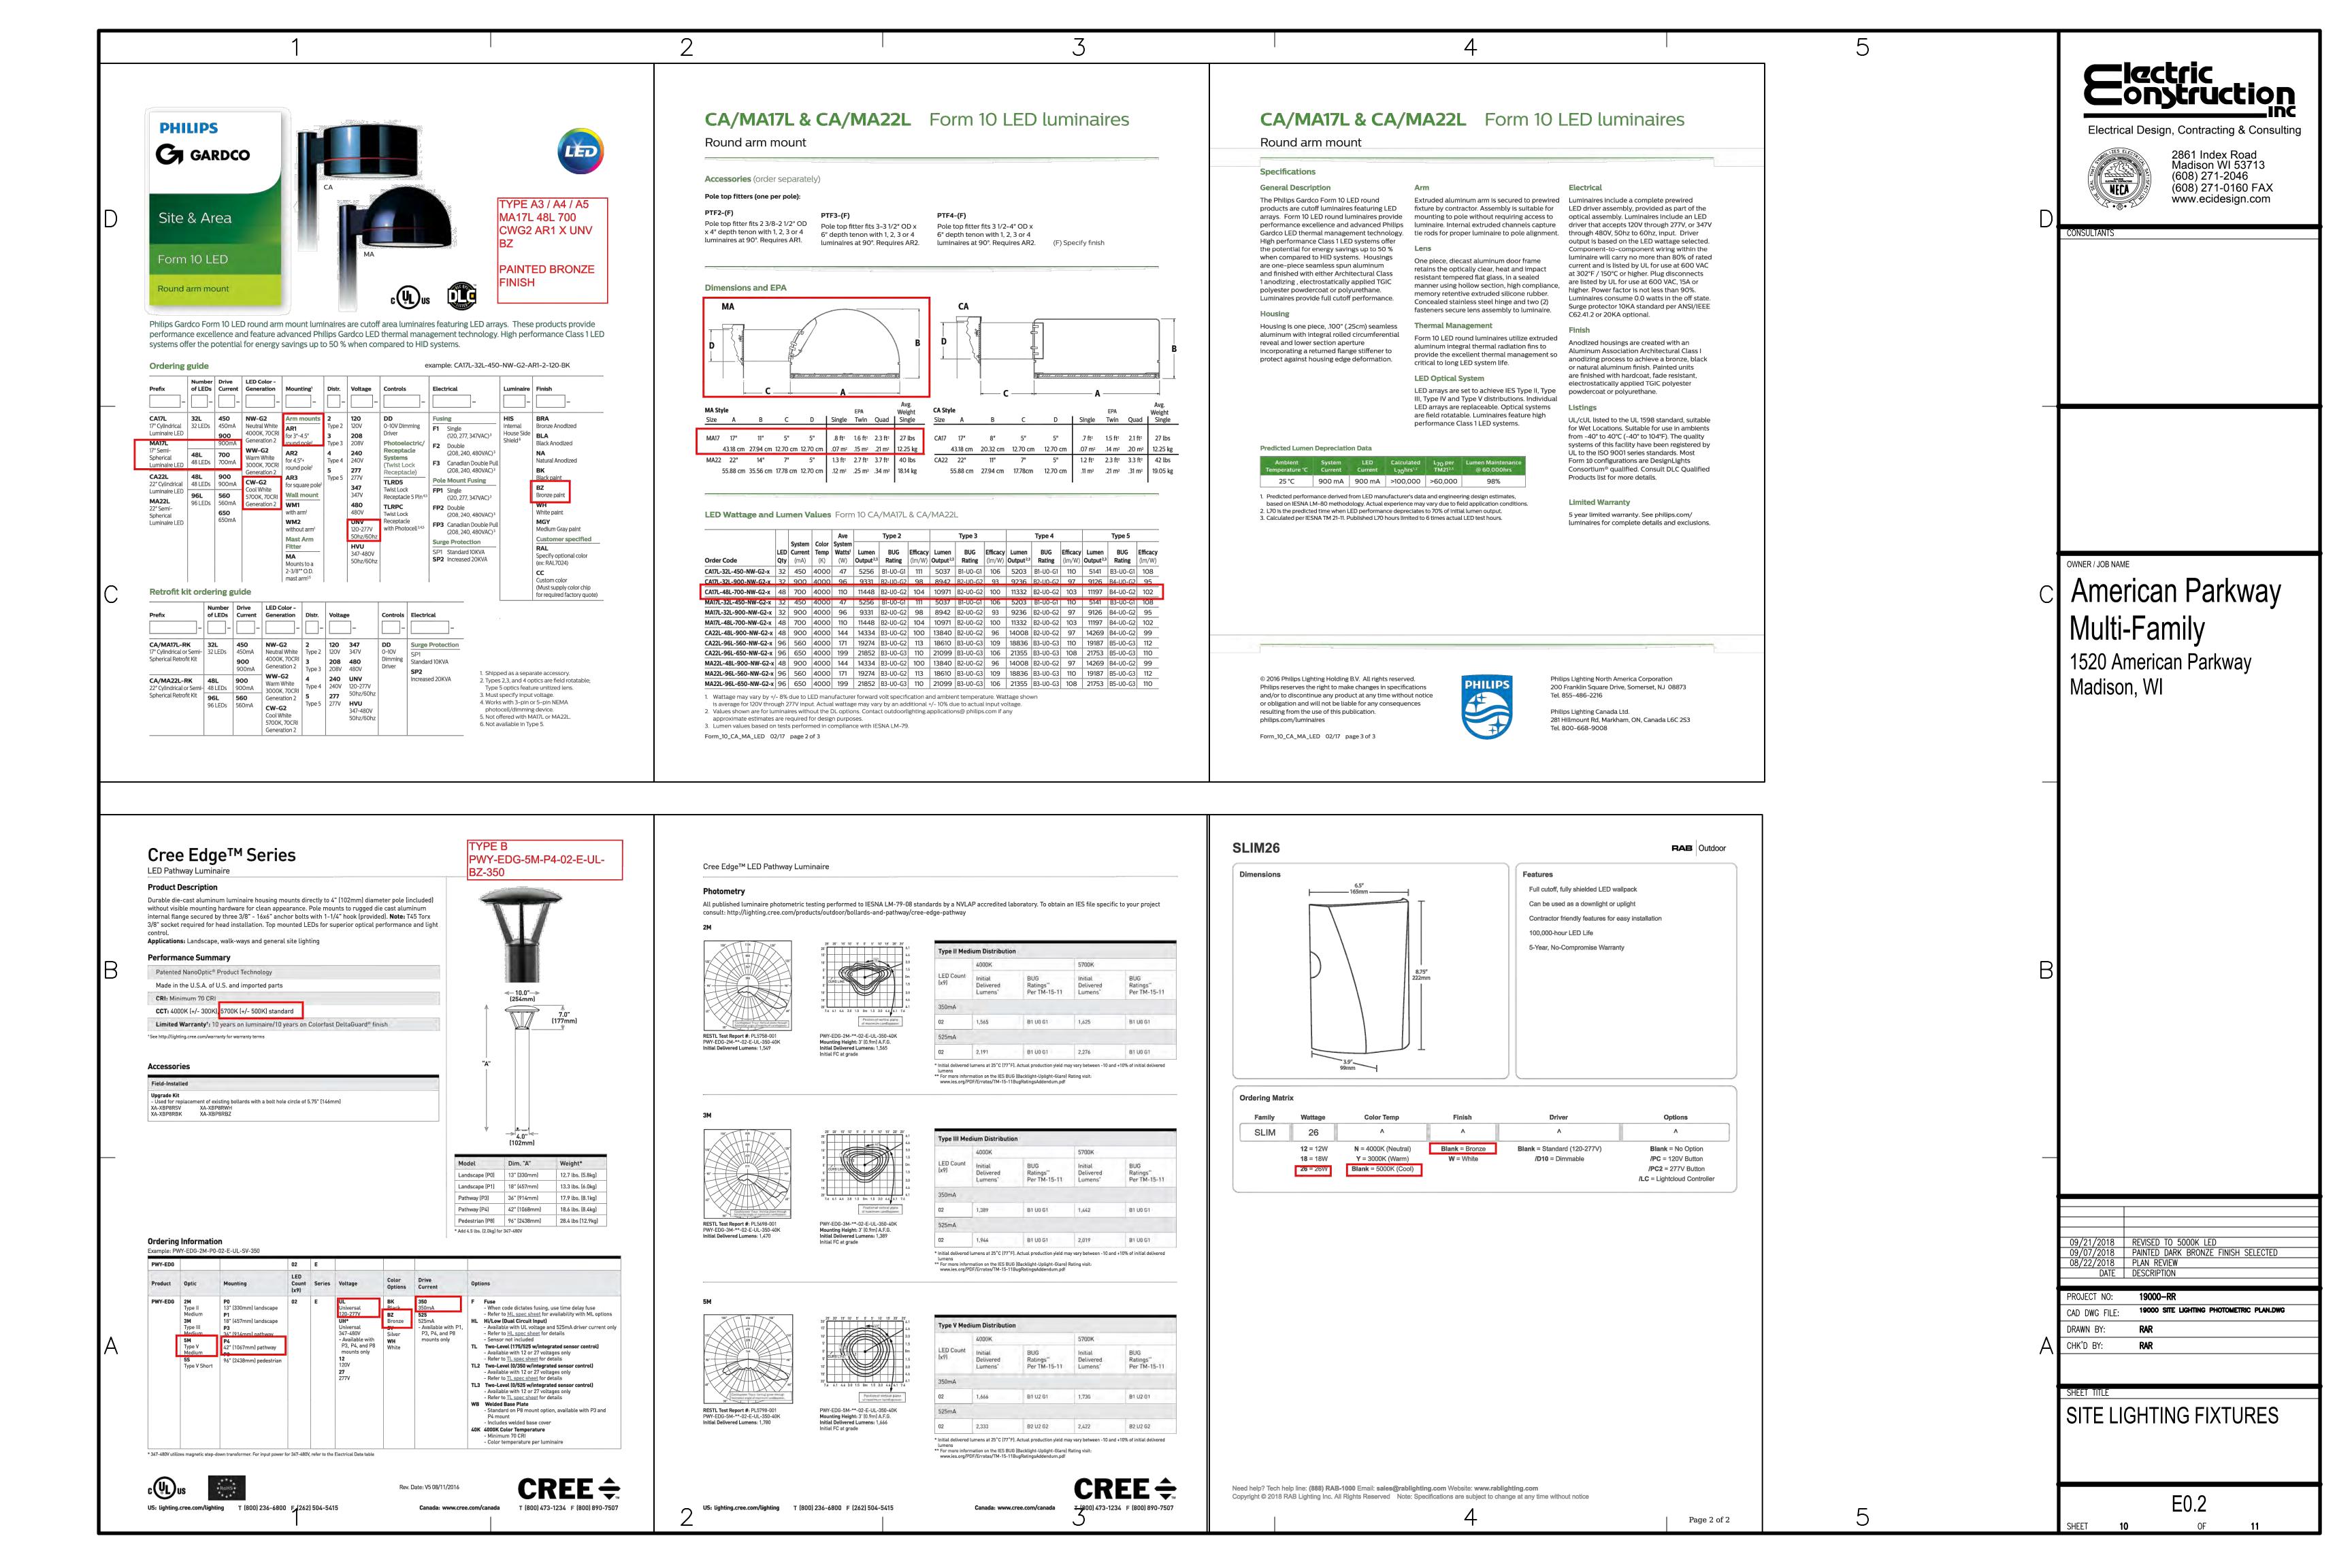

### LEGEND O BOLLARD SOIL BORING/MONITORING WELL MAILBOX → SIGN AIR CONDITIONER BI CONTROL BOX 中 TRAFFIC SIGNAL \* RAILROAD CROSSING SIGNAL CABLE PEDESTAL Ø POWER POLE Prepared for: Campbell Capital Group, LLC 下GUY POLE T GUY WIRE □ LIGHT POLE → SPOT/YARD/PEDESTAL LIGHT & HANDICAPPED PARKING © ELECTRIC MANHOLE © ELECTRIC PEDESTAL ⊠ ELECTRIC METER № ELECTRIC TRANSFORMER ① TELEPHONE MANHOLE □ TELEPHONE PEDESTAL ☑ UTILITY VAULT GAS METER GAS WARNING SIGN ⑤ STORM MANHOLE → ROUND INLET SQUARE INLET STORM SEWER END SECTION S SANITARY MANHOLE SANITARY CLEANOUT OR SEPTIC VENT ⊗ SANITARY INTERCEPTOR MANHOLE CB=S53°42'03"E MISCELLANEOUS MANHOLE WATER VALVE CH=271.59 R = 616.31© WATER SERVICE CURB STOP WATER MANHOLE L=273.84' ↓ WELL ▼ WATER SURFACE ♦ WETLANDS FLAG cannot be plotted. MARSH ★ CONIFEROUS TREE O DECIDUOUS TREE O SHRUB -EDGE OF TREES -S-SANITARY SEWER — — sto-storm sewer — — — — w –WATERMAIN ———— G —MARKED GAS MAIN ---- E -MARKED ELECTRIC B -BUREAU ELEC. SERV. 780 INDICATES EXISTING CONTOUR ELEVATION × 780.55 INDICATES EXISTING SPOT ELEVATION LOT 65 AMERICAN CENTER PLAT, BUTTONWOOD ADDITION AMERICAN CENTER PLAT, BUTTONWOOD ADDITION 3.0010 ACRES 951.69 RIM 947.372 N89°59'54"E 278.00' 954.39 RIM 947.57 12"E 944.67 12"NW 944.92<sub>c</sub> CB=N13°29'06"E CH=94.75' 947.44 × AMÉRICAN CENTER/PLAT, BUTTONWOOD ADDITION NO BUILDINGS ON SURVEYED SITE 193,644 SQ.F.T. 4.4455 ACRES RIM 946.51 18"N 942.69 15"E 942.69 21"S 942.61 12"W 943.11 CH=63.17' R=120.00' L=63.92' CB=S40°15'05"W R=1315.00 L=403.20' CB=N46'46'30"W \_CH=246,26' 42" INV. E\_ IE. 946.43 R=459.83 RIM 945.17 12"N 941.62 -12"E 941.62 12"NW 941.77 L=249.30' DIGGERS HOTLINE TICKET NO.: 20181401221 THE UNDERGROUND UTILITY INFORMATION AS SHOWN HEREON IS BASED, IN PART, UPON INFORMATION FURNISHED BY UTILITY COMPANIES AND THE LOCAL MUNICIPALITY. WHILE THIS INFOR-MATION IS BELIEVED TO BE RELIABLE, ITS ACCURACY AND COMPLETENESS CANNOT BE GUARANTEED NOR CERTIFIED TO. (P) INDICATES PIPE SIZES PER RECORD PLANS. OTHER PIPE SIZES ARE ESTIMATED. NO PIPE SIZES SHOULD BE RELIED UPON WITHOUT FURTHER VERIFICATION.

### ALTA/NSPS LAND TITLE SURVEY

### WITH TOPOGRAPHIC DATA

Lots Sixty-six (66) and Sixty Seven (67), The American Center Plat Buttonwood Addition, in the City of Madison, Dane County, Wisconsin. Drawing No.: 167475-KAC

Bearings are based on the East line of the Southeast 1/4 of Section 15, Township 08 North, Range 10 East, which is platted to

### B. Title Commitment

This survey was prepared based on Chicago Title Insurance Company title commitment number C-18204211, effective date of March 10, 2018, which lists the following easements and/or restrictions from schedule B-II:

1-5, 9, 10, 14, 17, and 22 - Not survey related.

6-8, 11 - Visible evidence shown, if any.

12. 1055 foot (NGVD-29) height limitation per the unrecorded Height Limitation Zoning Map, Dane County Regional-Truax Field, Madison, Wisconsin, Wisconsin Bureau of Aeronautics, adopted October 2, 2008. - Affects site by location - General in nature,

13. Affadavit, Resolution and revised Declarations of Protective Covenants and Conditions for The American Center recorded August 5, 1992 in Volume 19688 of Records, Page 1 as Document Number 2379020. - Affects site by location - General in nature,

15. Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat, recorded as Document Number 2514291. - Does not affect site by location - Shown.

16. Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat First Addition, recorded as Document Number 2520937. As modified by Release of Public Utility Easement by TDS Metrocom, LLC, recorded February 2, 2005 as Document Number 4018025; As modified by Release of Platted Utility Easement by Wisconsin Power and Light Company recorded February 16, 2005 as Document Number 4022051; As modified by Release of Public Utility Easement by Wisconsin Bell Inc. d/b/a SBC Wisconsin, recorded March 21, 2005 as Document Number 4032638; As modified by Release of Public Utility Easement by McLeodUSA Telecommunications Services, Inc., recorded March 21, 2005 as Document Number 4032639; As modified by Release of Rights by Madison Gas and Electric Company, recorded March 21, 2005 as Document Number 4032640; As modified by Release of Public Utility Easement by Charter Communications CC PTNRS, recorded March 21, 2005 as Document Number 4032641; As modified by Release of Public Utility Easement by the City of Madison, recorded August 9,2005 as Document Number 4092244. - Affects site by location - Shown.

18-20, and 24 - Does not affect site by location - Not Shown, (Affects other lots in American Center Plats).

21. Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat Buttonwood Addition, recorded as Document Number 4103949; As modified by Affidavit of Correction recorded December 29, 2005 as Document Number 4148114; As modified by Affidavit of Correction recorded December 14, 2011 as Document Number 4823393. - Affects site by location -

23. Right-Of-Way Grant Gas Main granted to Madison Gas and Electric Company and conditions as set forth in instrument recorded July 7, 2006 as Document Number 4210421. - Affects site by location - Shown.

25. Terms, provisions, conditions, charges and all other matters as may affect the Land as set forth in Driveway Easement recorded April 23, 2015 as Document Number 5145524 and Correction Instrument recorded May 29, 2015 as Document Number 5155012. - Affects site by location - Shown.

According to flood insurance rate map of the City of Madison, community panel number 55025C0268H, effective date of September, 17, 2014, this site falls in zone X (areas determined to be outside the 0.2% annual chance floodplain).

### There are 0 regular and 0 handicapped parking spaces marked on this site.

Elevations refer to NGVD 1927 Datum.

F. Municipal Zoning No zoning report was provided.



VICINITY MAP - NOT TO SCALE

To: Cambell Capital Group, LLC, Buttonwood Lot 67, LLC, American Family Mutual Insurance Company, S.I., and Chicago Title Insurance Company

This is to certify that this map or plat and the survey on which it is based were made in accordance with the 2016 Minimum Standard Detail Requirements for ALTA/NSPS Land Title Surveys, jointly established and adopted by ALTA and NSPS and includes items 1, 2, 3, 4, 5, 7(a), 7(b)(1), 7(c), 8, 9, and 11of Table A thereof. The fieldwork was completed on April 13, 2018.

Date of Plat or Map: April 18, 2018



Professional Land Surveyor Registration Number 2309 eric.sturm@rasmith.com

CREATIVITY BEYOND ENGINEERING

SHEET 1 OF 1


### CERTIFIED SURVEY MAP NO.

A compilation of Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin.

● INDICATES FOUND 1" IRON PIPE O INDICATES FOUND 1 1/4" IRON PIPE △ INDICATES FOUND 3/4" IRON PIPE


FLOOD INSURANCE RATE MAP OF THE CITY OF MADISON, COMMUNITY PANEL NUMBER 55025C0268H, EFFECTIVE DATE OF SEPTEMBER 17, 2014, THIS SITE FALLS IN ZONE X

ALL DIMENSIONS SHOWN ARE MEASURED TO THE NEAREST HUNDREDTH OF A FOOT.
ALL BEARINGS ARE REFERENCED TO THE E. LINE OF THE SE. 1/4 OF SECTION 15, T 8 N, R 10 E, WHICH IS ASSUMED TO BEAR S01'32'21"E.
WISCONSIN COUNTY COORDINATE SYSTEM DANE ZONE 1991

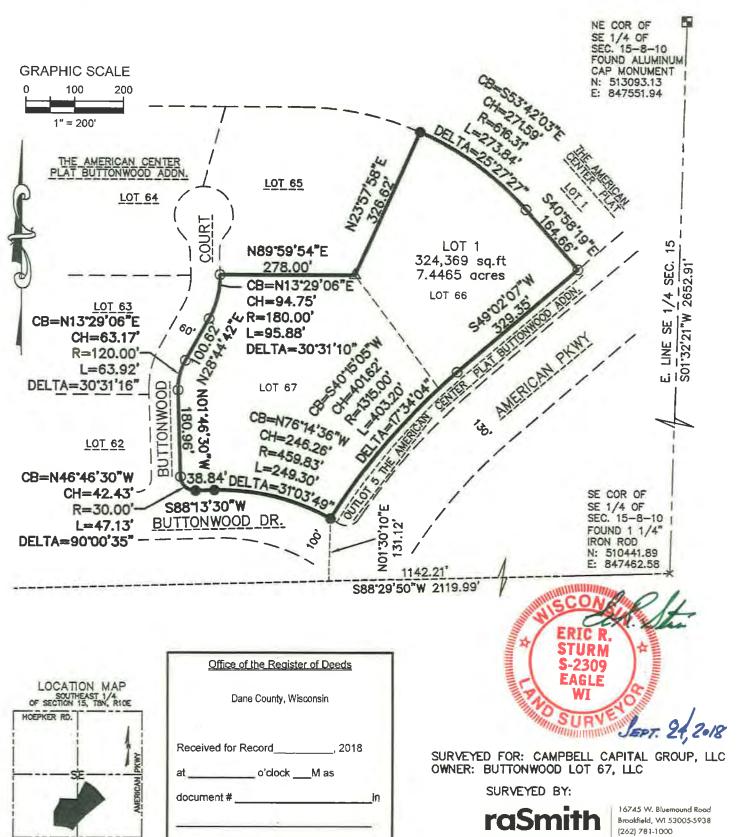

SCALE: 1" = 2000"

A compilation of Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin.

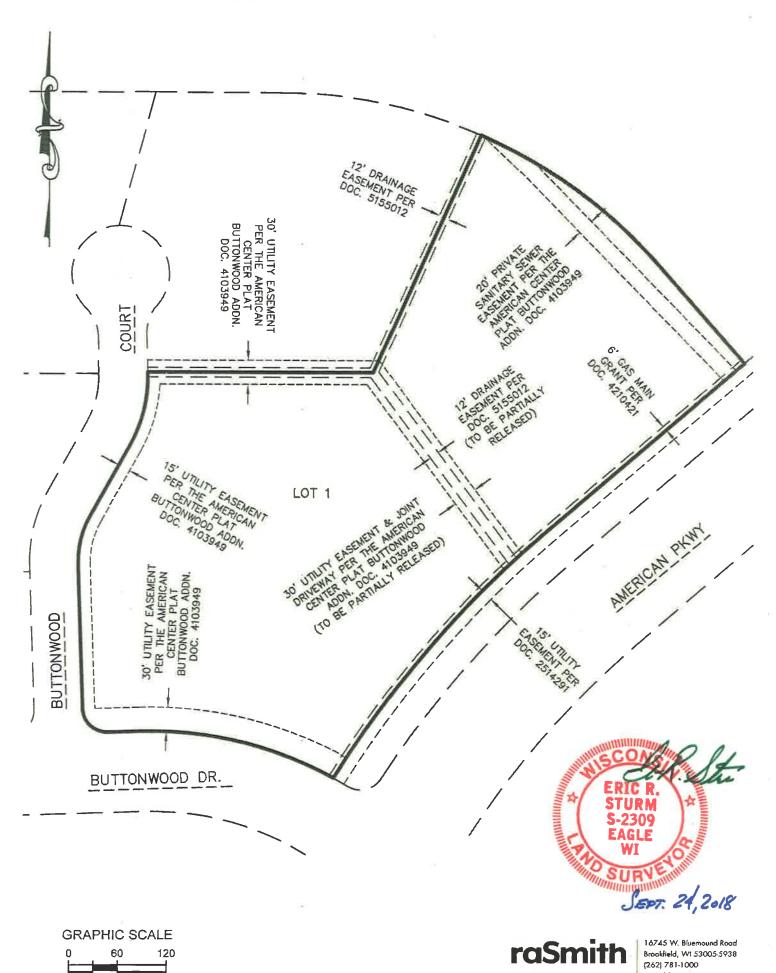

CERTIFIED SURVEY MAP NO.
--------------------------

A compilation of Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin.

This Certified Survey Map is subject to the following recorded instruments based on Chicago Title Insurance Company title commitment number C-18204211, effective date of March 10, 2018.

Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat, recorded as Document Number 2514291.

Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat First Addition, recorded as Document Number 2520937. As modified by Release of Public Utility Easement by TDS Metrocom, LLC, recorded February 2, 2005 as Document Number 4018025; As modified by Release of Platted Utility Easement by Wisconsin Power and Light Company recorded February 16, 2005 as Document Number 4022051; As modified by Release of Public Utility Easement by Wisconsin Bell Inc. d/b/a SBC Wisconsin, recorded March 21, 2005 as Document Number 4032638; As modified by Release of Public Utility Easement by McLeodUSA Telecommunications Services, Inc., recorded March 21, 2005 as Document Number 4032639; As modified by Release of Rights by Madison Gas and Electric Company, recorded March 21, 2005 as Document Number 4032640; As modified by Release of Public Utility Easement by Charter Communications CC PTNRS, recorded March 21, 2005 as Document Number 4032641; As modified by Release of Public Utility Easement by the City of Madison, recorded August 9,2005 as Document Number 4092244.

Reservations for and dedications of easements and rights of way, building setback lines, conditions, notations, and all other matters as may affect the Land as shown on the recorded plat of The American Center Plat Buttonwood Addition, recorded as Document Number 4103949; As modified by Affidavit of Correction recorded December 29, 2005 as Document Number 4148114; As modified by Affidavit of Correction recorded December 14, 2011 as Document Number 4823393.

Right-Of-Way Grant Gas Main granted to Madison Gas and Electric Company and conditions as set forth in instrument recorded July 7, 2006 as Document Number 4210421.

Terms, provisions, conditions, charges and all other matters as may affect the Land as set forth in Driveway Easement recorded April 23, 2015 as Document Number 5145524 and Correction Instrument recorded May 29, 2015 as Document Number 5155012.



<b>CERTIFIED SURVEY</b>	MAP NO.	
-------------------------	---------	--

A compilation of Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin.

### SURVEYOR'S CERTIFICATE

STATE OF WISCONSIN :SS
WAUKESHA COUNTY}

I, ERIC R. STURM, a Professional Land Surveyor, certify:

THAT I have surveyed, divided and mapped a compilation of Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin, bounded and described as follows:

Lots 66 & 67, in The American Center Plat Buttonwood Addition, being a part of the Southwest 1/4 and Southeast 1/4 of the Southeast 1/4 of Section 15, Township 8 North, Range 10 East, in the City of Madison, Dane County, Wisconsin.

Containing 324,369 square feet or 7.4465 acres.

THAT I have made this survey, land division and map by the direction of BUTTONWOOD LOT 67, LLC, owner.

THAT such map is correct representation of all exterior boundaries of the land surveyed and the land division thereof made.

THAT I have fully complied with the provisions of Chapter 236 of the Wisconsin Statutes and Ordinances of the City of Madison, in surveying, dividing and mapping the same.

ERIC R. STURM,

PROFESSIONAL LAND SURVEYOR S-2309

dition, being a nship 8 North,  n, was hereby  I on  f said  er provides for City for public
on f said er provides for
f said er provides for
er provides for
er provides for City for public
٦.
N
easurer of the are no unpaid
ncluded in this
<del></del>
ISCOASIA
N ea

Revise) May 3, 2019
THIS INSTRUMENT WAS DRAFTED BY ERIC R. STURM,

PROFESSIONAL LAND SURVEYOR S-2309

167475.csm

Sheet 6 of 6 Sheets

*		
CERTIFIED SURVEY MA	AP NO	
A compilation of Lots 66 & 67, in The A part of the Southwest 1/4 and Southeast 1/4 of Range 10 East, in the City of Madison, Dane Company of Madi	the Southeast 1/4 of Section 15, Tov	
<u>CORPORATE OW</u>	/NER'S CERTIFICATE	
BUTTONWOOD LOT 67, LLC, a Wisconsin lin under and by virtue of the laws of the State of W company caused the land described on this map on this map in accordance with requirements of the BUTTONWOOD LOT 67, LLC, as owner S.236.10 or 236.12 to be submitted to the following	Visconsin, as owner, certifies that said to be surveyed, divided and mapped to Ordinances of the City of Madison.  The does further certify that this map is the control of the certify that the certification is control to the certification that the certification is certified that the certification is certified that the certified th	d limited liability as represented required by
IN Witness Whereof, BUTTONWOOD LO	T 67, LLC, has caused these present	s to be signed
by	, its	, this day
of, 2019.		
	1	
STATE OF WISCONSIN }		
}SS WAUKESHA COUNTY }		
PERSONALLY came before me this	day of, 2019,	
(name)	(title), to me known a	s the person
who executed the foregoing instrument and to me the corporation, and acknowledged that he exec deed of the company, by its authority.	e known to be the uted the foregoing instrument as suc	of th officer as the

Notary Public, State of Wisconsin



\_(SEAL)



### **MEMORANDUM**

**DATE:** August 15, 2018

**TO:** Ken Saiki and Jane Grabowski-Miller, The American Center PRC

FR: Justin Schueler, PE, raSmith

**CC:** Mike Campbell, Campbell Madison Partners, LLC

Tom Mortenson, PLA, ASLA, raSmith

**RE:** American Parkway Apartments (Lots 66 & 67)

Trip Generation Study

### Introduction

Campbell Madison Partners, LLC is proposing to construct a 270-unit, four-story apartment building with ground level commercial space (4,000 square feet) along American Parkway in Madison, WI. The development will be constructed on two existing adjacent parcels (Lots 66 and 67) located within The American Center Business Park, as shown in Exhibit 1. The parcels are currently undeveloped and will be combined with the project. A preliminary site plan is provided in Exhibit 2.

As part of the development review process, the American Center Plan Review Committee (PRC) has requested a trip generation study be conducted for the proposed development. The committee has also requested an estimate of development traffic distribution along the adjacent public roadways and a preliminary assessment of site circulation and underground parking access. This memo summarizes the methodologies and results of the above evaluations.

### **Trip Generation and Distribution**

Proposed development traffic was estimated using ITE's *Trip Generation Manual*, 10th Edition. Representative land uses were selected based on descriptions within the manual. Although some multi-modal trips (transit, bicycle, walking) are expected, no reduction was applied to represent a high vehicular volume scenario for evaluation purposes. Table 1 summarizes the proposed trip generation.

Table 1
American Parkway Apartments Development: Trip Generation

	ITE		Weekday	Weekday Morning Peak Hour Trips			Weekday Evening Peak Hour Trips		
Land Use	Code	Size	Daily Trips	In	Out	Total	ln	Out	Total
Apartments	221	270 units	1,470	25	70	95	75	45	120
General Retail	820	4,000 SF	150	5	0	5	5	10	15
Total New Trips			1,620	30	70	100	80	55	135

As shown in Table 1, the proposed development is expected to generate a total of 100 new trips (30 in/70 out) during the weekday morning peak hour and 135 new trips (80 in/55 out) during the weekday evening peak hour.



The following general trip distribution pattern was developed based on Annual Average Daily Traffic (AADT) volumes on the surrounding street network and the general location of the development site.

- 70% to/from the south via American Parkway
- 15% to/from the north via American Parkway
- 15% to/from the west via Buttonwood Drive

The majority of development traffic is expected to travel to/from US 151 located south of the development site. The American Parkway Apartments development is expected to result in an increase in traffic of less than 5% along American Parkway.

### **Parking**

A total of 382 vehicular parking spaces are proposed onsite, including 112 surface lot spaces and 270 underground parking spaces (located below the building). A total of 270 bicycle parking spaces are also proposed within the underground parking area. Vehicular access to the underground parking is provided via a single entrance/exit point located on the northwest side of the building. A single point of access is typical for this size of parking facility located within similarly sized apartment developments and has been successfully used in other residential developments completed by Campbell Madison Partners, LLC. The single entrance/exit point is expected to adequately serve the underground parking area for this development.

### **City of Madison Coordination**

The American Parkway Apartments development team met with the City of Madison Development Assistance Team (DAT) in March of 2018 and has coordinated with City of Madison traffic staff regarding the proposed development. City staff provided a preliminary review of the site plan, expressed overall support for the project, and identified that a traffic impact analysis (TIA) would not be required.

raSmith contacted City of Madison traffic staff again in late July of 2018 regarding site circulation and parking concerns identified by the American Center PRC. From a traffic operations standpoint, the City was in support of the currently proposed site access, internal circulation, and single entrance/exit point for the underground parking.

### Conclusions

Due to the relatively low development volume and recent intersection improvements in the area, the public roadway network is expected to be able to accommodate the proposed development traffic. City of Madison traffic staff has provided initial support of the proposed development plan.

1



**American Parkway Apartments Development Site** 

Apartments Development Site

