

Q1 Please rank the current proposed options for the reconstruction of Dean Avenue in terms of your preference. Place a "1" next to the option you like the best, a "2" for the next best option, and a "3" next to your least preferred Option.

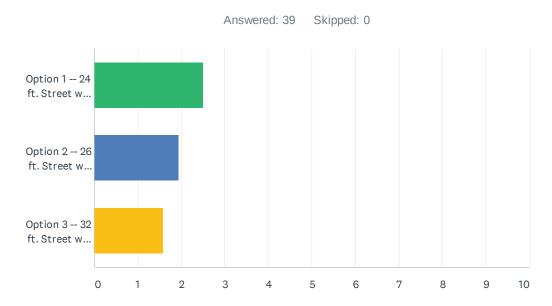

	1	2	3	TOTAL	SCORE
Option 1 24 ft. Street with Advisory Bike Lanes, parking pull-outs in select locations and standard sidewalk on both sides of the street.	69.23% 27	12.82% 5	17.95% 7	39	2.51
Option 2 26 ft. Street with shared bike/travel lanes, parking on one side, standard sidewalk on the north side and widened, 8 ft. sidewalk on the south side	22.86% 8	48.57% 17	28.57% 10	35	1.94
Option 3 32 ft. Street with standard travel lanes and bike lanes between	11.43%	37.14%	51.43%		
Monona Drive and Lance Lane, and shared bike/travel lanes from Lance Lane to Allis Avenue, including parking pull-outs in select locations and standard sidewalk on both sides of the street	4	13	18	35	1.60

## Q2 Please indicate which option you prefer for the reconstruction of Allis Avenue.

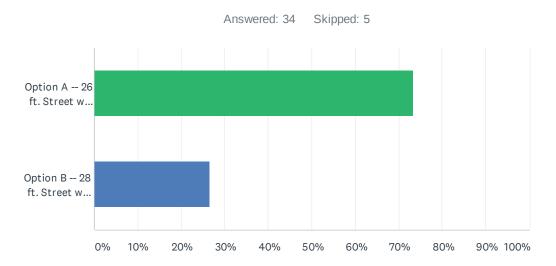

ANSWER CHOICES	RESPONSES	
Option A 26 ft. Street with parking allowed on one side of the street	73.53%	25
Option B 28 ft. Street with parking allowed on both sides of the street	26.47%	9
TOTAL		34

## Dean Ave., Allis Ave., Seth Circle & Tyler Circle Reconstruction Survey

Survey is also available on-line, and the link can be found on the City's project page at: www.cityofmadison.com/engineering/projects/dean-ave-east-and-allis-ave

To mail in a hard copy submission, please send to: Jim Wolfe City of Madison Engineering 210 Martin Luther King, Jr. Blvd, Rm 115 Madison, WI 53703

1. Please rank the current proposed options for the reconstruction of Dean Ave. in terms of your preference. Place a "1" next to the option you like the best, a "2" for the next best option, and a "3" next to your least preferred option.

Option 1 – 24 ft. Street with Advisory Bike Lanes, parking pull-outs in select locations and standard sidewalk on both sides of the street - only if city is committed to putting this in other parts of city

Option 2 – 26 ft. Street with shared bike/travel lanes, parking on one side, standard sidewalk on the north side and widened, 8 ft. sidewalk on the south side NO = 8 + 60 + 60 = 60

Option 3 – 32 ft. Street with standard travel lanes and bike lanes between Monona Dr. and Lance Ln., and shared bike/travel lanes from Lance Ln. to Allis Ave., including parking pull-outs in select locations and standard sidewalk on both sides of the street

Any thing with no side walks

2 leave 95-is

2. Please indicate which option you prefer for the reconstruction of Allis Ave.

Abstain

Option A – 26 ft. Street with parking allowed on one side of the street

Option B – 28 ft. Street with parking allowed on both sides of the street

## Dean Ave., Allis Ave., Seth Circle & Tyler Circle Reconstruction Survey

Survey is also available on-line, and the link can be found on the City's project page at: <a href="https://www.cityofmadison.com/engineering/projects/dean-ave-east-and-allis-ave">www.cityofmadison.com/engineering/projects/dean-ave-east-and-allis-ave</a>

To mail in a hard copy submission, please send to: Jim Wolfe City of Madison Engineering 210 Martin Luther King, Jr. Blvd, Rm 115 Madison, WI 53703

	adison, WI 5	3703				
L.	preference	Please rank the current proposed options for the reconstruction of Dean Ave. in terms of your preference. Place a "1" next to the option you like the best, a "2" for the next best option, and a "3 next to your least preferred option.				
		Option $1-24\mathrm{ft}$ . Street with Advisory Bike Lanes, parking pull-outs in select locations and standard sidewalk on both sides of the street				
	2	Option $2-26$ ft. Street with shared bike/travel lanes, parking on one side, standard sidewalk on the north side and widened, $8$ ft. sidewalk on the south side				
	3	Option 3 – 32 ft. Street with standard travel lanes and bike lanes between Monona Dr. and Lance Ln., and shared bike/travel lanes from Lance Ln. to Allis Ave., including parking pull-outs in select locations and standard sidewalk on both sides of the street				
2.	Please indi	cate which option you prefer for the reconstruction of Allis Ave.				
		Option A – 26 ft. Street with parking allowed on one side of the street				
		Option B – 28 ft. Street with parking allowed on both sides of the street				

## Dean Ave., Allis Ave., Seth Circle & Tyler Circle Reconstruction Survey

Survey is also available on-line, and the link can be found on the City's project page at: <a href="https://www.cityofmadison.com/engineering/projects/dean-ave-east-and-allis-ave">www.cityofmadison.com/engineering/projects/dean-ave-east-and-allis-ave</a>

To mail in a hard copy submission, please send to: Jim Wolfe City of Madison Engineering 210 Martin Luther King, Jr. Blvd, Rm 115 Madison, WI 53703

Ma	adison, WI 5	53703
1.	preference	k the current proposed options for the reconstruction of Dean Ave. in terms of your e. Place a "1" next to the option you like the best, a "2" for the next best option, and a "3 or least preferred option.
	2	Option $1-24$ ft. Street with Advisory Bike Lanes, parking pull-outs in select locations and standard sidewalk on both sides of the street
	3_	Option 2 – 26 ft. Street with shared bike/travel lanes, parking on one side, standard sidewalk on the north side and widened, 8 ft. sidewalk on the south side
	1.	Option $3-32$ ft. Street with standard travel lanes and bike lanes between Monona Dr. and Lance Ln., and shared bike/travel lanes from Lance Ln. to Allis Ave., including parking pull-outs in select locations and standard sidewalk on both sides of the street
		· · · · · · · · · · · · · · · · · · ·
2. Please indicate which option you prefer for the reconstruction		cate which option you prefer for the reconstruction of Allis Ave.
		Option A – 26 ft. Street with parking allowed on one side of the street
		Option B $-$ 28 ft. Street with parking allowed on both sides of the street