

EXTERIOR LIGHTING STATISTICS				
LOCATION	AVERAGE	AVE/ MIN	MAX	MIN
WEST PARKING	1.6	16.0-1	3.6	0.1
EAST PARKING	1.4	7.0-1	10.3	0.2
WEST SIDEWALK	0.7	7.0-1	2.4	0.1
NORTH SIDEWALK	1.4	4.7-1	3.1	0.3
EAST SIDEWALK	3.3	16.5-1	10.4	0.2
NORTH WEST ENTRANCE	5.1	1.7-1	7.6	3.0

LIGHT FIXTURE SCHEDULE									
TYPE	DESCRIPTION	LAMP	LUMENS	WATTS	VOLTS	CCT	MANUFACTURER	SERIES	
G1	6" RECESSED DOWNLIGHT, 4000K, 1000 LUMENS, WIDE DISTRIBUTION, SEM SPECULAR FINISH, WET LOCATION LISTED.	LED	1,000	10	MVOLT	4000K	GOYHAM	EV06	
W1	EXTERIOR LED WALL MOUNTED LIGHT FIXTURE, 10 LEDx, 330mA DRIVE CURRENT, 12M DISTRIBUTION, BRONZE FINISH.	LED	2,102	19	MVOLT	4000K	LITHONIA	OS3W1	
W2	EXTERIOR LED WALL MOUNTED LIGHT FIXTURE, 360mA DRIVE CURRENT, 4000 K CCT, 70 CRI, T2 DISTRIBUTION, BRONZE FINISH.	LED	2,902	20	MVOLT	4000K	MCGRAW EDISON	IS7	
Y1	EXTERIOR LED POLL MOUNTED LIGHT FIXTURE, TYPE IV MEDIUM WITH BACKLIGHT CONTROL SHIELD, DIRECT LONG ARM MOUNT, 60 LEDx, BRONZE FINISH, 535mA, PHOTOCELL.	LED	7,930	101	MVOLT	4000K	CREE LIGHTING	ARE-EDG	

KEYED NOTES	
1	REMOVE AND RETAIN EXISTING WALL PACK LIGHT FIXTURE FOR REINSTALLATION AT NEW LOCATION NOTED.
2	RELOCATED EXISTING WALL PACK LIGHT FIXTURE.
3	DEMOLISH EXISTING LIGHT POLE AND FIXTURE, TURN OVER TO OWNER.



milwaukee 333 East Chicago Street
Milwaukee, Wisconsin 53202
414.271.5350

madison 309 West Johnson Street, Suite 202
Madison, Wisconsin 53703
608.442.2550

denver 1899 Wynkoop Street, Suite 300
Denver, Colorado 80202
303.556.4500

PROJECT INFORMATION

**MMSD - SOUTHSIDE
ELEMENTARY
ADDITION**

501 E Badger Rd,
Madison, WI 53713

ISSUANCE AND REVISIONS	
DATE	DESCRIPTION
07/13/2021	UDC SUBMITTAL

KEY PLAN

SHEET INFORMATION

**PROGRESS DOCUMENTS
NOT FOR CONSTRUCTION**

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and shall not be used for final bidding or construction-related purposes.

PROJECT MANAGER PCC

PROJECT NUMBER 320539-00

ELECTRICAL SITE
PLAN

E010

E

D

C

B

A


E

D

C

B

A

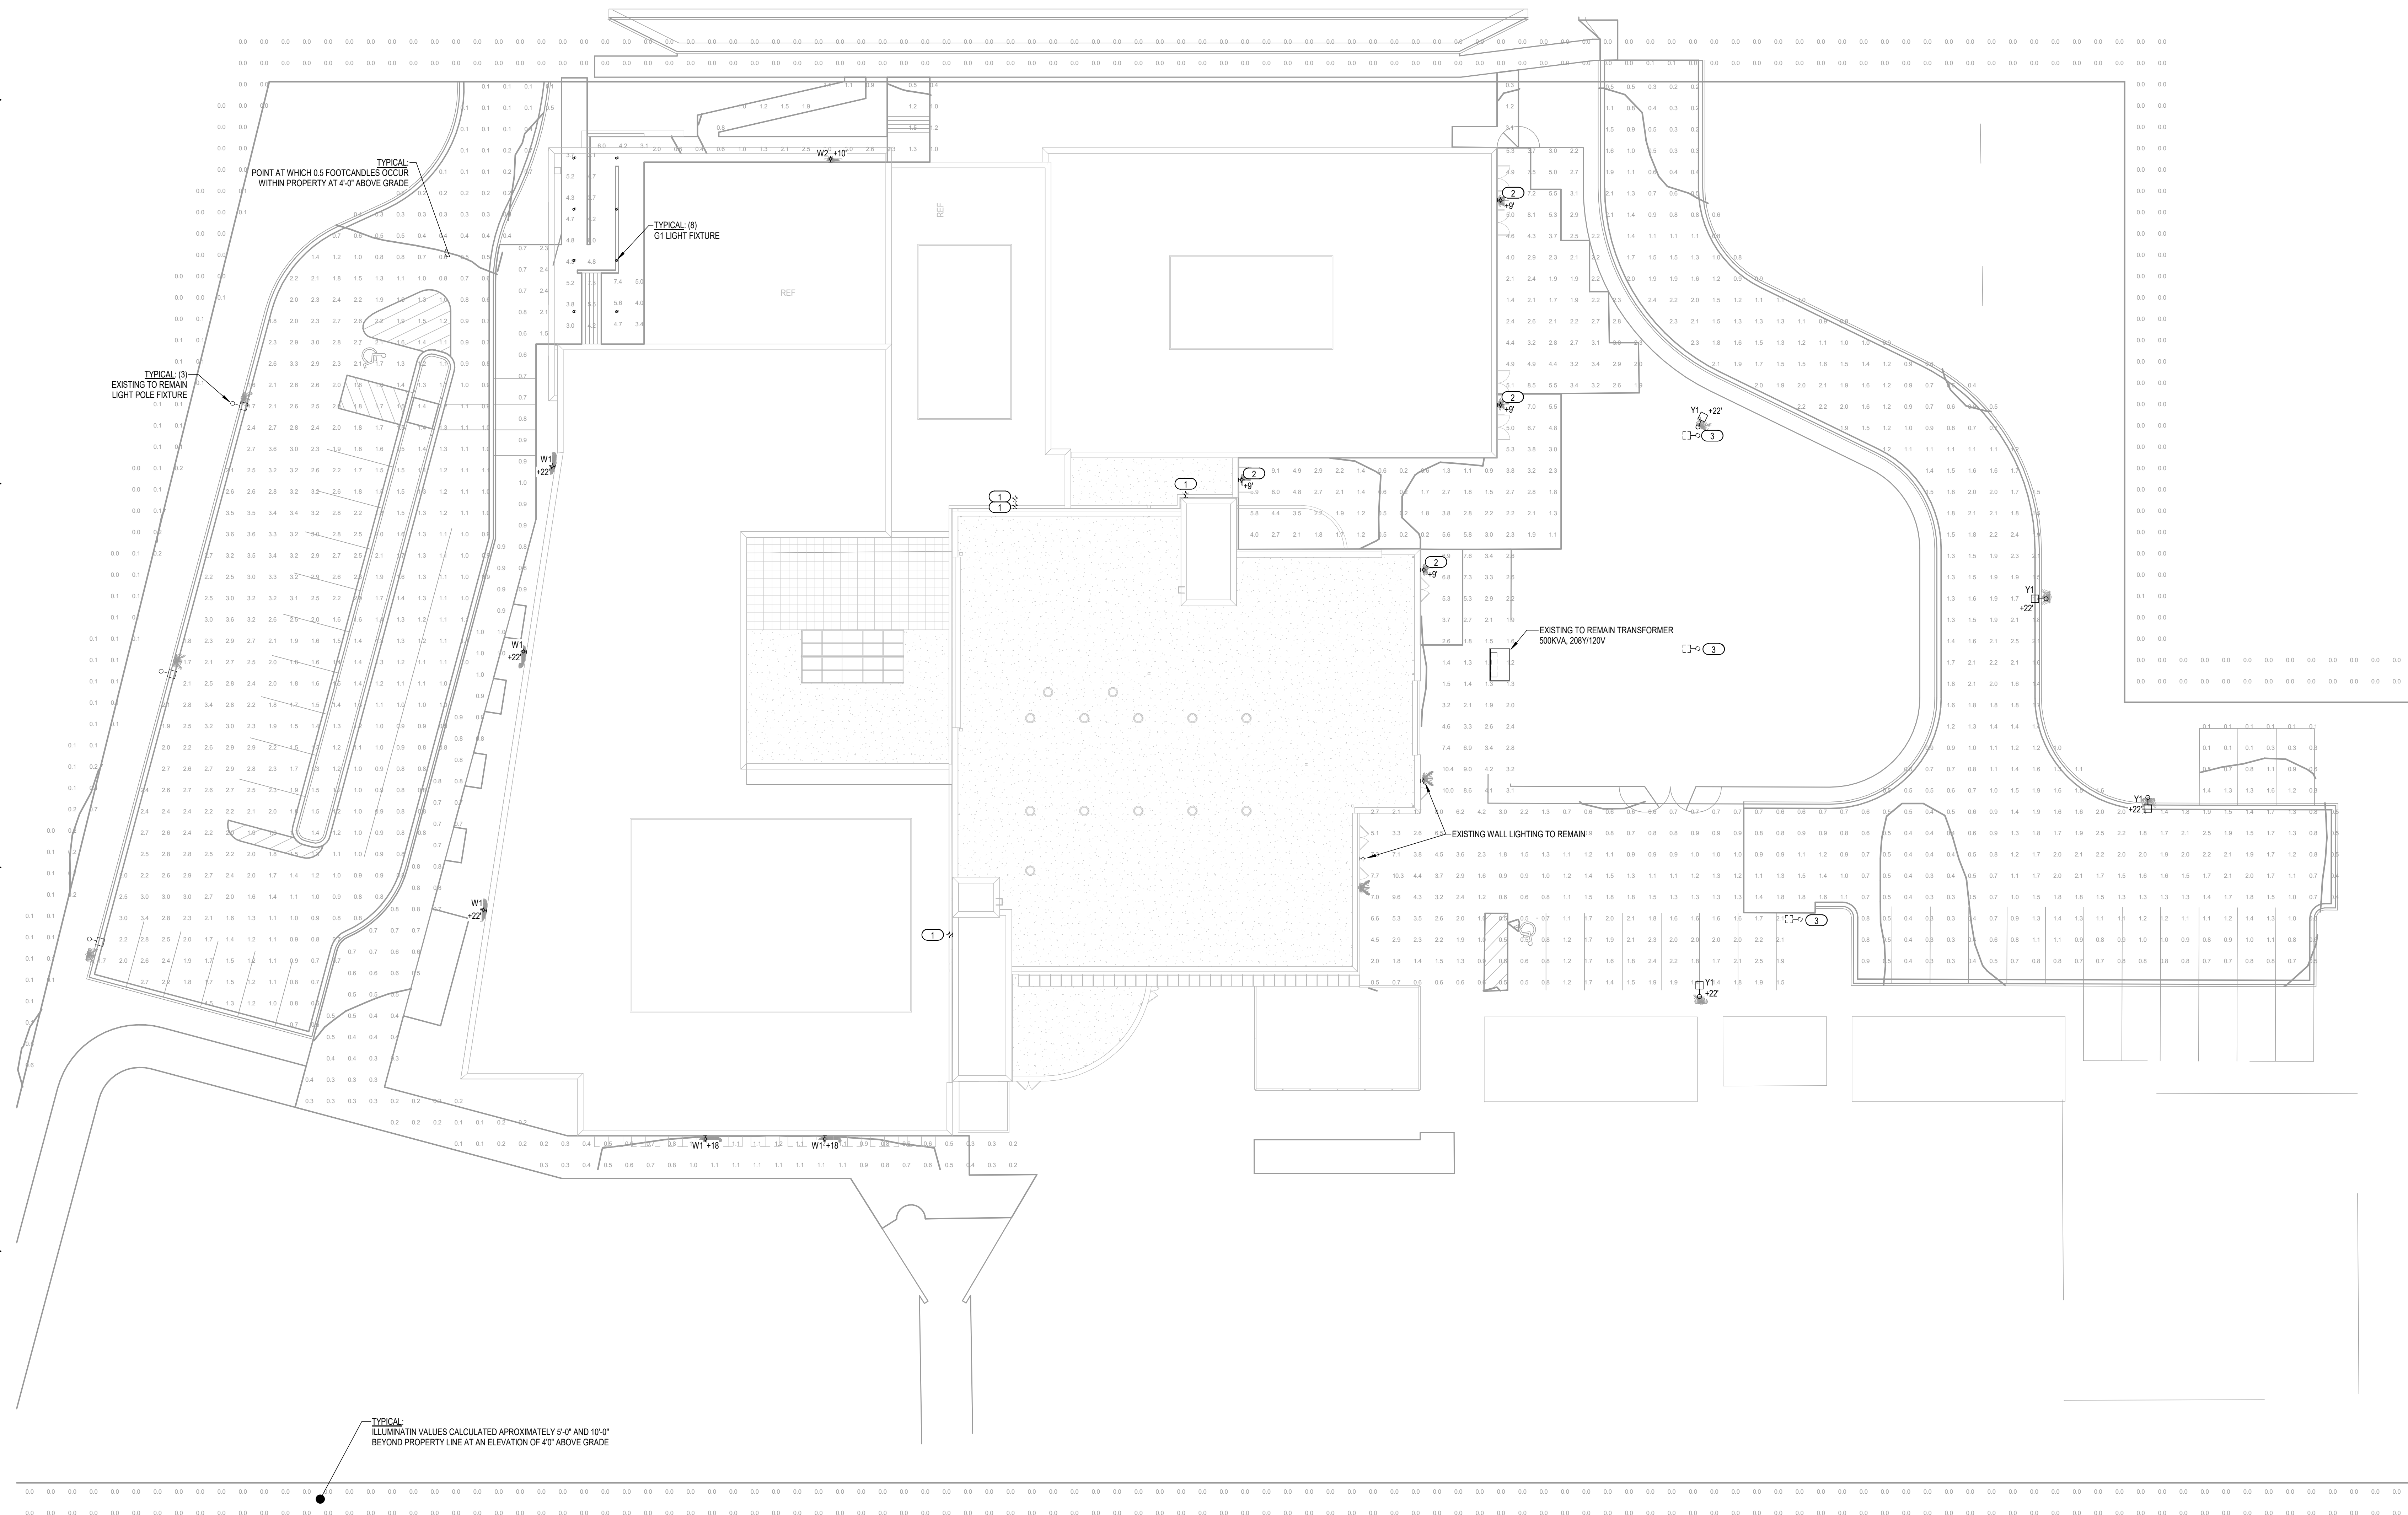



milwaukee 333 East Chicago Street
Milwaukee, Wisconsin 53202
414.271.5350

madison 309 West Johnson Street, Suite 202
Madison, Wisconsin 53703
608.442.2550

denver 1899 Wynkoop Street, Suite 300
Denver, Colorado 80202
303.556.4500

PROJECT INFORMATION

**MMSD - SOUTHSIDE
ELEMENTARY
ADDITION**

**D 501 E Badger Rd,
Madison, WI 53713**

ISSUANCE AND REVISIONS

DATE	DESCRIPTION
07/13/2021	UDC SUBMITTAL

KEY PLAN

SHEET INFORMATION


**PROGRESS DOCUMENTS
NOT FOR CONSTRUCTION**

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and shall not be used for final bidding or construction-related purposes.

PROJECT MANAGER PCC
PROJECT NUMBER 320539-00

**ELECTRICAL
DETAILS**

E501

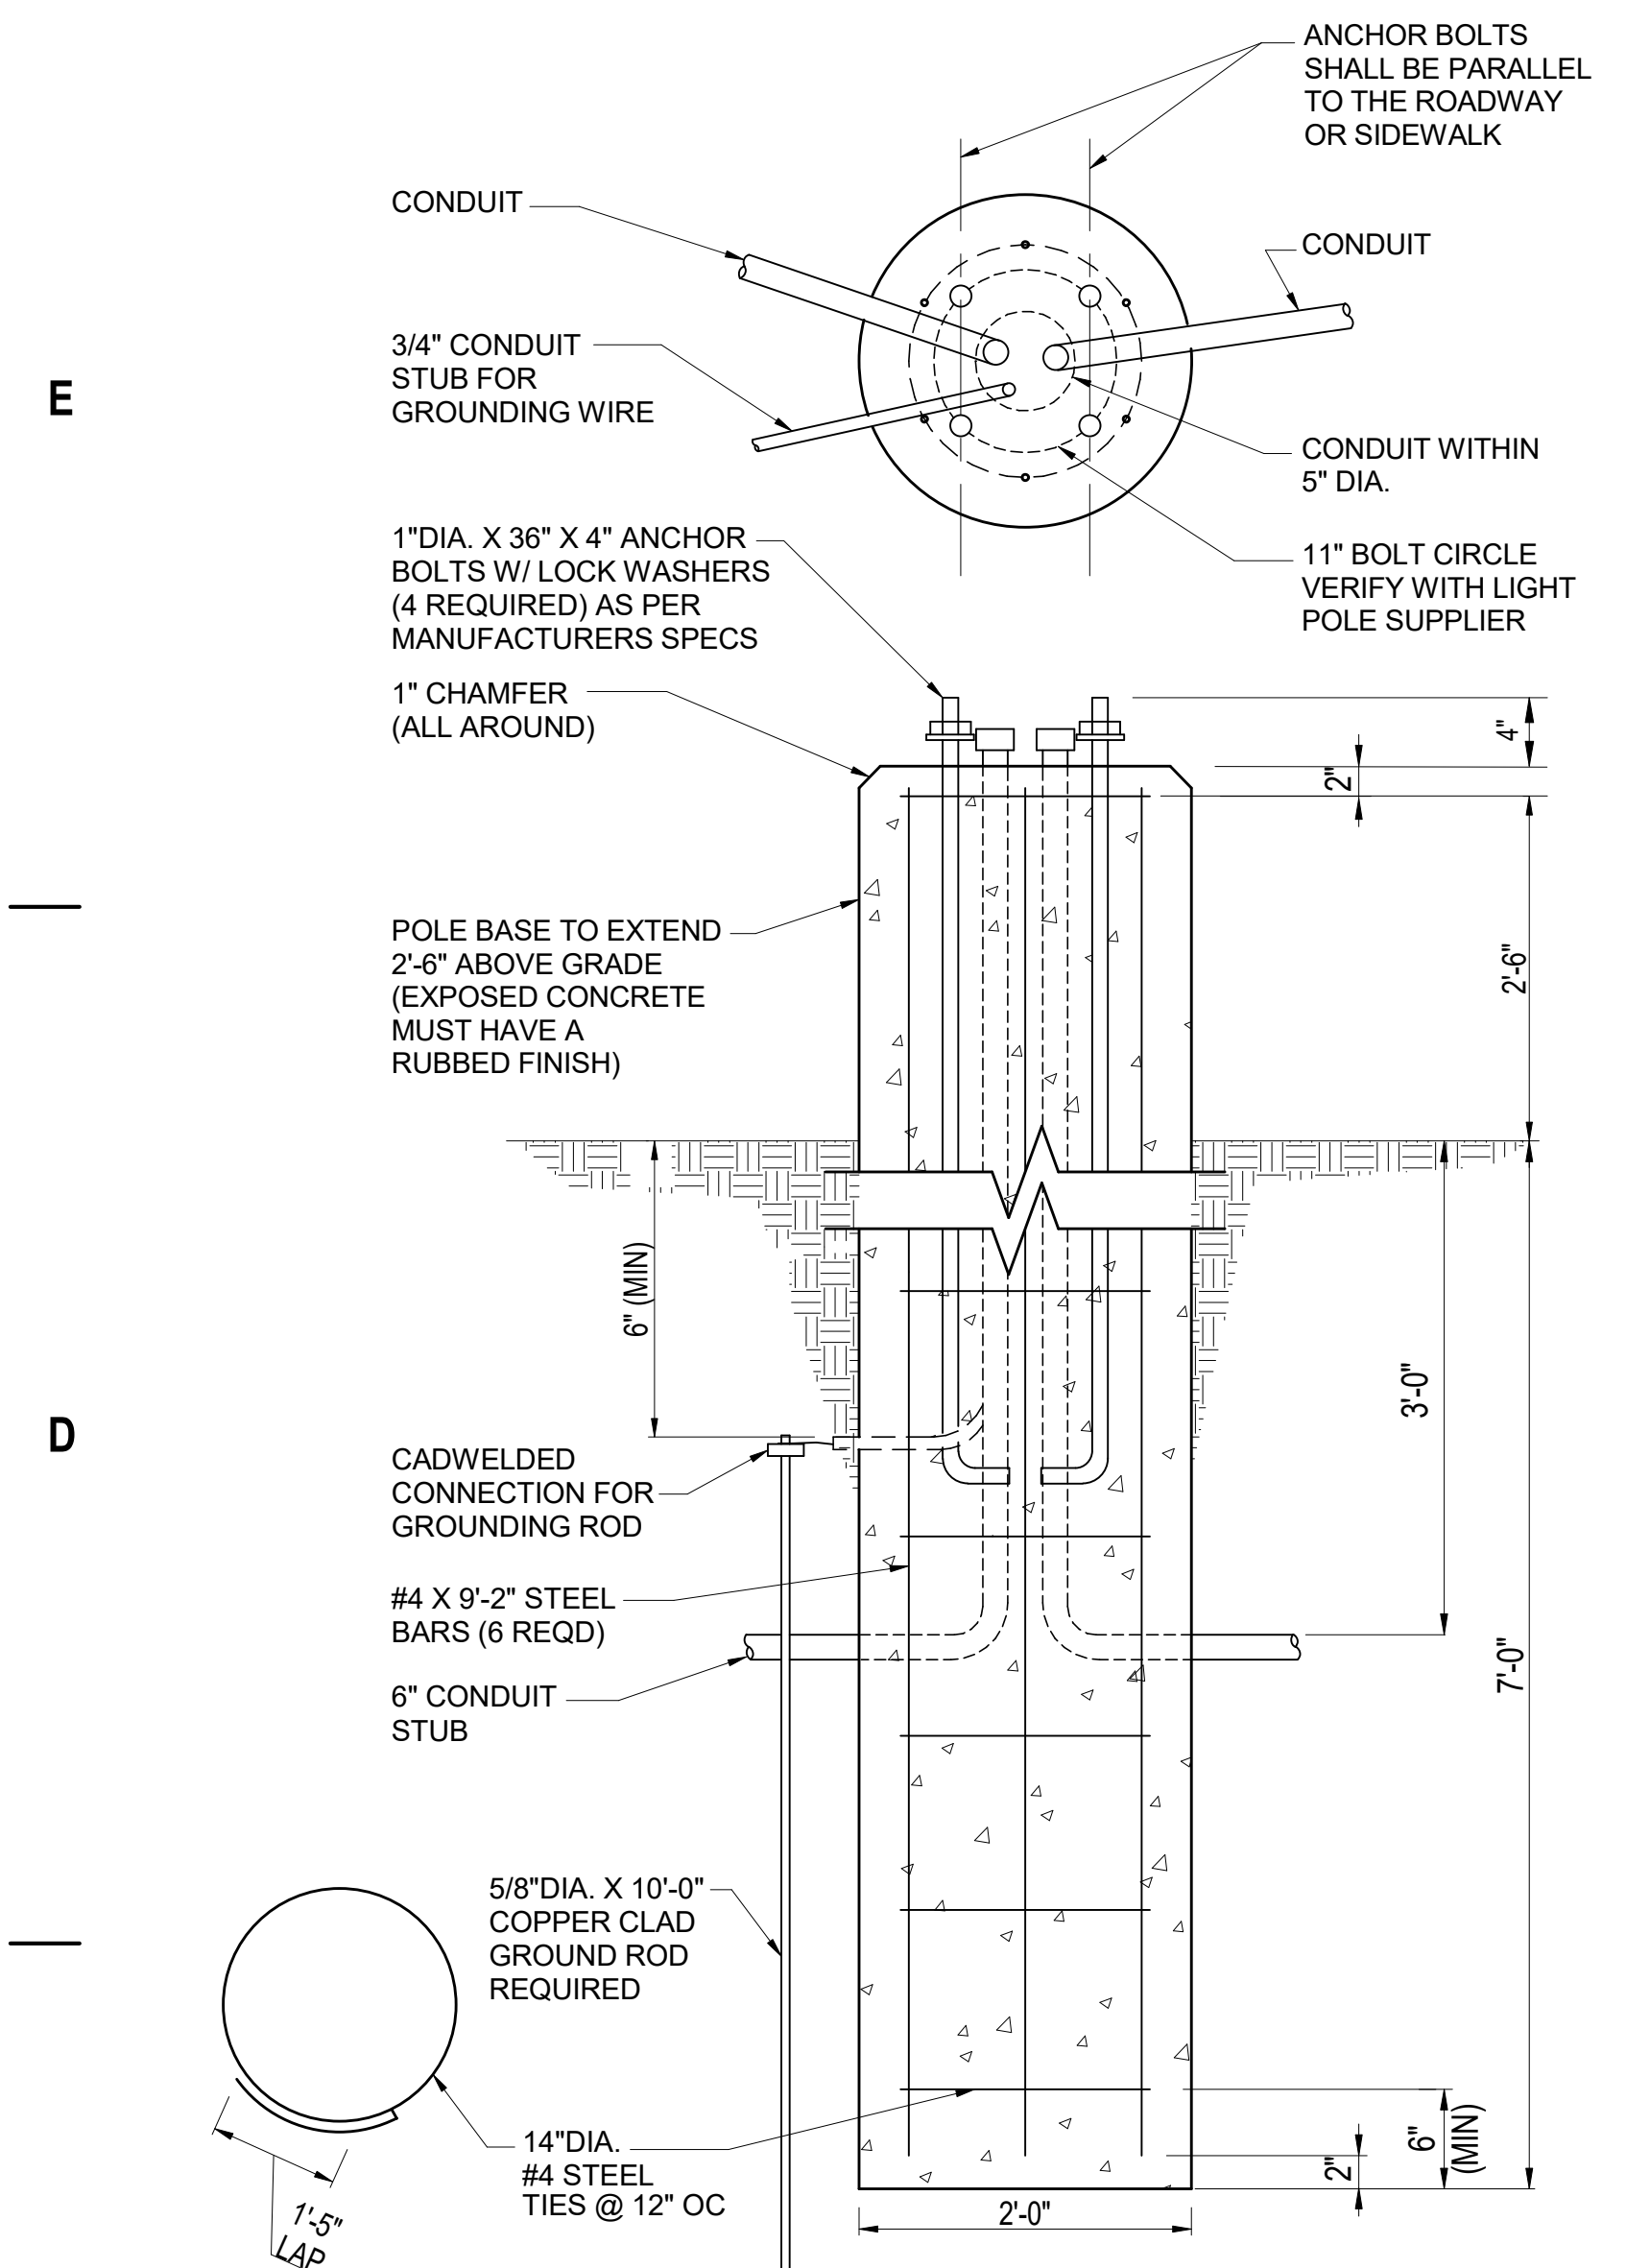

1 EXTENDED POLE BASE DETAIL
NOT TO SCALE

1 2 3 4 5 6 7

E


D

C

B

A

1 2 3 4 5 6 7



General Illumination Round Downlight

6"


Feature Set

- Bounding Ray™ optical design
- Unitized optics mechanically attach the light engine to the lower reflector for complete optical alignment.
- 45° cutoff to source and source image
- Fully serviceable and upgradeable lensed LED light engine
- 70% lumen maintenance at 60,000 hours
- 2.5 SDCM; 85 CRI typical, 90+ CRI optional
- Fixtures are wet location, covered ceiling
- Available with 10% dimming, 1% dimming, or dim to dark
- Batwing distribution with feathered edges provides even illumination on horizontal and vertical surfaces
- ENERGY STAR® certified product

Distribution



250 - 8,000 lumens

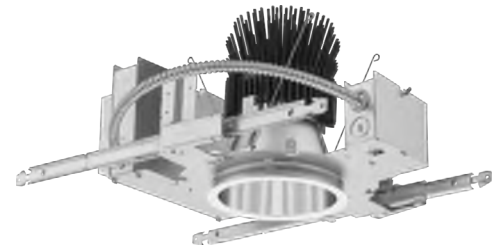

10,000 - 17,500 lumens

Superior Performance

Nominal Lumens	250	500	750	1000	1500	2000	2500	3000	3500	4000	4500	5000	6000	8000	10,000	12,000	15,000	17,500
Delivered Lumens	297	519	776	994	1471	2006	2537	3077	3542	4027	4533	5256	6371	8247	10637	12332	15776	17801
Wattage	3.4	6.2	8.2	9.6	14.7	19.7	24.7	29.5	33.8	39.0	47.3	48.7	57.6	74.9	97.1	115.0	150.9	175.3
Lumens per Watt	87.4	83.7	94.6	103.5	100.1	101.8	102.7	104.3	104.8	103.3	95.8	107.9	110.6	110.1	109.5	107.2	104.5	101.5

Coordinated Apertures | Multiple Layers of Light



General Illumination Layer | EVO



High Center Beam Layer | Incito



EVO + Incito — Multiple Layers of Light

Core



Healthcare



Special Applications



OVERVIEW

COMPLEMENTARY PRODUCTS

ORDERING INFORMATION

A+ Capable options indicated by this color background.

DS Design2Ship Quick Ship Program: Options in green text qualify for Design2Ship — 5 business days from order entry to ship. Refer to Design2Ship Brochure for complete program details. **Maximum Order Quantity: 100 units; 50 for Chicago Plenum.**

Luminaire Type:
 Catalog Number:

EXAMPLE: EV06 35/150 AR MWD LSS MVLDT EZ1

Series	Color Temperature	Nominal Lumen Values	Reflector & Flange Color	Trim Style	Distribution
EV06	27/ 2700 K	02 250 lumens	AR Clear	(blank) Self-flanged	VND Very Narrow (0.5 s/mh)
	30/ 3000 K	05 500 lumens	PR Pewter	FL Flangeless	ND Narrow (0.7 s/mh)
	35/ 3500 K	07 750 lumens	WTR Wheat		MD Medium (0.9 s/mh)
	40/ 4000 K	10 1000 lumens	GR Gold		MWD Medium Wide (1.0 s/mh)
	50/ 5000 K	15 1500 lumens	WR ¹ White		WD Wide (1.2 s/mh)
		20 2000 lumens	BR ¹ Black		
		25 2500 lumens	WRAMF ¹ White Anti-microbial		
		30 3000 lumens			
		35 3500 lumens			

Finish	Voltage	Driver ⁴	
LSS Semi-specular	MVLDT	GZ10 0-10V driver dims to 10%	ECOS2 ⁵ Lutron® Hi-Lume® 2-wire forward-phase driver. Minimum dimming level 1%, 120V only. Minimum 1000 lumens/Maximum 4000 lumens.
LD Matte-diffuse	120	GZ1 0-10V driver dims to 1%	
LS Specular	277	EZ10 eldoLED 0-10V ECOdrive. Linear dimming to 10% min.	ECOD ⁵ Lutron Ecosystem digital Hi-Lume 1% soft-on, fade to black. Max: 4000LM.
	347 ^{2,3}	EZ1 eldoLED 0-10V ECOdrive. Linear dimming to 1% min.	
		EZB eldoLED 0-10V SOLOdrive. Logarithmic dimming to <1%.	
		EDAB ⁵ eldoLED SOLOdrive DALI. Logarithmic dimming to <1%.	
		EDXB ⁵ eldoLED POWERdrive DMX with RDM (remote device management). Square Law dimming to <1%. Includes termination resistor. Refer to DMXR Manual. Minimum 1000 lumens/Maximum 15000 lumens.	

Control Interface	Options	
NLT ⁶ nLight® dimming pack controls	SF Single fuse. Specify 120V or 277V.	N80 ¹⁰ nLight® Lumen Compensation BGD ¹⁰ Bodine generator transfer device. Specify 120V or 277V. 90CRI High CRI (90+) CP ¹¹ Chicago Plenum. Specify 120V or 277V for 5000lm and above. HAO ¹² HAO High Ambient Option (40°C) RRL RELOC®-ready luminaire connectors enable a simple and consistent factory installed option across all ABL luminaire brands. Refer to RRL for complete nomenclature
NLTER ^{2,6,9} nLight® dimming pack controls emergency circuit	TRW ⁷ White painted flange	
NLTAIR2 ¹³ nLight® AIR enabled	TRBL ⁸ Black painted flange	
NLTAIRER2 ^{2,9,13} nLight® AIR enabled emergency	EL Emergency battery pack, 10W, with integral test switch	
EXA1 XPoint Wireless, eldoLED driver. Linear dimming to 1%	ELR Emergency battery pack, 10W, with self-diagnostics, with remote test switch	
EXAB XPoint Wireless, eldoLED driver. Logarithmic dimming to dark	ELSD Emergency battery pack, 10W, with self-diagnostics, integral test switch	
	ELRSD Emergency battery pack, 10W, with self-diagnostics, remote test switch	
	E10WC ⁹ Emergency battery pack, 10W Constant Power, CA Title 20 compliant with integral test switch	
	E10WCPR Emergency battery pack, 10W Constant Power, CA Title 20 compliant with remote test switch	

ACCESSORIES – order as separate catalog numbers (shipped separately)

SCA6	Sloped ceiling adapter. Degree of slope must be specified (5D, 10D, 15D, 20D, 25D, 30D). Ex: SCA6 10D. Refer to TECH-190 .
CTA EV06	6" Aperture ceiling thickness adapter, for up to 8,000LM (extends mounting frame to accommodate ceiling thickness up to 5").
CTA4-8 YK	4"-8" Aperture ceiling thickness adapter for use with EDXB or CP up to 8,000LM, or nTune options (extends mounting frame to accommodate ceiling thickness up to 5").
CTA4-8 YKHL	6" Aperture ceiling thickness adapter, for 10,000LM and up (extends mounting frame to accommodate ceiling thickness up to 5"). For use with CWW/DWW trims, EDXB, CP or nTune options.
ISD BC	0-10V wallbox dimmer. Refer to ISD-BC .

ORDERING NOTES

1. Not available with finishes.	9. ER for use with generator supply power. Will require an emergency hot feed and normal hot feed.
2. Not available with emergency battery pack options.	10. Fixture begins at 80% light level. Must be specified with NLT or NLTER. Only available with EZ10 and EZ1 drivers.
3. Supplied with factory installed step down transformer.	11. 12,000LM max with EL or nLight® options. 5,000LM max with Lutron drivers combined with EL. Not available with ELR, HAO, EXA1, or EXAB options.
4. Refer to TECH-240 for compatible dimmers.	12. Only available 5000LM - 15,000LM with eldoLED drivers.
5. Not available with nLight® and XPoint options.	13. Not available DALI or DMX drivers. Not available with CP or N80 options. Not recommended for metal ceiling installations.
6. Specify voltage.	
7. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with WR (white reflector) or FL (flangeless) option.	
8. For use with different reflector finish only (i.e. AR, PR, WTR, GR options). Not applicable with BR (black reflector) or FL (flangeless) option.	

Optical Assembly

Fully serviceable and upgradeable lensed LED light engine suitable for field maintenance or service from below the ceiling. Optical design is a Bounding Ray™ design with 45° cutoff to source and source image. Top-down flash characteristic for superior glare control. Unitized optics shall have mechanical attachment of the light engine to the lower reflector for complete optical alignment.

Electrical

The luminaire shall operate from a 50 or 60 Hz ±3 Hz AC line over a voltage ranging from 120 VAC to 277 VAC. The fluctuations of line voltage shall have no visible effect on the luminous output. The luminaire shall have a power factor of 90% or greater at all standard operating voltages and full luminaire output. Sound Rated A+. Driver shall be >80% efficient at full load across all input voltages. Input wires shall be 18AWG, 300V minimum, solid copper.

Controls

Luminaire shall be equipped with interface for nLight wired or wireless network with integral power supply as per specification.

Dimming

The luminaire shall be capable of continuous dimming without perceivable stroboscopic flicker as measured by flicker index (ANSI/IES RP-16-10) over a range of 100 – 10%, 100 – 1.0% or 100 – 0.1% of rated lumen output with a smooth shut off function to step to 0%. eldoLED LED drivers shall conform to IEEE P1789 standards. Alternatively, manufacturers must demonstrate conformance with product literature and testing which demonstrates this performance. Systems that do not meet IEEE P1789 will not be considered. Driver is inaudible in 24dB environment, and stable when input voltage conditions fluctuate over what is typically experienced in a commercial environment.

Construction

Luminaire housing shall be constructed of 16-gauge galvanized steel and have preinstalled telescopic mounting bars with maximum 32" and minimum 15" extension and 4" vertical adjustment. Luminaires shall be suitable for installation in ceilings up to 1½" thick. (specify ceiling thickness adapter to extend frame to accommodate ceiling thickness up to 5"). Tool-less adjustments shall be possible after installation. The assembly and manufacturing process for the luminaire shall be designed to assure all internal components are adequately supported to withstand mechanical shock and vibration. 25°C ambient temperature standard (1/2" clearance on all sides from non-combustible materials in non-IC applications, unless marked spacing noted otherwise). For use in insulated ceilings, a 3" clearance on all sides from insulation is required (unless marked spacing noted otherwise). 40°C high ambient optional.

Listings

Fixtures are CSA certified to meet US and Canadian Standards: All fixtures manufactured in strict accordance with the appropriate and current requirements of the "Standards for Safety" to UL, wet location covered ceiling. Luminaire configurations are Energy Star certified through testing in EPA-recognized laboratories, with the results reviewed by an independent, accredited certification organization. Visit www.energystar.gov for specific configurations listed.

Buy American

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to <https://www.acuitybrands.com/resources/buy-american> for additional information.

Photometrics

LEDs tested to LM-80 standards. Measured by IESNA Standard LM-79-08 in an accredited lab. Lumen output shall not decrease by more than 30% over the minimum operational life of 60,000 hours. Color appearance from luminaire to luminaire of the same type and in all configurations, shall be consistent both initially and at 6,000 hours and operate within a tolerance of <2.5 MacAdam ellipse as defined by a point at the intersection of the CCT line and the black body locus line in CIE chromaticity space.

Warranty

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/customer-support/terms-and-conditions

Note:

Actual performance may differ as a result of end user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background*
- This luminaire is part of an A+ Certified solution for nLight® control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background*

To learn more about A+, visit www.acuitybrands.com/aplus.

*See ordering tree for details

Flangeless



Partially finished mud ring, showing cross-section detail.



An EVO downlight requires only approximately 3" of plaster to finish.



EVO with flangeless trim

Flangeless Installation

Gotham's flangeless option utilizes a micro-thin polymer mud ring that minimizes the amount of drywall compound required to finish the ceiling. The end result is a virtually undetectable flangeless downlight installation.

The polymer mud ring is installed independent of the of the recessed frame, therefore floating with the ceiling. This innovation minimizes any surface cracks during reflector installation, ceiling movement and any future service to the recessed frame, wiring, electronics, etc.

Marked Spacing in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
500-5000	None	None	None
6000	24	12	5
8000	36	18	11
10000			9
12000			
15000			
17500	72	36	

EVO - eldoLED Driver Default Dimming Curve			
Nomenclature	Min Dimming	Driver Dim Curve	Control Dim Curve
EZ10	10%	Linear	Linear/Logarithmic
EZ1	1%	Linear	Linear/Logarithmic
EXA1	1%	Linear	Linear/Logarithmic
EZB	<1%	Logarithmic	Linear
EDAB	<1%	Logarithmic	Linear
EXAB	<1%	Logarithmic	Linear
EDXB	<1%	Square	Linear

Marked Spacing in Inches 40°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
5000	24	12	5
6000			
8000	48	24	9
10000			
12000			
15000			
17500	72	36	9

Lumen Output Multiplier		
CRI	CCT	Multiplier
80	2700K	0.96
	300K	1.00
	3500K	1.00
	4000K	1.01
90	5000K	1.07
	2700K	0.80
	300K	0.83
	3500K	0.85
	4000K	0.87
	5000K	0.91

Marked Spacing Chicago Plenum Open Frame in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
250-5000	None	None	None
6000	24	12	5
8000	36	18	11
10000			9
12000			
15000			
17500	72	36	

Reflector Finish Multiplier	
Reflector Finish	Multiplier
LS - Specular	1
LSS - Semi Specular	0.956
WR - White	0.87
LD - Matte Diffuse	0.85
BR - Black	0.73

Marked Spacing Chicago Plenum Enclosure in Inches 25°C Ambient			
Lumen Package	Fixed Center to Center MIN	Fixture Center to Building Member MIN	Space Above Fixture
250-6000	None	None	None
8000	36	18	6
10000	48	24	3
12000			

Distributions		
Nomenclature	Beam Angle	Field Angle
VND	30	64
ND	44	69
MD	54	82
MWD	67	89
WD	71	92

Driver		Control Provided (note: 347V/UVOLT versions provided with 347 option selected)			
Nomenclature	Description	NLT	NLTER	NLTAIR2	NLTAIRER2
GZ10	0-10V driver dims to 10%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
GZ1	0-10V driver dims to 1%	nPP16 D EFP	nPP16 D ER EFP	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ10	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZ1	eldoLED 0-10V ECOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2
EZB	eldoLED 0-10V SOLOdrive	nPS 80 EZ	nPS 80 EZ ER	RPP20 D 24V G2	RPP20 D 24V ER G2

How to Estimate Delivered Lumens in Emergency Mode

Delivered Lumens = 1.25 x P x LPW

P = Output power of emergency driver. P = 10W for PS1055CP


LPW = Lumen per watt rating of the luminaire. This information is available on the ABL luminaire spec sheet.

DIMENSIONAL DATA


*Dimensions in inches [centimeters]

Aperture: 6 1/4" [15.9]	Ceiling Opening: 7 1/8" [18.1] self-flanged
Overlap Trim: 7 1/2" [19.1]	7 1/4" [18.4] flangeless


250LM-500LM Standard

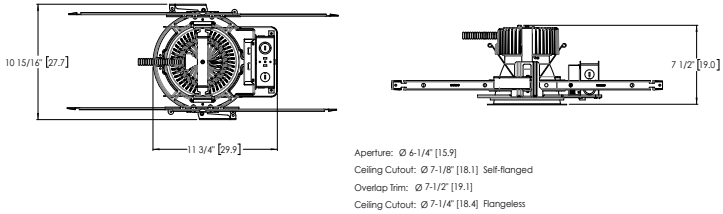


250LM-500LM Battery Pack

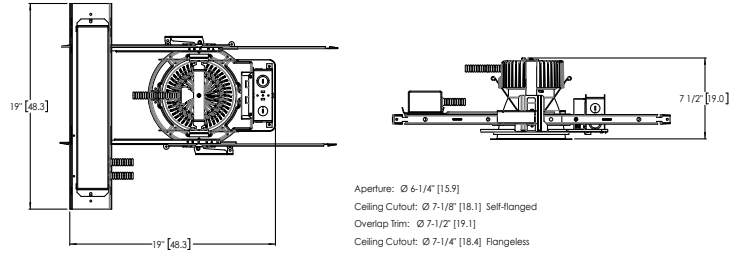


600LM-800LM Standard

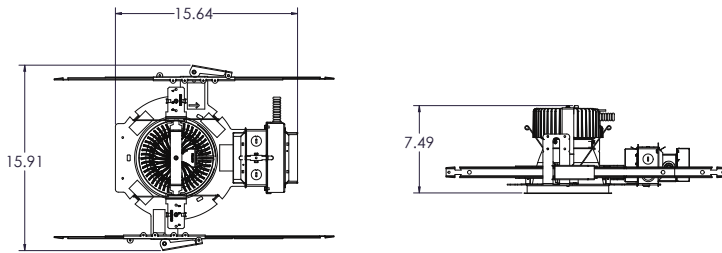


600LM-800LM Battery Pack

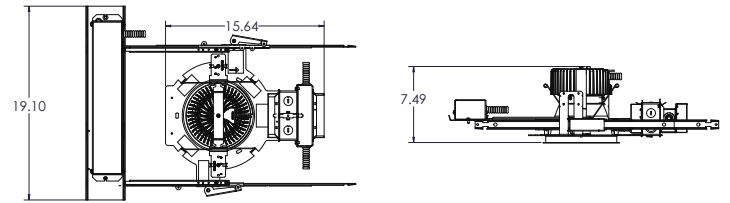

10,000LM-17,500LM Standard

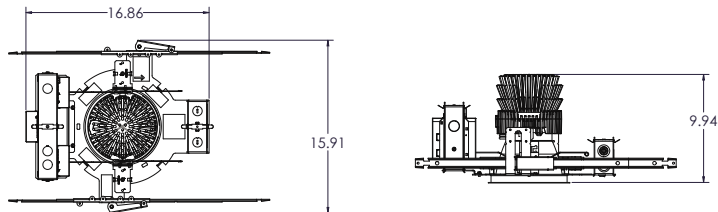


10,000LM-17,500LM Battery Pack

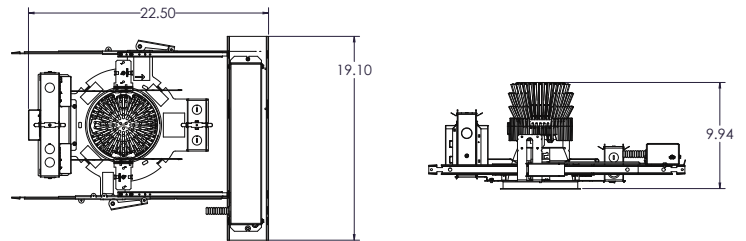


DIMENSIONAL DATA

*Dimensions in inches [centimeters]


250LM-450LM CP

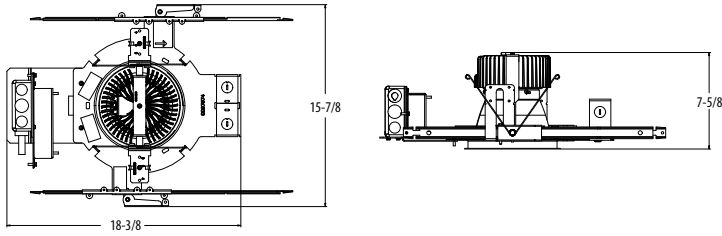


10000LM - 17,500LM Lumen Open Frame CP

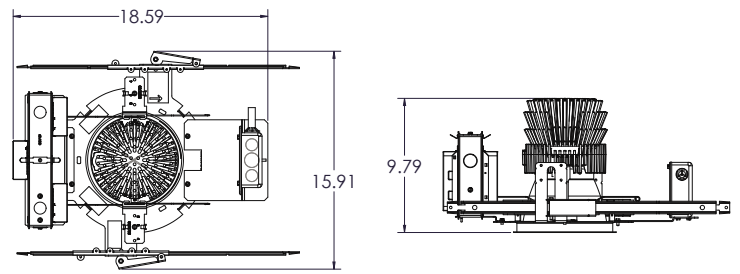


5000LM ECO/SOLO Drive Open Frame CP

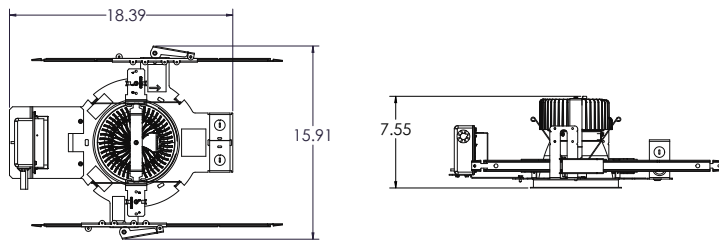


5000LM (Lutron & POWER Drive Only), 6000LM & 8000LM Open Frame CP

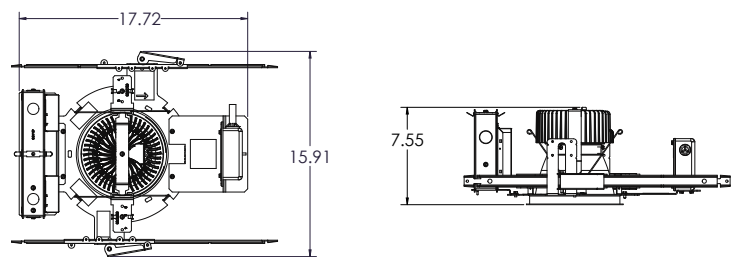


250LM - 6000LM CP Enclosed with Battery Pack and/or nLight™ Only

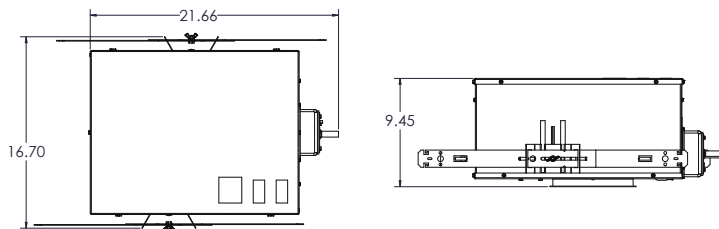

8,000LM CP Enclosed with Battery Pack and/or nLight™ Only

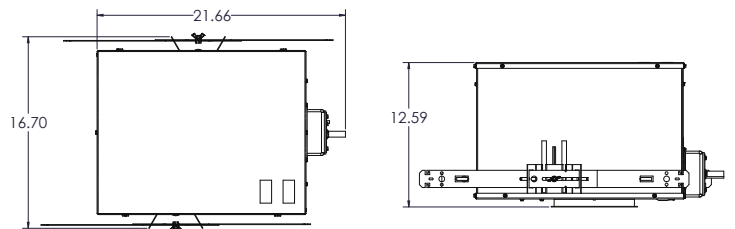


10,000LM-12,000LM CP Enclosed with Battery Pack and/or nLight™ Only

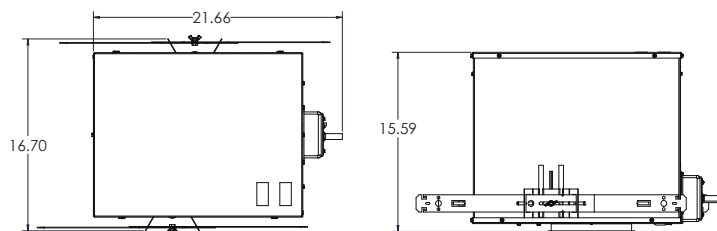


Photometry


EVO6 35/15 AR MWD LS INPUT WATTS: 14.7, DELIVERED LUMENS: 1471LM, LPW= 100, 1.03 S/MH, TEST NO. LTL27783P1505

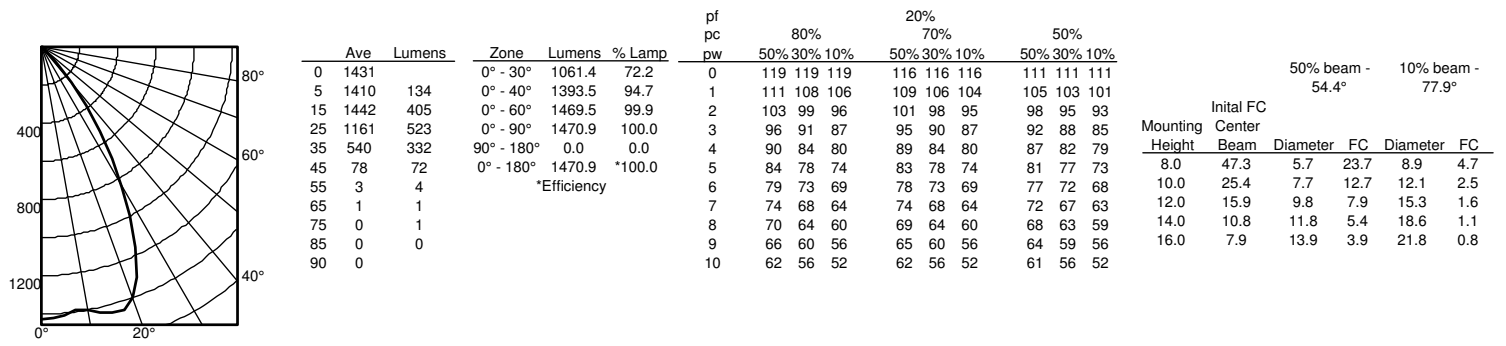

EVO6 35/45 AR MWD LS INPUT WATTS: 47.3, DELIVERED LUMENS: 4532.7LM, LPW= 95.8, 1.03 S/MH, TEST NO. LTL27783P1649

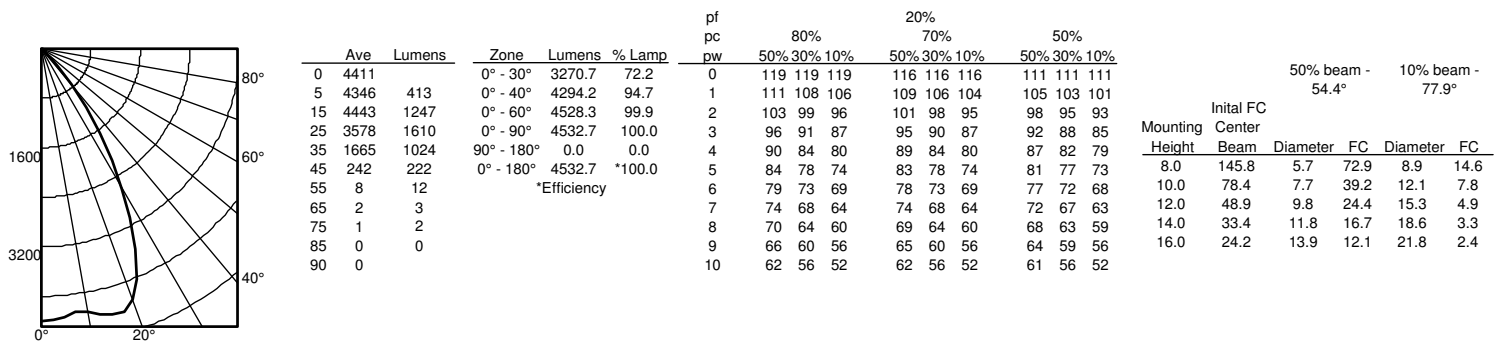


EVO6 35/175 AR MWD LS INPUT WATTS: 175.3, DELIVERED LUMENS: 17801LM, LPW=101.5, 1.06 S/MH, TEST NO. ISF 34035P268

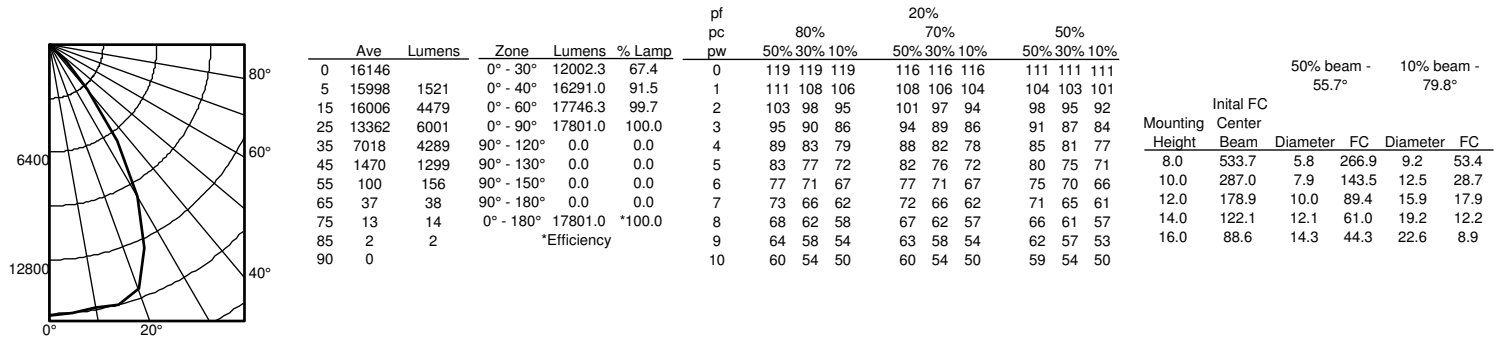



nLight® AIR is the ideal solution for retrofit or new construction spaces where adding communication wiring is cost prohibitive. The integrated nLight AIR rPP20 Power Pack is part of each EVO Luminaire ordered with the NLTAIR option. These individually addressable controls offer the ultimate in flexibility during initial setup and for space repurposing.

Possibilities for nLight® AIR

Fixtures ordered *without* the NLTAIR option

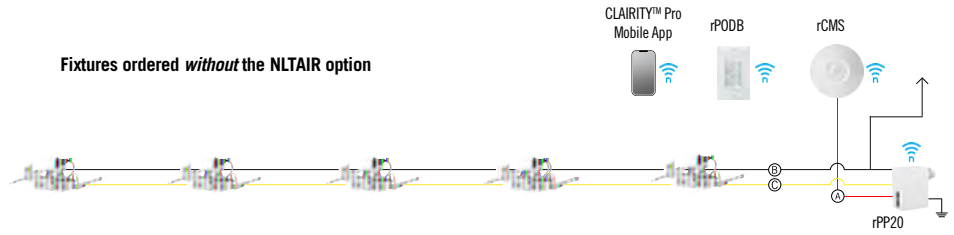

Fixtures ordered *with* the NLTAIR option

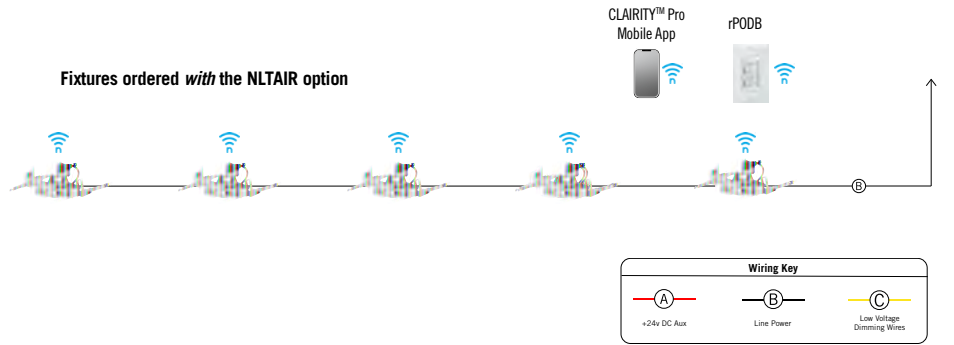

nLight® AIR Control Accessories

Order as separate catalog number. Visit [nLight AIR](#).

Wall Switches	Model Number
On/Off single pole	rPODB (color) G2
On/Off two pole	rPODB 2P (color) G2
On/Off & raise/lower single pole	rPODB DX (color) G2
On/Off & raise/lower two pole	rPODB 2P DX (color) G2


nLight® AIR Control Accessories (cont.)

Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	rCMS 9 / rCMS PDT 9
Large motion 360°, ceiling	rCMS 10 / rCMS PDT 10



nLight® The nLight® solution is a digital networked lighting control system that provides both energy savings and increased user configurability by cost effectively integrating time-based, daylight-based, sensor-based and manual lighting control schemes.

Possibilities for nLight® wired

Fixtures ordered *without* the NLT option

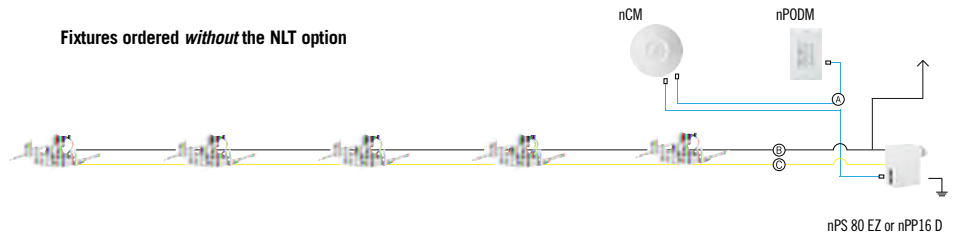

Fixtures ordered *with* the NLT option

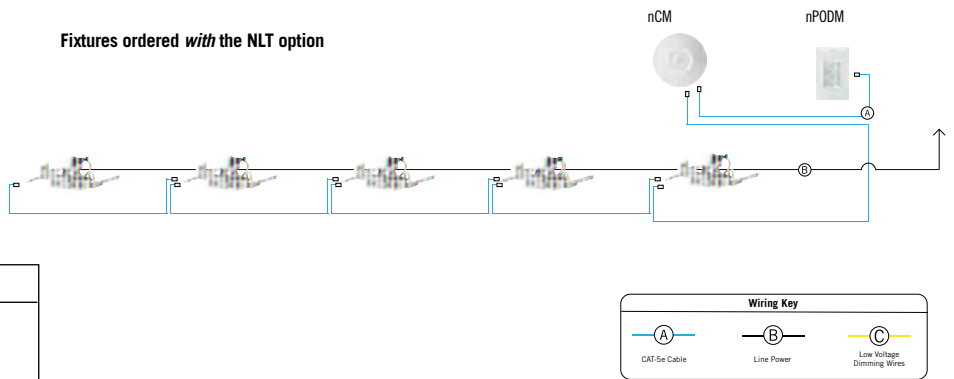

nLight® Wired Control Accessories

Order as separate catalog number. Visit [nLight](#).

Wall Switches	Model Number
On/Off single pole	nPODM (color)
On/Off two pole	nPODM 2P (color)
On/Off & raise/lower single pole	nPOD DX (color)
On/Off & raise/lower two pole	nPODM 2P DX (color)
Graphic touchscreen	nPOD GFX (color)

Photocell Controls	Model Number
Dimming	nCM ADCX

nLight® Wired Control Accessories (cont.)

Occupancy Sensors (PIR/dual tech)	Model Number
Small motion 360°, ceiling	nCM 9 / nCM PDT 9
Large motion 360°, ceiling	nCM 10 / nCM PDT 10
Wide View	nWV 16 / nWV PDT 16
Wall switch with raise/lower	nWSX LV DX / nWSX PDT LV DX

Cat-5 Cables (plenum rated)	Model Number
10', CAT5	CAT5 10FT J1
15', CAT5	CAT5 15FT J1



D-Series Size 1 LED Wall Luminaire



Buy American

Catalog
Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.


d#series

Specifications Luminaire

Width:	13-3/4" (34.9 cm)	Weight:	12 lbs (5.4 kg)
Depth:	10" (25.4 cm)		
Height:	6-3/8" (16.2 cm)		

Back Box (BBW, ELCW)

Width:	13-3/4" (34.9 cm)	BBW Weight:	5 lbs (2.3 kg)
Depth:	4" (10.2 cm)	ELCW Weight:	10 lbs (4.5 kg)
Height:	6-3/8" (16.2 cm)		



Introduction

The D-Series Wall luminaire is a stylish, fully integrated LED solution for building-mount applications. It features a sleek, modern design and is carefully engineered to provide long-lasting, energy-efficient lighting with a variety of optical and control options for customized performance.

With an expected service life of over 20 years of nighttime use and up to 74% in energy savings over comparable 250W metal halide luminaires, the D-Series Wall is a reliable, low-maintenance lighting solution that produces sites that are exceptionally illuminated.

Ordering Information

EXAMPLE: DSXW1 LED 20C 1000 40K T3M MVOLT DBBTD

Series	LEDs	Drive Current	Color temperature	Distribution	Voltage	Mounting	Control Options
DSXW1 LED	10C 10 LEDs (one engine) 20C 20 LEDs (two engines) ¹	350 350 mA 530 530 mA 700 700 mA 1000 1000 mA (1 A) ¹	30K 3000 K 40K 4000 K 50K 5000 K AMBPC Amber phosphor converted	T2S Type II Short T2M Type II Medium T3S Type III Short T3M Type III Medium T4M Type IV Medium TFTM Forward Throw Medium	MVOLT ² 120 ³ 208 ³ 240 ³ 277 ³ 347 ^{3,4} 480 ^{3,4}	Shipped included (blank) Surface mounting bracket BBW Surface-mounted back box (for conduit entry) ⁵	Shipped installed PE Photoelectric cell, button type ⁶ DMG 0-10v dimming wires pulled outside fixture (for use with an external control, ordered separately) PIR 180° motion/ambient light sensor, <15' mtg ht ^{1,7} PIRH 180° motion/ambient light sensor, 15-30' mtg ht ^{1,7} PIR1FC3V Motion/ambient sensor, 8-15' mounting height, ambient sensor enabled at 1fc ^{1,7} PIRH1FC3V Motion/ambient sensor, 15-30' mounting height, ambient sensor enabled at 1fc ^{1,7} ELCW Emergency battery backup (includes external component enclosure), CA Title 20 Noncompliant ^{8,9}

Other Options	Finish (required)
Shipped installed SF Single fuse (120, 277 or 347V) ^{3,10} DF Double fuse (208, 240 or 480V) ^{3,10} HS House-side shield ¹¹ SPD Separate surge protection ¹²	Shipped separately ¹¹ BSW Bird-deterrent spikes VG Vandal guard DDL Diffused drop lens DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DSSXD Sandstone DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white DSSTXD Textured sandstone

Accessories

Ordered and shipped separately.

DSXWHS U	House-side shield (one per light engine)
DSXWBSW U	Bird-deterrent spikes
DSXWTVG U	Vandal guard accessory

NOTES

- 20C 1000 is not available with PIR, PIRH, PIR1FC3V or PIRH1FC3V.
- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120, 277 or 347 voltage option. Double fuse (DF) requires 208, 240 or 480 voltage option.
- Only available with 20C, 700mA or 1000mA. Not available with PIR or PIRH.
- Back box ships installed on fixture. Cannot be field installed. Cannot be ordered as an accessory.
- Photocontrol (PE) requires 120, 208, 240, 277 or 347 voltage option. Not available with motion/ambient light sensors (PIR or PIRH).
- Reference Motion Sensor table on page 3.
- Cold weather (-20C) rated. Not compatible with conduit entry applications. Not available with BBW mounting option. Not available with fusing. Not available with 347 or 480 voltage options. Emergency components located in back box housing. Emergency mode IES files located on product page at www.lithonia.com
- Not available with SPD.
- Not available with ELCW.
- Also available as a separate accessory; see Accessories information.
- Not available with ELCW.



Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K (3000 K, 70CRI)					40K (4000 K, 70CRI)					50K (5000 K, 70CRI)					AMBPC (Amber Phosphor Converted)				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
10C (10 LEDs)	350mA	13W	T2S	1,415	0	0	1	109	1,520	0	0	1	117	1,530	0	0	1	118	894	0	0	1	69
			T2M	1,349	0	0	1	104	1,448	0	0	1	111	1,458	0	0	1	112	852	0	0	1	66
			T3S	1,399	0	0	1	108	1,503	0	0	1	116	1,512	0	0	1	116	884	0	0	1	68
			T3M	1,385	0	0	1	107	1,488	0	0	1	114	1,497	0	0	1	115	876	0	0	1	67
			T4M	1,357	0	0	1	104	1,458	0	0	1	112	1,467	0	0	1	113	858	0	0	1	66
	TFTM	1,411	0	0	1	109	1,515	0	0	1	117	1,525	0	0	1	117	892	0	0	1	69		
	530 mA	19W	T2S	2,053	1	0	1	108	2,205	1	0	1	116	2,220	1	0	1	117	1,264	0	0	1	67
			T2M	1,957	1	0	1	103	2,102	1	0	1	111	2,115	1	0	1	111	1,205	0	0	1	63
			T3S	2,031	1	0	1	107	2,181	1	0	1	115	2,194	1	0	1	115	1,250	0	0	1	66
			T3M	2,010	1	0	1	106	2,159	1	0	1	114	2,172	1	0	1	114	1,237	0	0	1	65
			T4M	1,970	1	0	1	104	2,115	1	0	1	111	2,129	1	0	1	112	1,212	0	0	1	64
	TFTM	2,047	0	0	1	108	2,198	1	0	1	116	2,212	1	0	1	116	1,260	0	0	1	66		
	700 mA	26W	T2S	2,623	1	0	1	101	2,816	1	0	1	108	2,834	1	0	1	109	1,544	0	0	1	59
			T2M	2,499	1	0	1	96	2,684	1	0	1	103	2,701	1	0	1	104	1,472	0	0	1	57
			T3S	2,593	1	0	1	100	2,785	1	0	1	107	2,802	1	0	1	108	1,527	0	0	1	59
			T3M	2,567	1	0	1	99	2,757	1	0	1	106	2,774	1	0	1	107	1,512	0	0	1	58
			T4M	2,515	1	0	1	97	2,701	1	0	1	104	2,718	1	0	1	105	1,481	0	0	1	57
	TFTM	2,614	1	0	1	101	2,808	1	0	1	108	2,825	1	0	1	109	1,539	0	0	1	59		
	1000 mA	39W	T2S	3,685	1	0	1	94	3,957	1	0	1	101	3,982	1	0	1	102	2,235	1	0	1	57
			T2M	3,512	1	0	1	90	3,771	1	0	1	97	3,794	1	0	1	97	2,130	1	0	1	55
			T3S	3,644	1	0	1	93	3,913	1	0	1	100	3,938	1	0	1	101	2,210	1	0	1	57
			T3M	3,607	1	0	1	92	3,873	1	0	1	99	3,898	1	0	1	100	2,187	1	0	1	56
			T4M	3,534	1	0	2	91	3,796	1	0	2	97	3,819	1	0	2	98	2,143	1	0	1	55
	TFTM	3,673	1	0	1	94	3,945	1	0	1	101	3,969	1	0	1	102	2,228	1	0	1	57		
20C (20 LEDs)	350mA	23W	T2S	2,820	1	0	1	123	3,028	1	0	1	132	3,047	1	0	1	132	1,777	1	0	1	77
			T2M	2,688	1	0	1	117	2,886	1	0	1	125	2,904	1	0	1	126	1,693	1	0	1	74
			T3S	2,789	1	0	1	121	2,994	1	0	1	130	3,014	1	0	1	131	1,757	0	0	1	76
			T3M	2,760	1	0	1	120	2,965	1	0	1	129	2,983	1	0	1	130	1,739	1	0	1	76
			T4M	2,704	1	0	1	118	2,905	1	0	1	126	2,922	1	0	1	127	1,704	1	0	1	74
	TFTM	2,811	1	0	1	122	3,019	1	0	1	131	3,038	1	0	1	132	1,771	0	0	1	77		
	530 mA	35W	T2S	4,079	1	0	1	117	4,380	1	0	1	125	4,407	1	0	1	126	2,504	1	0	1	72
			T2M	3,887	1	0	1	111	4,174	1	0	1	119	4,201	1	0	1	120	2,387	1	0	1	68
			T3S	4,033	1	0	1	115	4,331	1	0	1	124	4,359	1	0	1	125	2,477	1	0	1	71
			T3M	3,993	1	0	2	114	4,288	1	0	2	123	4,315	1	0	2	123	2,451	1	0	1	70
			T4M	3,912	1	0	2	112	4,201	1	0	2	120	4,227	1	0	2	121	2,402	1	0	1	69
	TFTM	4,066	1	0	2	116	4,366	1	0	2	125	4,394	1	0	2	126	2,496	1	0	1	71		
	700 mA	46W	T2S	5,188	1	0	1	113	5,572	1	0	1	121	5,607	1	0	1	122	3,065	1	0	1	67
			T2M	4,945	1	0	2	108	5,309	1	0	2	115	5,343	1	0	2	116	2,921	1	0	1	64
			T3S	5,131	1	0	2	112	5,510	1	0	2	120	5,544	1	0	2	121	3,031	1	0	1	66
			T3M	5,078	1	0	2	110	5,454	1	0	2	119	5,487	1	0	2	119	3,000	1	0	1	65
			T4M	4,975	1	0	2	108	5,343	1	0	2	116	5,376	1	0	2	117	2,939	1	0	1	64
	TFTM	5,172	1	0	2	112	5,554	1	0	2	121	5,589	1	0	2	122	3,055	1	0	1	66		
	1000 mA	73W	T2S	7,204	1	0	2	99	7,736	2	0	2	106	7,784	2	0	2	107	4,429	1	0	1	61
			T2M	6,865	1	0	2	94	7,373	2	0	2	101	7,419	2	0	2	102	4,221	1	0	1	58
			T3S	7,125	1	0	2	98	7,651	1	0	2	105	7,698	1	0	2	105	4,380	1	0	1	60
			T3M	7,052	1	0	2	97	7,573	2	0	2	104	7,620	2	0	2	104	4,335	1	0	2	59
			T4M	6,909	1	0	2	95	7,420	1	0	2	102	7,466	1	0	2	102	4,248	1	0	2	58
	TFTM	7,182	1	0	2	98	7,712	1	0	2	106	7,761	1	0	2	106	4,415	1	0	2	60		

Performance Data

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.02
10°C	50°F	1.01
20°C	68°F	1.00
25°C	77°F	1.00
30°C	86°F	1.00
40°C	104°F	0.98

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the DSXW1 LED 20C 1000 platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.95	0.93	0.88

Electrical Load

LEDs	Drive Current (mA)	System Watts	Current (A)					
			120V	208V	240V	277V	347V	480V
10C	350	14 W	0.13	0.07	0.06	0.06	-	-
	530	20 W	0.19	0.11	0.09	0.08	-	-
	700	27 W	0.25	0.14	0.13	0.11	-	-
	1000	40 W	0.37	0.21	0.19	0.16	-	-
20C	350	24 W	0.23	0.13	0.12	0.10	-	-
	530	36 W	0.33	0.19	0.17	0.14	-	-
	700	47 W	0.44	0.25	0.22	0.19	0.15	0.11
	1000	74 W	0.69	0.40	0.35	0.30	0.23	0.17

Motion Sensor Default Settings


Option	Dimmed State	High Level (when triggered)	Photocell Operation	Dwell Time	Ramp-up Time	Ramp-down Time
PIR or PIRH	3V (37%) Output	10V (100%) Output	Enabled @ 5FC	5 min	3 sec	5 min
*PIR1FC3V or PIRH1FC3V	3V (37%) Output	10V (100%) Output	Enabled @ 1FC	5 min	3 sec	5 min

*For use when motion sensor is used as dusk to dawn control

Photometric Diagrams

To see complete photometric reports or download .ies files for this product, visit Lithonia Lighting's [D-Series Wall Size 1 homepage](#).

Isfootcandle plots for the DSXW1 LED 20C 1000 40K. Distances are in units of mounting height (15').

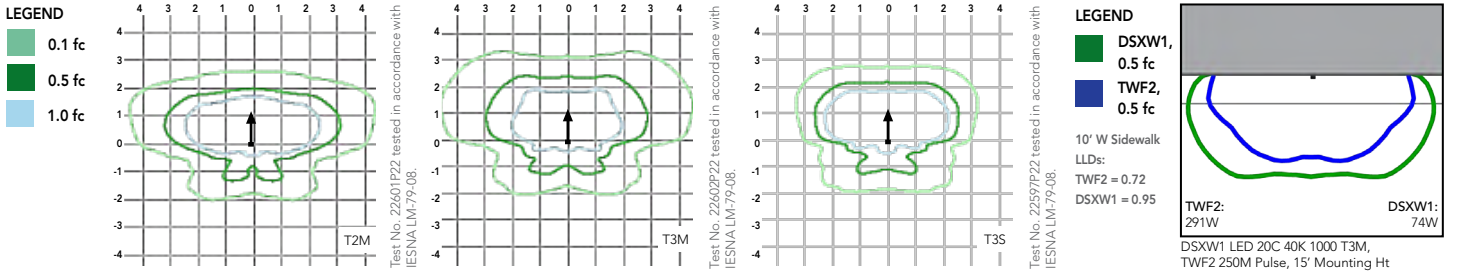


Options and Accessories



T3M (left)



HS - House-side shields



BSW - Bird-deterrent spikes



VG - Vandal guard



DDL - Diffused drop lens

FEATURES & SPECIFICATIONS

INTENDED USE

The energy savings, long life and easy-to-install design of the D-Series Wall Size 1 make it the smart choice for building-mounted doorway and pathway illumination for nearly any facility.

CONSTRUCTION

Two-piece die-cast aluminum housing has integral heat sink fins to optimize thermal management through conductive and convective cooling. Modular design allows for ease of maintenance. The LED driver is mounted to the door to thermally isolate it from the light engines for low operating temperature and long life. Housing is completely sealed against moisture and environmental contaminants (IP65).

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Available in textured and non-textured finishes.

OPTICS

Precision-molded proprietary acrylic lenses provide multiple photometric distributions tailored specifically to building mounted applications. Light engines are available in 3000 K (70 min. CRI), 4000 K (70 min. CRI) or 5000 K (70 min. CRI) configurations.

ELECTRICAL

Light engine(s) consist of 10 high-efficacy LEDs mounted to a metal-core circuit board to maximize heat dissipation and promote long life (L88/100,000 hrs at 25°C). Class 1 electronic drivers have a power factor >90%, THD <20%, and a minimum 2.5KV surge rating. When ordering the SPD option, a separate surge protection device is installed within the luminaire which meets a minimum Category C Low (per ANSI/IEEE C62.41.2).

INSTALLATION

Included universal mounting bracket attaches securely to any 4" round or square outlet box for quick and easy installation. Luminaire has a slotted gasket wireway and attaches to the mounting bracket via corrosion-resistant screws.

LISTINGS

CSA certified to U.S. and Canadian standards. Rated for -40°C minimum ambient.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

BUY AMERICAN

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

Five-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.



Project		Catalog #		Type	
Prepared by		Notes		Date	



McGraw-Edison

Impact Elite LED

Wall Mount Luminaire

Interactive Menu

- Ordering Information [page 2](#)
- Product Specifications [page 2](#)
- Energy and Performance Data [page 3](#)
- Control Options [page 4](#)

Product Certifications



Quick Facts


- 10 Optical Distributions
- Lumen packages range from 2,459 to 8,123 (20W - 66W)
- Efficacy up to 143 lumens per watt

Connected Systems


- WaveLinX
- Enlighted

Dimensional Details


Cylinder

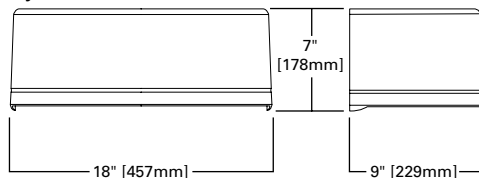


Quarter Sphere

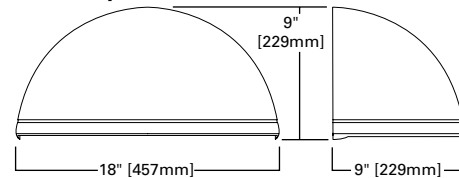


Hook -n- Lock

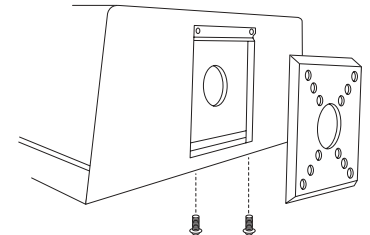

Trapezoid

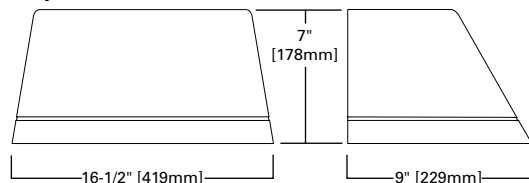

Wedge

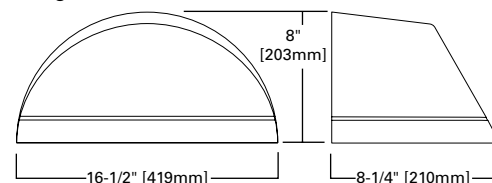


Ordering Information

SAMPLE NUMBER: ISC-SA1F-740-U-T3-BZ

Product Family ¹	Light Engine		Color Temperature	Voltage	Distribution	Finish
	Configuration	Drive Current				
ISC =Impact Elite LED Small Cylinder ISS =Impact Elite LED Small Quarter Sphere IST =Impact Elite LED Small Trapezoid ISW =Impact Elite LED Small Wedge	SA1=1 Square	A =350mA B =450mA C =600mA D =800mA E =1000mA F =1200mA ²	722 =70CRI, 2200K 727 =70CRI, 2700K 730 =70CRI, 3000K 735 =70CRI, 3500K 740 =70CRI, 4000K 750 =70CRI, 5000K 760 =70CRI, 6000K 827 =80CRI, 2700K 830 =80CRI, 3000K AMB =Amber, 590nm ^{3,4}	U =120/277V 1=120V 2=208V 3=240V 4=277V 8=480V ^{2,5} 9=347V ²	T2 =Type II T3 =Type III T4FT =Type IV Forward Throw T4W =Type IV Wide SL2 =Type II w/Spill Control SL3 =Type III w/Spill Control SL4 =Type IV w/Spill Control SLL =90° Spill Light Eliminator Left SLR =90° Spill Light Eliminator Right AMB =Rectangular Wide Type I	AP =Grey BZ =Bronze BK =Black DP =Dark Platinum GM =Graphite Metallic WH =White
Options (Add as Suffix)	Controls and Systems Options (Add as Suffix)			Accessories (Order Separately)		
HA =50°C High Ambient ⁸ AHD145 =After Hours Dim, 5 Hours, 50% ⁹ AHD245 =After Hours Dim, 6 Hours, 50% ⁹ AHD255 =After Hours Dim, 7 Hours, 50% ⁹ AHD355 =After Hours Dim, 8 Hours, 50% ⁹ CBP =Battery Pack with Back Box, Cold Weather Rated ^{13,15} CBP-CEC =Battery Pack with Back Box, Cold Weather Rated, CEC compliant ¹³ LCF =Light Square Trim Plate Painted to Match Housing HSS =Factory Installed House Side Shield ¹⁶ ULG =Uplight Glow ^{6,7} CC =Coastal Construction ²² TR =Tamper Resistant Hardware X =Driver Surge Protection (6kV) Only ¹⁷ 20K =Series 20kV UL 1449 Surge Protective Device	BPC =Button Type Photocontrol (120, 208, 240 or 277V, Must Specify Voltage) PR7 =NEMA 7-PIN Twistlock Photocontrol Receptacle ^{2,6,7} SPB1 =Dimming Occupancy Sensor with Bluetooth Interface, <8' Mounting ^{12,23} SPB2 =Dimming Occupancy Sensor with Bluetooth Interface, 8'-20' Mounting ^{12,23} SPB4 =Dimming Occupancy Sensor with Bluetooth Interface, 21'-40' Mounting ^{12,23} MS/DIM-LXX =Motion Sensor for Dimming Operation ^{7,10,11,12} LWR-LW =Enlighted Wireless Sensor, Wide Lens for 8'-16' Mounting Height ^{6,12,13} LWR-LN =Enlighted Wireless Sensor, Narrow Lens for 16'-40' Mounting Height ^{6,12,13} ZW =WaveLinX-Enabled Module and 4-PIN Receptacle ⁷ ZD =WaveLinX-Enabled Module with DALI Driver and 4-PIN Receptacle ⁷ ZW-SWPD4XX =WaveLinX Control Module and Wireless Sensor - 7'-15' ^{7,18,20} ZW-SWPD5XX =WaveLinX Control Module and Wireless Sensor - 15'-40' ^{7,18,20} ZW-WOBXX =WaveLinX Control Module and LC Bluetooth Sensor - 7'-15' ^{7,18,20} ZW-WOFXX =WaveLinX Control Module and LC Bluetooth Sensor - 15'-40' ^{7,18,20} ZD-SWPD4XX =WaveLinX with DALI Driver and Wireless Sensor - 7'-15' ^{7,18,20} ZD-SWPD5XX =WaveLinX with DALI Driver and Wireless Sensor - 15'-40' ^{7,18,20} ZD-WOBXX =WaveLinX with DALI Driver and LC Bluetooth Sensor - 7'-15' ^{7,18,20} ZD-WOFXX =WaveLinX with DALI Driver and LC Bluetooth Sensor - 15'-40' ^{7,18,20}			MA1253 =10kV Circuit Module Replacement MA1254-XX =Thruway Back Box - Impact Elite Trapezoid MA1255-XX =Thruway Back Box - Impact Elite Cylinder MA1256-XX =Thruway Back Box - Impact Elite Quarter Sphere MA1257-XX =Thruway Back Box - Impact Elite Wedge FSIR-100 =Wireless Configuration Tool for Occupancy Sensor WOLC-7P-10A =WaveLinX Outdoor Control Module (7-pin) ^{7,19} SWPD4-XX =WaveLinX Wireless Sensor, 7' - 15' Mounting Height ^{7,18,20,21} SWPD5-XX =WaveLinX Wireless Sensor, 15' - 40' Mounting Height ^{7,18,20,21}		
NOTES: 1. DesignLight Consortium® Qualified. Refer to www.designlights.org, Qualified Products List under Family Models for details. 2. Not available with ULG option. 3. Choose Drive Current "B" for Amber 590nm, which is provided at 500mA only 4. Narrow-band 590nm +/- 5nm for wildlife and observatory use. 5. 480V must use Wye system only. Per NEC, not for use with ungrounded systems, impedance grounded systems or corner grounded systems (commonly known as Three Phase Three Wire Delta, Three Phase High Leg Delta and Three Phase Corner Grounded Delta systems). 6. Not available with ISS or ISW. 7. Cannot be used in conjunction with other control options. 8. Suitable for 50°C provided no options other than motion sensor are included and driver output set to 1000mA or less. 9. Requires the use of photocontrol. Not available with 350mA drive current. See After Hours Dim supplemental guide for additional information. 10. Replace LXX with L08 (<8' mounting), L20 (8'-20' mounting) or L40W (21'-40' mounting.) 11. The FSIR-100 configuration tool is required to adjust parameters including high and low modes, sensitivity, time delay, cutoff and more. Consult your lighting representative at Cooper Lighting Solutions for more information. 12. Includes integral photocell. 13. Enlighted wireless sensors are factory installed and require network components in appropriate quantities. 14. Battery pack operating temperature of -20C to +40C. Operates downlight for 90-minutes. 15. Must specify 120V or 277V. 16. Not for use with 5WQ, 5WQ, 5WQ or RW optics. A black trim plate is used when HSS is selected. 17. Removes additional surge module. 18. Replace XX with sensor color (WH, BZ, or BK). 19. Requires PR7. 20. For WaveLinX applications, Smart Gateway required to enable field-configurability: Order WAC-PoE and WPOE-120 (10V to PoE injector) power supply if needed. Gateway not required for WaveLinX Lite Commercial (LC) applications. 21. Requires ZW or ZD receptacle. 22. Coastal construction finish salt spray tested to over 5,000-hours per ASTM B117, with a scribe rating of 9 per ASTM D1654. 23. Smart device with mobile application required to change system defaults. See controls section for details.						

Thruway Back Box

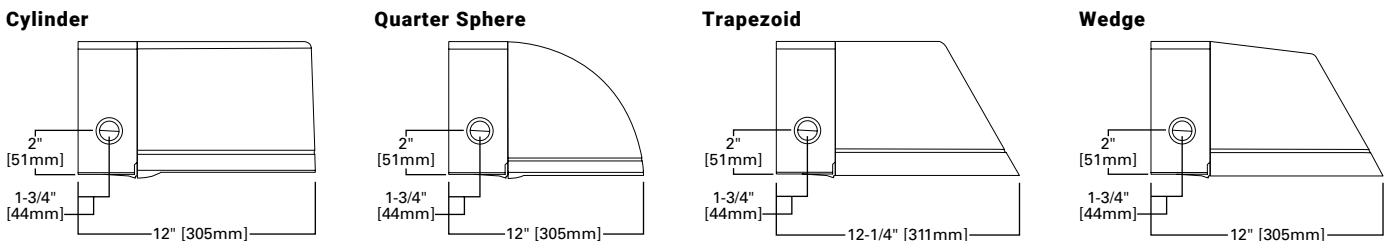

Product Specifications

Construction

- Heavy-wall, die-cast aluminum housing and removable hinged door frame
- Optional tamper-resistant fasteners offer vandal resistant access

Optics

- High-efficiency injection-molded AccuLED optics technology
- 10 optical distributions
- IDA Certified (3000K CCT and warmer only)

Electrical

- Standard with 0-10V dimming
- Standard with Cooper Lighting Solutions proprietary circuit module designed to withstand 10kV of transient line surge

- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration
- Suitable for operation in -40°C to 40°C ambient environments. Optional 50°C high ambient (HA) configuration.

Mounting

- Utilizes "Hook-N-Lock" mounting mechanism, securing to a gasketed and zinc plated mounting attachment
- Two black oxide coated Allen set screws concealed but accessible from below

Finish

- Super durable TGIC polyester powder coat paint, 2.5 mil nominal thickness
- RAL and custom color matches available
- Coastal Construction (CC) option available

Warranty

- Five year limited warranty, consult website for details. www.cooperlighting.com/legal

Energy and Performance Data

1 Light Squares (AF)		Cylinder (ISC) and Quarter Sphere (ISS)						Trapezoid (IST) and Wedge (ISW)					
Drive Current (mA)		350	450	600	800	1000	1200	350	450	600	800	1000	1200
Power (Watts)	120-277V	20.1	25.4	34.2	45.2	58.2	66.0	20.1	25.4	34.2	45.2	58.2	66.0
Current (A)	120	0.17	0.22	0.29	0.38	0.48	0.56	0.17	0.22	0.29	0.38	0.48	0.56
	277V	0.09	0.10	0.13	0.17	0.21	0.25	0.09	0.10	0.13	0.17	0.21	0.25
Power (Watts)	347V or 480V	23.3	28.7	36.6	49.5	60.7	70.1	23.3	28.7	36.6	49.5	60.7	70.1
Current (A)	347V	0.07	0.08	0.11	0.15	0.18	0.21	0.07	0.08	0.11	0.15	0.18	0.21
	480V	0.05	0.06	0.08	0.11	0.13	0.16	0.05	0.06	0.08	0.11	0.13	0.16
Optics (4000K, 70 CRI)													
T2	Lumens	2,802	3,500	4,618	5,778	7,231	7,895	2,772	3,475	4,576	5,733	7,175	7,834
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	139	138	135	128	124	120	138	137	134	127	123	119
T3	Lumens	2,778	3,470	4,578	5,729	7,169	7,827	2,731	3,424	4,508	5,648	7,069	7,718
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	138	137	134	127	123	119	136	135	132	125	121	117
T4FT	Lumens	2,751	3,436	4,534	5,673	7,099	7,751	2,762	3,462	4,559	5,712	7,149	7,805
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	137	135	133	126	122	117	137	136	133	126	123	118
T4W	Lumens	2,780	3,473	4,582	5,733	7,174	7,833	2,739	3,434	4,522	5,665	7,089	7,740
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	138	137	134	127	123	119	136	135	132	125	122	117
SL2	Lumens	2,763	3,451	4,554	5,698	7,130	7,785	2,730	3,422	4,507	5,646	7,066	7,715
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B2-U0-G2
	Lumens Per Watt	137	136	133	126	123	118	136	135	132	125	121	117
SL3	Lumens	2,745	3,429	4,524	5,660	7,084	7,734	2,709	3,396	4,472	5,603	7,012	7,655
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	137	135	132	125	122	117	135	134	131	124	120	116
SL4	Lumens	2,680	3,348	4,417	5,526	6,916	7,551	2,666	3,342	4,401	5,514	6,900	7,534
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	133	132	129	122	119	114	133	132	129	122	119	114
SLL	Lumens	2,447	3,057	4,033	5,046	6,315	6,895	2,459	3,083	4,059	5,086	6,365	6,949
	BUG Rating	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G1	B1-U0-G2	B1-U0-G2
	Lumens Per Watt	122	120	118	112	109	104	122	121	119	113	109	105
RW	Lumens	2,883	3,601	4,751	5,945	7,440	8,123	2,818	3,533	4,652	5,828	7,294	7,964
	BUG Rating	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1	B2-U0-G1	B2-U0-G1	B2-U0-G1	B3-U0-G1	B3-U0-G1	B3-U0-G1
	Lumens Per Watt	143	142	139	132	128	123	140	139	136	129	125	121

Lumen Maintenance (TM-21)

Drive Current	Ambient Temperature	25,000 hours*	50,000 hours*	60,000 hours*	100,000 hours**	Theoretical L70 hours**
Up to 1A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.7%	98.3%	98.1%	97.4%	> 1.9M
	50°C	98.2%	97.2%	96.8%	95.2%	> 851,000
1.2A	25°C	99.4%	99.0%	98.9%	98.3%	> 2.4M
	40°C	98.5%	97.9%	97.7%	96.7%	> 1.3M

Lumen Multiplier

Ambient Temperature	Lumen Multiplier
10°C	1.02
15°C	1.01
25°C	1.00
40°C	0.99

* Supported by IES TM-21 standards

** Theoretical values represent estimations commonly used; however, refer to the IES position on LED Product Lifetime Prediction, IES PS-10-18, explaining proper use of IES TM-21 and LM-80.

 [View Impact Elite IES files](#)

Control Options

0-10V (DIM)

This fixture is offered standard with 0-10V dimming driver(s). The DIM option provides 0-10V dimming wire leads for use with a lighting control panel or other control method.

Photocontrol (BPC and PR7)




Optional button-type photocontrol provides a flexible solution to enable "dusk-to-dawn" lighting by sensing light levels.

After Hours Dim (AHD)

This feature allows photocontrol-enabled luminaires to achieve additional energy savings by dimming during scheduled portions of the night. The dimming profile will automatically take effect after a "dusk-to-dawn" period has been calculated from the photocontrol input. Specify the desired dimming profile for a simple, factory-shipped dimming solution requiring no external control wiring. Reference the After Hours Dim supplemental guide for additional information.



Dimming Occupancy Sensor (SPB, MS/DIM-LXX and MS-LXX)

These sensors are factory installed in the luminaire housing. When the SPB or MS/DIM sensor options are selected, the occupancy sensor is connected to a dimming driver and the entire luminaire dims when there is no activity detected. When activity is detected, the luminaire returns to full light output. The MS/DIM sensor is factory preset to dim down to approximately 50 percent power with a time delay of five minutes. The MS-LXX sensor is factory preset to turn the luminaire off after five minutes of no activity. SPB motion sensors require the Sensor Configuration mobile application by Wattstopper to change factory default dimming level, time delay, sensitivity and other parameters. Available for iOS and Android devices. The SPB sensor is factory preset to dim down to approximately 10% power with a time delay of five minutes. The MS/DIM occupancy sensors require the FSIR-100 programming tool to adjust factory defaults.

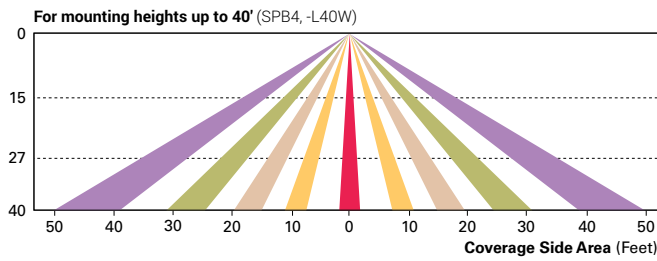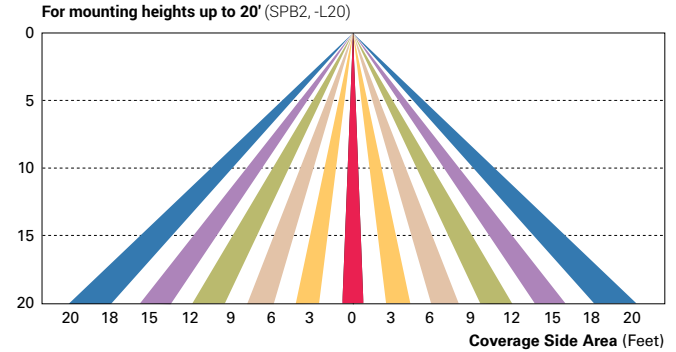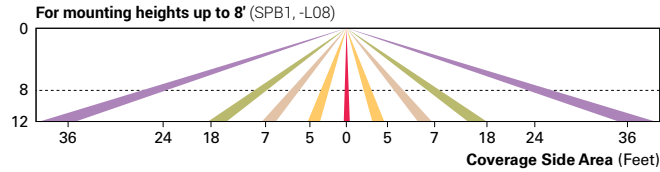

Enlighted Wireless Control and Monitoring System (LWR-LW and LWR-LN)

Enlighted is a connected lighting solution that combines a broad selection of energy-efficient LED luminaires with a powerful integrated wireless sensor system. The sensor controls the lighting system in compliance with the latest energy codes and collects valuable data about building performance and use. Software applications turn the granular data into information through energy dashboards and specialized apps that make it simple and help optimize the use of building resources, beyond lighting.

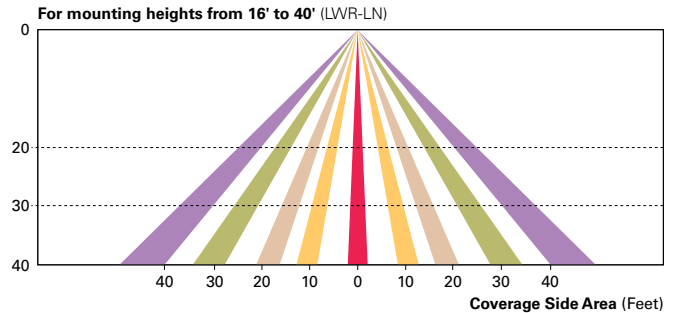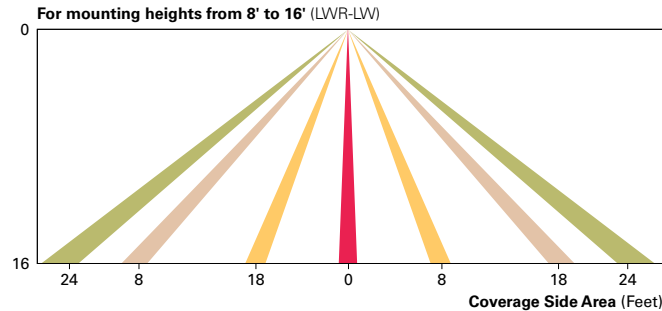

WaveLinX Wireless Outdoor Lighting Control Module (WOLC-7P-10A)

The 7-pin wireless outdoor lighting control module enables WaveLinX to control outdoor area, site and flood lighting. WaveLinX controls outdoor lighting using schedules to provide ON, OFF and dimming controls based on astronomic or time schedules based on a 7 day week.

THE EDGE® Series

LED Area/Flood Luminaire

Rev. Date: V10 10/22/2020

Product Description

THE EDGE® Series has a slim, low profile design. Its rugged cast aluminum housing minimizes wind load requirements and features an integral, weathertight LED driver compartment and high performance aluminum heat sinks. Various mounting choices: Adjustable Arm, Direct Arm, Direct Arm Long, or Side Arm (details on page 2). Includes a leaf/debris guard.

Applications: Parking lots, walkways, campuses, car dealerships, office complexes, and internal roadways

Performance Summary

Patented NanoOptic® Product Technology

Assembled in the U.S.A. of U.S. and imported parts

CRI: Minimum 70 CRI

CCT: 4000K (+/- 300K), 5700K (+/- 500K) standard

Limited Warranty*: 10 years on luminaire/10 years on Colorfast DeltaGuard® finish

*See <http://creelighting.com/warranty> for warranty terms

Accessories


Field-Installed	
Bird Spikes XA-BRDSPK	Backlight Control Shields XA-20BLS-4 - Four-pack - Unpainted stainless steel
Hand-Held Remote XA-SENSREM - For successful implementation of the programmable multi-level option, a minimum of one hand-held remote is required	Shorting Cap XA-XLSHRT

Ordering Information

Example: ARE-EDG-2M-AA-12-E-UL-SV-350

Product	Optic	Mounting*	LED Count (x10)	Series	Voltage	Color Options	Drive Current	Options								
ARE-EDG	2M Type II Medium 3MB Type III Medium w/BLS 4MP Type IV Medium w/Partial BLS 2MB Type II Medium w/BLS 3MP Type III Medium w/Partial BLS 5M Type V Medium 2MP Type II Medium w/Partial BLS 4M Type IV Medium 5S Type V Short 3M Type III Medium w/BLS 4MB Type IV Medium w/BLS	AA Adjustable Arm DA Direct Arm DL Direct Long Arm	02	E	UL Universal 120-277V UH Universal 347-480V	BK Black BZ Bronze SV Silver WH White	350 350mA 525 525mA 700 700mA - Available with 20-60 LEDs	DIM 0-10V Dimming - Control by others - Refer to Dimming spec sheet for details - Can't exceed specified drive current - Not available with PML options F Fuse - Compatible only with 120V, 277V or 347V (phase to neutral) - Consult factory if fusing is required for 208V, 240V or 480V (phase to phase) - Refer to PML spec sheet for availability with PML options - When code dictates fusing, use time delay fuse HL Hi/Low (Dual Circuit Input) - Refer to HL spec sheet for details - Sensor not included P Photocell - Refer to PML spec sheet for availability with PML options - Available with UL voltage only PML Programmable Multi-Level, 20-40' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt								
			04													
			06													
			08													
			10													
			12													
			14													
			16													
			FLD-EDG						25 25° Flood 70 70° Flood N6 NEMA® 6 40 40° Sign Flood SN Sign	AA Adjustable Arm SA Side Arm - Available with 20-60 LEDs						PML2 Programmable Multi-Level, 10-30' Mounting Height - Refer to PML spec sheet for details - Intended for downlight applications at 0° tilt R NEMA® 3-Pin Photocell Receptacle - 3-pin receptacle per ANSI C136.10 - Not available with SA mount - Intended for downlight applications with maximum 45° tilt - Requires photocell or shorting cap by others - Refer to PML spec sheet for availability with PML options 40K 4000K Color Temperature - Minimum 70 CRI - Color temperature per luminaire TRL Amber Turtle Friendly LEDs - Available only with 350mA - Lumen multiplier from 5700K: 0.32 (350mA) - Power multiplier: 0.76 - 600nm dominant wavelength - Additional shielding (by others) may be required for Florida Fish and Wildlife Conservation Commission compliance

DA Mount

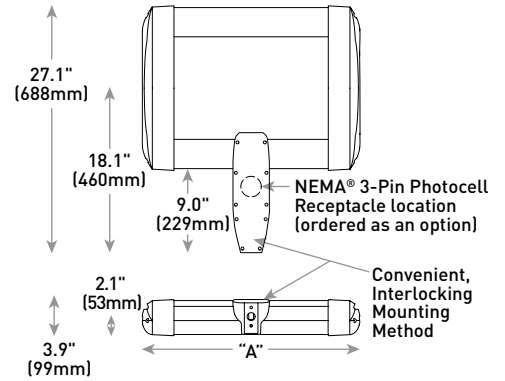

LED Count (x10)	Dim. "A"	Weight
02	12.1" (306mm)	21 lbs. (10kg)
04	12.1" (306mm)	24 lbs. (11kg)
06	14.1" (357mm)	27 lbs. (12kg)
08	16.1" (408mm)	28 lbs. (13kg)
10	18.1" (459mm)	32 lbs. (15kg)
12	20.1" (510mm)	34 lbs. (15kg)
14	22.1" (560mm)	37 lbs. (17kg)
16	24.1" (611mm)	41 lbs. (19kg)

AA/DL/SA Mount - see page 22 for weight & dimensions

* Reference EPA and pole configuration suitability data beginning on page 19



US: creelighting.com (800) 236-6800

Canada: creelighting-canada.com (800) 473-1234



Product Specifications

CONSTRUCTION & MATERIALS

- Slim, low profile, minimizing wind load requirements
- Luminaire sides are rugged die cast aluminum with integral, weathertight LED driver compartment and high performance heat sinks
- DA and DL mount utilizes convenient interlocking mounting method. Mounting is rugged die cast aluminum, mounts to 3-6" (76-152mm) square or round pole and secures to pole with 5/16-18 UNC bolts spaced on 2" (51mm) centers
- AA and SA mounts are rugged die cast aluminum and mount to 2" (51mm) IP, 2.375" (60mm) O.D. tenons
- Includes leaf/debris guard
- Exclusive Colorfast DeltaGuard® finish features an E-Coat epoxy primer with an ultra-durable powder topcoat, providing excellent resistance to corrosion, ultraviolet degradation and abrasion. Black, bronze, silver, and white are available
- **Weight:** See Dimensions and Weight Charts on pages 1 and 22

ELECTRICAL SYSTEM

- **Input Voltage:** 120-277V or 347-480V, 50/60Hz, Class 1 drivers
- **Power Factor:** > 0.9 at full load
- **Total Harmonic Distortion:** < 20% at full load
- DA and DL mounts designed with integral weathertight electrical box with terminal strips (12Ga-20Ga) for easy power hookup
- Integral 10kV surge suppression protection standard
- When code dictates fusing, a slow blow fuse or type C/D breaker should be used to address inrush current
- **Maximum 10V Source Current:** 20 LED (350mA): 10mA; 20 LED (525 & 700mA) and 40-80 LED: 0.15mA; 100-160 LED: 0.30mA

REGULATORY & VOLUNTARY QUALIFICATIONS

- cULus Listed
- Suitable for wet locations
- Enclosure rated IP66 per IEC 60529 when ordered without P or R options
- Consult factory for CE Certified products
- Certified to ANSI C136.31-2001, 3G bridge and overpass vibration standards when ordered with AA, DA and DL mounts
- ANSI C136.2 10kV surge protection, tested in accordance with IEEE/ANSI C62.41.2
- Meets FCC Part 15, Subpart B, Class A limits for conducted and radiated emissions
- Luminaire and finish endurance tested to withstand 5,000 hours of elevated ambient salt fog conditions as defined in ASTM Standard B 117
- DLC qualified with select SKUs. Refer to <https://www.designlights.org/search/> for most current information
- Meets Buy American requirements within ARRA
- **CA RESIDENTS WARNING:** Cancer and Reproductive Harm – www.p65warnings.ca.gov

Electrical Data*							
LED Count (x10)	System Watts 120-480V	Total Current (A)					
		120V	208V	240V	277V	347V	480V
350mA							
02	25	0.21	0.13	0.11	0.10	0.08	0.07
04	46	0.36	0.23	0.21	0.20	0.15	0.12
06	66	0.52	0.31	0.28	0.26	0.20	0.15
08	90	0.75	0.44	0.38	0.34	0.26	0.20
10	110	0.92	0.53	0.47	0.41	0.32	0.24
12	130	1.10	0.63	0.55	0.48	0.38	0.28
14	158	1.32	0.77	0.68	0.62	0.47	0.35
16	179	1.49	0.87	0.77	0.68	0.53	0.39
525mA							
02	37	0.30	0.19	0.17	0.16	0.12	0.10
04	70	0.58	0.34	0.31	0.28	0.21	0.16
06	101	0.84	0.49	0.43	0.38	0.30	0.22
08	133	1.13	0.66	0.58	0.51	0.39	0.28
10	171	1.43	0.83	0.74	0.66	0.50	0.38
12	202	1.69	0.98	0.86	0.77	0.59	0.44
14	232	1.94	1.12	0.98	0.87	0.68	0.50
16	263	2.21	1.27	1.11	0.97	0.77	0.56
700mA							
02	50	0.41	0.25	0.22	0.20	0.15	0.12
04	93	0.78	0.46	0.40	0.36	0.27	0.20
06	134	1.14	0.65	0.57	0.50	0.39	0.29

* Electrical data at 25°C (77°F). Actual wattage may differ by +/- 10% when operating between 120-277V or 347-480V +/- 10%

THE EDGE® Series Ambient Adjusted Lumen Maintenance ¹						
Ambient	CCT	Initial LMF	25K hr Reported ² LMF	50K hr Reported ² LMF	75K hr Estimated ³ LMF	100K hr Estimated ³ LMF
5°C (41°F)	30K/40K/50K/57K	1.04	1.01	0.99	0.98	0.96
	TRL	1.06	1.06	1.06	1.06	1.06
10°C (50°F)	30K/40K/50K/57K	1.03	1.00	0.98	0.97	0.95
	TRL	1.04	1.04	1.04	1.04	1.04
15°C (59°F)	30K/40K/50K/57K	1.02	0.99	0.97	0.96	0.94
	TRL	1.03	1.03	1.03	1.03	1.03
20°C (68°F)	30K/40K/50K/57K	1.01	0.98	0.96	0.95	0.93
	TRL	1.01	1.01	1.01	1.01	1.01
25°C (77°F)	30K/40K/50K/57K	1.00	0.97	0.95	0.94	0.92
	TRL	1.00	1.00	1.00	1.00	1.00

¹ Lumen maintenance values at 25°C (77°F) are calculated per IES TM-21 based on IES LM-80 report data for the LED package and in-situ luminaire testing. Luminaire ambient temperature factors (LATF) have been applied to all lumen maintenance factors. Please refer to the [Temperature Zone Reference Document](#) for outdoor average nighttime ambient conditions.


² In accordance with IES TM-21, Reported values represent interpolated values based on time durations that are up to 6x the tested duration in the IES LM-80 report for the LED.

³ Estimated values are calculated and represent time durations that exceed the 6x test duration of the LED.


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

2M



RESTL Test Report #: PL10270-004B
ARE-EDG-2M--06-E-UL-525-40K**
Initial Delivered Lumens: 10,053



ARE-EDG-2M--10-E-UL-525-40K**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 17,504
Initial FC at grade

Type II Medium Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,501	B1 U0 G1	2,551	B1 U0 G1
04	5,003	B1 U0 G1	5,102	B1 U0 G1
06	7,418	B2 U0 G2	7,565	B2 U0 G2
08	9,891	B2 U0 G2	10,087	B2 U0 G2
10	12,334	B2 U0 G2	12,578	B2 U0 G2
12	14,801	B3 U0 G3	15,094	B3 U0 G3
14	17,158	B3 U0 G3	17,498	B3 U0 G3
16	19,609	B3 U0 G3	19,998	B3 U0 G3
525mA				
02	3,550	B1 U0 G1	3,624	B1 U0 G1
04	7,099	B2 U0 G2	7,248	B2 U0 G2
06	10,527	B2 U0 G2	10,748	B2 U0 G2
08	14,037	B3 U0 G3	14,331	B3 U0 G3
10	17,504	B3 U0 G3	17,870	B3 U0 G3
12	21,004	B3 U0 G3	21,444	B3 U0 G3
14	24,350	B3 U0 G3	24,860	B3 U0 G3
16	27,828	B4 U0 G3	28,411	B4 U0 G3
700mA				
02	4,189	B1 U0 G1	4,275	B1 U0 G1
04	8,379	B2 U0 G2	8,549	B2 U0 G2
06	12,425	B2 U0 G2	12,678	B2 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

2MB



RESTL Test Report #: PL10023-003B
ARE-EDG-2MB--06-E-UL-525-40K**
Initial Delivered Lumens: 7,784



ARE-EDG-2MB--10-E-UL-525-40K**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 13,185
 Initial FC at grade

Type II Medium Distribution w/BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,884	B0 U0 G1	1,921	B0 U0 G1
04	3,768	B1 U0 G1	3,843	B1 U0 G1
06	5,588	B1 U0 G1	5,698	B1 U0 G1
08	7,450	B1 U0 G2	7,598	B1 U0 G2
10	9,291	B1 U0 G2	9,475	B1 U0 G2
12	11,149	B1 U0 G2	11,370	B1 U0 G2
14	12,924	B1 U0 G2	13,181	B1 U0 G2
16	14,771	B1 U0 G2	15,063	B1 U0 G2
525mA				
02	2,674	B0 U0 G1	2,730	B0 U0 G1
04	5,348	B1 U0 G1	5,460	B1 U0 G1
06	7,930	B1 U0 G2	8,096	B1 U0 G2
08	10,573	B1 U0 G2	10,794	B1 U0 G2
10	13,185	B1 U0 G2	13,461	B1 U0 G2
12	15,821	B2 U0 G2	16,153	B2 U0 G3
14	18,341	B2 U0 G3	18,726	B2 U0 G3
16	20,962	B2 U0 G3	21,401	B2 U0 G3
700mA				
02	3,156	B0 U0 G1	3,220	B0 U0 G1
04	6,311	B1 U0 G1	6,440	B1 U0 G1
06	9,359	B1 U0 G2	9,549	B1 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

2MP



RESTL Test Report #: PL10097-001B
 ARE-EDG-2MP-**-06-E-UL-525-40K
 Initial Delivered Lumens: 9,149



ARE-EDG-2MP-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 15,458
 Initial FC at grade

Type II Medium Distribution w/Partial BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,209	B1 U0 G1	2,253	B1 U0 G1
04	4,418	B1 U0 G1	4,505	B1 U0 G1
06	6,551	B2 U0 G1	6,681	B2 U0 G1
08	8,735	B2 U0 G2	8,908	B2 U0 G2
10	10,892	B2 U0 G2	11,108	B2 U0 G2
12	13,071	B2 U0 G2	13,330	B2 U0 G2
14	15,153	B2 U0 G2	15,453	B2 U0 G3
16	17,317	B3 U0 G3	17,661	B3 U0 G3
525mA				
02	3,135	B1 U0 G1	3,200	B1 U0 G1
04	6,270	B1 U0 G1	6,401	B2 U0 G1
06	9,297	B2 U0 G2	9,492	B2 U0 G2
08	12,396	B2 U0 G2	12,656	B2 U0 G2
10	15,458	B2 U0 G3	15,782	B2 U0 G3
12	18,549	B3 U0 G3	18,938	B3 U0 G3
14	21,504	B3 U0 G3	21,954	B3 U0 G3
16	24,576	B3 U0 G3	25,091	B3 U0 G3
700mA				
02	3,700	B1 U0 G1	3,775	B1 U0 G1
04	7,400	B2 U0 G2	7,550	B2 U0 G2
06	10,973	B2 U0 G2	11,196	B2 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

3M



RESTL Test Report #: PL09405-001A
ARE-EDG-3M--06-E-UL-525-40K**
Initial Delivered Lumens: 9,460



ARE-EDG-3M--10-E-UL-525-40K**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 16,594
Initial FC at grade

Type III Medium Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,371	B1 U0 G1	2,418	B1 U0 G1
04	4,743	B1 U0 G1	4,837	B1 U0 G1
06	7,033	B2 U0 G2	7,172	B2 U0 G2
08	9,377	B2 U0 G2	9,563	B2 U0 G2
10	11,693	B3 U0 G3	11,925	B3 U0 G3
12	14,032	B3 U0 G3	14,310	B3 U0 G3
14	16,267	B3 U0 G3	16,589	B3 U0 G3
16	18,591	B3 U0 G3	18,959	B3 U0 G3
525mA				
02	3,365	B1 U0 G1	3,436	B1 U0 G1
04	6,731	B2 U0 G2	6,872	B2 U0 G2
06	9,981	B3 U0 G3	10,190	B3 U0 G3
08	13,307	B3 U0 G3	13,586	B3 U0 G3
10	16,594	B3 U0 G3	16,942	B3 U0 G3
12	19,913	B3 U0 G3	20,330	B3 U0 G3
14	23,085	B3 U0 G3	23,569	B3 U0 G3
16	26,383	B4 U0 G4	26,936	B4 U0 G4
700mA				
02	3,972	B1 U0 G1	4,053	B1 U0 G1
04	7,944	B2 U0 G2	8,105	B2 U0 G2
06	11,779	B3 U0 G3	12,019	B3 U0 G3


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

3MB



RESTL Test Report #: PL10023-001B
 ARE-EDG-3MB-**-06-E-UL-525-40K
 Initial Delivered Lumens: 7,602



ARE-EDG-3MB-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 12,275
 Initial FC at grade

Type III Medium Distribution w/BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,754	B0 U0 G1	1,789	B0 U0 G1
04	3,508	B1 U0 G1	3,578	B1 U0 G1
06	5,202	B1 U0 G2	5,305	B1 U0 G2
08	6,936	B1 U0 G2	7,074	B1 U0 G2
10	8,650	B1 U0 G2	8,821	B1 U0 G2
12	10,380	B1 U0 G3	10,585	B1 U0 G3
14	12,033	B1 U0 G3	12,272	B1 U0 G3
16	13,752	B2 U0 G3	14,025	B2 U0 G3
525mA				
02	2,489	B0 U0 G1	2,542	B0 U0 G1
04	4,979	B1 U0 G2	5,083	B1 U0 G2
06	7,383	B1 U0 G2	7,538	B1 U0 G2
08	9,844	B1 U0 G2	10,050	B1 U0 G3
10	12,275	B1 U0 G3	12,532	B1 U0 G3
12	14,730	B2 U0 G3	15,039	B2 U0 G3
14	17,077	B2 U0 G3	17,434	B2 U0 G3
16	19,516	B2 U0 G3	19,925	B2 U0 G3
700mA				
02	2,938	B1 U0 G1	2,998	B1 U0 G1
04	5,876	B1 U0 G2	5,996	B1 U0 G2
06	8,714	B1 U0 G2	8,891	B1 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

3MP



RETL Test Report #: PL10097-002B
ARE-EDG-3MP--10-E-UL-525-40K**
Initial Delivered Lumens: 8,670



ARE-EDG-3MP--10-E-UL-525-40K**
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 14,548
Initial FC at grade

Type III Medium Distribution w/Partial BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,079	B1 U0 G1	2,120	B1 U0 G1
04	4,158	B1 U0 G1	4,240	B1 U0 G1
06	6,166	B1 U0 G2	6,288	B1 U0 G2
08	8,221	B2 U0 G2	8,384	B2 U0 G2
10	10,252	B2 U0 G2	10,455	B2 U0 G3
12	12,302	B2 U0 G3	12,546	B2 U0 G3
14	14,261	B3 U0 G3	14,544	B3 U0 G3
16	16,299	B3 U0 G3	16,622	B3 U0 G3
525mA				
02	2,950	B1 U0 G1	3,012	B1 U0 G1
04	5,901	B1 U0 G2	6,024	B1 U0 G2
06	8,750	B2 U0 G2	8,933	B2 U0 G2
08	11,667	B2 U0 G3	11,911	B2 U0 G3
10	14,548	B3 U0 G3	14,853	B3 U0 G3
12	17,458	B3 U0 G3	17,824	B3 U0 G3
14	20,239	B3 U0 G3	20,663	B3 U0 G3
16	23,130	B3 U0 G4	23,615	B3 U0 G4
700mA				
02	3,482	B1 U0 G1	3,553	B1 U0 G1
04	6,964	B2 U0 G2	7,106	B2 U0 G2
06	10,327	B2 U0 G2	10,537	B2 U0 G3


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

4M



RESTL Test Report #: PL10270-001B
 ARE-EDG-4M-**-06-E-UL-525-40K
 Initial Delivered Lumens: 10,483



ARE-EDG-4M-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 17,504
 Initial FC at grade

Type IV Medium Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,501	B1 U0 G1	2,551	B1 U0 G1
04	5,003	B2 U0 G1	5,102	B2 U0 G1
06	7,418	B2 U0 G2	7,565	B2 U0 G2
08	9,891	B2 U0 G2	10,087	B2 U0 G2
10	12,334	B3 U0 G3	12,578	B3 U0 G3
12	14,801	B3 U0 G3	15,094	B3 U0 G3
14	17,158	B3 U0 G3	17,498	B3 U0 G3
16	19,609	B3 U0 G3	19,998	B3 U0 G3
525mA				
02	3,550	B1 U0 G1	3,624	B1 U0 G1
04	7,099	B2 U0 G2	7,248	B2 U0 G2
06	10,527	B2 U0 G2	10,748	B2 U0 G2
08	14,037	B3 U0 G3	14,331	B3 U0 G3
10	17,504	B3 U0 G3	17,870	B3 U0 G3
12	21,004	B3 U0 G3	21,444	B3 U0 G3
14	24,350	B4 U0 G3	24,860	B4 U0 G3
16	27,828	B4 U0 G3	28,411	B4 U0 G3
700mA				
02	4,189	B1 U0 G1	4,275	B1 U0 G1
04	8,379	B2 U0 G2	8,549	B2 U0 G2
06	12,425	B3 U0 G3	12,678	B3 U0 G3


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

4MB



RESTL Test Report #: PL01023-002B
 ARE-EDG-4MB-**-06-E-UL-525-40K
 Initial Delivered Lumens: 7,985



ARE-EDG-4MB-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 13,185
 Initial FC at grade

Type IV Medium Distribution w/BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	1,884	B0 U0 G1	1,921	B0 U0 G1
04	3,768	B1 U0 G1	3,843	B1 U0 G1
06	5,588	B1 U0 G1	5,698	B1 U0 G2
08	7,450	B1 U0 G2	7,598	B1 U0 G2
10	9,291	B1 U0 G2	9,475	B1 U0 G2
12	11,149	B1 U0 G2	11,370	B1 U0 G2
14	12,924	B1 U0 G2	13,181	B1 U0 G2
16	14,771	B2 U0 G2	15,063	B2 U0 G2
525mA				
02	2,674	B0 U0 G1	2,730	B0 U0 G1
04	5,348	B1 U0 G1	5,460	B1 U0 G1
06	7,930	B1 U0 G2	8,096	B1 U0 G2
08	10,573	B1 U0 G2	10,794	B1 U0 G2
10	13,185	B1 U0 G2	13,461	B1 U0 G2
12	15,821	B2 U0 G3	16,153	B2 U0 G3
14	18,341	B2 U0 G3	18,726	B2 U0 G3
16	20,962	B2 U0 G3	21,401	B2 U0 G3
700mA				
02	3,156	B1 U0 G1	3,220	B1 U0 G1
04	6,311	B1 U0 G2	6,440	B1 U0 G2
06	9,359	B1 U0 G2	9,549	B1 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

4MP



RESTL Test Report #: PL10097-003B
 ARE-EDG-4MP-**-06-E-UL-525-40K
 Initial Delivered Lumens: 9,410



ARE-EDG-4MP-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 15,458
 Initial FC at grade

Type IV Medium Distribution w/Partial BLS				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,209	B1 U0 G1	2,253	B1 U0 G1
04	4,418	B1 U0 G1	4,505	B1 U0 G1
06	6,551	B2 U0 G1	6,681	B2 U0 G1
08	8,735	B2 U0 G2	8,908	B2 U0 G2
10	10,892	B2 U0 G2	11,108	B2 U0 G2
12	13,071	B2 U0 G2	13,330	B2 U0 G2
14	15,153	B3 U0 G2	15,453	B3 U0 G2
16	17,317	B3 U0 G2	17,661	B3 U0 G2
525mA				
02	3,135	B1 U0 G1	3,200	B1 U0 G1
04	6,270	B2 U0 G1	6,401	B2 U0 G1
06	9,297	B2 U0 G2	9,492	B2 U0 G2
08	12,396	B2 U0 G2	12,656	B2 U0 G2
10	15,458	B3 U0 G2	15,782	B3 U0 G2
12	18,549	B3 U0 G2	18,938	B3 U0 G3
14	21,504	B3 U0 G3	21,954	B3 U0 G3
16	24,576	B3 U0 G3	25,091	B3 U0 G3
700mA				
02	3,700	B1 U0 G1	3,775	B1 U0 G1
04	7,400	B2 U0 G2	7,550	B2 U0 G2
06	10,973	B2 U0 G2	11,196	B2 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

5M



RESTL Test Report #: PL09285-001
ARE-EDG-5M-**-06-E-UL-700-40K
Initial Delivered Lumens: 13,136



ARE-EDG-5M-**-10-E-UL-525-40K
Mounting Height: 25' (7.6m) A.F.G.
Initial Delivered Lumens: 18,413
Initial FC at grade

Type V Medium Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,631	B2 U0 G1	2,683	B2 U0 G1
04	5,262	B3 U0 G1	5,367	B3 U0 G1
06	7,804	B3 U0 G2	7,958	B3 U0 G2
08	10,405	B4 U0 G2	10,611	B4 U0 G2
10	12,975	B4 U0 G2	13,232	B4 U0 G2
12	15,570	B4 U0 G3	15,878	B4 U0 G3
14	18,049	B4 U0 G3	18,407	B4 U0 G3
16	20,628	B5 U0 G3	21,037	B5 U0 G3
525mA				
02	3,734	B2 U0 G1	3,812	B2 U0 G1
04	7,468	B3 U0 G2	7,625	B3 U0 G2
06	11,074	B4 U0 G2	11,306	B4 U0 G2
08	14,766	B4 U0 G2	15,075	B4 U0 G3
10	18,413	B4 U0 G3	18,799	B4 U0 G3
12	22,096	B5 U0 G3	22,558	B5 U0 G3
14	25,615	B5 U0 G3	26,151	B5 U0 G3
16	29,274	B5 U0 G3	29,887	B5 U0 G3
700mA				
02	4,407	B3 U0 G1	4,497	B3 U0 G1
04	8,814	B3 U0 G2	8,993	B3 U0 G2
06	13,070	B4 U0 G2	13,336	B4 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

55



RESTL Test Report #: PL09286-001A
 ARE-EDG-5S-**-06-E-UL-700-40K
 Initial Delivered Lumens: 14,123



ARE-EDG-5S-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G.
 Initial Delivered Lumens: 20,459
 Initial FC at grade

Type V Short Distribution				
LED Count (x10)	4000K		5700K	
	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11	Initial Delivered Lumens*	BUG Ratings** Per TM-15-11
350mA				
02	2,924	B2 U0 G0	2,982	B2 U0 G0
04	5,847	B3 U0 G1	5,963	B3 U0 G1
06	8,671	B3 U0 G1	8,842	B3 U0 G1
08	11,561	B3 U0 G2	11,790	B3 U0 G2
10	14,416	B4 U0 G2	14,702	B4 U0 G2
12	17,300	B4 U0 G2	17,642	B4 U0 G2
14	20,055	B4 U0 G2	20,453	B4 U0 G2
16	22,920	B4 U0 G2	23,374	B4 U0 G2
525mA				
02	4,149	B2 U0 G1	4,236	B2 U0 G1
04	8,298	B3 U0 G1	8,472	B3 U0 G1
06	12,305	B3 U0 G2	12,563	B3 U0 G2
08	16,406	B4 U0 G2	16,750	B4 U0 G2
10	20,459	B4 U0 G2	20,887	B4 U0 G2
12	24,551	B4 U0 G2	25,065	B4 U0 G2
14	28,461	B5 U0 G3	29,057	B5 U0 G3
16	32,527	B5 U0 G3	33,208	B5 U0 G3
700mA				
02	4,897	B2 U0 G1	4,996	B2 U0 G1
04	9,793	B3 U0 G1	9,993	B3 U0 G2
06	14,523	B4 U0 G2	14,818	B4 U0 G2


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens

** For more information on the IES BUG (Backlight-Uplight-Glare) Rating visit: <https://www.ies.org/wp-content/uploads/2017/03/TM-15-11BUGRatingsAddendum.pdf>


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

25°



RESTL Test Report #: PL09832-003B
FLD-EDG-25-**-06-E-UL-700-40K
Initial Delivered Lumens: 14,998



FLD-EDG-25-**-10-E-UL-525-40K
Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
Initial Delivered Lumens: 20,913
Initial FC at grade


25° Flood Distribution		
LED Count (x10)	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*
350mA		
02	2,989	3,048
04	5,977	6,096
06	8,863	9,039
08	11,818	12,052
10	14,737	15,029
12	17,684	18,035
14	20,501	20,907
16	23,429	23,894
525mA		
02	4,241	4,330
04	8,482	8,660
06	12,578	12,842
08	16,771	17,122
10	20,913	21,352
12	25,096	25,622
14	29,093	29,703
16	33,250	33,946
700mA		
02	5,006	5,107
04	10,011	10,215
06	14,845	15,147

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

40°



RESTL Test Report #: PL09832-002B
 FLD-EDG-40-**-06-E-UL-700-40K
 Initial Delivered Lumens: 13,808



FLD-EDG-40-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
 Initial Delivered Lumens: 20,459
 Initial FC at grade


40° Flood Distribution		
LED Count (x10)	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*
350mA		
02	2,924	2,982
04	5,847	5,963
06	8,671	8,842
08	11,561	11,790
10	14,416	14,702
12	17,300	17,642
14	20,055	20,453
16	22,920	23,374
525mA		
02	4,149	4,236
04	8,298	8,472
06	12,305	12,563
08	16,406	16,750
10	20,459	20,887
12	24,551	25,065
14	28,461	29,057
16	32,527	33,208
700mA		
02	4,897	4,996
04	9,793	9,993
06	14,523	14,818

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

70°



RESTL Test Report #: PL09832-001B
 FLD-EDG-70-**-06-E-UL-700-40K
 Initial Delivered Lumens: 13,888



FLD-EDG-70-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
 Initial Delivered Lumens: 18,640
 Initial FC at grade


70° Flood Distribution		
LED Count (x10)	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*
350mA		
02	2,664	2,716
04	5,327	5,433
06	7,900	8,056
08	10,533	10,742
10	13,135	13,395
12	15,762	16,074
14	18,272	18,635
16	20,883	21,297
525mA		
02	3,780	3,859
04	7,560	7,719
06	11,211	11,446
08	14,948	15,261
10	18,640	19,031
12	22,368	22,837
14	25,931	26,474
16	29,636	30,256
700mA		
02	4,461	4,552
04	8,923	9,104
06	13,232	13,501

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

SN



RESTL Test Report #: PL10142-001B
 FLD-EDG-SN-**-06-E-UL-700-40K
 Initial Delivered Lumens: 13,701



FLD-EDG-SN-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
 Initial Delivered Lumens: 18,868
 Initial FC at grade


SN Flood Distribution		
LED Count (x10)	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*
350mA		
02	2,696	2,750
04	5,392	5,499
06	7,996	8,155
08	10,662	10,873
10	13,295	13,559
12	15,954	16,270
14	18,495	18,862
16	21,137	21,556
525mA		
02	3,826	3,906
04	7,653	7,813
06	11,348	11,585
08	15,130	15,447
10	18,868	19,263
12	22,641	23,115
14	26,247	26,797
16	29,997	30,625
700mA		
02	4,516	4,608
04	9,032	9,215
06	13,393	13,665

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens


Photometry

All published luminaire photometric testing performed to IES LM-79-08 standards. To obtain an IES file specific to your project consult: <http://creelighting.com/products/outdoor/area/cree-edge-series-1>

N6



RESTL Test Report #: PL09832-004B
 FLD-EDG-N6-**-D6-E-UL-700-40K
 Initial Delivered Lumens: 15,251


















FLD-EDG-N6-**-10-E-UL-525-40K
 Mounting Height: 25' (7.6m) A.F.G., 60° Tilt
 Initial Delivered Lumens: 20,913
 Initial FC at grade

NEMA® 6 Flood Distribution		
LED Count (x10)	4000K	5700K
	Initial Delivered Lumens*	Initial Delivered Lumens*
350mA		
02	2,989	3,048
04	5,977	6,096
06	8,863	9,039
08	11,818	12,052
10	14,737	15,029
12	17,684	18,035
14	20,501	20,907
16	23,429	23,894
525mA		
02	4,241	4,330
04	8,482	8,660
06	12,578	12,842
08	16,771	17,122
10	20,913	21,352
12	25,096	25,622
14	29,093	29,703
16	33,250	33,946
700mA		
02	5,006	5,107
04	10,011	10,215
06	14,845	15,147

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -10 and +10% of initial delivered lumens










Luminaire EPA

Fixed Arm Mount – ARE-EDG-DA						
LED Count (x10)	Single	2 @ 90°	2 @ 180°	3 @ 90°	3 @ 120°	4 @ 90°
						
02	0.60	0.87	1.20	1.47	1.47	1.75
04	0.60	0.87	1.20	1.47	1.47	1.75
06	0.60	0.92	1.20	1.51	1.51	1.83
08	0.60	0.96 N/A with 3" poles	1.20	1.55 N/A with 3" poles	1.55	1.91 N/A with 3" poles
10	0.60	1.00 N/A with 3" poles	1.20	1.60 N/A with 3" poles	1.60	2.00 N/A with 3" poles
12	0.60	1.04 N/A with 3" poles	1.20	1.64 N/A with 3" poles	1.64	2.08 N/A with 3" poles
14	0.60	1.08 N/A with 3" or 4" poles	1.20	1.68 N/A with 3" or 4" poles	1.68	2.16 N/A with 3" or 4" poles
16	0.60	1.12 N/A with 3" or 4" poles	1.20	1.72 N/A with 3" or 4" poles	1.72	2.24 N/A with 3" or 4" poles
Fixed Arm Mount – ARE-EDG-DL						
02	0.75	1.02	1.50	1.77	1.77	1.91
04	0.75	1.02	1.50	1.77	1.77	1.91
06	0.75	1.07	1.50	1.82	1.82	1.98
08	0.75	1.11	1.50	1.86	1.86	2.04
10	0.75	1.15	1.50	1.90	1.90	2.10
12	0.75	1.19	1.50	1.94	1.94	2.16
14	0.75	1.23	1.50	1.98	1.98	2.22
16	0.75	1.27	1.50	2.02	2.02	2.28

Adjustable Arm Mount – ARE-EDG-AA/FLD-EDG-AA/SA									
LED Count (x10)	Single	2 @ 90°	2 @ 180°	In-Line 2 @ 180°	3 @ 90°	3 @ 120°	In-Line 3 @ 180°	4 @ 90°	In-Line 4 @ 180°
Tenon Configuration If used with Cree Lighting tenons, please add tenon EPA with Luminaire EPA									
									
	Vertical: PB-1A*; PT-1; PW-1A3** Horizontal: By others	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(90); PT-2(90)	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(180); PT-2(180)	Vertical: PB-2A*; PB-2R2.375	Vertical: PB-3A*; PB-3R2.375 Horizontal: PD-3A4(90); PT-3(90)	Vertical: PB-3A*; PB-3R2.375 Horizontal: PT-3(120)	Vertical: PB-3A*; PB-3R2.375	Vertical: PB-4A*(90); PB-4R2.375 Horizontal: PD-4A4(90) PT-4(90)	Vertical: PB-4A*(180); PB-4R2.375
0° Tilt									
02	0.66	0.98	1.32	1.32	1.77	1.64	1.98	1.91	2.64
04	0.66	0.98	1.32	1.32	1.64	1.64	1.98	1.97	2.64
06	0.66	1.02	1.32	1.32	1.68	1.68	1.98	2.05	2.64
08	0.66	1.07	1.32	1.32	1.80	1.72	1.98	2.29	2.64
10	0.66	1.11	1.32	1.32	1.76	1.76	1.98	2.21	2.64
12	0.66	1.15	1.32	1.32	1.80	1.80	1.98	2.29	2.64
14	0.66	1.19	1.32	1.32	1.84	1.84	1.98	2.38	2.64
16	0.66	1.23	1.32	N/A	1.89	1.89	N/A	2.46	N/A

* Specify pole size: 3 (3"), 4 (4"), 5 (5"), or 6 (6") for single, double or triple luminaire orientation or 4 (4"), 5 (5"), or 6 (6") for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 (3"), 4 (4"), 5 (5"), or 6 (6")

Luminaire EPA

Adjustable Arm Mount – ARE-EDG-AA/FLD-EDG-AA/SA									
LED Count (x10)	Single	2 @ 90°	2 @ 180°	In-Line 2 @ 180°	3 @ 90°	3 @ 120°	In-Line 3 @ 180°	4 @ 90°	In-Line 4 @ 180°
Tenon Configuration If used with Cree Lighting tenons, please add tenon EPA with Luminaire EPA									
									
	Vertical: PB-1A*; PT-1; PW-1A3** Horizontal: By others	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(90); PT-2(90)	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(180); PT-2(180)	Vertical: PB-2A*; PB-2R2.375	Vertical: PB-3A*; PB-3R2.375 Horizontal: PD-3A4(90); PT-3(90)	Vertical: PB-3A*; PB-3R2.375 Horizontal: PT-3(120)	Vertical: PB-3A*; PB-3R2.375	Vertical: PB-4A*(90); PB-4R2.375 Horizontal: PD-4A4(90) PT-4(90)	Vertical: PB-4A*(180); PB-4R2.375
30° Tilt									
02	0.71	1.37	1.42	1.42	2.08	2.08	2.13	2.73	2.84
04	0.71	1.37	1.42	1.42	2.08	2.08	2.13	2.73	2.84
06	0.82	1.48	1.64	1.64	2.30	2.30	2.46	2.95	3.28
08	0.93	1.59	1.86	1.86	2.52	2.52	2.79	3.17	3.72
10	1.04	1.70	2.08	2.08	2.74	2.74	3.12	3.40	4.16
12	1.15	1.81	2.30	2.30	2.96	2.96	3.45	3.62	4.60
14	1.26	1.92	2.52	2.52	3.18	3.18	3.78	3.84	5.04
16	1.37	2.03	2.74	N/A	3.40	3.40	N/A	4.06	N/A
45° Tilt									
02	0.89	1.55	1.78	1.78	2.45	2.45	2.67	3.10	3.56
04	0.89	1.55	1.78	1.78	2.45	2.45	2.67	3.10	3.56
06	1.03	1.69	2.06	2.06	2.72	2.72	3.09	3.38	4.12
08	1.17	1.83	2.34	2.34	3.00	3.00	3.51	3.66	4.68
10	1.31	1.97	2.62	2.62	3.28	3.28	3.93	3.94	5.24
12	1.45	2.11	2.90	2.90	3.56	3.56	4.35	4.21	5.80
14	1.59	2.25	3.18	3.18	3.83	3.83	4.77	4.49	6.36
16	1.73	2.38	3.46	N/A	4.11	4.11	N/A	4.77	N/A
60° Tilt									
02	1.20	1.86	2.40	2.40	3.06	3.06	3.60	3.72	4.80
04	1.20	1.86	2.40	2.40	3.06	3.06	3.60	3.72	4.80
06	1.39	2.05	2.78	2.78	3.44	3.44	4.17	4.10	5.56
08	1.58	2.23	3.16	3.16	3.81	3.81	4.74	4.47	6.32
10	1.77	2.42	3.54	3.54	4.19	4.19	5.31	4.84	7.08
12	1.95	2.61	3.90	3.90	4.56	4.56	5.85	5.22	7.80
14	2.14	2.80	4.28	4.28	4.94	4.94	6.42	5.59	8.56
16	2.33	2.98	4.66	N/A	5.31	5.31	N/A	5.97	N/A

* Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"] for single, double or triple luminaire orientation or 4 [4"], 5 [5"], or 6 [6"] for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"]

Luminaire EPA

Adjustable Arm Mount – ARE-EDG-AA/FLD-EDG-AA/SA									
LED Count (x10)	Single	2 @ 90°	2 @ 180°	In-Line 2 @ 180°	3 @ 90°	3 @ 120°	In-Line 3 @ 180°	4 @ 90°	In-Line 4 @ 180°
Tenon Configuration If used with Cree Lighting tenons, please add tenon EPA with Luminaire EPA									
	Vertical: PB-1A*; PT-1; PW-1A3** Horizontal: By others	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(90); PT-2(90)	Vertical: PB-2A*; PB-2R2.375; PW-2A3** Horizontal: PD-2A4(180); PT-2(180)	Vertical: PB-2A*; PB-2R2.375	Vertical: PB-3A*; PB-3R2.375 Horizontal: PD-3A4(90); PT-3(90)	Vertical: PB-3A*; PB-3R2.375 Horizontal: PT-3(120)	Vertical: PB-3A*; PB-3R2.375	Vertical: PB-4A*(90); PB-4R2.375 Horizontal: PD-4A4(90) PT-4(90)	Vertical: PB-4A*(180); PB-4R2.375
90° Tilt									
02	1.85	2.51	3.70	3.64	4.36	4.36	5.55	5.02	7.40
04	1.85	2.51	3.70	3.64	4.36	4.36	5.55	5.02	7.40
06	2.14	2.80	4.28	4.22	4.94	4.94	6.42	5.59	8.56
08	2.43	3.09	4.86	4.78	5.51	5.51	7.29	6.17 N/A with horizontal tenon	9.72
10	2.71	3.37	5.42	5.34	6.08	6.08	8.13	6.74 N/A with horizontal tenon	10.84
12	3.00	3.66	6.00	5.90	6.66	6.66	9.00	7.31 N/A with horizontal tenon	12.00
14	3.29	3.95 N/A with PW-2A3**	6.58	6.48	7.23	7.23	9.87	7.89 N/A with horizontal tenon	13.16
16	3.57	4.23 N/A with PW-2A3**	7.14	N/A	7.81	7.81	N/A	8.46 N/A with horizontal tenon	N/A

* Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"] for single, double or triple luminaire orientation or 4 [4"], 5 [5"], or 6 [6"] for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"]

Tenon EPA

Part Number	EPA
PB-1A*	None
PB-2A*	0.82
PB-3A*	1.52
PB-4A*(180)	2.22
PB-4A*(90)	1.11
PB-2R2.375	0.92
PB-3R2.375	1.62
PB-4R2.375	2.32
PD Series Tenons	0.09
PT Series Tenons	0.10
PW-1A3**	0.47
PW-2A3**	0.94
WM-2	0.08
WM-4	0.25
WM-DM	None


* Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"] for single, double or triple luminaire orientation or 4 [4"], 5 [5"], or 6 [6"] for quad luminaire orientation
 ** These EPA values must be multiplied by the following ratio: Fixture Mounting Height/Total Pole Height. Specify pole size: 3 [3"], 4 [4"], 5 [5"], or 6 [6"]

Tenons and Brackets [†] (must specify color)	
<p>Square Internal Mount Vertical Tenons (Steel) - Mounts to 3-6" [76-152mm] square aluminum or steel poles PB-1A* – Single PB-4A*(90) – 90° Quad PB-2A* – 180° Twin PB-4A*(180) – 180° Quad PB-3A* – 180° Triple</p> <p>Square Internal Mount Horizontal Tenons (Aluminum) - Mounts to 4" [102mm] square aluminum or steel poles PD-2A4(90) – 90° Twin PD-3A4(90) – 90° Triple PD-2A4(180) – 180° Twin PD-4A4(90) – 90° Quad</p> <p>Wall Mount Brackets - Mounts to wall or roof WM-2 – Horizontal for AA and SA mounts WM-4 – L-Shape for AA and SA mounts WM-DM – Plate for DA and DL mounts</p>	<p>Round External Mount Vertical Tenons (Steel) - Mounts to 2.375" [60mm] O.D. round aluminum or steel poles or tenons PB-2R2.375 – Twin PB-4R2.375 – Quad PB-3R2.375 – Triple</p> <p>Round External Mount Horizontal Tenons (Aluminum) - Mounts to 2.375" [60mm] O.D. round aluminum or steel poles or tenons - Mounts to square pole with PB-1A* tenon PT-1 – Single (Vertical) PT-3(90) – 90° Triple PT-2(90) – 90° Twin PT-3(120) – 120° Triple PT-2(180) – 180° Twin PT-4(90) – 90° Quad</p> <p>Mid-Pole Bracket - Mounts to square pole PW-1A3** – Single PW-2A3** – Double</p> <p>Ground Mount Post - For ground mounted flood luminaires PGM-1 - For use with AA and SA mounts</p>

[†] Refer to the [Bracket and Tenons spec sheet](#) for more details


THE EDGE® LED Area/Flood Luminaire

AA Mount

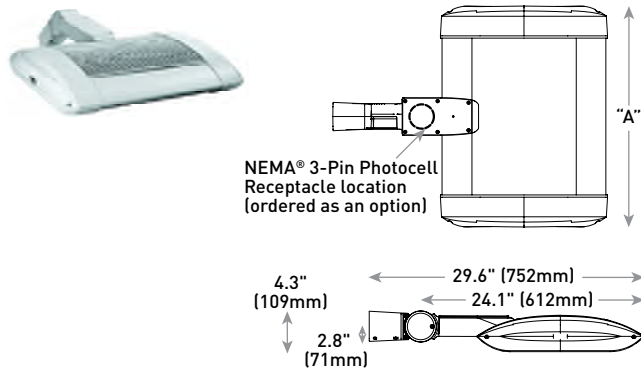


LED Count (x10)	Dim. "A"	Weight
02	12.1" (306mm)	21 lbs. (10kg)
04	12.1" (306mm)	24 lbs. (11kg)
06	14.1" (357mm)	27 lbs. (12kg)
08	16.1" (408mm)	28 lbs. (13kg)
10	18.1" (459mm)	32 lbs. (15kg)
12	20.1" (510mm)	34 lbs. (15kg)
14	22.1" (560mm)	37 lbs. (17kg)
16	24.1" (611mm)	41 lbs. (19kg)

DL Mount

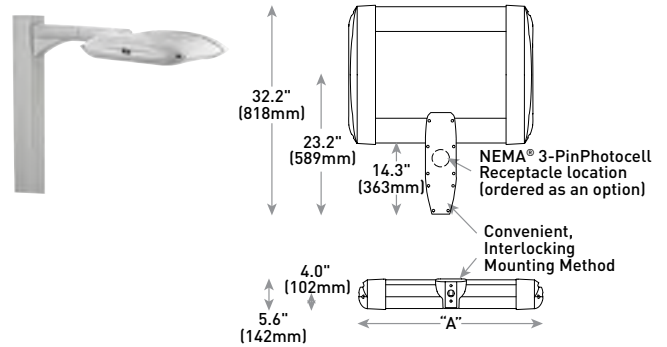

LED Count (x10)	Dim. "A"	Weight
02	12.1" (306mm)	23 lbs. (10kg)
04	12.1" (306mm)	26 lbs. (12kg)
06	14.1" (357mm)	29 lbs. (13kg)
08	16.1" (408mm)	30 lbs. (14kg)
10	18.1" (459mm)	34 lbs. (15kg)
12	20.1" (510mm)	36 lbs. (16kg)
14	22.1" (560mm)	42 lbs. (19kg)
16	24.1" (611mm)	44 lbs. (20kg)

SA Mount

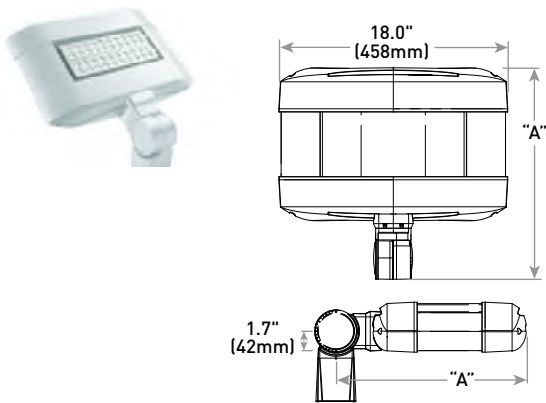

LED Count (x10)	Dim. "A"	Weight
02	16.0" (406mm)	25 lbs. (11kg)
04	18.0" (457mm)	26 lbs. (12kg)
06	20.0" (508mm)	28 lbs. (13kg)

© 2020 Cree Lighting, A company of IDEAL INDUSTRIES. All rights reserved. For informational purposes only. Content is subject to change. Patent www.creelighting.com/patents. THE EDGE®, NanoOptic® and Colorfast DeltaGuard® are registered trademarks of Cree Lighting, A company of IDEAL INDUSTRIES. Cree® and the Cree logo are registered trademarks of Cree, Inc. The UL logo is a registered trademark of UL LLC. NEMA® is a registered trademark of the National Electrical Manufacturers Association. The DLC QPL Logo is a registered trademark of Efficiency Forward, Inc.