



University Avenue & Campus Drive Intersection Reconstruction Assessment District - 2010

Project Engineer Chris Petykowski 267-8678

Project Limits University Ave from Breese Ter to Campus Dr
Alder: Bidar-Sielaff Campus Dr from 500' w of Univ to 700' e of Univ

Street	Existing	Proposed
Project Type		Pavement Replacement & Utility
Last Surfaced	1975	
Pavement Rating	6	
Curb Rating	7	
Width	Varies	Same
Surface Type	Asphalt	Asphalt
Traffic (Average Vehicles per Day)	39300	

Sidewalk	Existing	Proposed
Work Required		Replace As Necessary

Storm Sewer	Existing	Proposed
Work Required		Inlet Replacement as necessary
Size	2.3' x 1.7' Box	24"x38"
Material		HERCP
Year		

Sanitary Sewer	Existing	Proposed
Work Required		Replace as necessary
Size	8" & 10"	8" & 10"
Material	VP	PVC
Year	1909	

Water Main	Existing	Proposed
Work Required		Complete Replacement
Size	8 Inch	10 Inch
Material	Cast Iron	Ductile Iron
Year	1920's	

Parking	Existing	Proposed
Parking Conditions	None	None

Street Lighting	Existing	Proposed
Street Lighting	On Steel Poles	Same

Cost

Total Cost	\$1,141,731
Adjacent Property Assessments	\$13,420
City Share	\$1,128,311

Assessment Policy

- Street Concrete Items Owner 50% / City 50%
- Sanitary Sewer Lateral Replacements Owner 25% / City 75%
- Assessments payable in one lump sum or over a period of 8 years, with 3.5% interest charged on unpaid balance
- All remaining contract items to be paid for by the City of Madison


Schedule

Start Date	17-May-10
Length of Project	Aug 27/2010

Correspondence None



Location Map

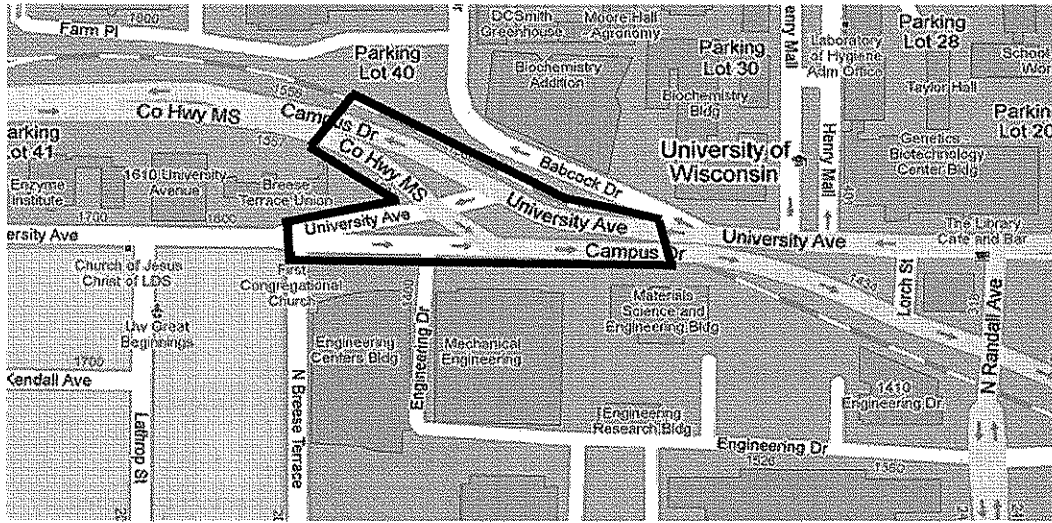

Source: Google Maps