


MUNIS 15227

Developer: Board of Regents of the University of Wisconsin System

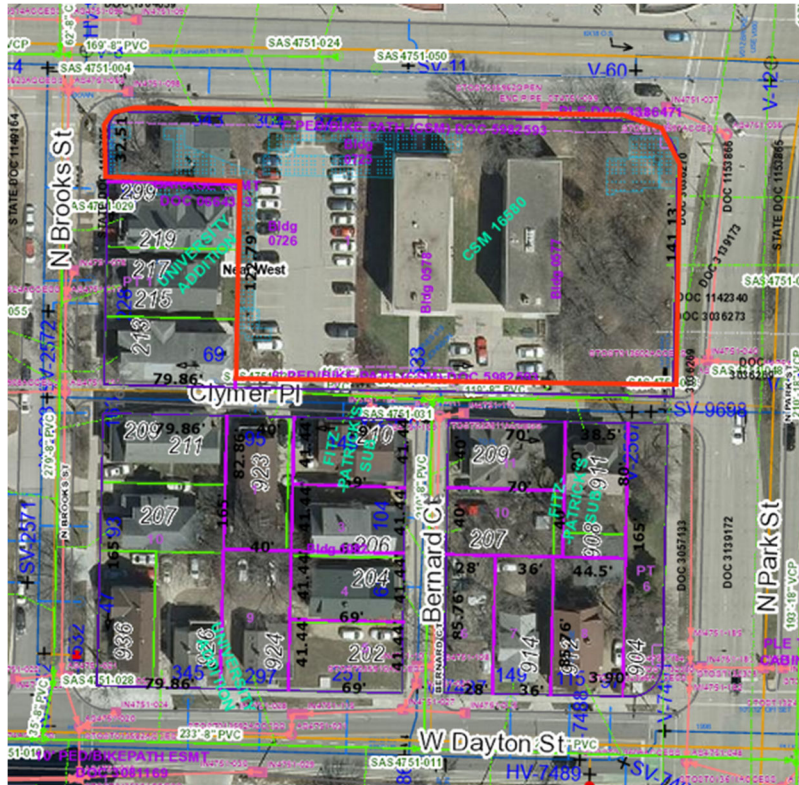

Maintenance Agreement Items:

- Snow and ice removal;
- Cleaning of dirt and debris;
- Graffiti removal or the correction of other vandalism;
- Repair and maintenance of sidewalks and other pavements or paving materials;
- Repair and replacement of planting areas including concrete curbed planting beds;
- Trimming, pruning and seasonal maintenance of all plant material excluding street trees. Street tree trimming, pruning, and silva cell replacement shall be by the City of Madison;
- Repair and maintenance of drain tile.

1.	FIELD VERIFY SURVEY INFORMATION PRIOR TO START OF CONSTRUCTION AND REPORT ANY DISCREPANCIES TO THE DFD REPRESENTATIVE.	7.	ANY DEVIATION FROM THE LAYOUT AND DIMENSION SHOWN ON THIS PLAN SHALL REQUIRE APPROVAL BY THE DFD REPRESENTATIVE PRIOR TO PROCEEDING WITH MODIFICATIONS.
2.	CONTACT DIGGERS' HOTLINE TO LOCATE ALL PUBLIC AND PRIVATE UTILITIES PRIOR TO STARTING WORK.	8.	SUBMIT CONCRETE CONSTRUCTION JOINT LAYOUT PLAN ACCORDANCE WITH SECTION 32 13 - CONCRETE PAVING.
3.	FIELD VERIFY ALL EXISTING SITE CONDITIONS AND UTILITIES PRIOR TO STARTING WORK. ANY DAMAGE CAUSED TO UTILITIES, EITHER SHOWN OR NOT, SHALL BE REPAIRED AND PAID FOR AT THE CONTRACTOR'S EXPENSE.	9.	ALL DISTURBED PAVEMENT AREAS SHALL BE RESTORED WITH RIGID PAVEMENT EITHER TEMPORARILY OR PER THE FINAL PAVEMENT CONDITION AS SHOWN ON THE DRAWINGS. GRAVEL, SOIL, OR OTHER BACKFILL MATERIALS ARE NOT ACCEPTABLE.
4.	PROTECT OR RELOCATE ALL BENCHMARKS. RELOCATED BENCHMARKS TO BE INCLUDED WITH CONTRACT OR AS-BUILTS.	10.	CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE(S). CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREES. THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608) 266-4816. PENALTIES AND REMEDIATION SHALL BE THE CONTRACTOR'S RESPONSIBILITY.
5.	PROTECT ALL EXISTING PAVEMENTS, CURBS, UTILITIES, AND OTHER IMPROVEMENTS (TO REMAIN) FROM CONSTRUCTION ACTIVITIES. RESTORE ALL AREAS DISTURBED BY CONSTRUCTION RELATED ACTIVITIES TO EXISTING CONDITIONS AT COMPLETION OF WORK UNLESS SHOWN OTHERWISE ON PLANS.		
6.	CONTRACTOR IS RESPONSIBLE FOR STAKING SITE FOR HORIZONTAL AND VERTICAL ALIGNMENT.		

11. AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY AT (608) 266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE:
[HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)
12. SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE):
[HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.

13. NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONDUITS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRATE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRATE, MATCHING FRAME AND/OR TREE GUARD. TREE GRATE TYPE AND MATCHING FRAME: NEENAH 4X8 (R-8815-A). TREE GUARD NEENAH (R-8501-4818).


	8" DEPTH COMPACTED DENSE GRADED BASE	
	UW ASPHALTIC CONCRETE PAVEMENT	3 (C804)
	UW STANDARD DUTY CONCRETE PAVEMENT	1 (C804)
	UW HEAVY DUTY CONCRETE PAVEMENT	2 (C804)
	CITY OF MADISON CONCRETE PAVEMENT	4 (C804)
	UNIT PAVERS, TYPE 1 CITY R.O.W. PAVERS (NON-PERMEABLE)	1 (C801)
	UNIT PAVERS, TYPE 2 NON-PERMEABLE	4 (C801)
	UNIT PAVERS, TYPE 2 PERMEABLE	3 (C801)
	SALVAGED LIMESTONE PAVERS	SEE SHEET LA100
	MODULAR SOIL VAULTS	1 (C800)
	CONSTRUCTION LIMITS	
	PROPERTY LINE/R.O.W.	
	TREE PROTECTION FENCING	
	CONSTRUCTION FENCING	
	LIGHT POLES	
	UTILITY INLETS & MANHOLES	

INTERIOR: 26 STALLS
EXTERIOR: 248 STALLS
TOTAL = 274 STALLS

UW SERVICE VEHICLES:
2 STALLS

	Levy Hall		923 Clymer Pl.		209 Bernard Ct. & 911 Clymer Pl.		All Lots Total	
	SF	Acres	SF	Acres	SF	Acres	SF	Acres
Lot Size	47347	1.09	3149	0.07	5352	0.12	55848	1.28
Existing Site Impervious	21258	0.49	2320	0.05	3224	0.08	26802	0.62
Existing Building Coverage	7344	0.17	1360	0.03	2808	0.06	11512	0.26
Proposed Site Impervious	41729	0.96	1629	0.04	1366	0.03	44724	1.03
Proposed Building Coverage	31557	0.72	0	0.00	0	0.00	31557	0.72
Useable Open Space	5618	0.13	1520	0.03	3986	0.09	11124	0.26
Total Disturbed Area							89787	2.06

1 SITE LAYOUT PLAN - OVERALL
SCALE: 1"=20'-0"



232 N. PARK ST.
MADISON, WI 53715

NEW ACADEMIC BUILDING
LEVY HALL
UNIVERSITY OF WISCONSIN - MADISON
MADISON, WISCONSIN

SITE LAYOUT PLAN - OVERALL

[illegible]





	8" DEPTH COMPACTED DENSE GRADED BASE	
	UW ASPHALTIC CONCRETE PAVEMENT	3 C804
	UW STANDARD DUTY CONCRETE PAVEMENT	1 C804
	UW HEAVY DUTY CONCRETE PAVEMENT	2 C804
	CITY OF MADISON CONCRETE PAVEMENT	4 C804
	UNIT PAVERS, TYPE 1 CITY R.O.W. PAVERS (NON-PERMEABLE)	1 C801
	UNIT PAVERS, TYPE 2 NON-PERMEABLE	4 C801
	UNIT PAVERS, TYPE 2 PERMEABLE	3 C801
	SALVAGED LIMESTONE PAVERS	SEE SHEET LA100
	MODULAR SOIL VAULTS	1 C800
	CONSTRUCTION LIMITS	
	PROPERTY LINE/ROW	
	TREE PROTECTION FENCING	
	CONSTRUCTION FENCING	
	LIGHT POLES	
	UTILITY INLETS & MANHOLES	

NOTES

1. FIELD VERIFY SURVEY INFORMATION PRIOR TO STARTING CONSTRUCTION AND REPORT ANY DISCREPANCIES TO THE DFD REPRESENTATIVE.
2. CONTACT DIGGER'S HOTLINE TO LOCATE ALL PUBLIC AND PRIVATE UTILITIES PRIOR TO STARTING WORK.
3. FIELD VERIFY ALL EXISTING SITE CONDITIONS AND UTILITIES PRIOR TO STARTING WORK. ANY DAMAGE CAUSED TO UTILITIES, EITHER SHOWN OR NOT, SHALL BE REPAIRED AND PAID FOR AT THE CONTRACTOR'S EXPENSE.
4. PROTECT ALL BENCHMARKS.
5. PROTECT ALL EXISTING PAVEMENTS, CURBS, UTILITIES, AND OTHER IMPROVEMENTS (TO REMAIN) FROM CONSTRUCTION ACTIVITIES. RESTORE ALL AREAS DISTURBED BY CONSTRUCTION RELATED ACTIVITIES TO EXISTING CONDITIONS AT COMPLETION OF WORK UNLESS SHOWN OTHERWISE ON PLANS.
6. CONTRACTOR IS RESPONSIBLE FOR STAKING SITE FOR HORIZONTAL AND VERTICAL ALIGNMENT.
7. ANY DEVIATION FROM THE LAYOUT AND DIMENSION SHOWN ON THIS PLAN SHALL REQUIRE APPROVAL BY THE DFD REPRESENTATIVE PRIOR TO PROCEEDING WITH MODIFICATIONS.
8. SUBMIT CONCRETE CONSTRUCTION JOINT LAYOUT PLAN ACCORDANCE WITH SECTION 32 13 - CONCRETE PAVING.
9. ALL DISTURBED PAVEMENT AREAS SHALL BE RESTORED WITH RIGID PAVEMENT EITHER TEMPORARILY OR PER THE FINAL PAVEMENT CONDITION AS SHOWN ON THE DRAWINGS. GRAVEL, SOIL, OR OTHER BACKFILL MATERIALS ARE NOT ACCEPTABLE.
10. CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE(S). CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREES. THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608) 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.
11. AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY AT (608) 266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: <https://www.cityofmadison.com/business/pw/specs/cfm>.
12. SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE: <https://www.cityofmadison.com/business/pw/specs/cfm>) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.
13. NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONFLICTS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRATE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRATE, MATCHING FRAME AND/OR TREE GUARD. TREE GRATE TYPE AND MATCHING FRAME: NEEAH 4x8 (R-8815-A). TREE GUARD NEEAH (R-8801-4818).

LEGEND

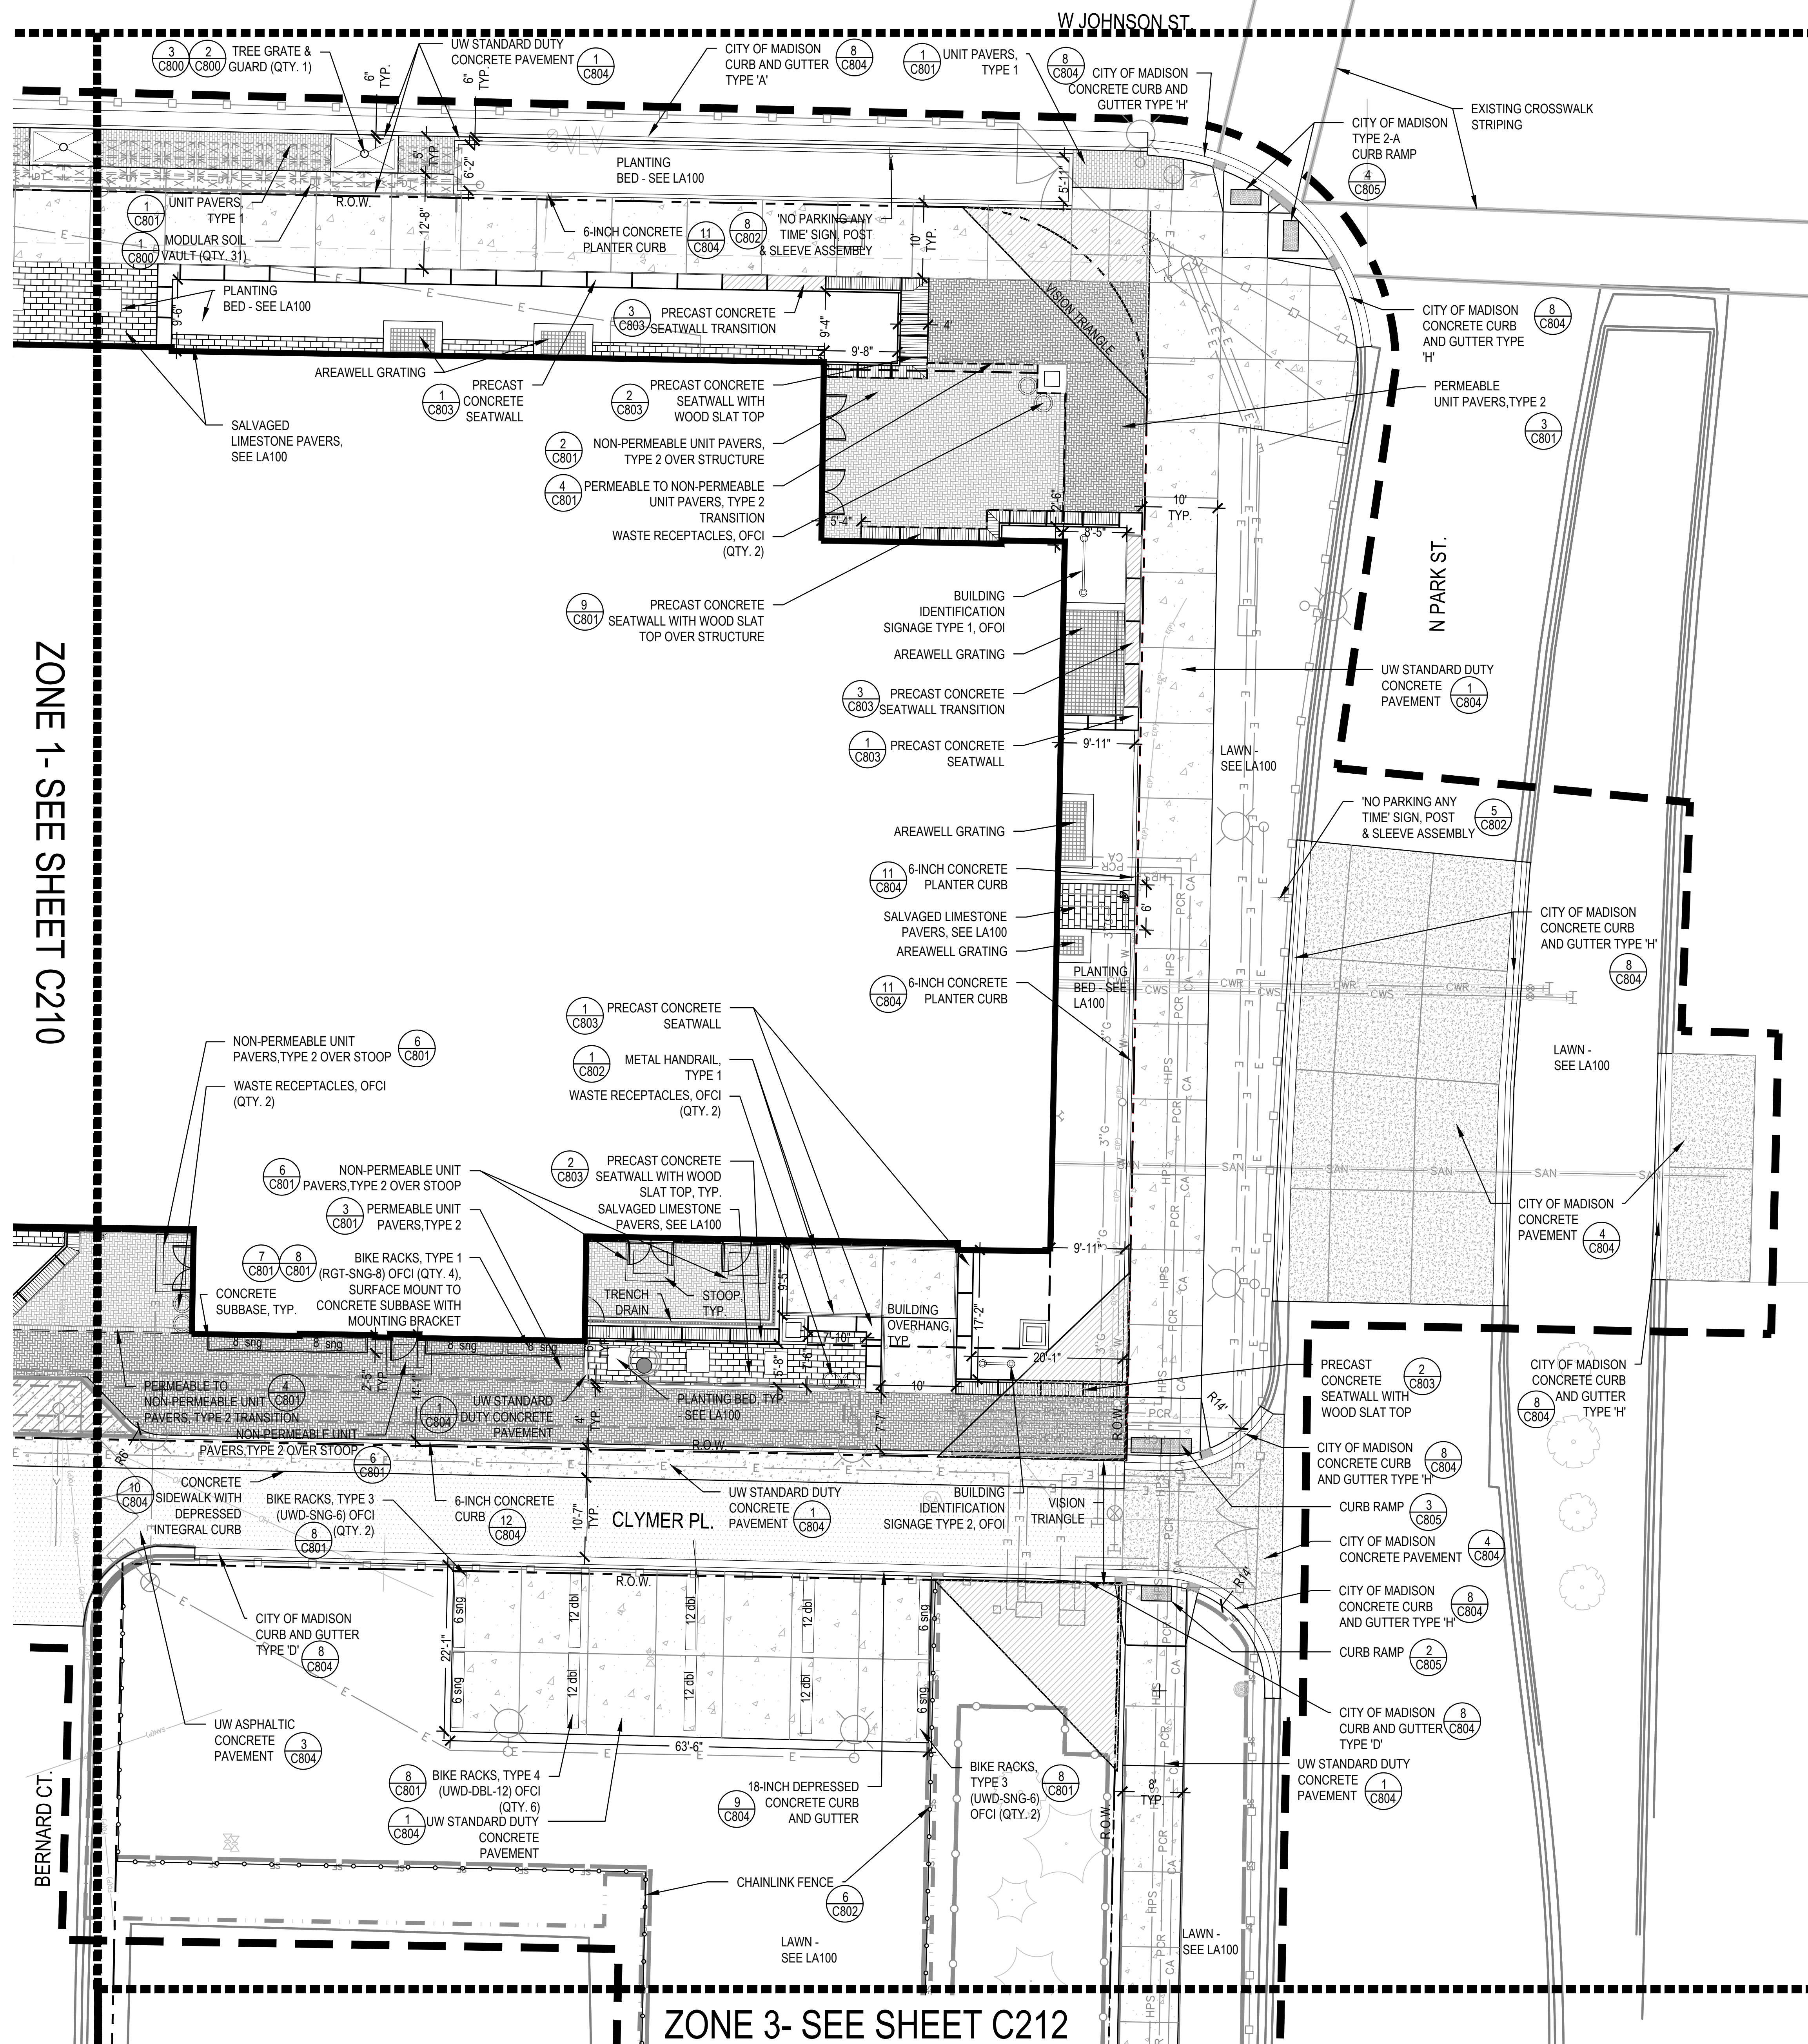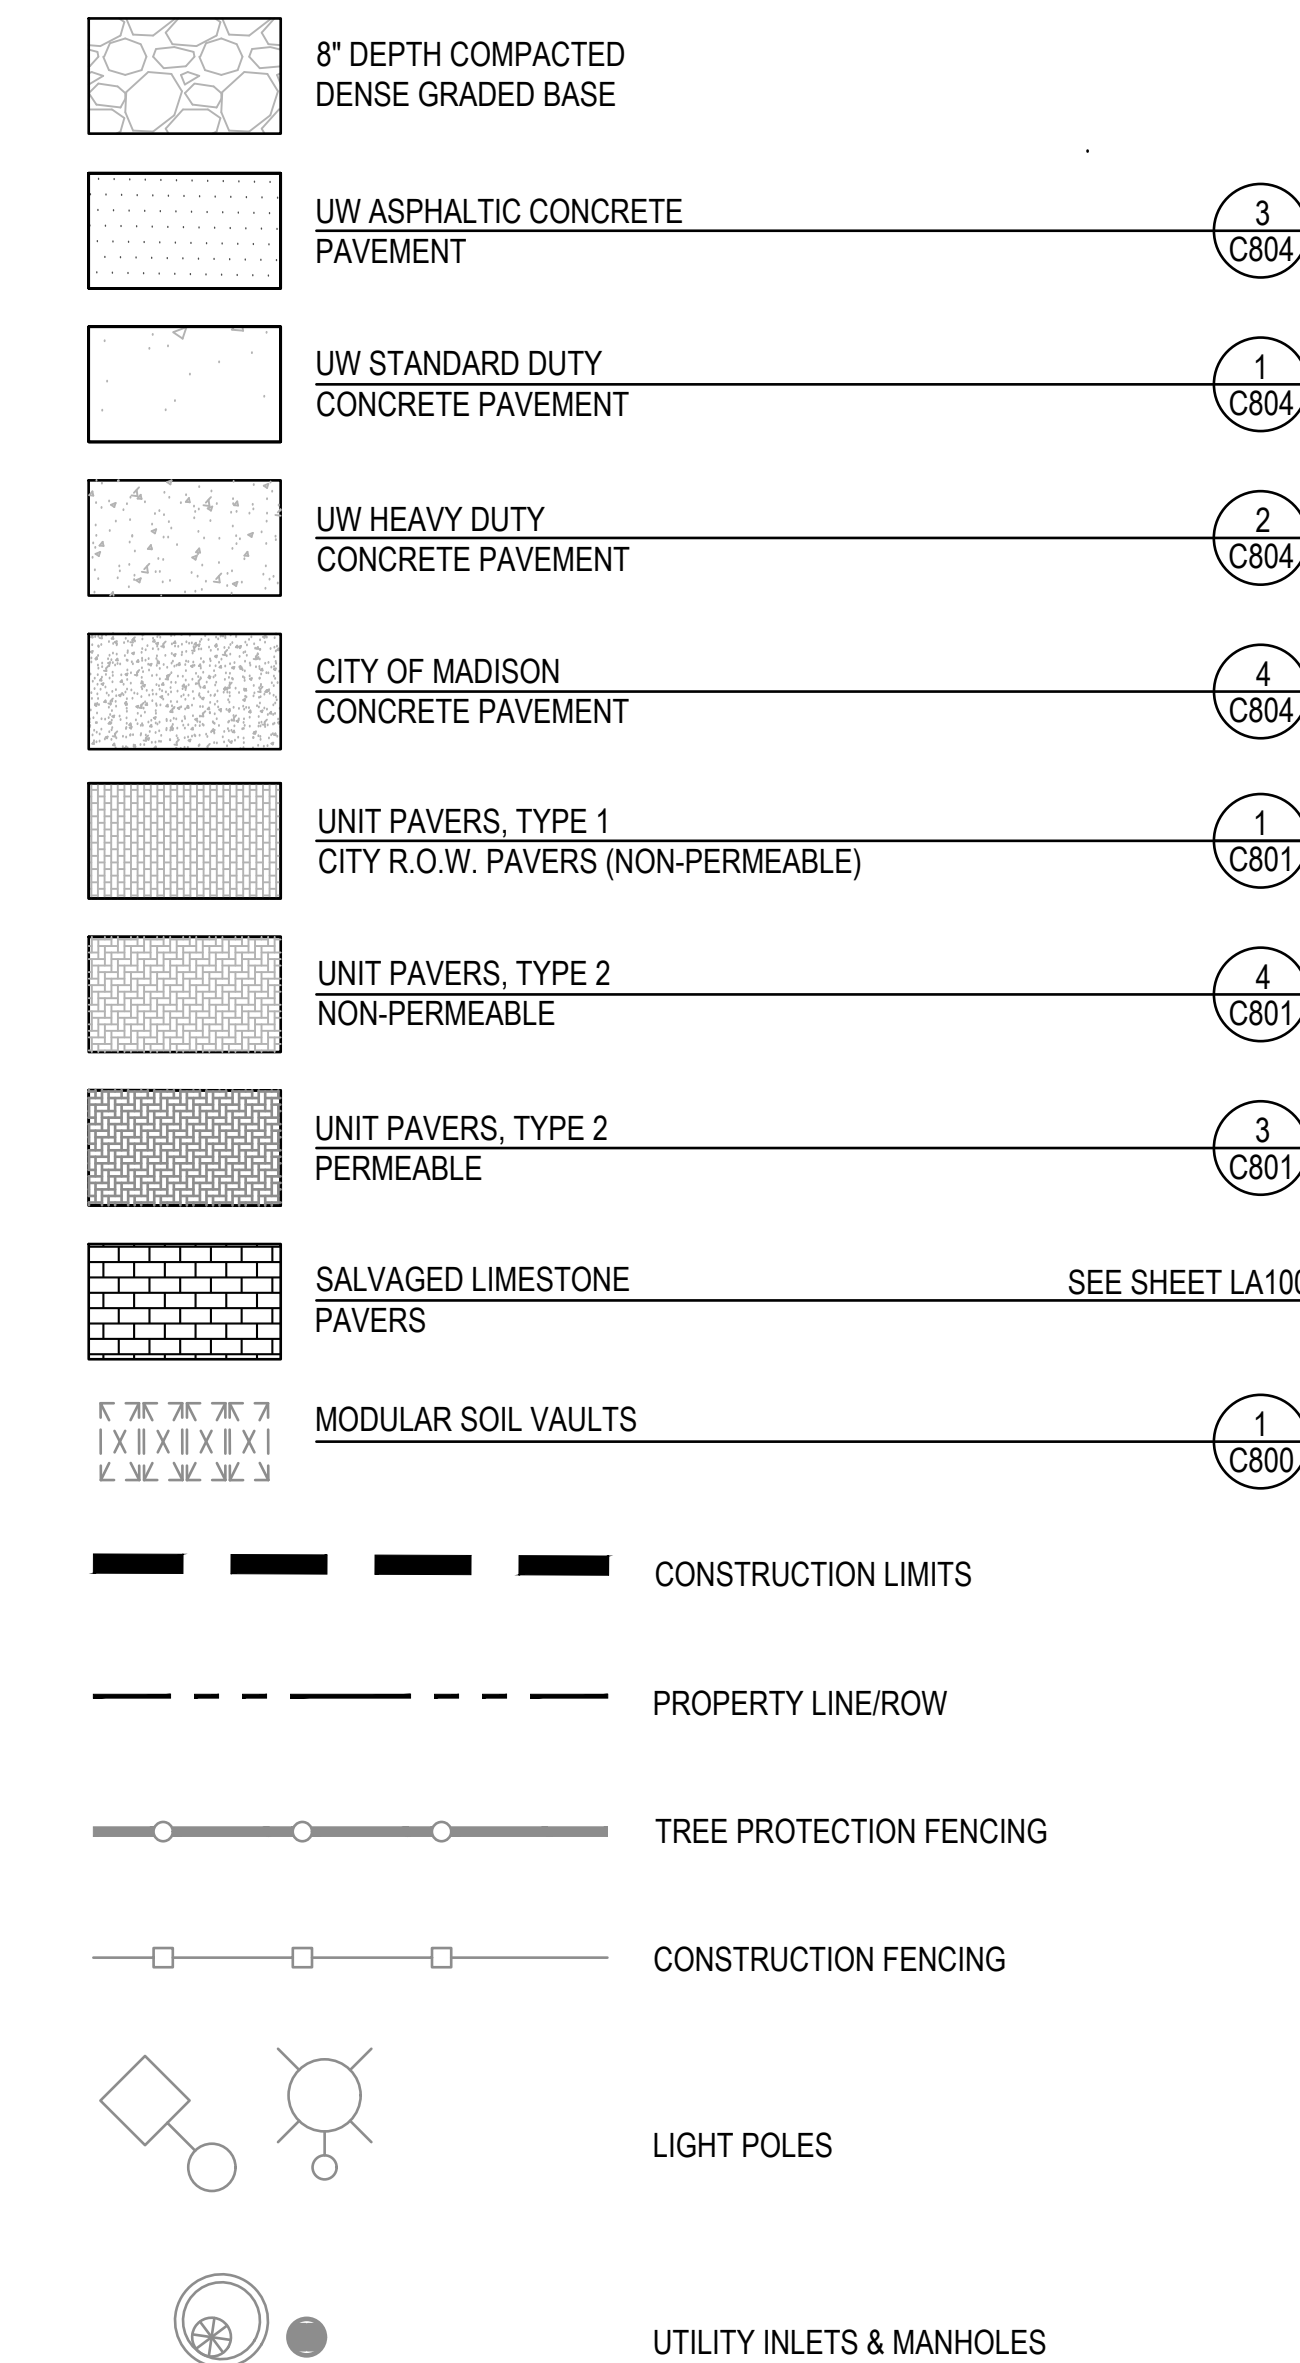

ZONE 1-SEE SHEET C210

BERNARD CT.


1



SITE LAYOUT PLAN - ZONE 2 ENLARGEMENT











ZONE 3- SEE SHEET C212
















Sheet Number	C510
--------------	------

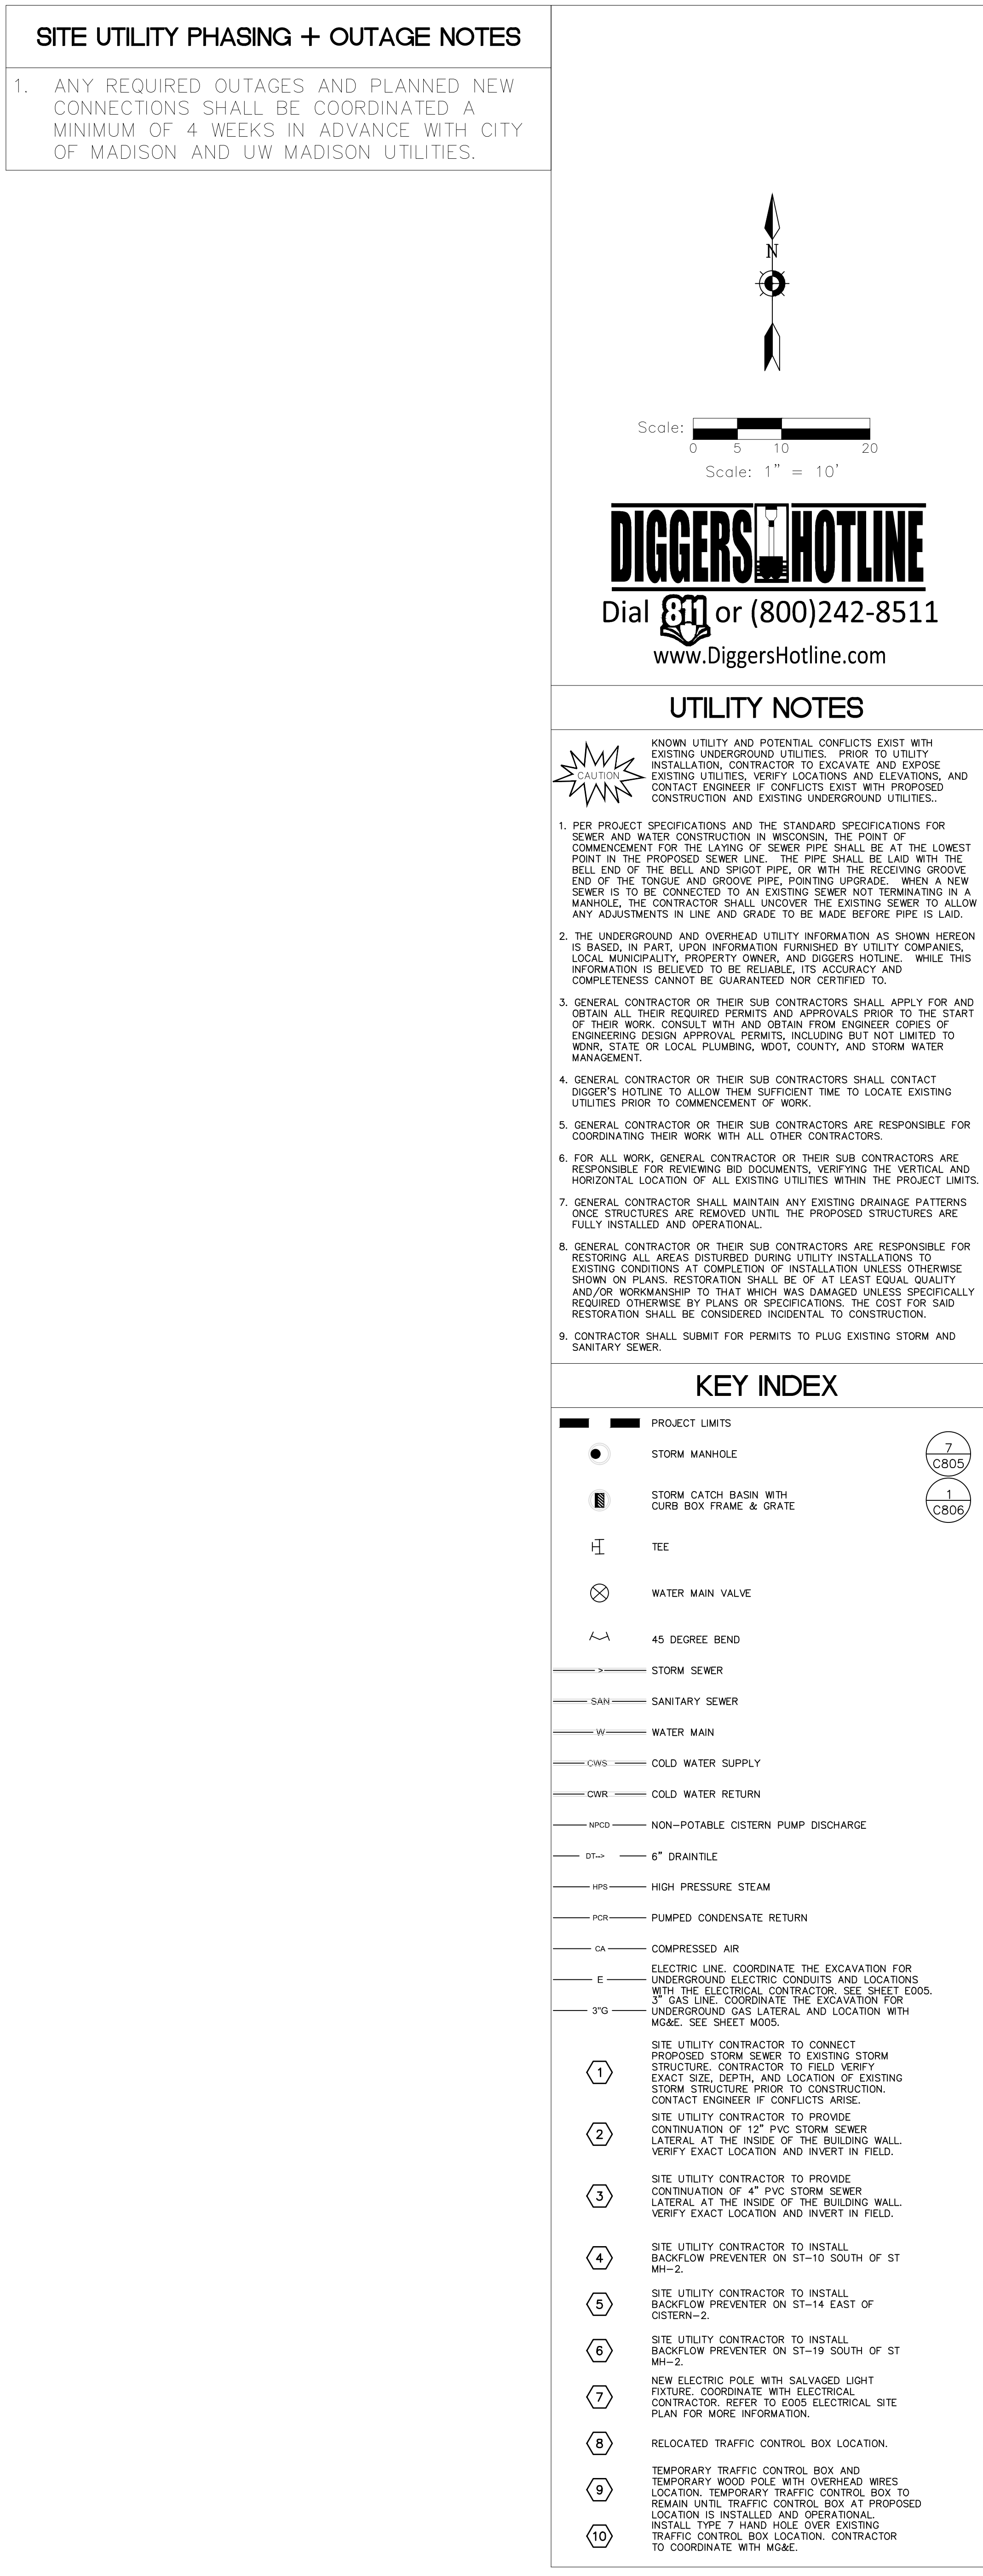

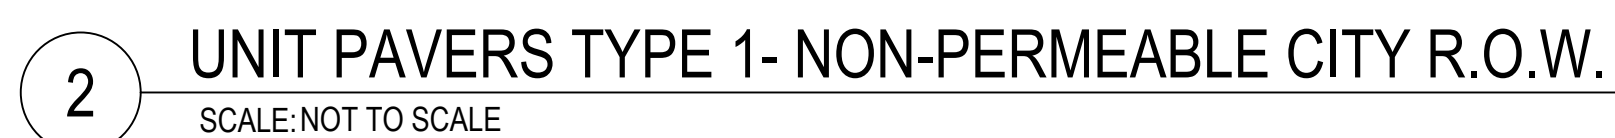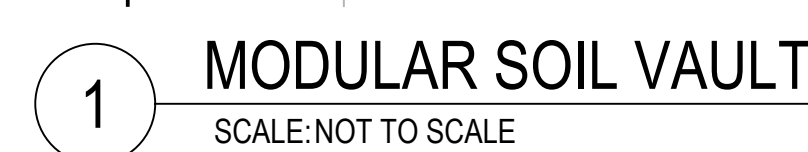

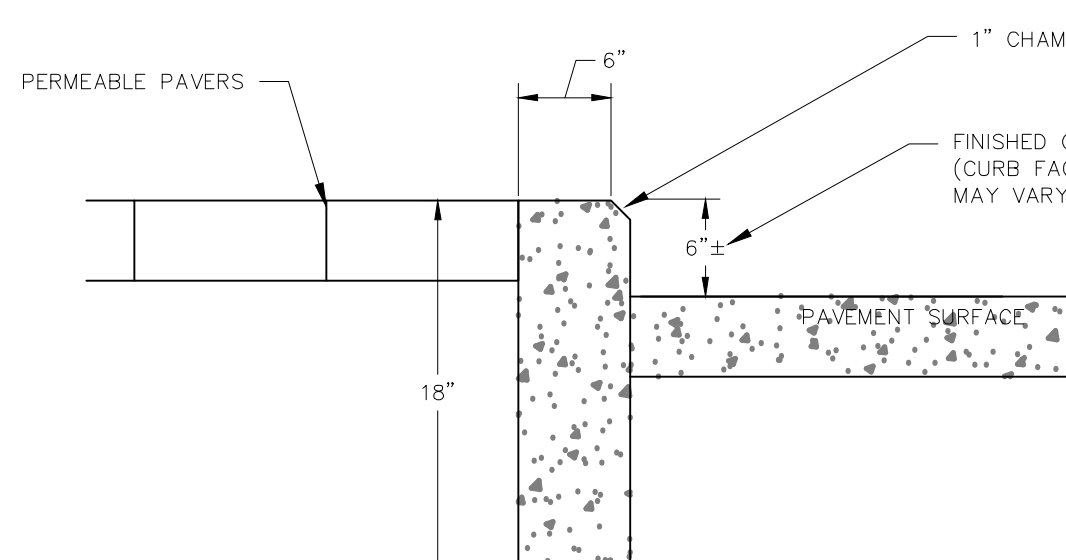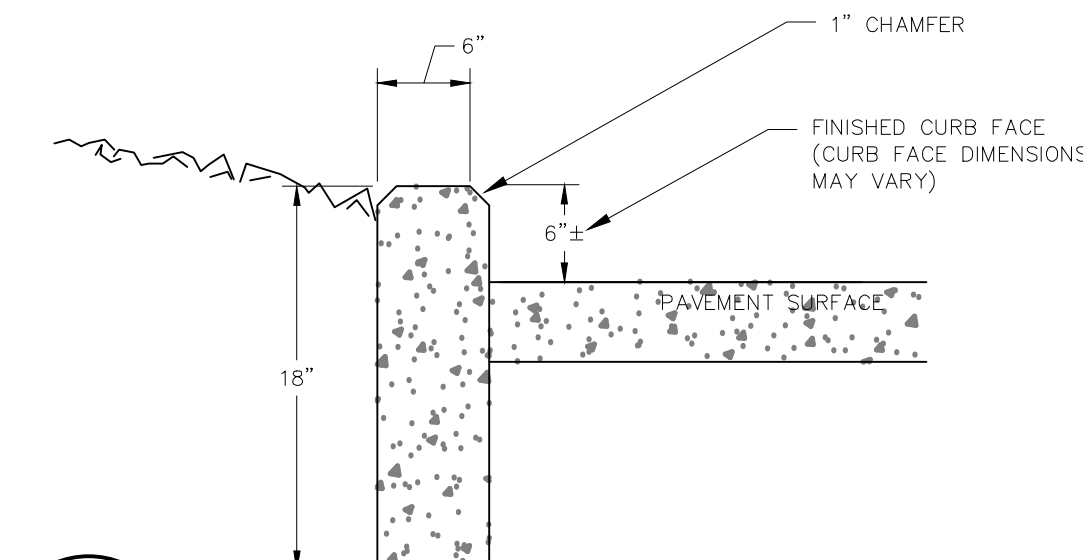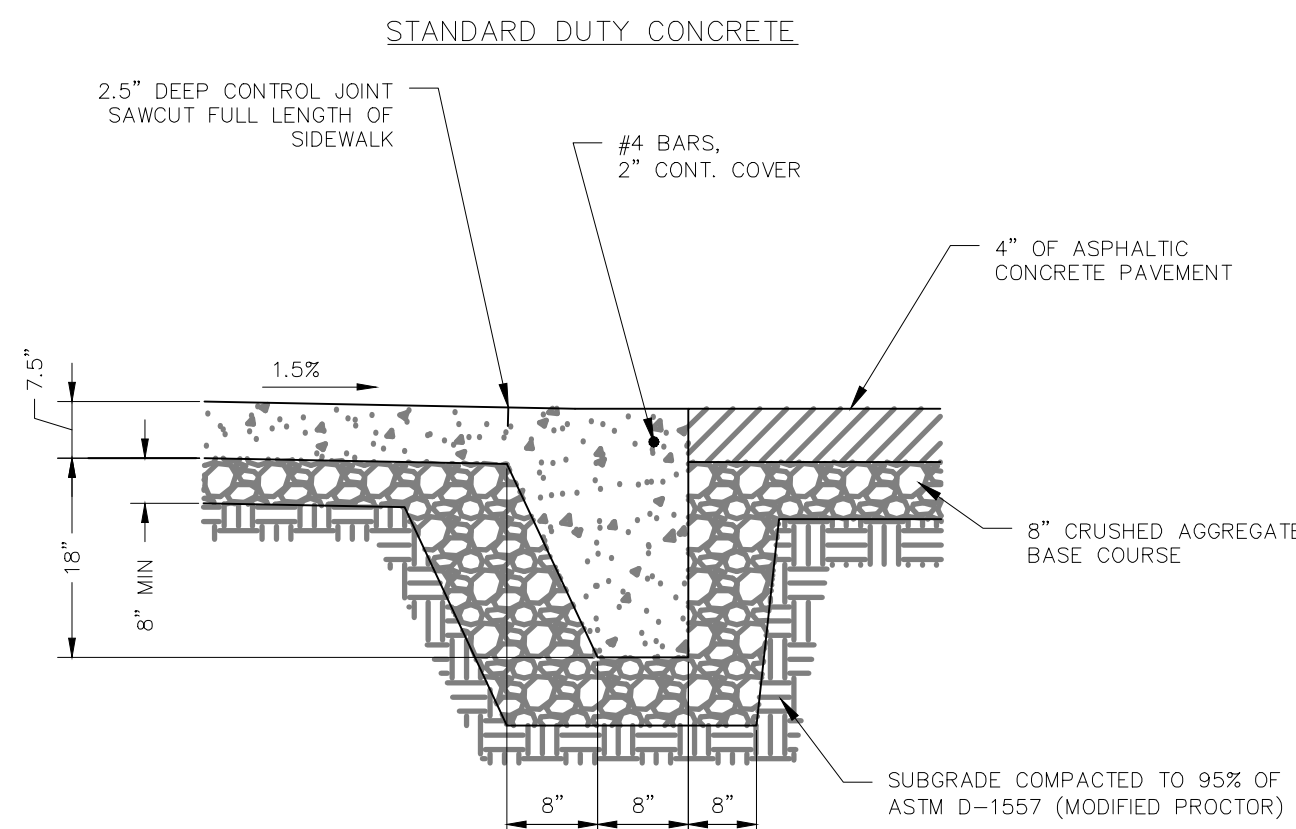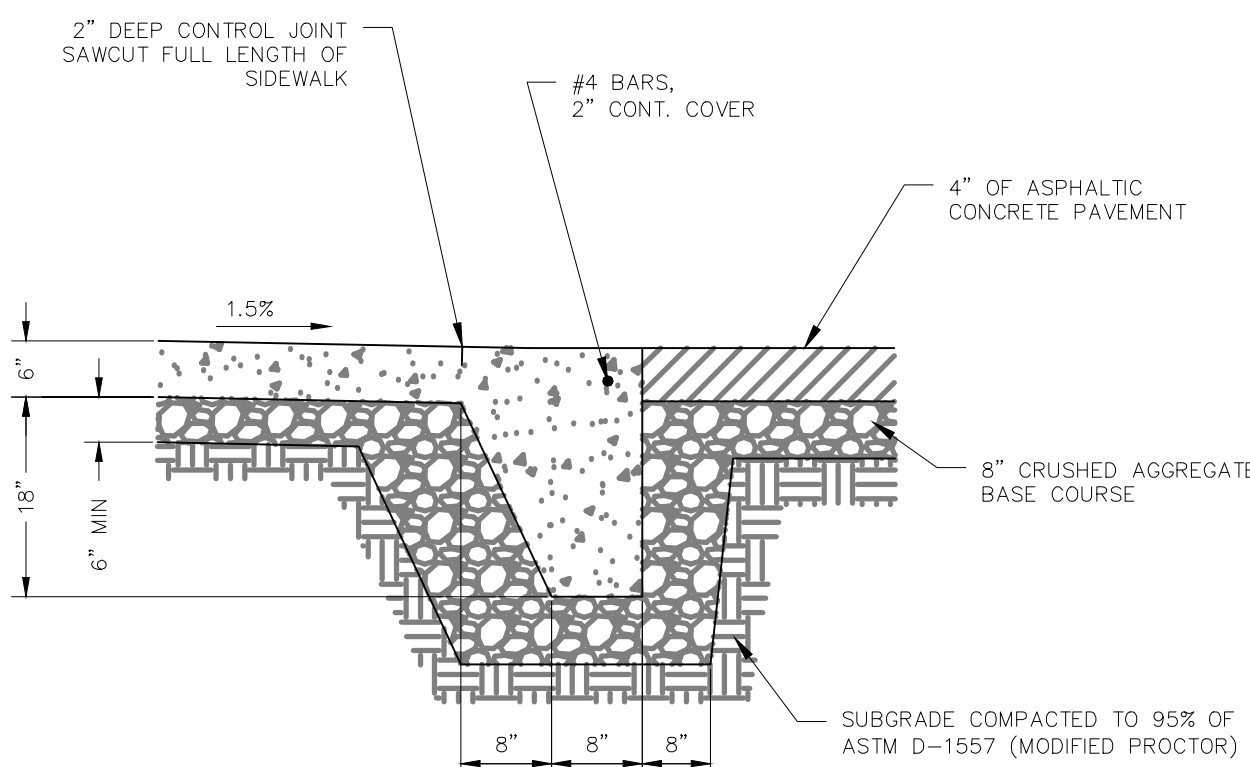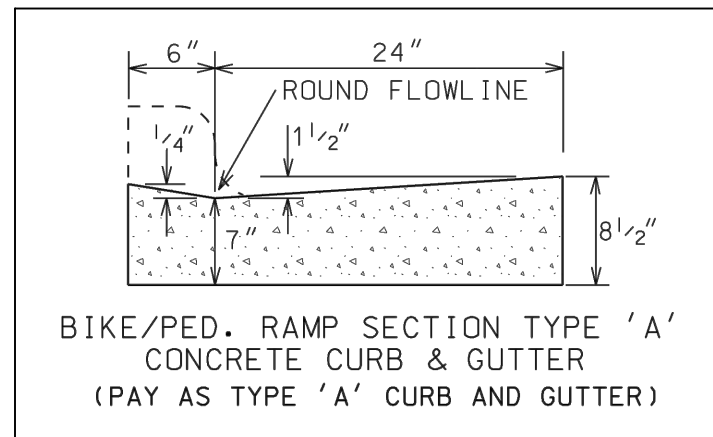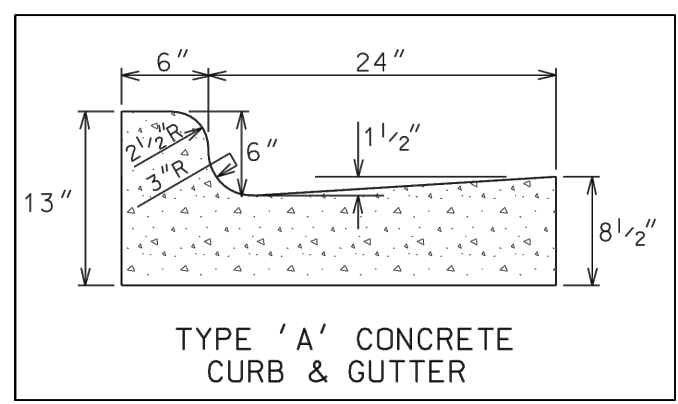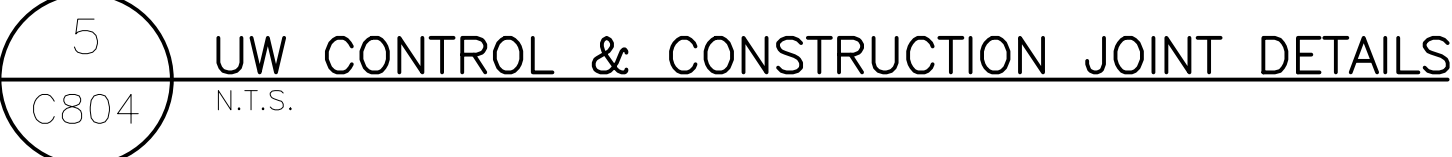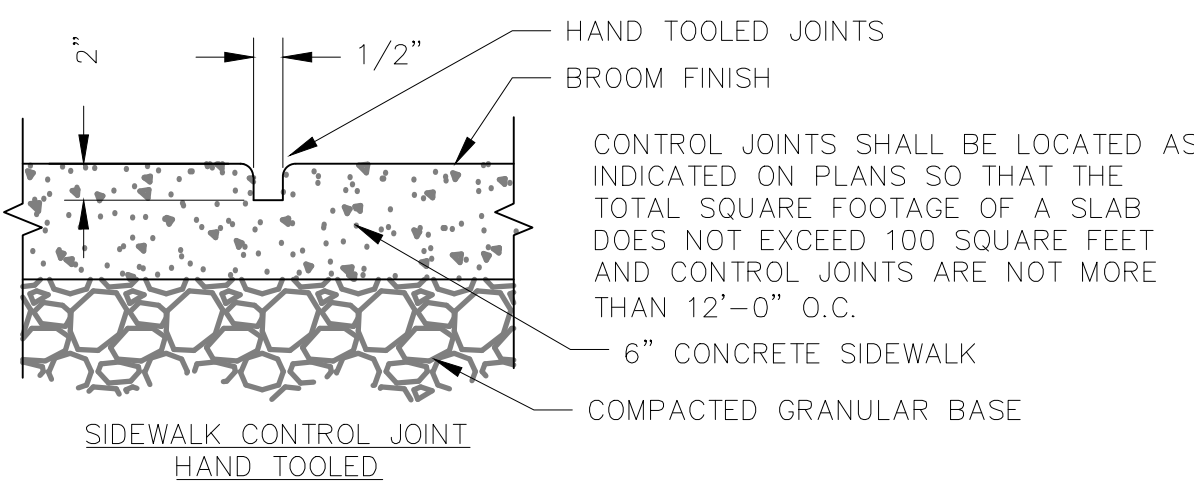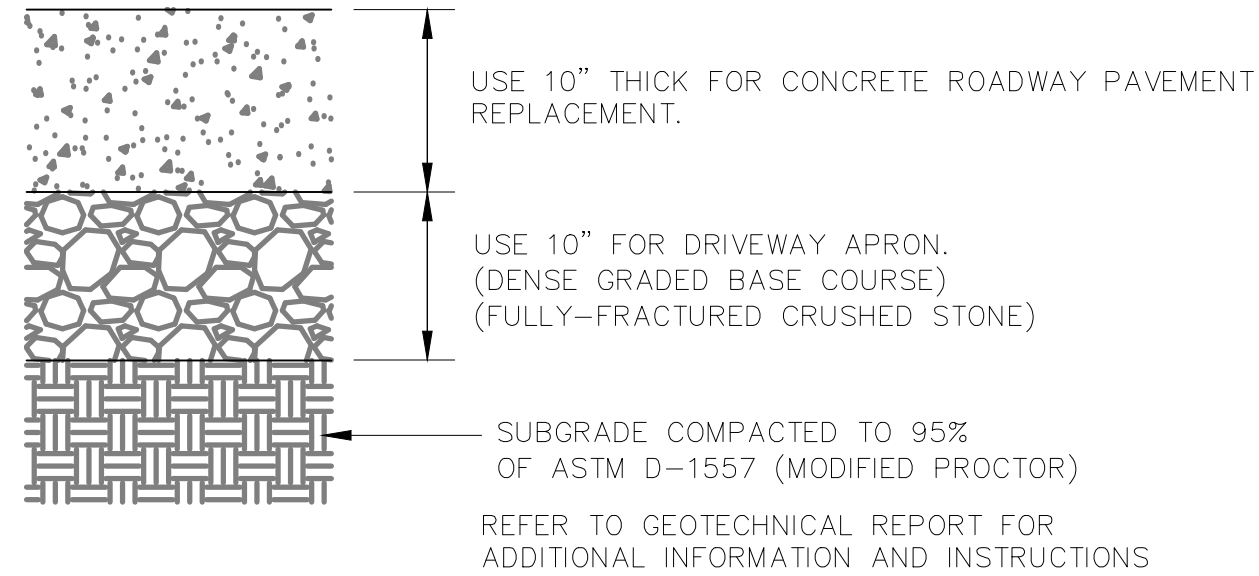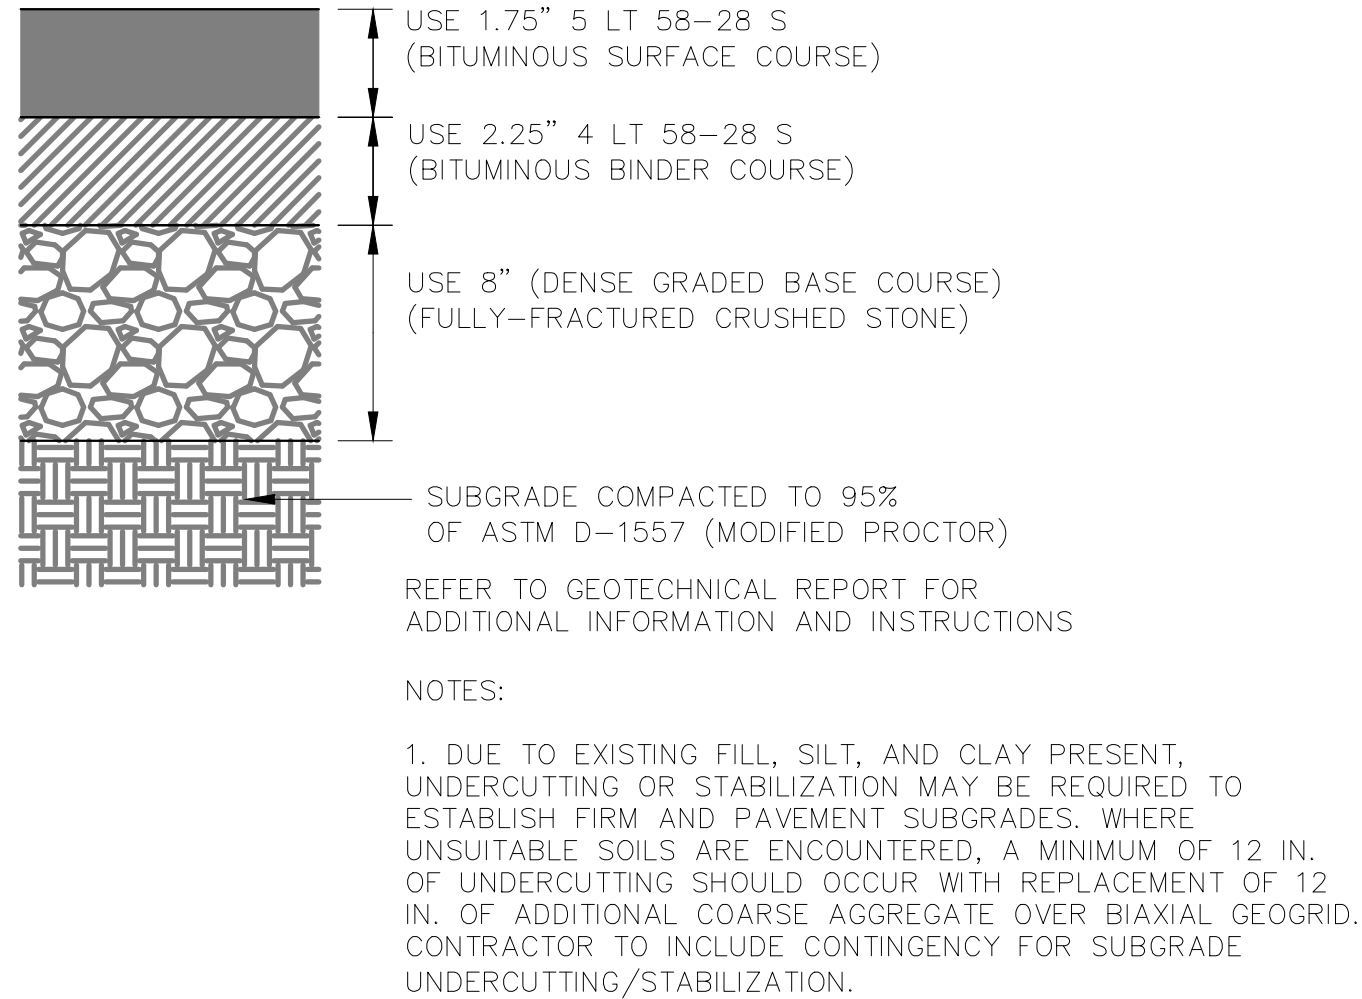

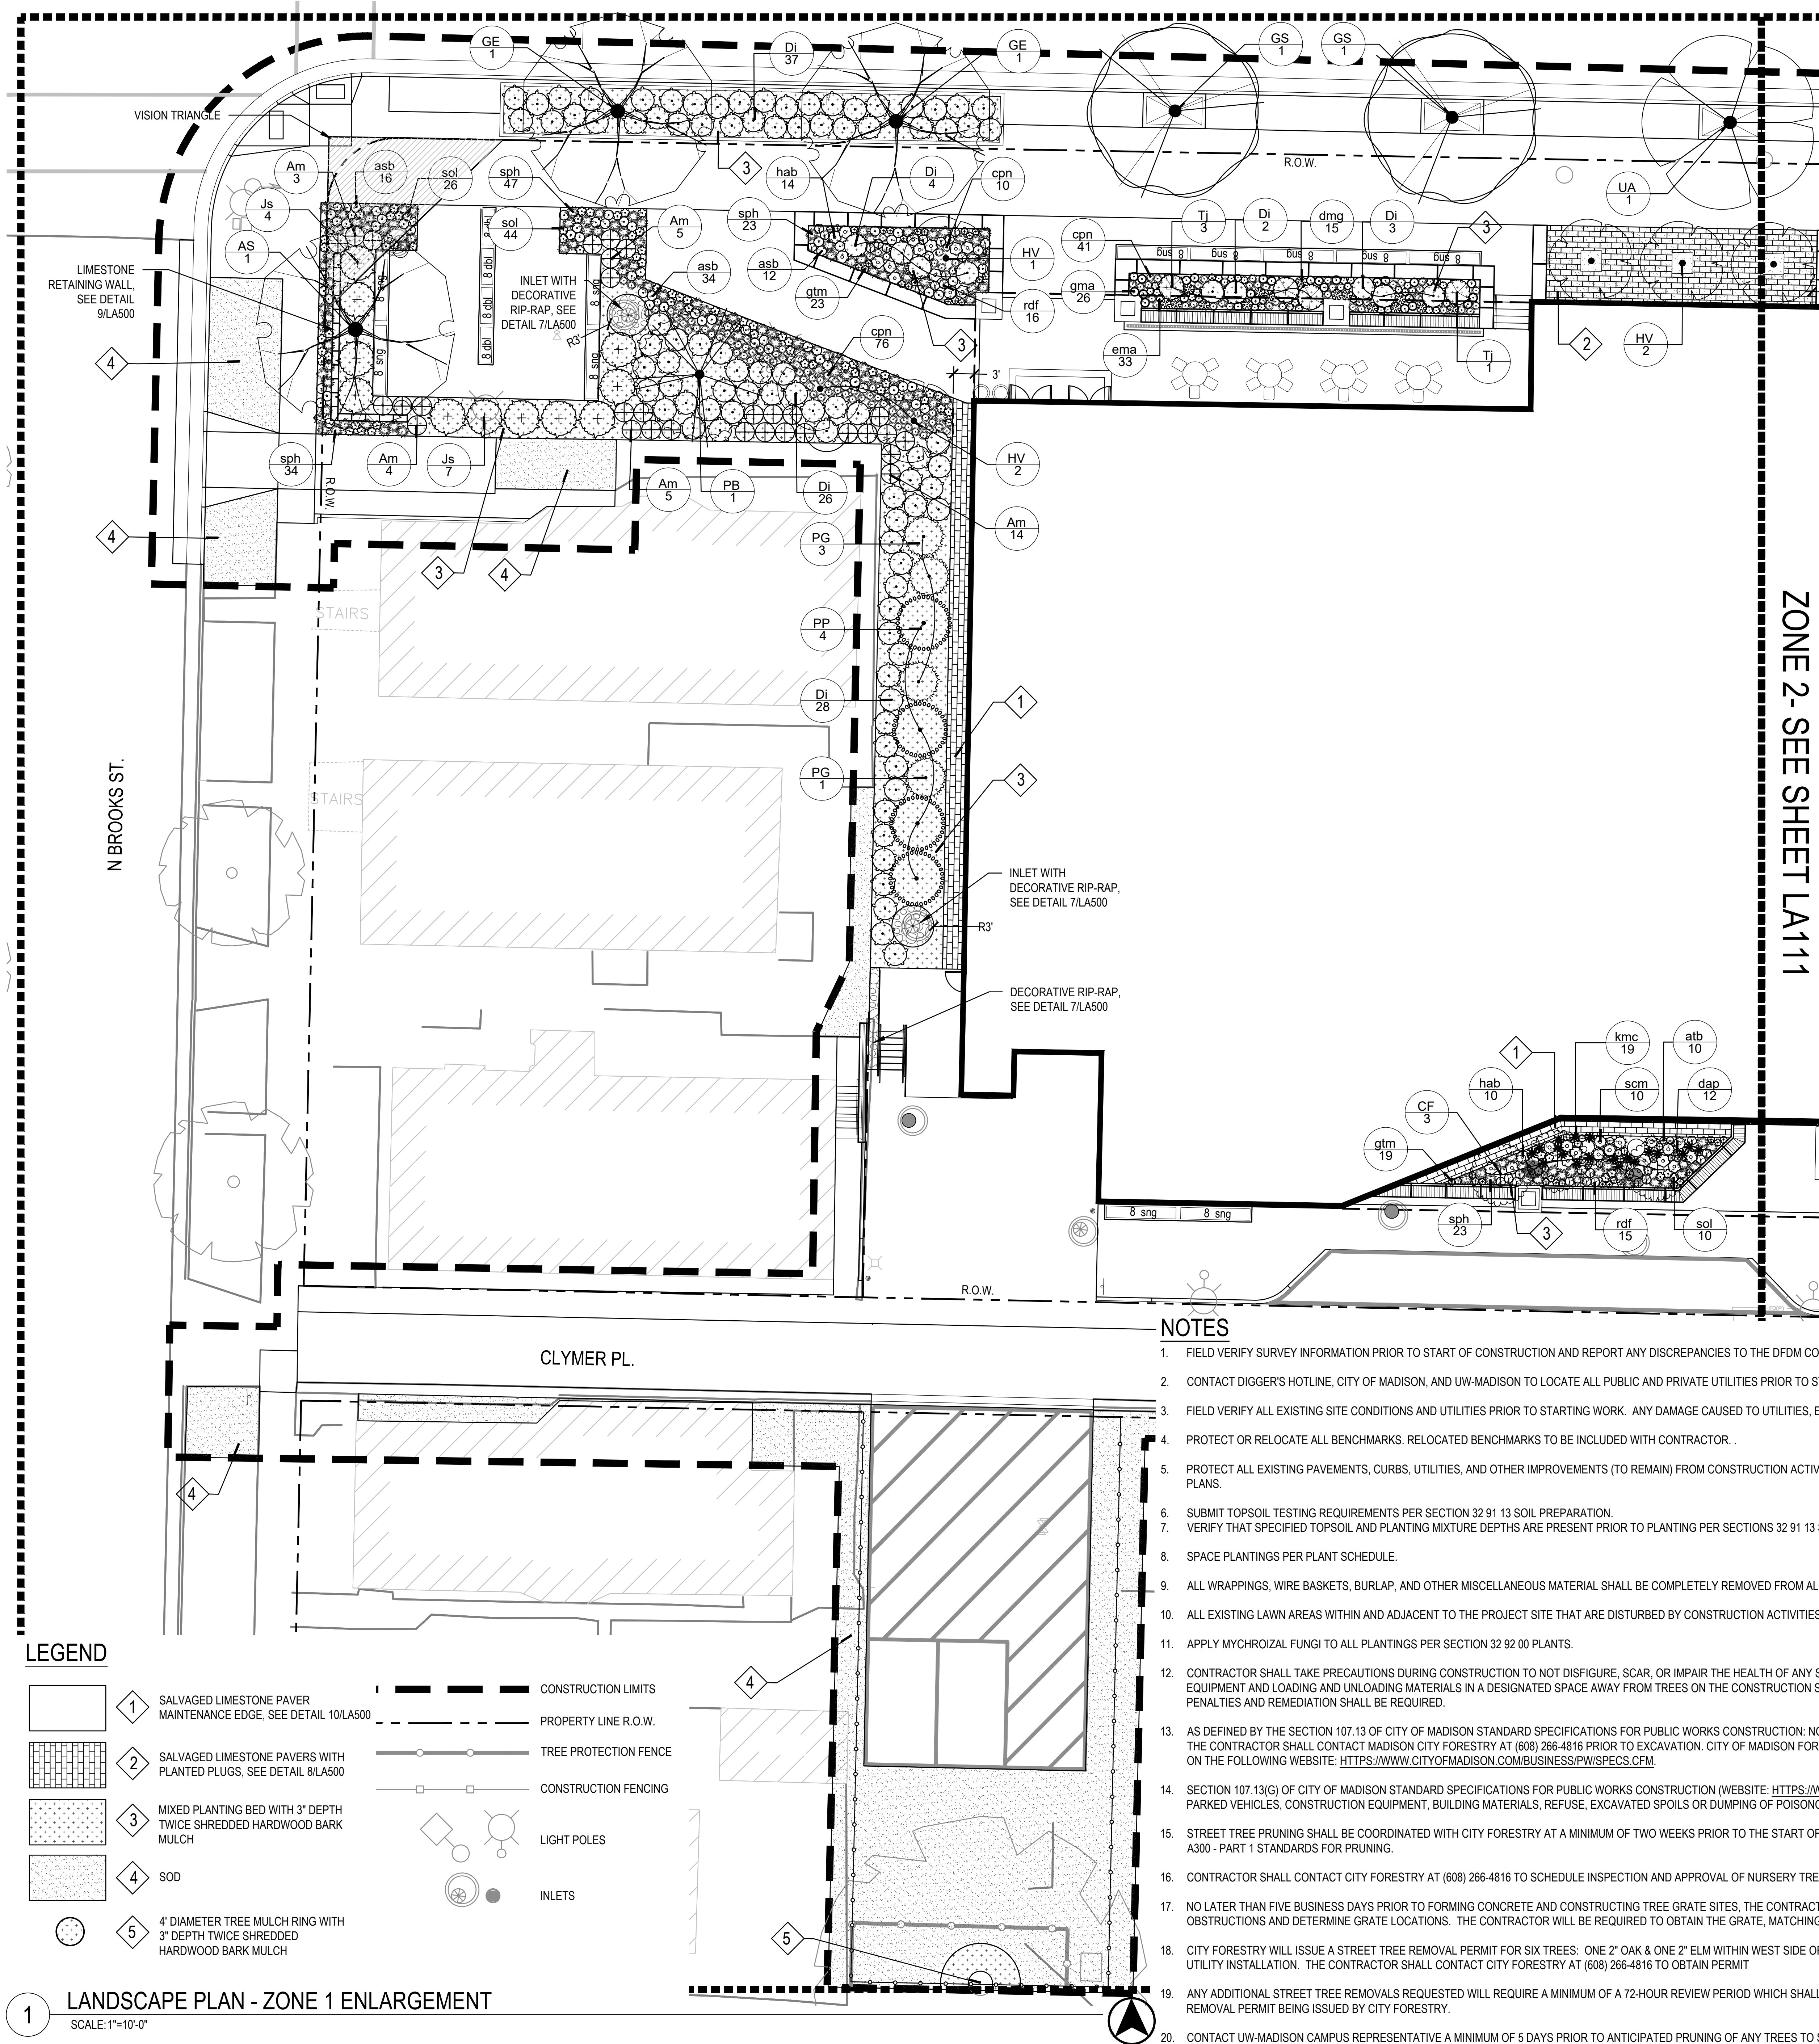

PLANT SCHEDULE					
EVERGREEN TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	PG	Picea glauca 'J.N. Select' / Midway White Spruce	B&B	6' HT (MIN.)	4
	PP	Picea glauca 'Pendula' / Weeping White Spruce	B&B	6' HT (MIN.)	4
	PB	Pinus strobus / White Pine	B&B	6' HT (MIN.)	1
ORNAMENTAL TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	CF	Carpinus caroliniana 'J.N. Upright' / Firespire Muscledwood	B&B	2" Cal	3
	HV	Hamamelis virginiana / Common Witch Hazel	B&B	2" Cal	5
SHADE TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	AS	Acer saccharum / Sugar Maple	B&B	2" Cal	1
	GS	Gleditsia triacanthos 'inermis' 'Shademaster' TM / Shademaster Honeylocust	B&B	2" Cal	2
	GE	Gymnocladus dioica 'Espresso' / Espresso Coffeetree	B&B	2" Cal	2
	UA	Ulmus americana 'Princeton' / Princeton American Elm	B&B	2" Cal	1
DECIDUOUS SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	Am	Aronia melanocarpa 'UCONAM166' / Low Scape Hedge® Black Chokeberry	5 gal	CONT.	31
	Di	Diervilla lonicera / Dwarf Bush Honeysuckle	3 gal	CONT.	100
EVERGREEN SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	Js	Juniperus chinensis 'Sea Green' / Sea Green Juniper	5 gal	CONT.	11
	Tj	Tsuga canadensis 'Jeddleloh' / Jeddleloh Eastern Hemlock	5 gal	CONT.	4
HERBACEOUS PERENNIALS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	asb	Allium tanguticum 'Summer Beauty' / Summer Beauty Allium	1 gal	CONT.	62
	atb	Asclepias tuberosa / Butterfly Milkweed	1 gal	CONT.	10
	dap	Dalea purpurea / Purple Prairie Clover	1 gal	CONT.	12
	dmg	Dryopteris marginalis / Marginal Shield Fern	1 gal	CONT.	15
	ema	Eurybia macrophylla / Bigleaf Aster	1 gal	CONT.	33
	gma	Geranium maculatum / Spotted Geranium	1 gal	CONT.	26
	gtm	Geum triflorum / Prairie Smoke	1 gal	CONT.	42
	halb	Heuchera macrozantha 'Autumn Bride' / Autumn Bride Coral Bells	1 gal	CONT.	24
	rdf	Rutbeckia fulgida 'Blow' / Viette's Little Suzy Cornflower	1 gal	CONT.	31
	sol	Symphyotrichum olerantiense / Sky Blue Aster	1 gal	CONT.	80
ORNAMENTAL GRASSES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	cpn	Carex pensylvanica / Pennsylvania Sedge	1 gal	CONT.	127
	kmc	Koeleria macrantha / Prairie Junegrass	1 gal	CONT.	19
	scm	Schizachyrium scoparium / Little Bluestem	1 gal	CONT.	10
	sph	Sporobolus heterolepis / Prairie Dropseed	1 gal	CONT.	127

- ## NOTES
1. FIELD VERIFY SURVEY INFORMATION PRIOR TO START OF CONSTRUCTION AND REPORT ANY DISCREPANCIES TO THE DFDM CONSTRUCTION REPRESENTATIVE.
 2. CONTACT DIGGER'S HOTLINE, CITY OF MADISON, AND UW-MADISON TO LOCATE ALL PUBLIC AND PRIVATE UTILITIES PRIOR TO STARTING WORK.
 3. FIELD VERIFY ALL EXISTING SITE CONDITIONS AND UTILITIES PRIOR TO STARTING WORK. ANY DAMAGE CAUSED TO UTILITIES, EITHER SHOWN OR NOT, SHALL BE REPAIRED AND PAID FOR AT THE CONTRACTOR'S EXPENSE.
 4. PROTECT OR RELOCATE ALL BENCHMARKS. RELOCATED BENCHMARKS TO BE INCLUDED WITH CONTRACTOR. .
 5. PROTECT ALL EXISTING PAVEMENTS, CURBS, UTILITIES, AND OTHER IMPROVEMENTS (TO REMAIN) FROM CONSTRUCTION ACTIVITIES. RESTORE ALL AREAS DISTURBED BY CONSTRUCTION RELATED ACTIVITIES TO EXISTING CONDITIONS AT COMPLETION OF WORK UNLESS SHOWN OTHERWISE ON PLANS.
 6. SUBMIT TOPSOIL TESTING REQUIREMENTS PER SECTION 32 91 13 SOIL PREPARATION.
 7. VERIFY THAT SPECIFIED TOPSOIL AND PLANTING MIXTURE DEPTHS ARE PRESENT PRIOR TO PLANTING PER SECTIONS 32 91 13 SOIL PREPARATION. NOTIFY DFD CONSTRUCTION REPRESENTATIVE OF ANY PROBLEMS.
 8. SPACE PLANTINGS PER PLANT SCHEDULE.
 9. ALL WRAPPINGS, WIRE BASKETS, BURLAP, AND OTHER MISCELLANEOUS MATERIAL SHALL BE COMPLETELY REMOVED FROM ALL SHRUB AND TREE ROOT BALLS PRIOR TO INSTALLATION.
 10. ALL EXISTING LAWN AREAS WITHIN AND ADJACENT TO THE PROJECT SITE THAT ARE DISTURBED BY CONSTRUCTION ACTIVITIES INCLUDING, BUT NOT LIMITED TO, UTILITY TRENCHING, ACCESS, OR MATERIALS STORAGE SHALL BE REPAIRED WITH SOD PER SECTION 32 92 23 SODDING.
 11. APPLY MYCHORIZAL FUNGI TO ALL PLANTINGS PER SECTION 32 92 00 PLANTS.
 12. CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREE(S). THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608) 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.
 13. AS DEFINED BY THE SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY AT (608) 266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/BUSINESS/PW/SPECS.CFM).
 14. SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/BUSINESS/PW/SPECS.CFM)) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.
 15. STREET TREE PRUNING SHALL BE COORDINATED WITH CITY FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. CONTACT CITY FORESTRY AT (608)266-4816. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 - PART 1 STANDARDS FOR PRUNING.
 16. CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO SCHEDULE INSPECTION AND APPROVAL OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS WITH THE LANDSCAPER AT LEAST ONE WEEK PRIOR TO STREET TREE PLANTING.
 17. NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONFLICTS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRATE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRATE, MATCHING FRAME AND/OR TREE GUARD. TREE GRATE TYPE AND MATCHING FRAME: NEENAH 4X8 (R-8815-A). TREE GUARD NEENAH (R-8501-4818).
 18. CITY FORESTRY WILL ISSUE A STREET TREE REMOVAL PERMIT FOR SIX TREES: ONE 2" OAK & ONE 2" ELM WITHIN WEST SIDE OF NORTH PARK STREET TERRACE, TWO 5" CRABAPPLES, ONE 4" CRABAPPLE & ONE 14" ELM WITHIN THE CENTER MEDIAN OF NORTH PARK STREET DUE TO UNDERGROUND UTILITY INSTALLATION. THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO OBTAIN PERMIT
 19. ANY ADDITIONAL STREET TREE REMOVALS REQUESTED WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHO'S DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO AN ADDITIONAL STREET TREE REMOVAL PERMIT BEING ISSUED BY CITY FORESTRY.
 20. CONTACT UW-MADISON CAMPUS REPRESENTATIVE A MINIMUM OF 5 DAYS PRIOR TO ANTICIPATED PRUNING OF ANY TREES TO SCHEDULE A REVIEW & CONSULTATION WITH CAMPUS GROUNDS STAFF PRIOR TO PERFORMING ANY PRUNING.

[illegible]



- FIELD VERIFY SURVEY INFORMATION PRIOR TO START OF CONSTRUCTION AND REPORT ANY DISCREPANCIES TO THE OFDM CONSTRUCTION REPRESENTATIVE.
- CONTACT DIGGER'S HOTLINE, CITY OF MADISON, AND UW-MADISON TO LOCATE ALL PUBLIC AND PRIVATE UTILITIES PRIOR TO STARTING WORK.
- FIELD VERIFY ALL EXISTING SITE CONDITIONS AND UTILITIES PRIOR TO STARTING WORK. ANY DAMAGE CAUSED TO UTILITIES, EITHER SHOWN OR NOT, SHALL BE REPAIRED AND PAID FOR AT THE CONTRACTOR'S EXPENSE.
- PROTECT OR RELOCATE ALL BENCHMARKS. RELOCATED BENCHMARKS TO BE INCLUDED WITH CONTRACTOR.
- PROTECT ALL EXISTING PAVEMENTS, CURBS, UTILITIES, AND OTHER IMPROVEMENTS (TO REMAIN) FROM CONSTRUCTION ACTIVITIES. RESTORE ALL AREAS DISTURBED BY CONSTRUCTION RELATED ACTIVITIES TO EXISTING CONDITIONS AT COMPLETION OF WORK UNLESS SHOWN OTHERWISE ON PLANS.
- SUBMIT TOPSOIL TESTING REQUIREMENTS PER SECTION 32 91 13 SOIL PREPARATION.
- VERIFY THAT SPECIFIED TOPSOIL AND PLANTING MIXTURE DEPTHS ARE PRESENT PRIOR TO PLANTING PER SECTIONS 32 91 13 SOIL PREPARATION. NOTIFY OFDM CONSTRUCTION REPRESENTATIVE OF ANY PROBLEMS.
- SPACE PLANTINGS PER PLANT SCHEDULE.
- ALL WRAPPINGS, WIRE BASKETS, BURLAP, AND OTHER MISCELLANEOUS MATERIAL SHALL BE COMPLETELY REMOVED FROM ALL SHRUB AND TREE ROOT BALLS PRIOR TO INSTALLATION.
- ALL EXISTING LAWN AREAS WITHIN AND ADJACENT TO THE PROJECT SITE THAT ARE DISTURBED BY CONSTRUCTION ACTIVITIES INCLUDING, BUT NOT LIMITED TO, UTILITY TRENCHING, ACCESS, OR MATERIALS STORAGE SHALL BE REPAIRED WITH SOD PER SECTION 32 92 23 SODDING.
- APPLY MYCHROIZAL FUNGI TO ALL PLANTINGS PER SECTION 32 92 00 PLANTS.
- CONTRACTOR SHALL TAKE PRECAUTIONS DURING CONSTRUCTION TO NOT DISFIGURE, SCAR, OR IMPAIR THE HEALTH OF ANY STREET TREE. CONTRACTOR SHALL OPERATE EQUIPMENT IN A MANNER AS TO NOT DAMAGE THE BRANCHES OF THE STREET TREE(S). THIS MAY REQUIRE USING SMALLER EQUIPMENT AND LOADING AND UNLOADING MATERIALS IN A DESIGNATED SPACE AWAY FROM TREES ON THE CONSTRUCTION SITE. ANY DAMAGE OR INJURY TO EXISTING STREET TREES (EITHER ABOVE OR BELOW GROUND) SHALL BE REPORTED IMMEDIATELY TO CITY FORESTRY AT (608) 266-4816. PENALTIES AND REMEDIATION SHALL BE REQUIRED.
- AS DEFINED BY THE SECTION 107.13 OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION: NO EXCAVATION IS PERMITTED WITHIN 5 FEET OF THE TRUNK OF THE STREET TREE OR WHEN CUTTING ROOTS OVER 3 INCHES IN DIAMETER. IF EXCAVATION IS NECESSARY, THE CONTRACTOR SHALL CONTACT MADISON CITY FORESTRY AT (608) 266-4816 PRIOR TO EXCAVATION. CITY OF MADISON FORESTRY PERSONNEL SHALL ASSESS THE IMPACT TO THE TREE AND TO ITS ROOT SYSTEM PRIOR TO WORK COMMENCING. TREE PROTECTION SPECIFICATIONS CAN BE FOUND ON THE FOLLOWING WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm).
- SECTION 107.13(G) OF CITY OF MADISON STANDARD SPECIFICATIONS FOR PUBLIC WORKS CONSTRUCTION (WEBSITE: [HTTPS://WWW.CITYOFMADISON.COM/BUSINESS/PW/SPECS.CFM](https://www.cityofmadison.com/business/pw/specs.cfm)) ADDRESSES SOIL COMPACTION NEAR STREET TREES AND SHALL BE FOLLOWED BY CONTRACTOR. THE STORAGE OF PARKED VEHICLES, CONSTRUCTION EQUIPMENT, BUILDING MATERIALS, REFUSE, EXCAVATED SPOILS OR DUMPING OF POISONOUS MATERIALS ON OR AROUND TREES AND ROOTS WITHIN FIVE (5) FEET OF THE TREE OR WITHIN THE PROTECTION ZONE IS PROHIBITED.
- STREET TREE PRUNING SHALL BE COORDINATED WITH CITY FORESTRY AT A MINIMUM OF TWO WEEKS PRIOR TO THE START OF CONSTRUCTION FOR THIS PROJECT. CONTACT CITY FORESTRY AT (608)266-4816. ALL PRUNING SHALL FOLLOW THE AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI) A300 - PART 1 STANDARDS FOR PRUNING.
- CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO SCHEDULE INSPECTION AND APPROVAL OF NURSERY TREE STOCK AND REVIEW PLANTING SPECIFICATIONS WITH THE LANDSCAPER AT LEAST ONE WEEK PRIOR TO STREET TREE PLANTING.
- NO LATER THAN FIVE BUSINESS DAYS PRIOR TO FORMING CONCRETE AND CONSTRUCTING TREE GRATE SITES, THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO IDENTIFY AND LOCATE UNDERGROUND CONFLICTS (UTILITIES, VAULTS, CONDUIT) OR OTHER UNDERGROUND OBSTRUCTIONS AND DETERMINE GRATE LOCATIONS. THE CONTRACTOR WILL BE REQUIRED TO OBTAIN THE GRATE, MATCHING FRAME AND/OR TREE GUARD. TREE GRATE TYPE AND MATCHING FRAME: NEENAH 4X8 (R-8815-A). TREE GUARD NEENAH (R-8501-4816).
- CITY FORESTRY WILL ISSUE A STREET TREE REMOVAL PERMIT FOR SIX TREES: ONE 2" OAK & ONE 2" ELM WITHIN WEST SIDE OF NORTH PARK STREET TERRACE, TWO 5" CRABAPPLES, ONE 4" CRABAPPLE & ONE 14" ELM WITHIN THE CENTER MEDIAN OF NORTH PARK STREET DUE TO UNDERGROUND UTILITY INSTALLATION. THE CONTRACTOR SHALL CONTACT CITY FORESTRY AT (608) 266-4816 TO OBTAIN PERMIT
- ANY ADDITIONAL STREET TREE REMOVALS REQUESTED WILL REQUIRE A MINIMUM OF A 72-HOUR REVIEW PERIOD WHICH SHALL INCLUDE THE NOTIFICATION OF THE ALDERPERSON WITHIN WHO'S DISTRICT IS AFFECTED BY THE STREET TREE REMOVAL(S) PRIOR TO AN ADDITIONAL STREET TREE REMOVAL PERMIT BEING ISSUED BY CITY FORESTRY.
- CONTACT UW-MADISON CAMPUS REPRESENTATIVE A MINIMUM OF 5 DAYS PRIOR TO ANTICIPATED PRUNING OF ANY TREES TO SCHEDULE A REVIEW & CONSULTATION WITH CAMPUS GROUNDS STAFF PRIOR TO PERFORMING ANY PRUNING.

EVERGREEN TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	PG	<i>Picea glauca</i> 'N Select' / Midway White Spruce	8&B	6' HT (MIN.)	7
	PP	<i>Picea glauca</i> 'Pendula' / Weeping White Spruce	8&B	6' HT (MIN.)	4
ORNAMENTAL TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	AR	<i>Amelanchier x grandiflora</i> 'Robin Hill' / Robin Hill Serviceberry	8&B	6' HT (MIN.) UPRIGHT MULTI-STEM	1
	CF	<i>Carpinus caroliniana</i> 'J.N. Upright' / Firespire Muscadewood	8&B	2" Cal	3
	HV	<i>Hamelis virginiana</i> / Common Witch Hazel	8&B	2" Cal	1
SHADE TREES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	CS	<i>Catalpa speciosa</i> / Northern Catalpa	8&B	2" Cal	1
	GS	<i>Gleditsia triacanthos inermis</i> 'Shademaster' TM / Shademaster Honeylocust	8&B	2" Cal	1
	PT	<i>Populus tremuloides</i> / Quaking Aspen	8&B	2" Cal	6
	QR	<i>Quercus muehlenbergii</i> / Chinkapin Oak	8&B	2" Cal	2
	TD	<i>Taxodium distichum</i> / Bald Cypress	8&B	2" Cal	2
	UN	<i>Ulmus americana</i> 'New Harmony' / New Harmony American Elm	8&B	2" Cal	1
	UA	<i>Ulmus americana</i> 'Princeton' / Princeton American Elm	8&B	2" Cal	1
DECIDUOUS SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	DI	<i>Diervilla lonicera</i> / Dwarf Bush Honeysuckle	3 gal	CONT.	53
EVERGREEN SHRUBS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	Jp	<i>Juniperus chinensis</i> 'Pfitzeriana Kalley' / Kallays Compact Pfitzer Juniper	5 gal	CONT.	13
	Tj	<i>Tsuga canadensis</i> 'Jeddeth' / Jeddeth Eastern Hemlock	5 gal	CONT.	7
HERBACEOUS PERENNIALS	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	abi	<i>Amsonia tabernaemontana</i> 'Blue Ice' / Blue Ice Blue Star	1 gal	CONT.	71
	atb	<i>Asclepias tuberosa</i> / Butterfly Milkweed	1 gal	CONT.	10
	dmg	<i>Dryopteris marginalis</i> / Marginal Shield Fern	1 gal	CONT.	33
	ema	<i>Eurybia macrophylla</i> / Bigleaf Aster	1 gal	CONT.	65
	gma	<i>Geranium maculatum</i> / Spotted Geranium	1 gal	CONT.	93
	gtm	<i>Geum triflorum</i> / Prairie Smoke	1 gal	CONT.	13
	hab	<i>Heuchera macrobriza</i> 'Autumn Bride' / Autumn Bride Coral Bells	1 gal	CONT.	36
	rdl	<i>Ruzbeckia fulgida</i> 'Blow' / Viette's Little Suzy Coneflower	1 gal	CONT.	11
ORNAMENTAL GRASSES	CODE	BOTANICAL / COMMON NAME	CONT.	SIZE	QTY
	cpn	<i>Carex pensylvanica</i> / Pennsylvania Sedge	1 gal	CONT.	219
	kmc	<i>Koeleria macrantha</i> / Prairie Junegrass	1 gal	CONT.	7
	sph	<i>Sporobolus heterolepis</i> / Prairie Dropseed	1 gal	CONT.	17

		1 SALVAGED LIMESTONE PAVER MAINTENANCE EDGE, SEE DETAIL 10/LA500
		2 SALVAGED LIMESTONE PAVERS WITH PLANTED PLUGS, SEE DETAIL 8/LA500
		3 MIXED PLANTING BED WITH 3" DEPTH SHREDDED HARDWOOD BARK MULCH
		4 SOD
		5 4" DIAMETER TREE MULCH RING WITH 3" DEPTH TWICE SHREDDED HARDWOOD BARK MULCH

	CONSTRUCTION LIMITS
	PROPERTY LINE R.O.W.
	TREE PROTECTION FENCE
	CONSTRUCTION FENCING
	LIGHT POLES
	INLETS