




eppstein uhen : architects
 milwaukee 333 East Chicago Street
 Milwaukee, Wisconsin 53202
 tel 414 271 5350 fax 414 271 7794
 madison 222 West Washington Ave, Suite 650
 Madison, Wisconsin 53703
 tel 608 442 5350 fax 608 442 6680

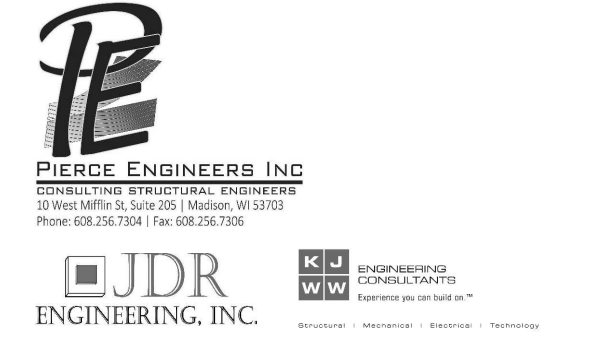

PROJECT INFORMATION

**FIRE DEPARTMENT
 ADMIN OFFICES AND
 ALTERATIONS TO
 FIRE STATION #1**

316 West Dayton St.
 Madison, WI 53703




ISSUANCE AND REVISIONS

**95% CONSTRUCTION
 DOCUMENTS - CITY
 REVIEW**

REVISIONS

#	DATE	DESCRIPTION

KEY PLAN

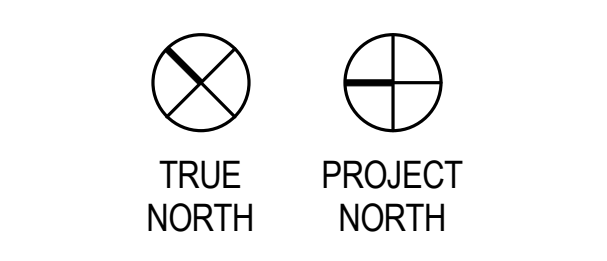

SHEET INFORMATION

PROGRESS DOCUMENTS

These documents reflect progress and intent and may be subject to change, including additional detail. These are not final construction documents and should not be used for final bidding or construction-related purposes.

PROJECT MANAGER	CG
PROJECT NUMBER	12149
DATE	06/20/2014

**FIRE STATION 1
 THIRD FLOOR AND
 PENTHOUSE PLAN**

A103


KEYNOTES PER SHEET	
01-01	ALIGN
0241-33	REMOVE AND REFURBISH EXISTING FLOOR HATCH, HANDRAIL & HARDWARE FOR REINSTALLATION
0721-05	SPRAY-APPLIED POLYURETHANE FOAM INSULATION
0921-01	5/8" TYPE X GYPSUM WALLBOARD
1044-01	SEMI-RECESSED FIRE EXTINGUISHER CABINET
B2010-02	3-COAT STUCCO SYSTEM ON GALV. METAL LATH OVER 1" RIGID INSULATION OVER EXTERIOR SHEATHING ON 4" STEEL STUD W/ R30 CLOSED CELL SPRAY FOAM INSULATION AND GWS
B2010-03	METAL PANEL SCREEN WALL ON TUBE STEEL STRUCTURE
B3020-04	INFILL HOLES AND/OR OPENINGS IN ROOF FROM VENTS, FANS AND MOTORS THAT WERE REMOVED.

CLEANING GENERAL NOTE

ALL EXISTING FIXTURES, FITTINGS, FLOOR AND WALL SURFACES IN EVERY ROOM OF FIRE STATION #1 NOT REQUIRING NEW PAINT OR SURFACINGS SHALL BE THOROUGHLY CLEANED AND, WHERE APPROPRIATE, POLISHED USING CLEANING AGENTS AND METHODS RESULTING IN A LIKE-NEW APPEARANCE.

FLOOR PLAN GENERAL NOTES

- ALL CMU EXPOSED TO ROOMS IN FIRE STATION #1 SHALL BE STACK BOND.
- ALL NEW WALLS SHALL BE TYPE S3A 11, UNLESS NOTED OTHERWISE. SEE WALL TYPES A000.

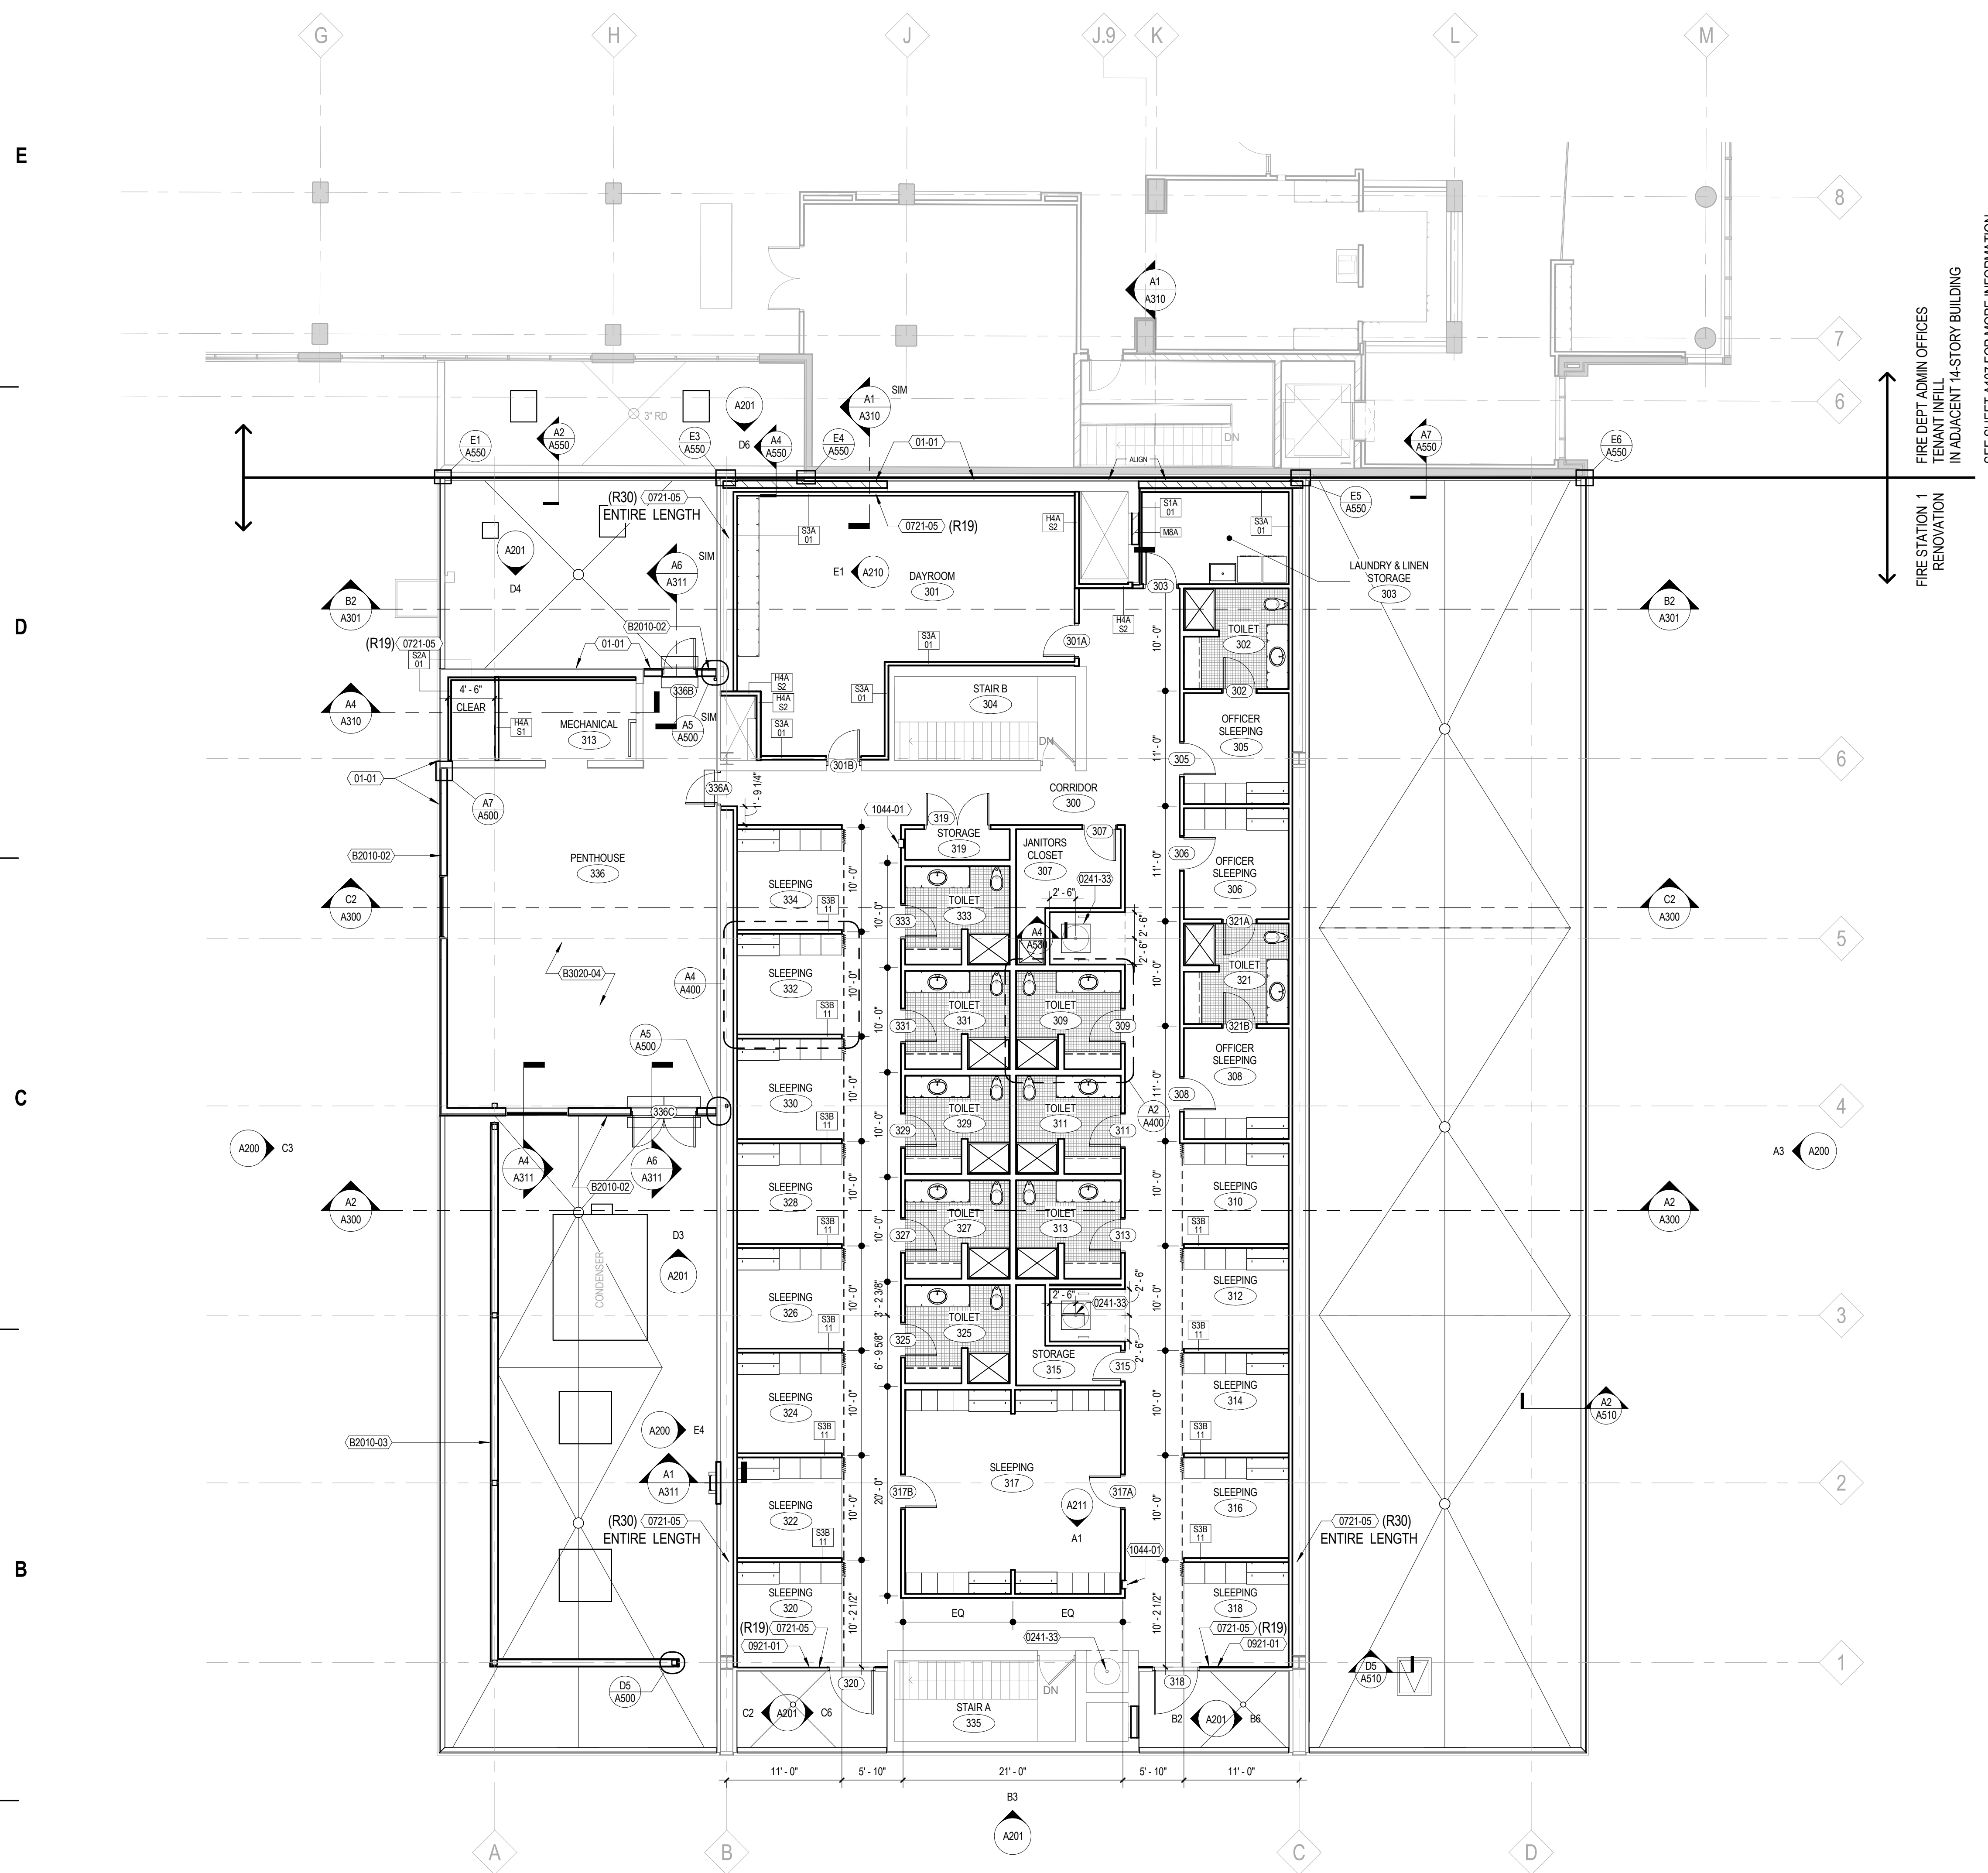

A2 STATION 1 THIRD FLOOR PLAN
 1/8" = 1'-0"