


W Dayton St, N Carroll St Assessment District - 2011
Project Engineer Chris Petykowski 267-8678

Project Limits	E Dayton St	from Wisconsin Ave to State St
Alder: Verveer	N Carroll St	from W Mifflin St to W Johnson St

Street	Existing	Proposed
Project Type		Pavement Replacement & Utility
Last Surfaced	1975, 1989	
Pavement Rating	5, 7	
Curb Rating	6, 7	
Width	Varies	Same
Surface Type	Asphalt	Asphalt
Traffic (Average Vehicles per Day)	8500	

Sidewalk	Existing	Proposed
Work Required		Replace As Necessary

Storm Sewer	Existing	Proposed
Work Required		Inlet Replacement as necessary
Size	varies	
Material	varies	
Year	varies	

Sanitary Sewer	Existing	Proposed
Work Required		Replace as necessary
Size	6" & 8"	8" & 10"
Material	VP	PVC
Year	varies - 1908 oldest	

Water Main	Existing	Proposed
Work Required		Abandon 4 Inch Main
Size	4 Inch, 10 Inch	
Material	Cast Iron, Ductile Iron	Ductile Iron
Year	1922 & 1963	

Parking	Existing	Proposed
Parking Conditions	Metered	same

Street Lighting	Existing	Proposed
Street Lighting	On Steel Poles	New Area & Ped Lights

Cost	
Total Cost	\$1,066,000
Adjacent Property Assessments	\$236,000
City Share	\$830,000

Assessment Policy

Street Concrete Items	Owner 50% / City 50%
Sanitary Sewer Lateral Replacements	Owner 25% / City 75%
Lighting	Owner 100% on Ped Lighting


Assessments payable in one lump sum or over a period of 8 years, with 2.5% interest charged on unpaid balance
All remaining contract items to be paid for by the City of Madison

Schedule

Start Date	1-Apr-11
Length of Project	27-May-11

Correspondence	None
-----------------------	------

Location Map

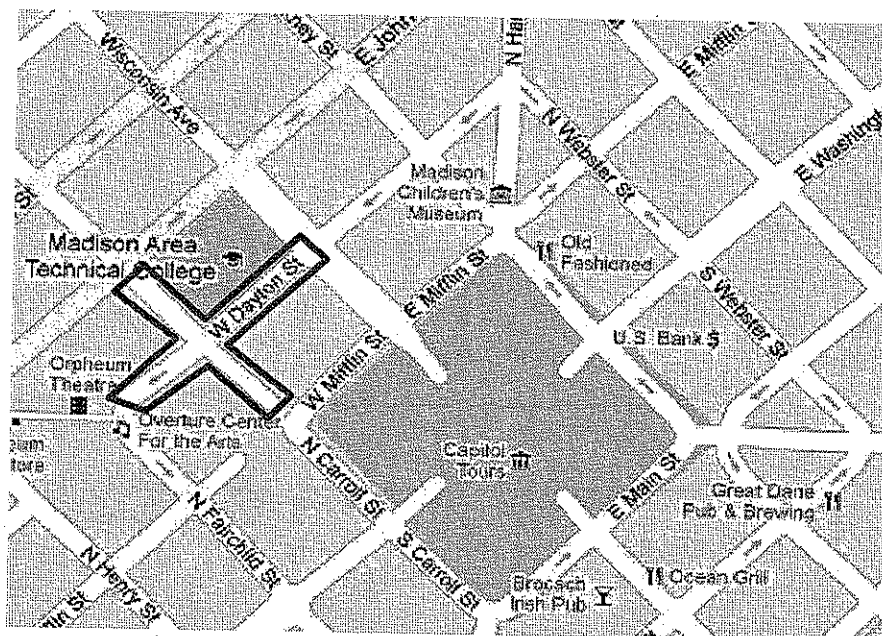

Source: Google Maps