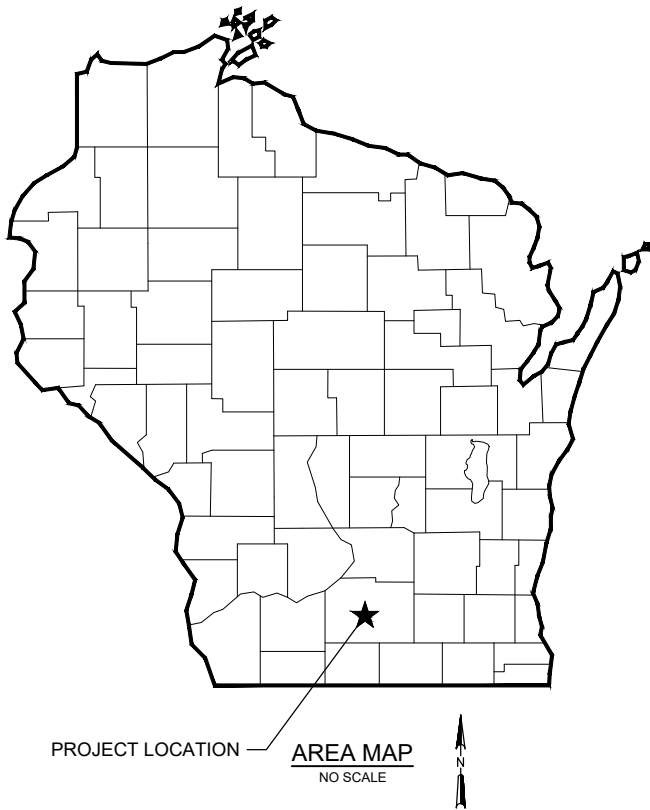


PLAENERT DRIVE TREE CLEARING
FOR
STRAND ASSOCIATES, INC.
MADISON, WI



PROJECT LOCATION MAP
NO SCALE



DRAWING LIST	
SHEET NO.	SHEET TITLE
1	TITLE
2	GENERAL NOTES AND LEGEND
3	EROSION CONTROL DETAILS
4	EROSION CONTROL PLAN
5	CLEARING AND GRUBBING PLAN
6	RESTORATION PLAN
7	EXISTING DITCH CROSS SECTIONS

Strand Associates, Inc.
910 West Wingra Drive
Madison, WI 53715
608-251-4843
www.strand.com

INTERNAL CONTRACT



PLAN SUBMISSION

SHEET
1

PROJECT CONTACTS

STRAND ASSOCIATES INC.

910 WEST WINGRA DRIVE
MADISON, WI 53715
CONTACT: RYAN RUFF
OFFICE: 608-817-4047
RYAN.RUFF@STRAND.COM

CITY OF MADISON PARKS DEPT.

330 E. LAKESIDE STREET
MADISON, WI 53715
CONTACT: CHAD HUGHES
OFFICE: 608-267-8804
CMHUGHES@CITYOFMADISON.COM

WRIGHT MIDDLE SCHOOL

1717 FISH HATCHERY ROAD
MADISON, WI 53713
CONTACT: JAIMI NORIEGA
OFFICE: 608-267-8804
JENORIEGA@MADISON.K12.WI.US

ALLIANT ENERGY

2147 CO HWY PB
VERONA, WI 53593
CONTACT: NICK NIEMANN
OFFICE: 608-845-1105
NICHOLASNIEMANN@ALLIANTENERGY.COM

AT&T WISCONSIN

152 DIXON STREET
MADISON, WI 53704
CONTACT: RYAN DENEWELLIS
OFFICE: 608-252-2879
RD1238@ATT.COM

CHARTER COMMUNICATIONS CO.

2701 DANIELS STREET
MADISON, WI 53718
CONTRACT: NEIL HUNTAMER
OFFICE: 608-219-1321
NEIL.HUNTAMER@CHARTER.COM

LEGEND

EXISTING

	EXISTING RIGHT OF WAY
	EXISTING PROPERTY LINE
	EXISTING GAS LINE
	EXISTING SANITARY SEWER
	EXISTING WATER MAIN
	EXISTING STORM SEWER
	EXISTING TELEPHONE LINE
	EXISTING UNDERGROUND ELECTRIC LINE
	EXISTING OVERHEAD ELECTRIC LINE
	EXISTING FIBER OPTIC LINE
	EXISTING FENCE
	CONTROL POINT
	EXISTING BENCHMARK
	SOIL BORING
	EXISTING DECIDUOUS/CONIFEROUS TREE
	EXISTING TREE STUMP
	EXISTING MANHOLE
	EXISTING INLET
	EXISTING CATCH BASIN
	EXISTING POWER POLE
	EXISTING LIGHT POLE
	EXISTING SIGN
	EXISTING GAS VALVE
	EXISTING WATER VALVE
	EXISTING WATER MANHOLE
	EXISTING FIRE HYDRANT

PROPOSED

	PROPOSED GAS LINE
	PROPOSED SANITARY SEWER
	PROPOSED WATER MAIN
	PROPOSED WATER MAIN W/ CASING
	PROPOSED STORM SEWER
	PROPOSED TELEPHONE LINE
	PROPOSED UNDERGROUND ELECTRIC LINE
	PROPOSED FIBER OPTIC LINE
	PROPOSED FENCE
	PROPOSED SILT FENCE
	PROPOSED SHEET PILING
	PROPOSED INLET PROTECTION
	PROPOSED END CAP
	PROPOSED WATER VALVE
	PROPOSED FIRE HYDRANT
	PROPOSED SANITARY SEWER MANHOLE
	PROPOSED STORM SEWER MANHOLE
	PROPOSED INLET

GENERAL NOTES AND LEGEND

PLAENERT DRIVE TREE CLEARING
CITY OF MADISON
DANE COUNTY, WISCONSIN

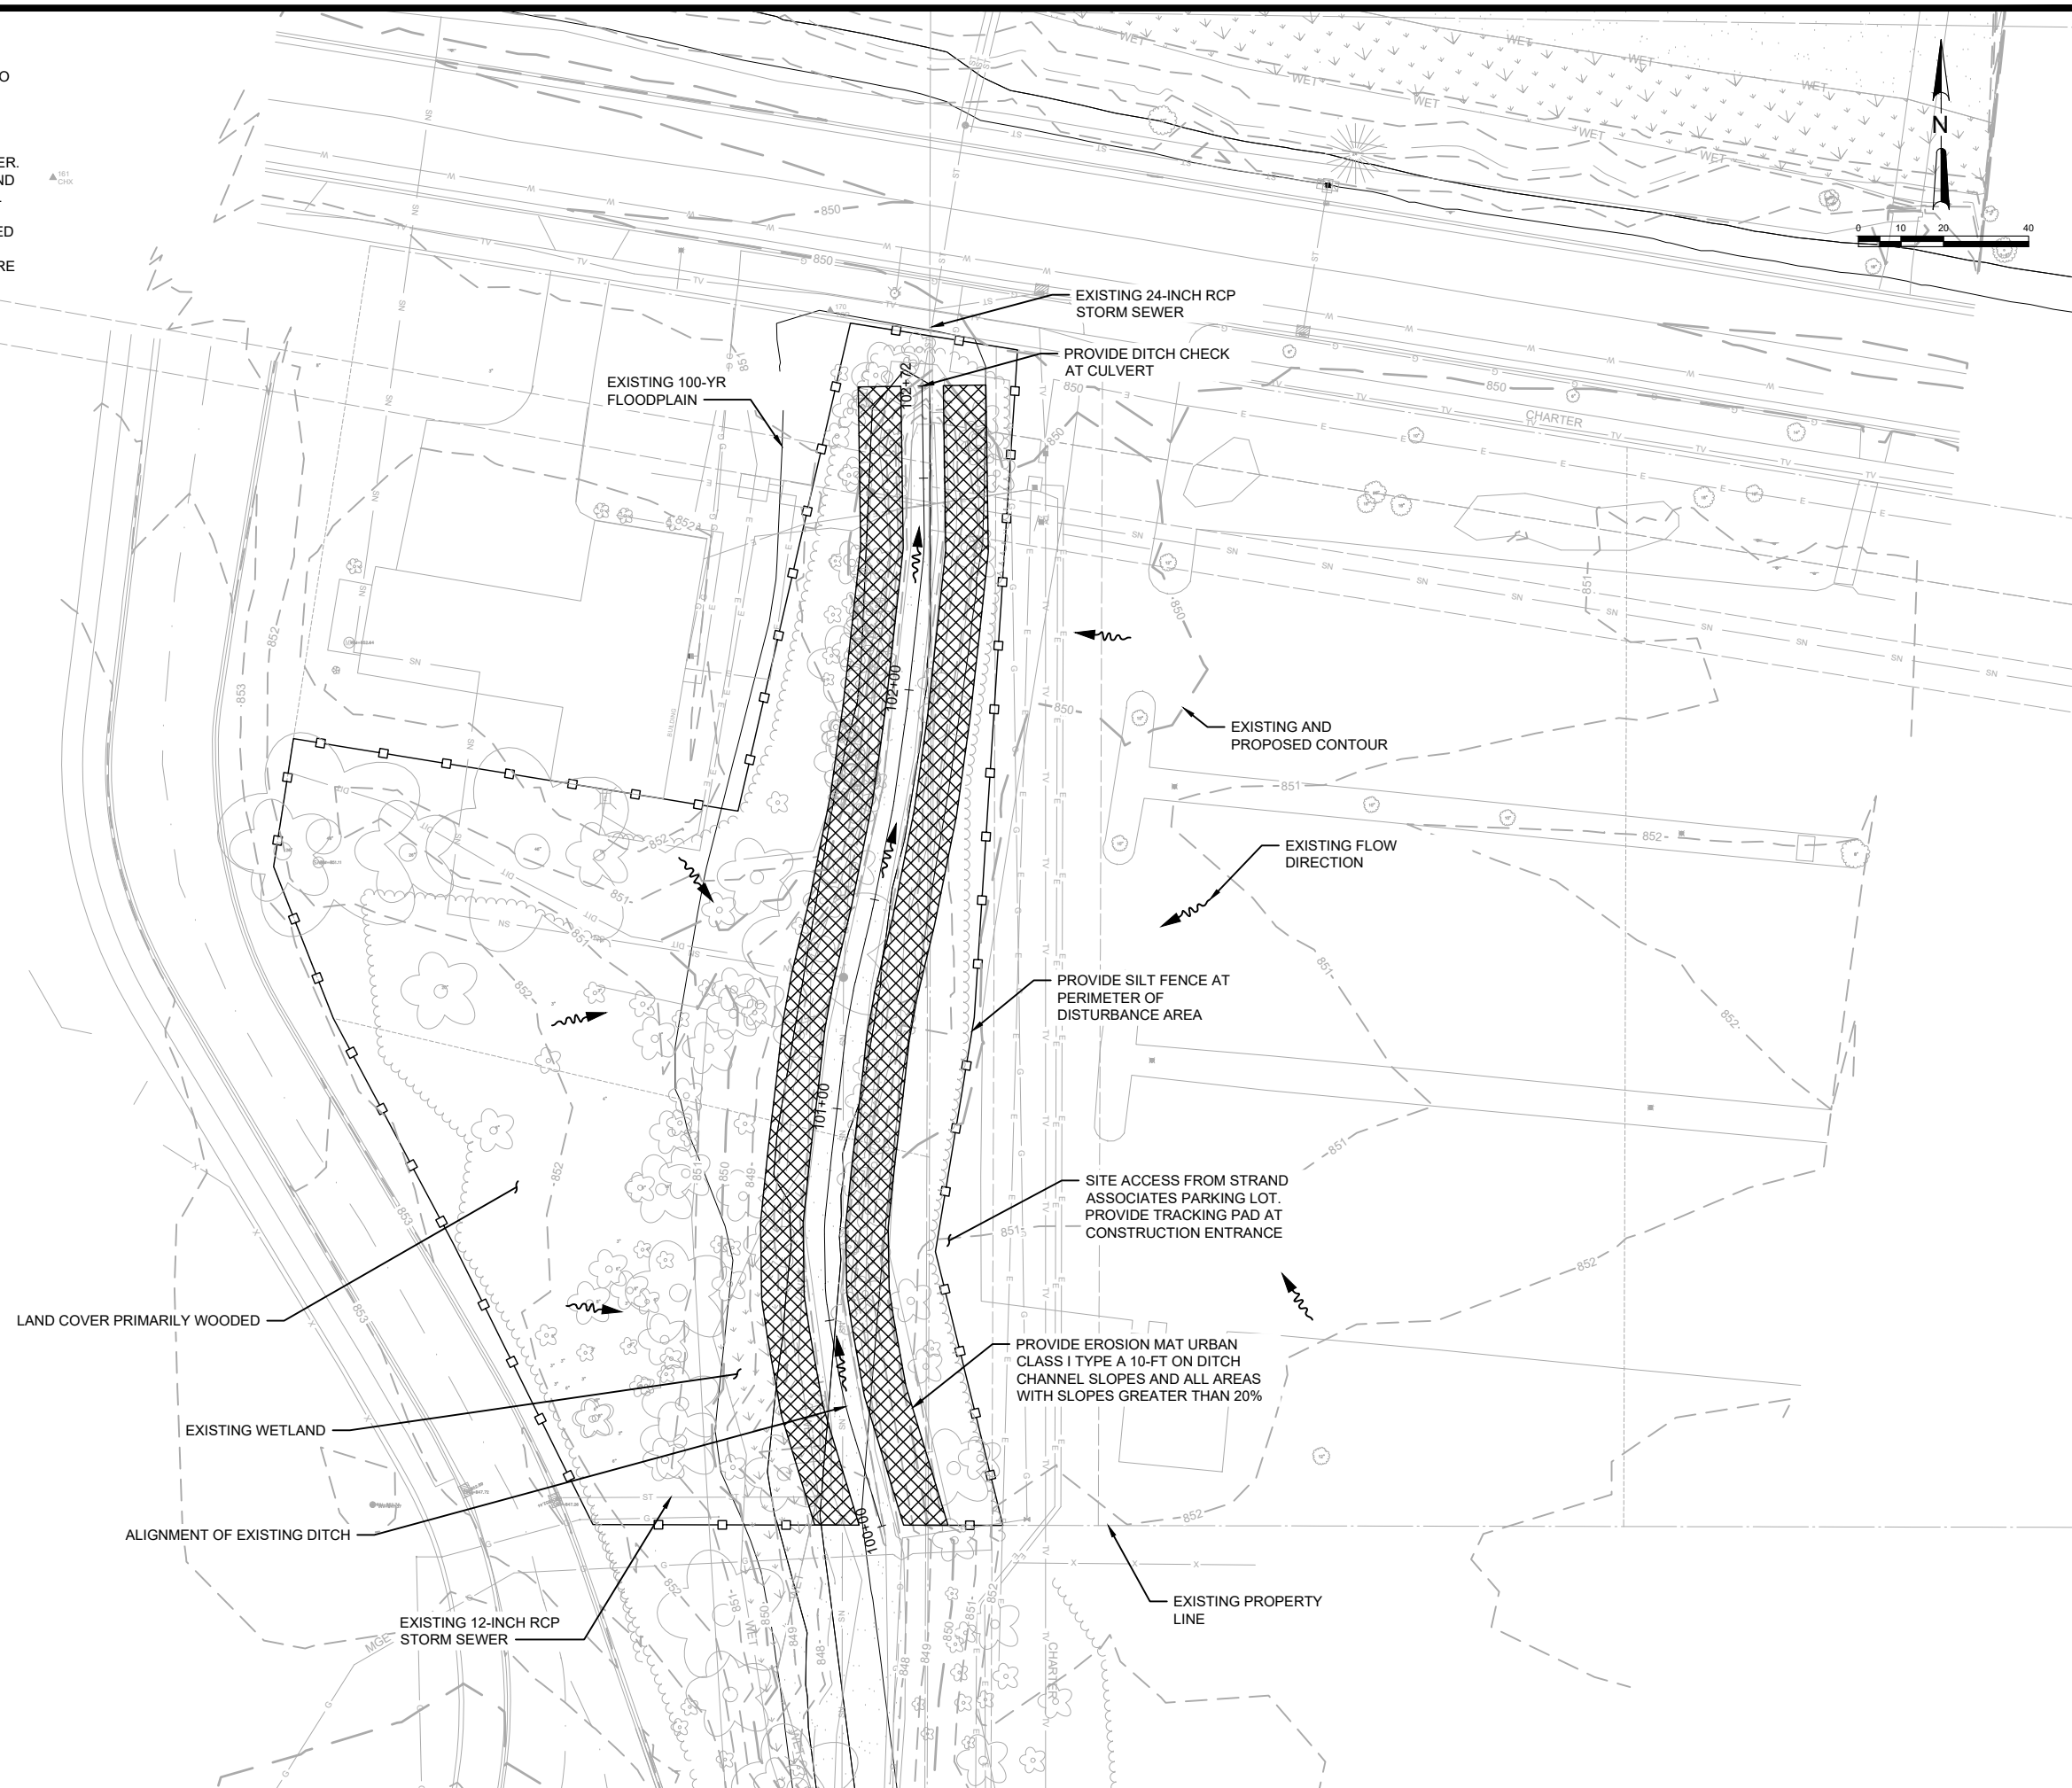
JOB NO.
1121.166

PROJECT MGR.
RRR

STRAND ASSOCIATES®

SHEET
2

1. EROSION CONTROL MEASURES SHALL BE IN PLACE PRIOR TO ANY OTHER CONSTRUCTION ACTIVITY.
2. POST EROSION CONTROL PERMIT ON-SITE.
3. CONTRACTOR IS RESPONSIBLE FOR ROUTINE SITE INSPECTION AT LEAST ONCE EVERY 7 DAYS AND WITHIN 24 HOURS AFTER A RAINFALL EVENT OF 0.5-INCHES OR GREATER.
4. CONTRACTOR IS RESPONSIBLE FOR THE CONSTRUCTION AND MAINTENANCE OF ALL EROSION CONTROL MEASURES UNTIL FINAL ACCEPTANCE.
5. CONTRACTOR SHALL PROVIDE STREET CLEANING AS NEEDED ON A DAILY BASIS TO KEEP TRACKING TO A MINIMUM
6. POLYMER SHALL BE APPLIED TO DISTURBED AREAS THAT ARE NOT RESTORED WITHIN 7 DAYS OR AS DIRECTED BY THE ENGINEER.

[illegible]

EROSION CONTROL PLAN

**PLAENERT DRIVE TREE CLEARING
CITY OF MADISON
DANE COUNTY, WISCONSIN**

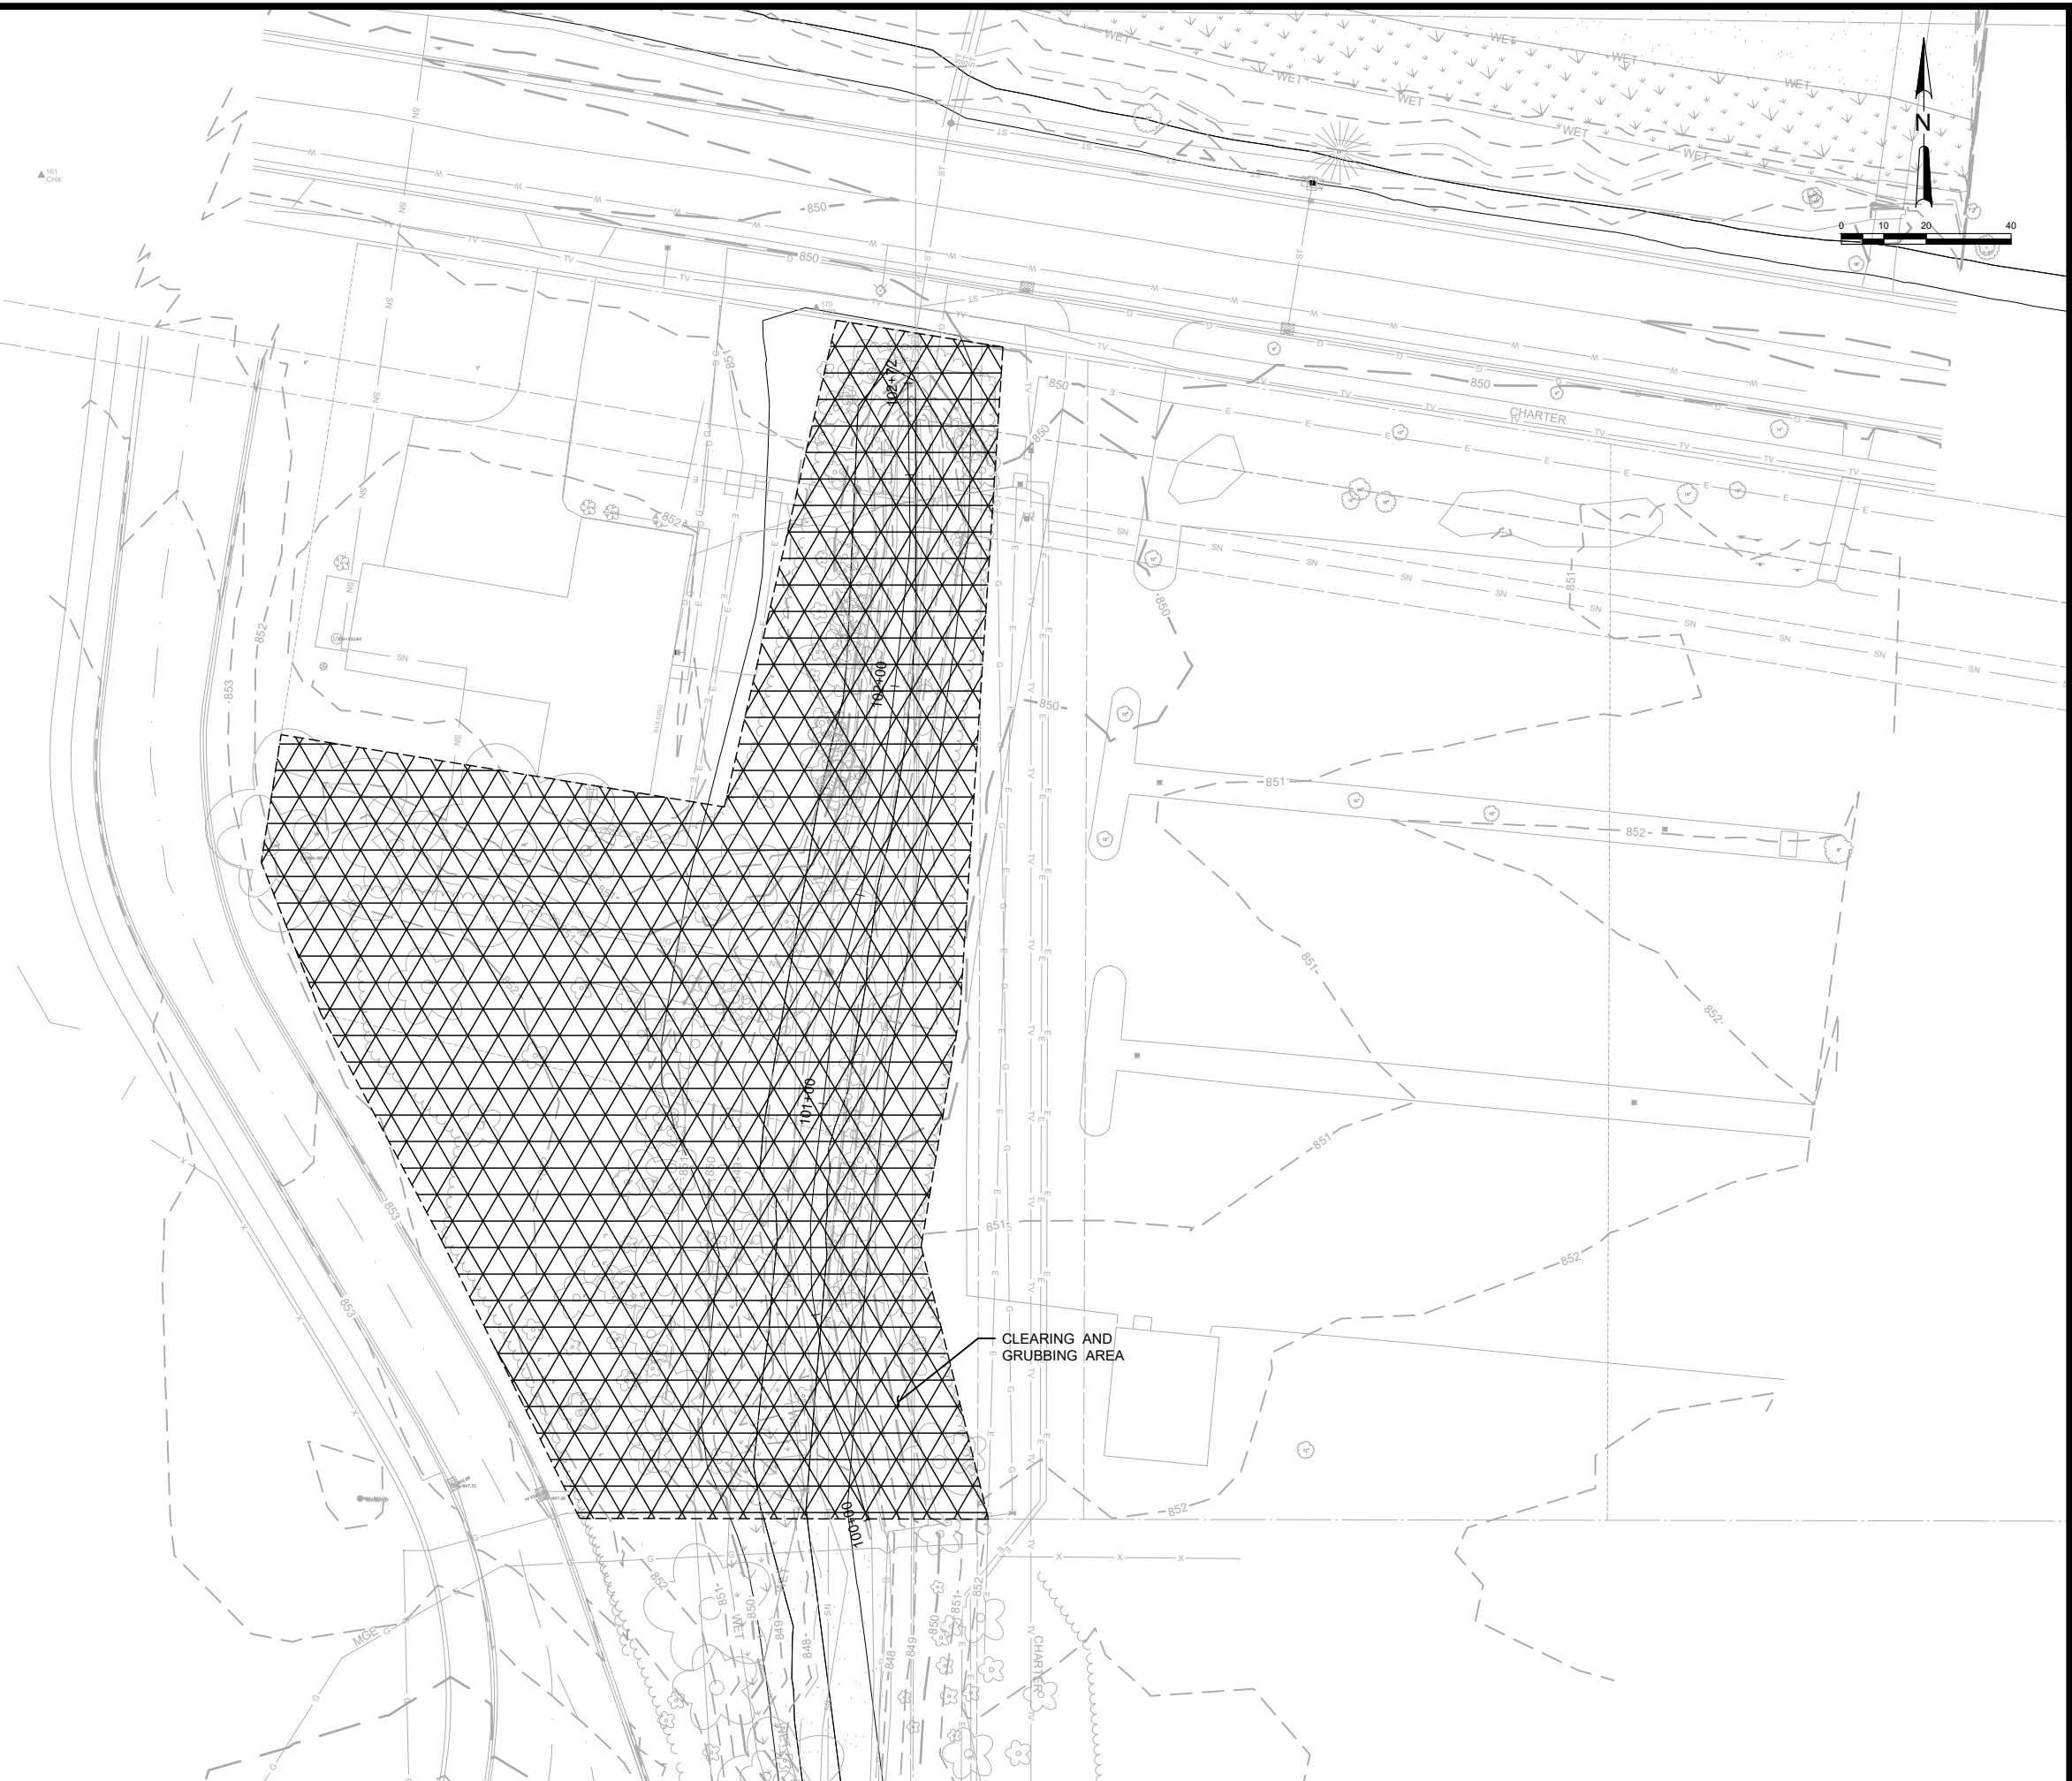
JOB NO.
1121.166

PROJECT MGR.
RRR



SHEET
4

1. ALL TREE STUMPS SHALL BE COMPLETELY REMOVED BY EXCAVATION AT LEAST 12-INCHES BELOW THE ORIGINAL GROUND AREA.
2. CONTRACTOR SHALL PROVIDE A DISPOSAL AREA FOR ALL TREES, STUMPS, LIMBS, BRUSH AND VEGETATION FROM THE PROJECT. CHIPS MUST BE REMOVED FROM THE SITE.
3. STUMPS, ROOTS, BRUSH, LOGS, LIMBS, AND OTHER DEBRIS RESULTING FROM CLEARING AND GRUBBING SHALL NOT BE BURNED.
4. DO NOT REMOVE TREES AND SHRUBS LOCATED BEYOND THE CLEARING LIMITS UNLESS THE ENGINEER SPECIFICALLY AUTHORIZES THEIR REMOVAL.

[illegible]

**PLAENERT DRIVE TREE CLEARING
CITY OF MADISON
DANE COUNTY, WISCONSIN**

PROJECT MGR.
RRR



SHEET
5

1. RESTORATION SHALL CONFORM TO CITY OF MADISON SPECIFICATIONS.
2. THE SITE SHALL BE GRADED TO MAINTAIN THE ORIGINAL TOPOGRAPHY. NO FILL IS PERMITTED IN WETLAND OR FLOODPLAIN AREAS.
3. ALL AREAS TO BE SEEDDED SHALL BE LIGHTLY WORKED TO CREATE A SEEDBED SUITABLE FOR GERMINATION AND GROWTH OF VEGETATION. EXISTING WEEDS, DEBRIS, AND OTHER FOREIGN MATTER SHALL BE REMOVED AND PROPERLY DISPOSED OF BY THE CONTRACTOR AS NECESSARY FOR GOOD SOIL TO SEED CONTACT. THE CONTRACTOR SHALL SUBMIT THEIR SEEDING PLAN TO THE ENGINEER FOR REVIEW AND APPROVAL PRIOR TO COMMENCING SEED INSTALLATION.
4. WOODY AND HERBACEOUS CONTROL WORK SHALL INCLUDE NOT LESS THAN THREE FOLLOW UP MAINTENANCE VISITS CONDUCTED APPROXIMATELY THIRTY, SIXTY, AND NINETY DAYS FOLLOWING CLEARING AND GRUBBING TO TREAT ANY RE-SPROUTS AND/OR NEW SEEDLINGS. ALL MAINTENANCE VISITS MUST BE CONDUCTED DURING THE GENERALLY RECOGNIZED GROWING SEASON WHILE THE VEGETATION IS ACTIVELY GROWING AND NOT DORMANT.


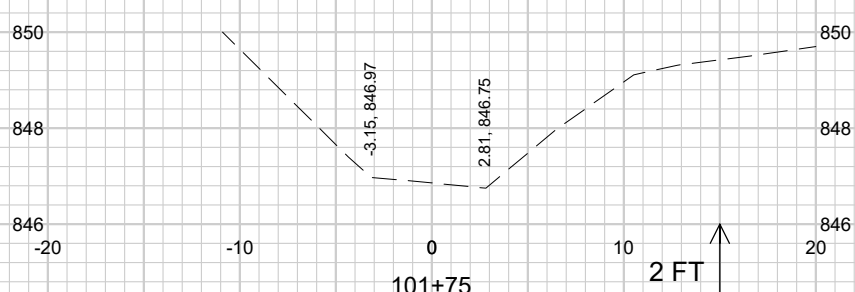
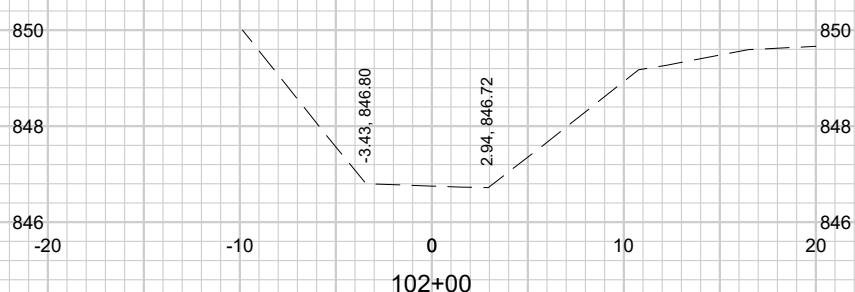
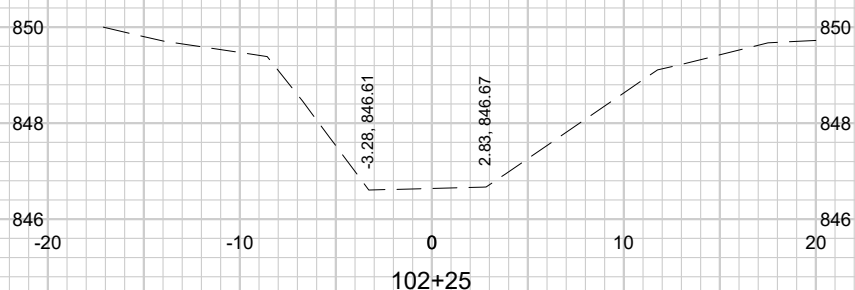
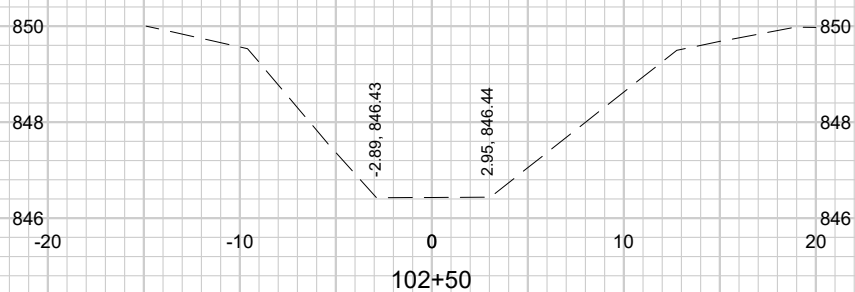
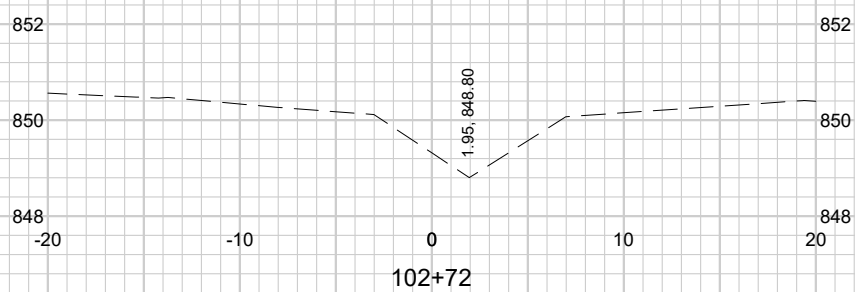
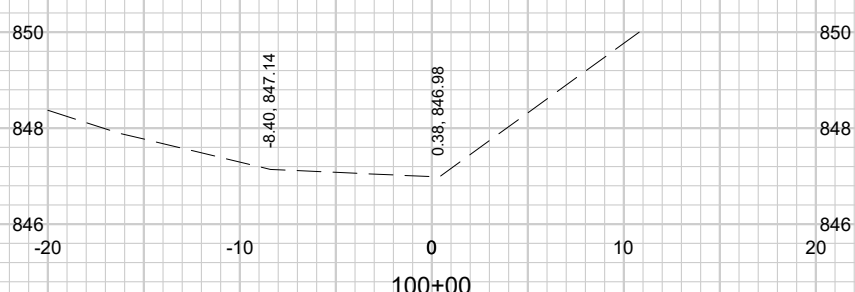
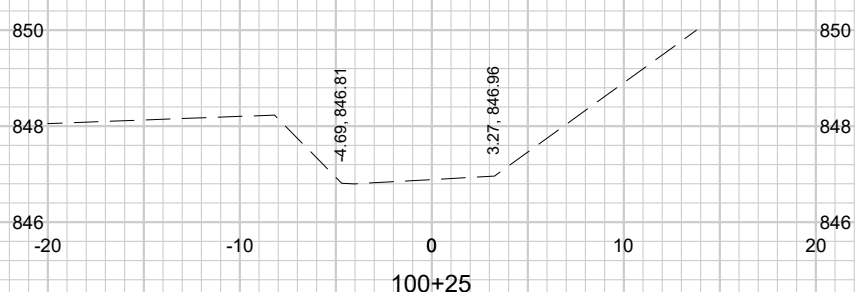
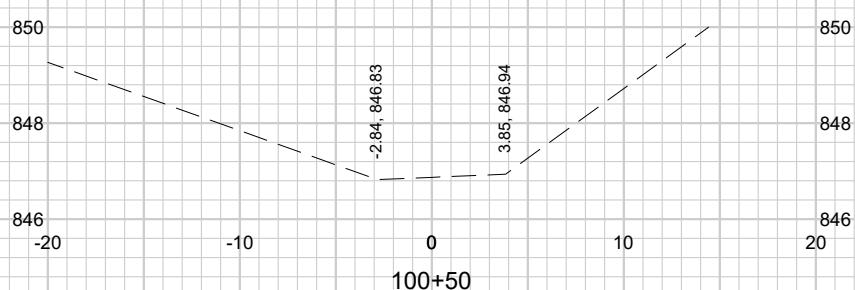
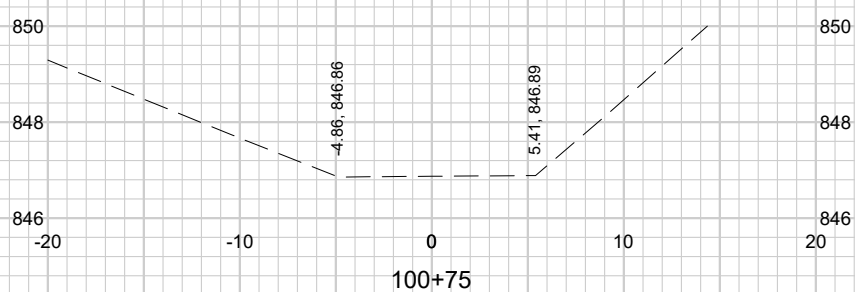
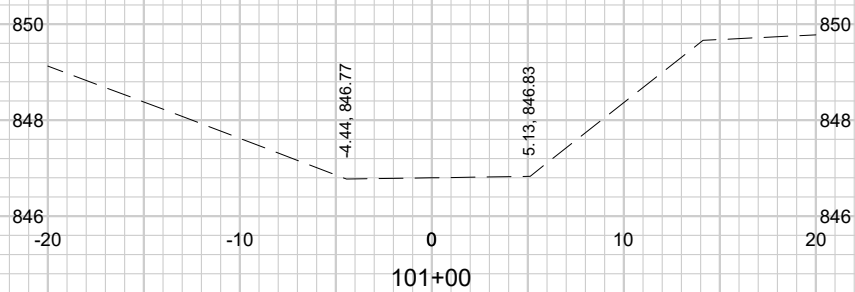
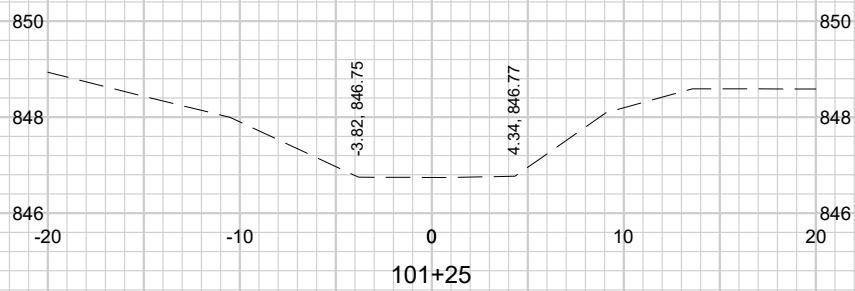
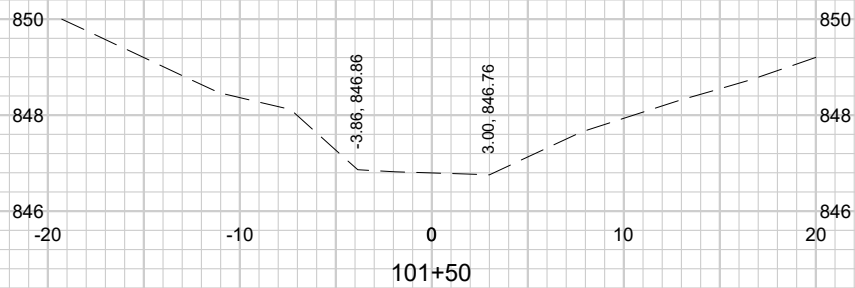
[illegible]

**PLAENERT DRIVE TREE CLEARING
CITY OF MADISON
DANE COUNTY, WISCONSIN**

PROJECT MGR.
RRR



SHEET
6

[illegible]

EXISTING DITCH CROSS SECTIONS

PLAENERT DRIVE TREE CLEARING
CITY OF MADISON
DANE COUNTY, WISCONSIN

JOB NO.

1121.166

PROJECT MGR.
RRR

RRR



STRAND
ASSOCIATES®

SH