



Near West Watershed Study Solutions

City of Madison Engineering Division
Board of Public Works Meeting
October 29, 2025

[Link to Final Report](https://www.cityofmadison.com/engineering/projects/near-west-watershed-study)


(Or can be found on the project webpage:

[https://www.cityofmadison.com/engineering/
projects/near-west-watershed-study](https://www.cityofmadison.com/engineering/projects/near-west-watershed-study))

CITY OF **MADISON**



Watershed Study Program

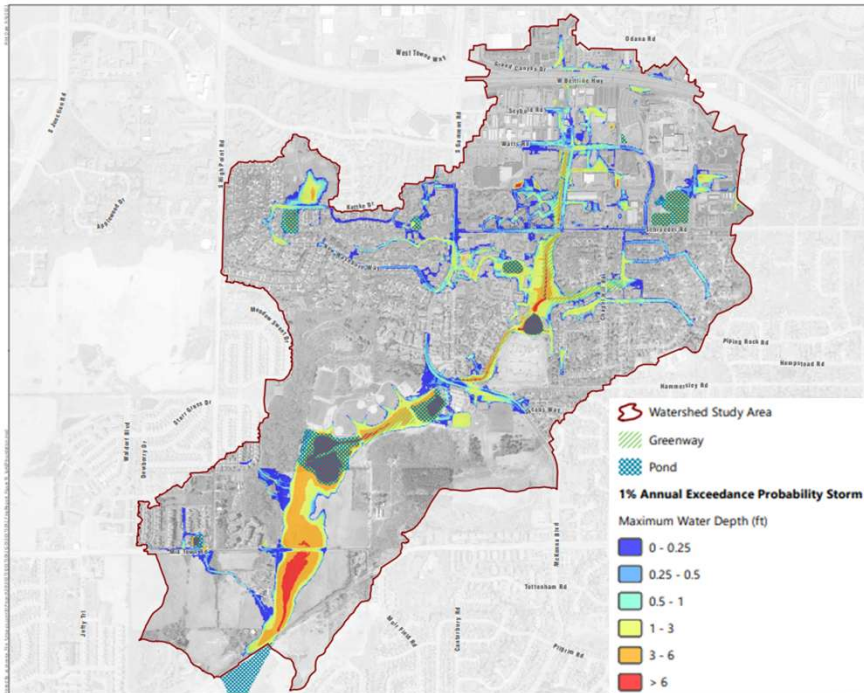

Maps and completed studies are available at:

<https://www.cityofmadison.com/flooding/city-initiatives/watershed-studies>

Interactive Citywide Flood Risk Map available at:

<https://www.cityofmadison.com/flooding/understanding-flooding/watershed-study-flood-risk-map>

- Citywide –22 watersheds
- Detailed modeling of stormwater management system
- Identify areas at risk of flooding and understand causes
- Develop solutions
- Outcomes
 - System Models
 - Citywide Flash Flood Risk Maps
 - Flood mitigation project list

CITY OF MADISON



Watershed Study Program Progress




Municipal Limits

Watershed Study Status

2025_Q3

- Existing Conditions In Progress
- Developing Recommendations
- PIM 3 Complete
- Draft Final Report
- Complete

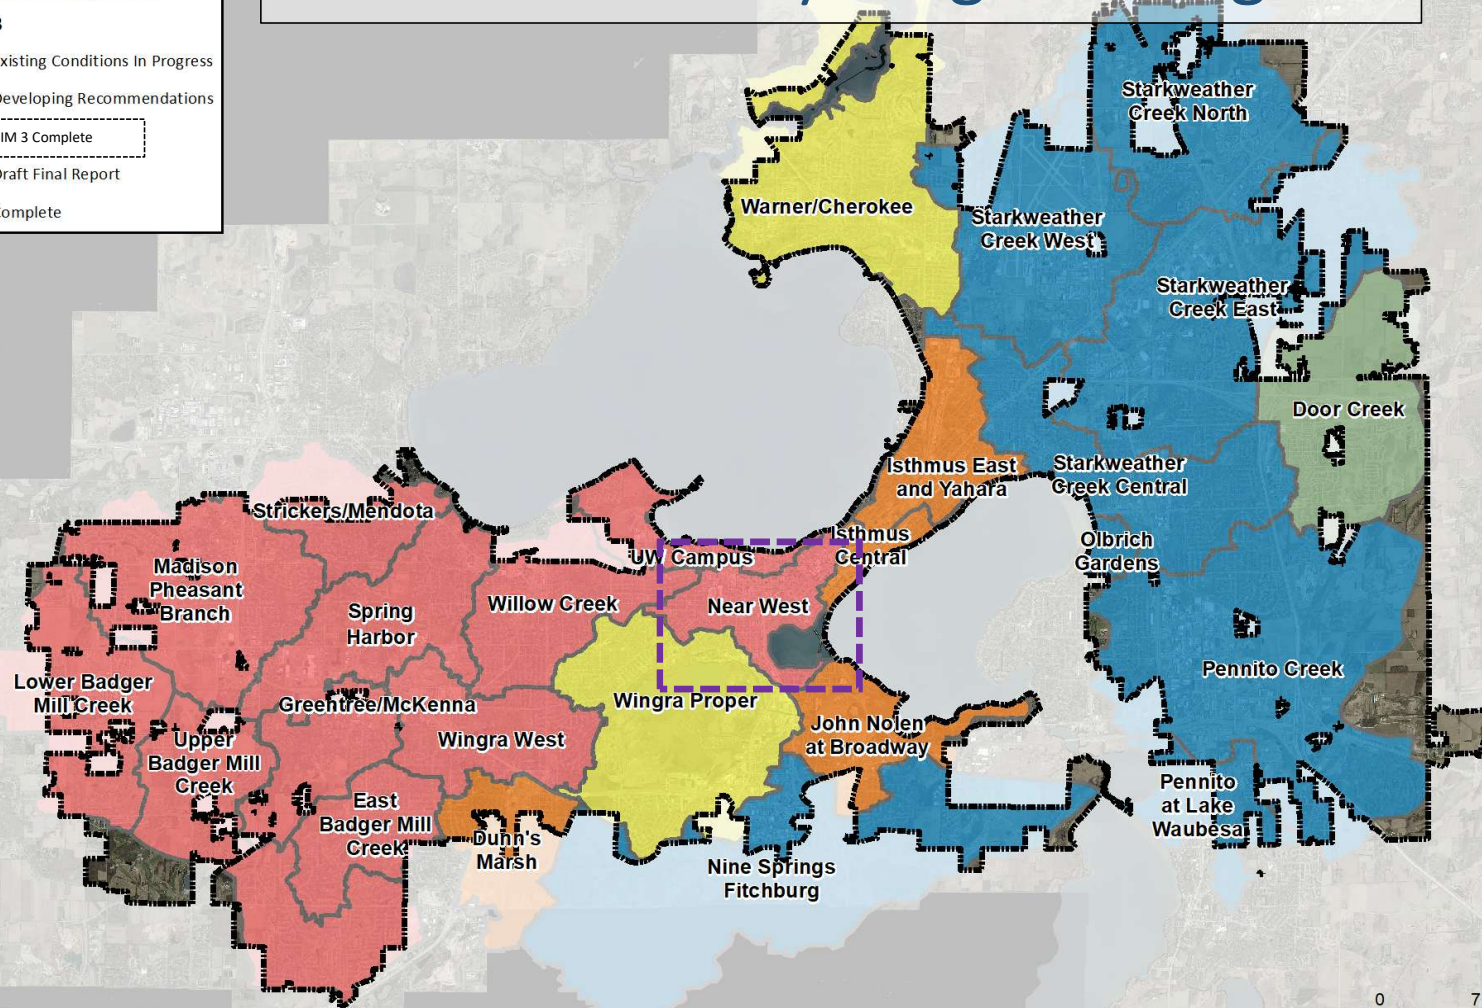

Date: 9/29/2025

User Name: entrss2 Document Path: \\FPS2\\DATA2\\Encommon\\STORM\\Watershed Studies\\GIS\\MXDs\\WatershedStudyProgress.mxd



Schedule

Winter 2022
– Summer
2023

*Create and
Calibrate
Model*

Summer/
Fall 2023

*Identify
Flood
Impacts*

Fall 2023

*2nd Public
Meeting**

Spring 2024 –
Fall 2024

*Evaluate
Solutions*

Consultant also completed
UW-Madison Campus
stormwater modeling
funded by the University

Spring 2025

*3rd Public
Meeting**

Summer
2025

*Finalize
Study*

**Presentations from all three PIM's can be found on the Watershed Study Website*

CITY OF **MADISON**



Near West Watershed Study Milestones

- PIM 1: 10/24/22
- PIM 2: 10/25/23
- Public Works Improvements: 2/6/25
- Informational to BPC: 3/12/25
- PIM 3: 3/18/25
- Report Final Draft Finished: 6/3/25
- Report Public Comment Period: 6/25/25 – 7/28/25
- BPC: 10/8/25
- BPW: 10/29/25
- FINAL REPORT:

[https://www.cityofmadison.com/engineering/documents/projects/Near West Watershed Study Report for Public Comment_20250603.pdf](https://www.cityofmadison.com/engineering/documents/projects/Near_West_Watershed_Study_Report_for_Public_Comment_20250603.pdf)

CITY OF **MADISON**



Watershed Study Performance Targets


- 10% Event (*4.09" rain/24 hours*).
 - No surcharging of storm sewer onto roadway (storm sewer pipes are sized to carry storm)
- 4% Event (*5.01" rain/24 hours*)
 - Roads passable for emergency vehicles
- 1% Event (*6.66" rain/24 hours*)
 - No structure (home/building) flooding
 - No greenway crossing overflow
 - Safe overflow from enclosed depressions
- 0.2% Chance Event (*8.81" rain/24 hours*)
 - Safe conveyance of overflow




Tenney Park, Madison, WI

[illegible]

Existing Conditions 1% Chance Event Inundation Mapping

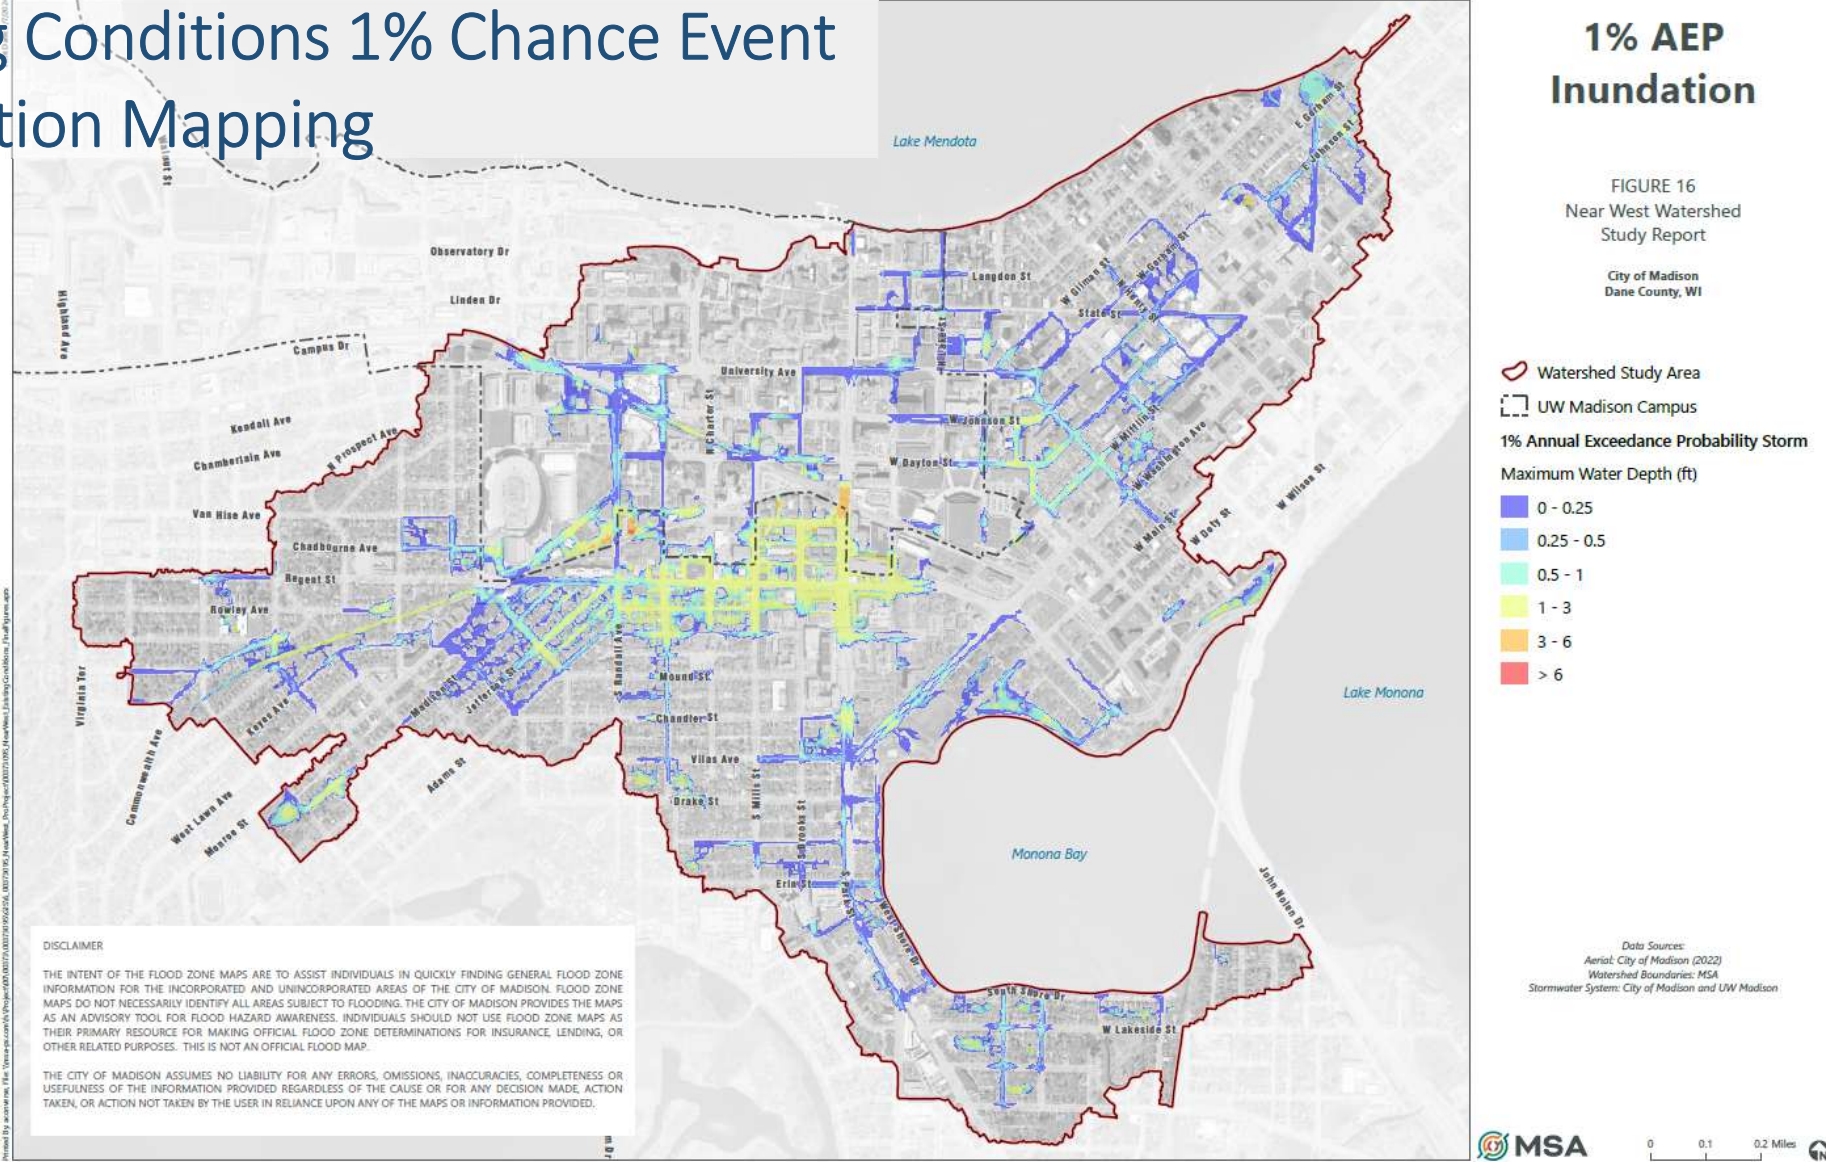

Proposed Solutions

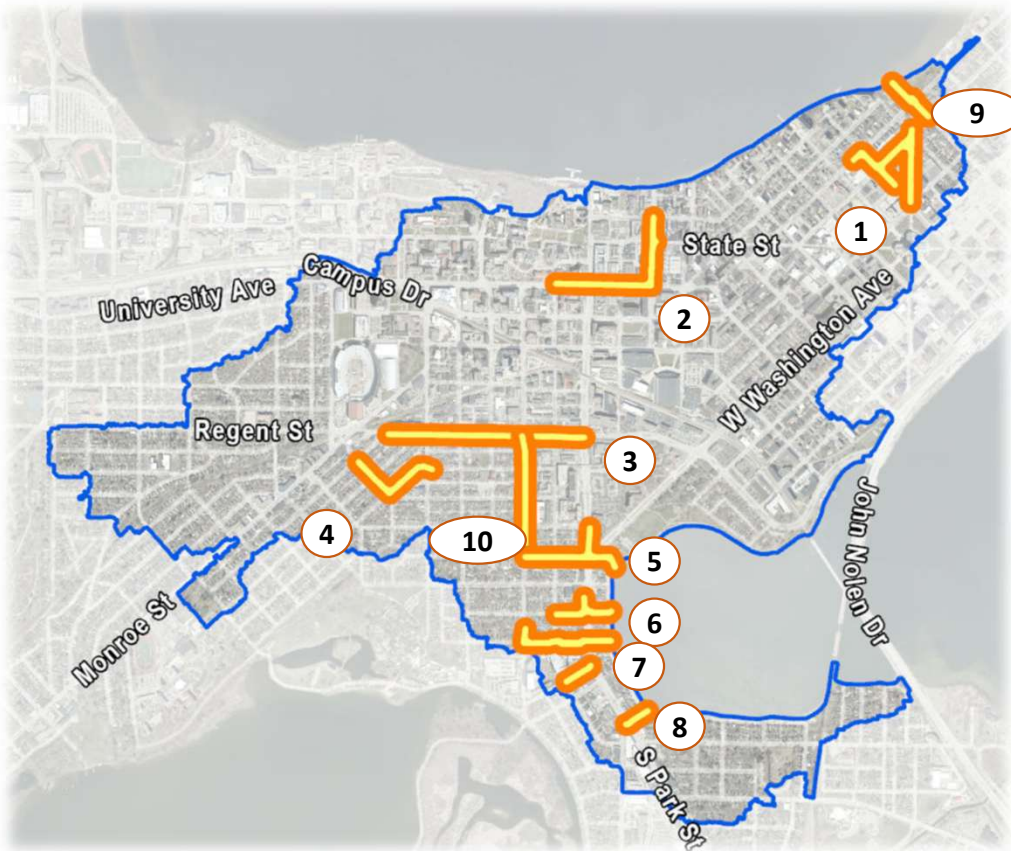

Local Sewer Projects

1. E Johnson St/N Pickney St/N Hamilton St/Gorham St
2. University Ave/Lake St
3. Regent St*
4. Oakland Ave/Adams St/Milton St
5. Vilas Ave/S Park St*
6. Emerald St/S Park St
7. Erin St/Delaplaine Ct
8. Parr St

Stand-alone Projects


9. Hancock St and outfall in James Madison Park *
10. S Mills St Relief Sewer*

Results


- **10% Chance Storm Event – Target: Eliminate storm sewer surcharge**
 - Existing: 268 of 464 stormwater structures (58%) do not meet the target
 - Proposed: 233 of 464 stormwater structures (50%) not meet the target
- **4% Chance Storm Event – Target: Maintain drivability of city streets**
 - Existing: 4.2 of 49.9 street miles (8.4%) do not meet the target
 - Proposed: 2.9 of 49.9 street miles (5.8%) do not meet the target
- **1% Chance Storm Event – Target: No structure flooding**
 - Existing: 319 of 4,678 buildings do not meet the target
 - Proposed: 235 of 4,678 buildings do not meet the target
- **1% Chance Storm Event – Target: Pass flow through greenway crossings**
 - No Greenway Crossings in Watershed

3. Regent St Sewer Upgrades

- ▶ **Goal: Increase LOS on Regent St and in adjacent neighborhoods**
- ▶ In conjunction with the Mills Relief Sewer:
 - 1.26 miles more of passable street for emergency vehicles in the 4% chance event.
 - Removes 74 buildings from flooding during the 1% chance event
- ▶ By itself
 - Jefferson & Bowen Ct/Orchard St:
 - Regent St: ~5-yr -> ~10-yr LOS

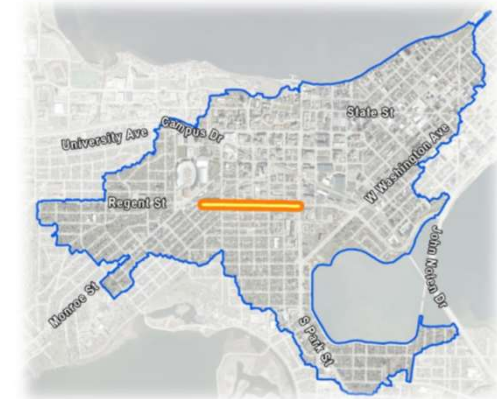


- ▶ **Est Cost - \$10.5 M (Incorporating into Regent St Reconstruction Design, currently in the CIP)**

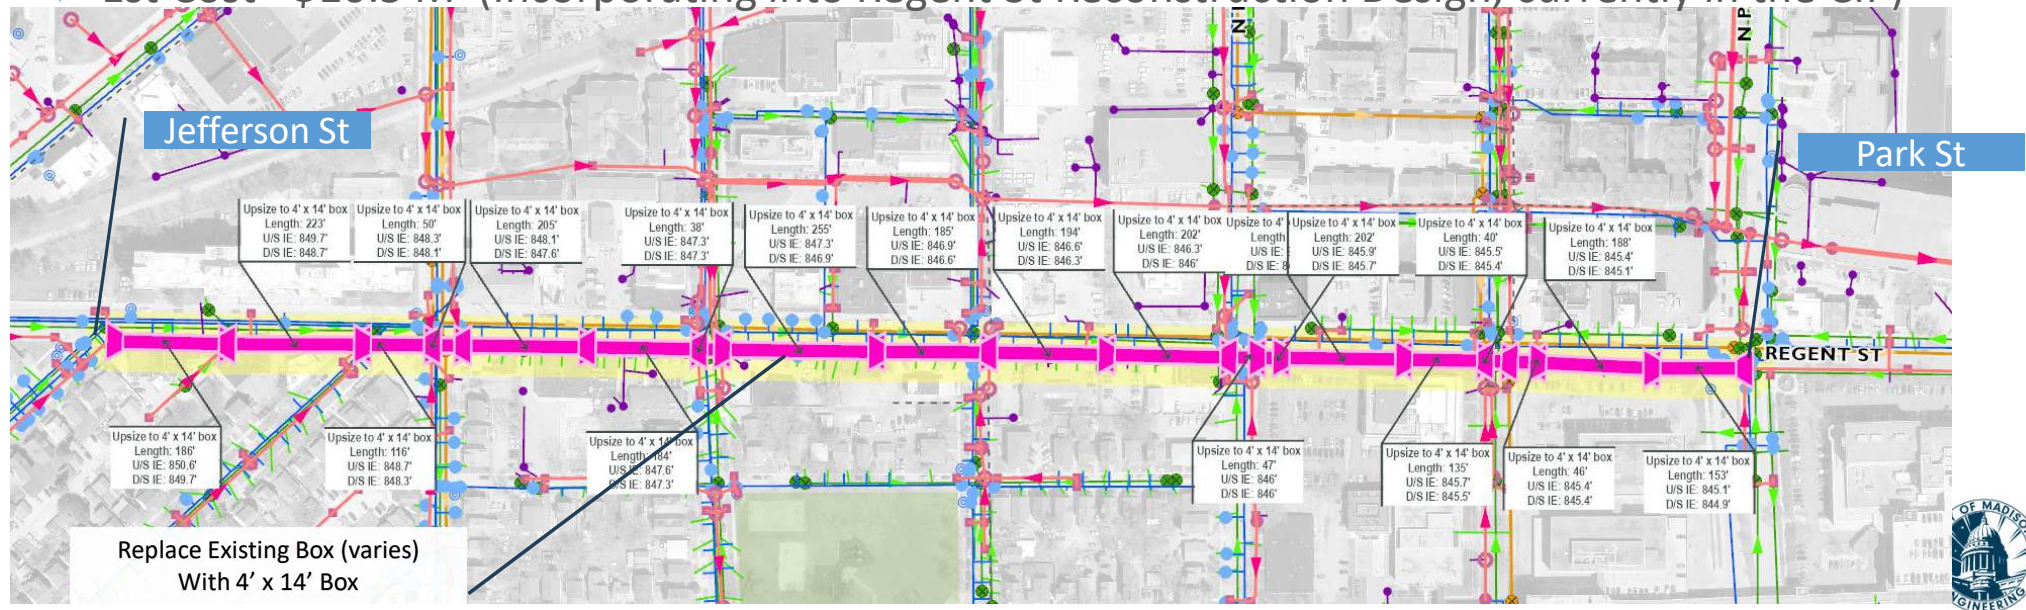

9. Hancock St and outfall in James Madison Park

- ▶ **Goal: Reduce flooding on Gorham and provide capacity for additional later upstream projects (Johnson and Hancock)**
- ▶ Increases passability of 90 ft of roadway on E Gorham for 4% chance event
- ▶ Removes six building from flooding in 1% chance event (along w/upstream projects).
- ▶ Design will need to coordinate with Parks and fit within James Madison Park Master Plan
- ▶ Est. Cost - \$1.43M

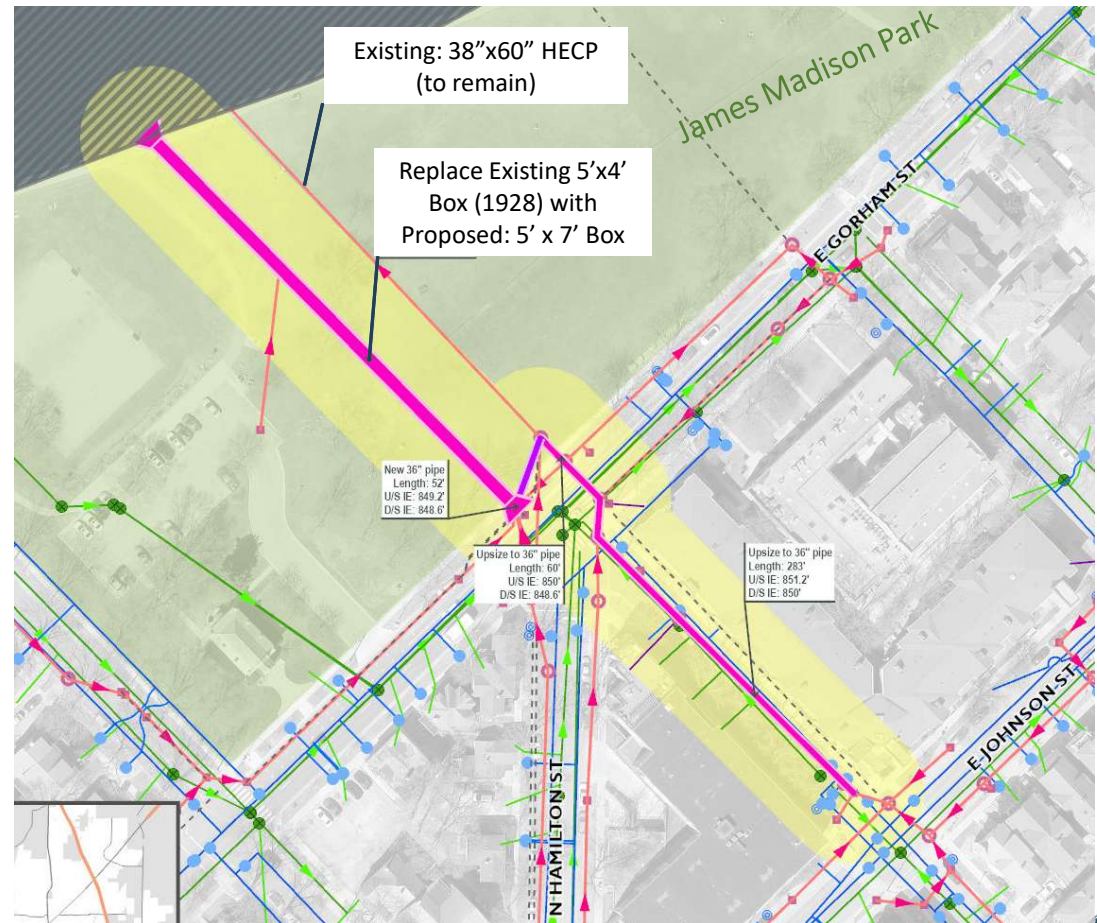


CITY OF MADISON




10. S Mills St Relief Sewer

- ▶ **Goal: Improve LOS on Regent St and provide up to 1% LOS on Park St at West Washington and Chandler St**
- ▶ Provide a secondary outlet for the Regent St enclosed depression
- ▶ Improves passability of 1.26 miles of street during 4% chance event.
- ▶ Removes 74 buildings from flooding during the 1% chance event
- ▶ Very significant construction effort (max depth >25', large box culvert, coordination with MMSD, other utility coordination)
- ▶ Est. Cost - \$32.2M

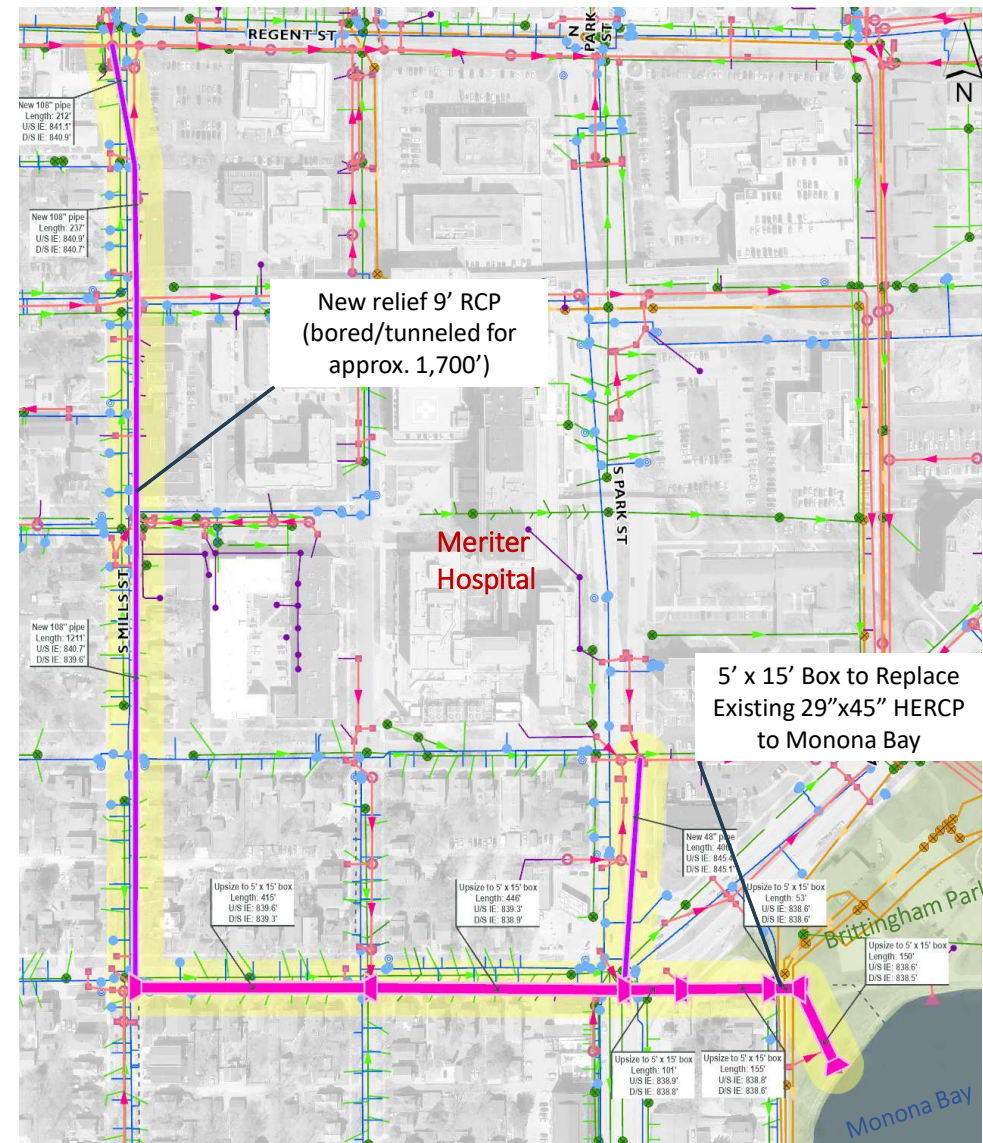


5. Vilas Ave/Park St Storm Sewer Upgrade

- ▶ **Goal: Reduce flooding at Park and West Washington and Chandler**
- ▶ Alternate Plan if the S Mills St Relief Sewer does not move forward.
- ▶ Eliminates flooding on Park St in the area Chandler and Vilas up to the 1% chance event.
- ▶ Est. Cost - \$0.72M

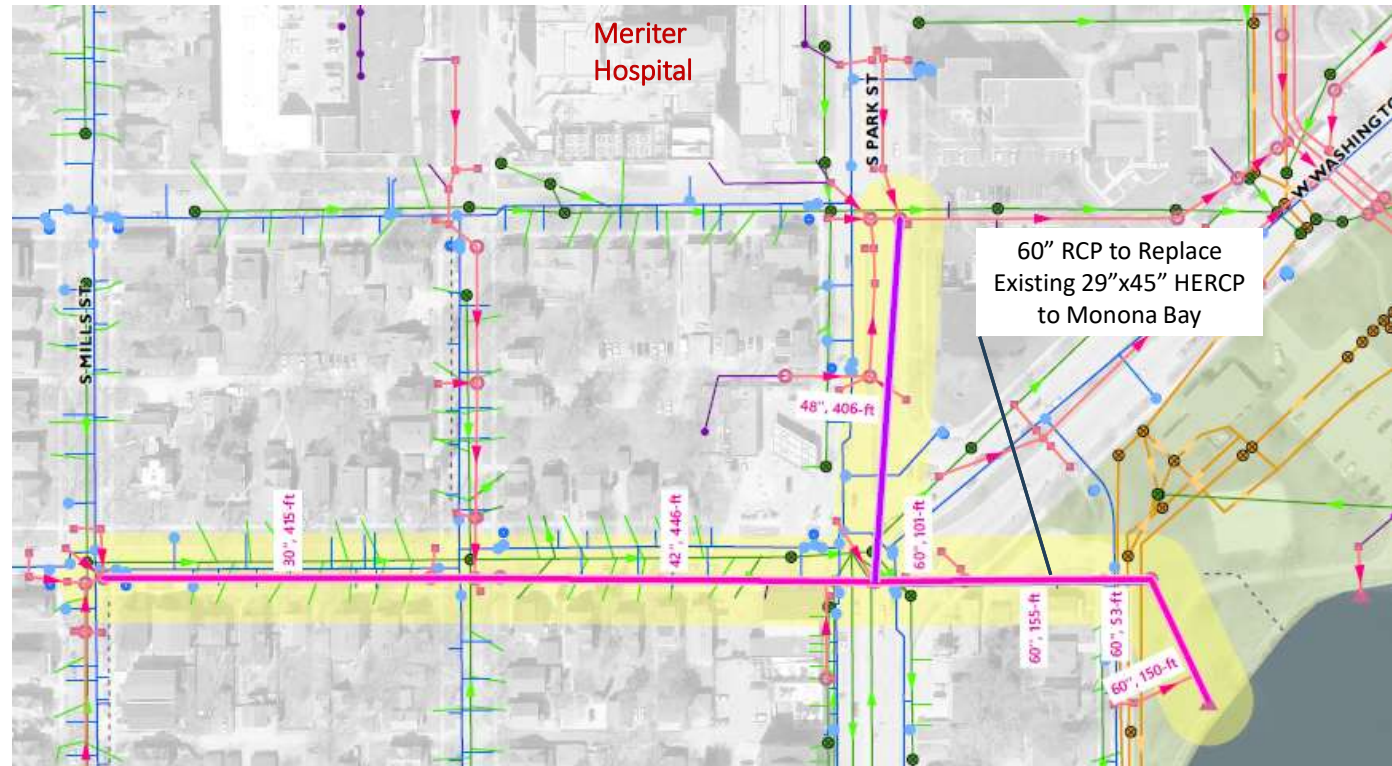


Existing Conditions

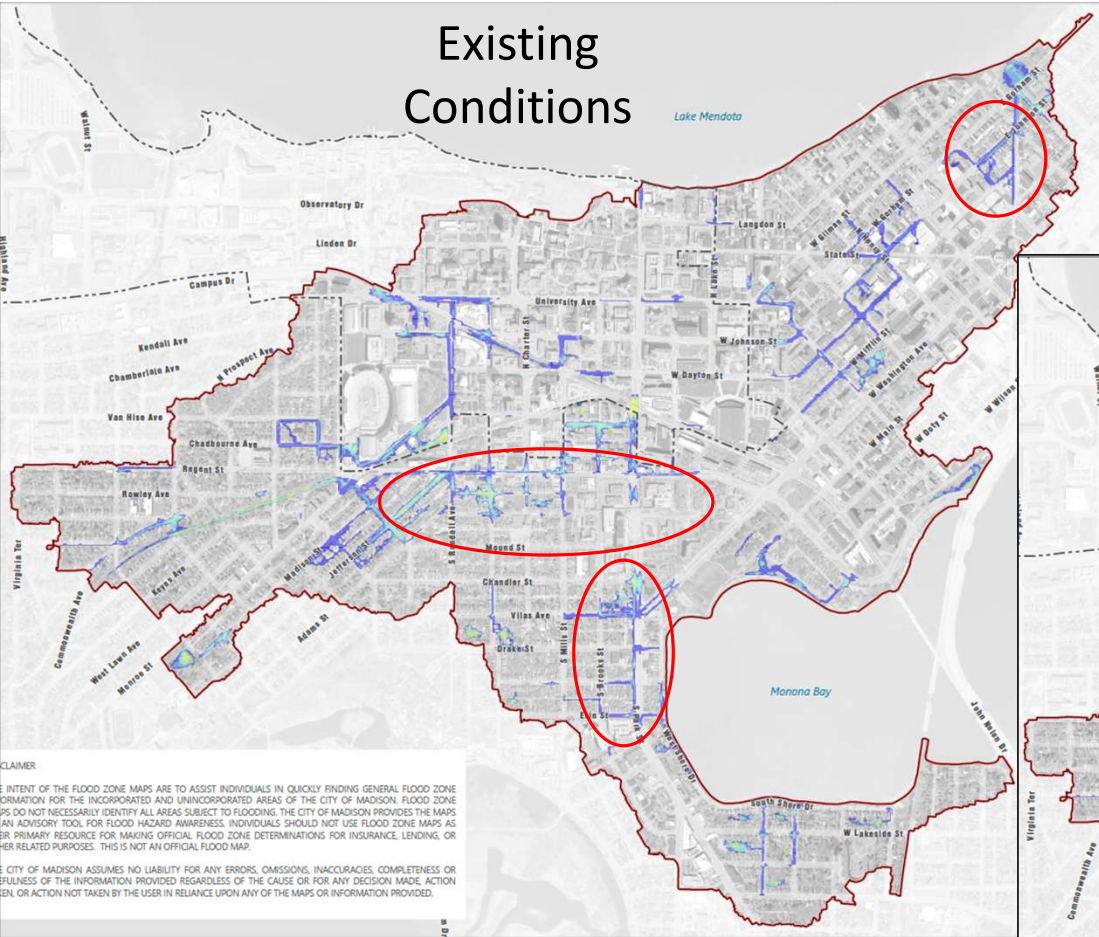

CLAIMER
THE INTENT OF THE FLOOD ZONE MAPS ARE TO ASSIST INDIVIDUALS IN QUICKLY FINDING GENERAL FLOOD ZONE INFORMATION FOR THE INCORPORATED AND UNINCORPORATED AREAS OF THE CITY OF MADISON. FLOOD ZONE MAPS DO NOT NECESSARILY IDENTIFY ALL AREAS SUBJECT TO FLOODING. THE CITY OF MADISON PROVIDES THE MAPS AS AN ADVISORY TOOL FOR FLOOD HAZARD AWARENESS. INDIVIDUALS SHOULD NOT USE FLOOD ZONE MAPS AS A PRIMARY RESOURCE FOR MAKING OFFICIAL FLOOD ZONE DETERMINATIONS FOR INSURANCE, LENDING, OR OTHER RELATED PURPOSES. THIS IS NOT AN OFFICIAL FLOOD MAP.
CITY OF MADISON ASSUMES NO LIABILITY FOR ANY ERRORS, OMISSIONS, INACCURACIES, COMPLETENESS OR UNFULNESS OF THE INFORMATION PROVIDED REGARDLESS OF THE CAUSE OR FOR ANY DECISION MADE, ACTION TAKEN, OR ACTION NOT TAKEN BY THE USER IN RELIANCE UPON ANY OF THE MAPS OR INFORMATION PROVIDED.

20% Chance Storm

w/all recommendations

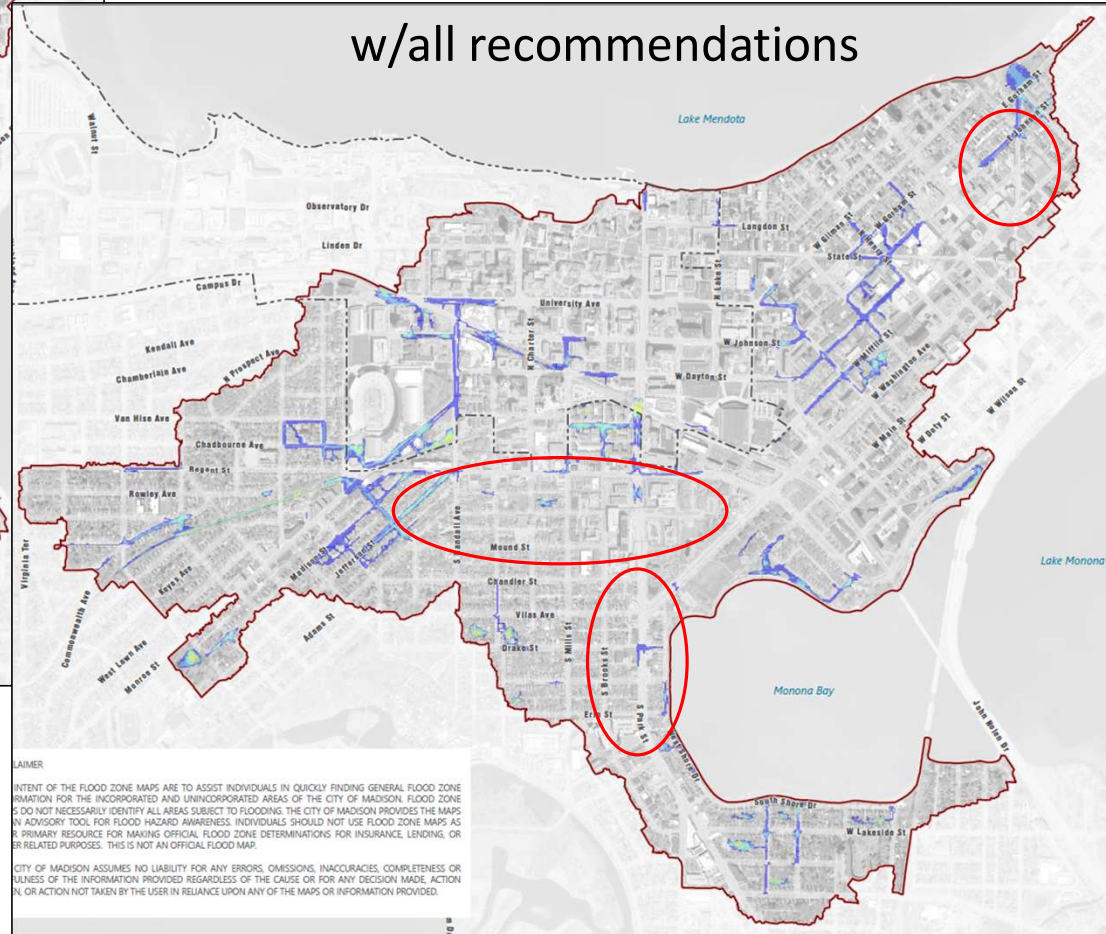

CLAIMER
THE INTENT OF THE FLOOD ZONE MAPS ARE TO ASSIST INDIVIDUALS IN QUICKLY FINDING GENERAL FLOOD ZONE INFORMATION FOR THE INCORPORATED AND UNINCORPORATED AREAS OF THE CITY OF MADISON. FLOOD ZONE MAPS DO NOT NECESSARILY IDENTIFY ALL AREAS SUBJECT TO FLOODING. THE CITY OF MADISON PROVIDES THE MAPS AS AN ADVISORY TOOL FOR FLOOD HAZARD AWARENESS. INDIVIDUALS SHOULD NOT USE FLOOD ZONE MAPS AS A PRIMARY RESOURCE FOR MAKING OFFICIAL FLOOD ZONE DETERMINATIONS FOR INSURANCE, LENDING, OR OTHER RELATED PURPOSES. THIS IS NOT AN OFFICIAL FLOOD MAP.
CITY OF MADISON ASSUMES NO LIABILITY FOR ANY ERRORS, OMISSIONS, INACCURACIES, COMPLETENESS OR UNFULNESS OF THE INFORMATION PROVIDED REGARDLESS OF THE CAUSE OR FOR ANY DECISION MADE, ACTION TAKEN, OR ACTION NOT TAKEN BY THE USER IN RELIANCE UPON ANY OF THE MAPS OR INFORMATION PROVIDED.

Estimated Project Costs Near West Watershed

Sewer Project Area	Estimated Costs	Notes
E Johnson St/N Pickney St/N Hamilton St/Gorham St	\$0.74M	Sewer improvement costs only
University Ave/Lake St Storm System Improvements	\$1.56M	Sewer improvement costs only
Regent Street Upgrades	\$10.5M	Sewer improvement costs only
Oakland Ave/Adams St/Milton St	\$2.92M	Sewer improvement costs only
Vilas Ave/S Park St	\$0.72M	Sewer improvement costs only
Emerald St/S Park St	\$0.35M	Sewer improvement costs only
Erin St / Park St / Delaplaine Ct	\$6.52M	Sewer improvement costs only
Parr Ct	\$0.17M	Sewer improvement costs only
Mills Street Relief Sewer	\$32.27M	Includes anticipated street reconstruction and utility relocation
Hancock St / Gorham St	\$1.43M	Includes anticipated street reconstruction costs
<i>All projects include a 25% contingency and 10% design costs on top of the base cost estimate</i>		

Approx. \$57.2 million total

CITY OF MADISON



Public Outreach

69,934 points of outreach or interactions for the
Near West Watershed Study



Public Meetings
3 meetings, approx. 75 participants



Postcards Sent
66,948



Project Website
1,422+ views



Email List
64 residents



Virtual Focus Groups
7 groups, 14 participants



Social Media
3 related project posts

CITY OF **MADISON**



Questions

